


SIDDHI KUMBHAR

Step 1: Create Maven Project


Step 2: Push Code to GitHub

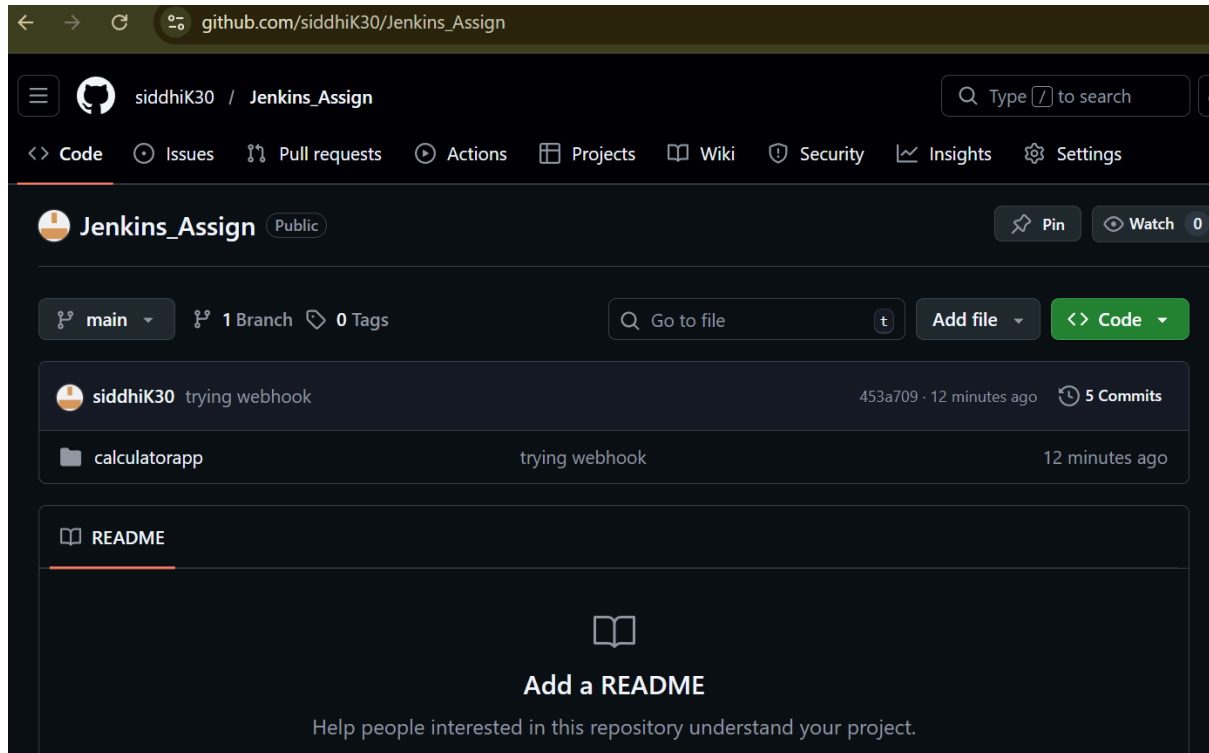


Step 3: Install & Configure Jenkins

Step 4: Create Jenkins Freestyle Job

Step 5: Connect Jenkins to GitHub

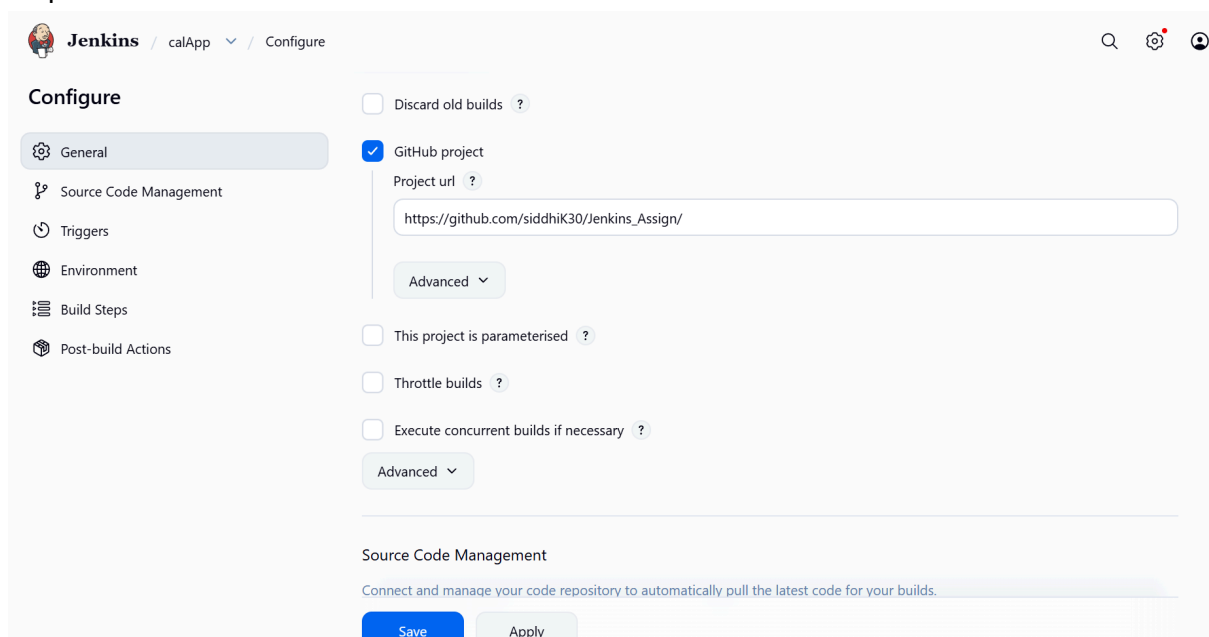

Step 6: Configure Build Trigger

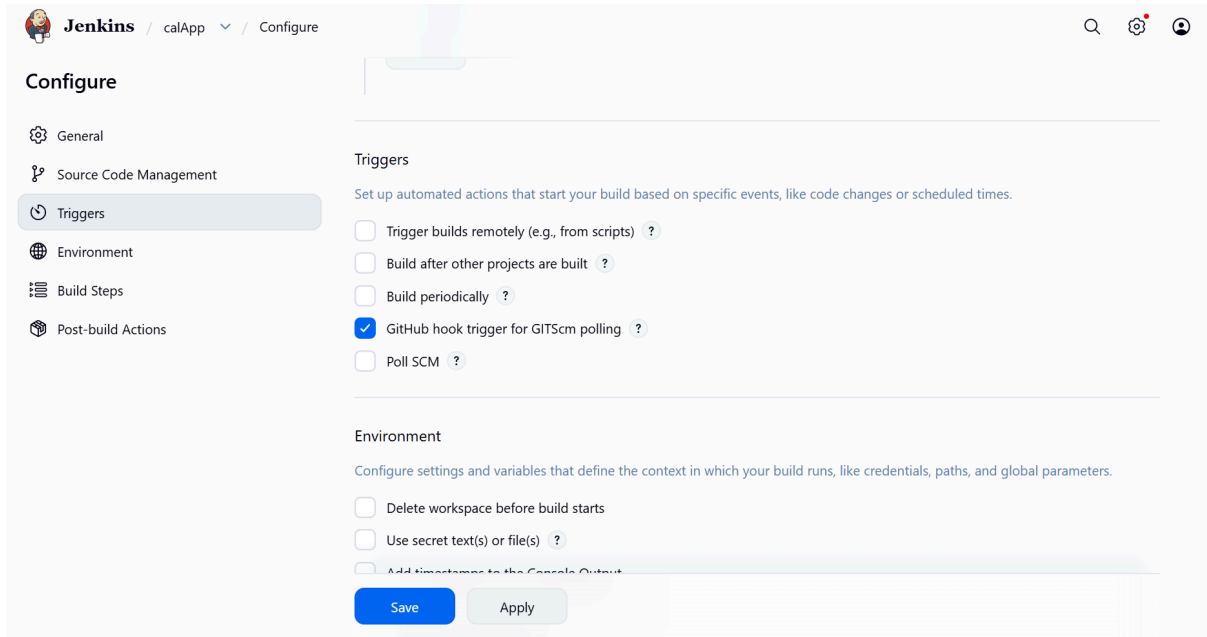

The image shows the Jenkins configuration page for a project named 'calApp'. The 'Configure' tab is selected, and the 'Triggers' sub-tab is active. The 'Triggers' section is titled 'Set up automated actions that start your build based on specific events, like code changes or scheduled times.' It contains five checkboxes: 'Trigger builds remotely (e.g., from scripts)', 'Build after other projects are built', 'Build periodically', 'GitHub hook trigger for GITScm polling' (which is checked), and 'Poll SCM'. Below this is the 'Environment' section, titled 'Configure settings and variables that define the context in which your build runs, like credentials, paths, and global parameters.' It contains three checkboxes: 'Delete workspace before build starts', 'Use secret text(s) or file(s)', and 'Add timestamps to the console output'. At the bottom are 'Save' and 'Apply' buttons.

Configure

- General
- Source Code Management
- Triggers**
- Environment
- Build Steps
- Post-build Actions

Triggers

Set up automated actions that start your build based on specific events, like code changes or scheduled times.

- ☐ Trigger builds remotely (e.g., from scripts) ?
- ☐ Build after other projects are built ?
- ☐ Build periodically ?
- ☒ GitHub hook trigger for GITScm polling ?
- ☐ Poll SCM ?


Environment

Configure settings and variables that define the context in which your build runs, like credentials, paths, and global parameters.

- ☐ Delete workspace before build starts
- ☐ Use secret text(s) or file(s) ?
- ☐ Add timestamps to the console output

Save **Apply**

Step 7: Setup ngrok

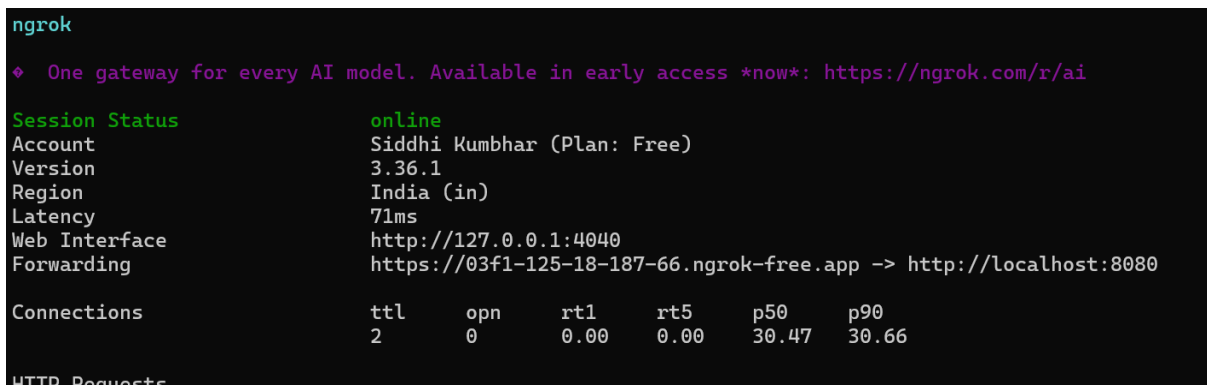

The image shows the output of the 'ngrok' command in a terminal. It displays the session status, account information, and connection statistics. The session is online, and the account is 'Siddhi Kumbhar (Plan: Free)'. The version is 3.36.1, and the region is India (in). The latency is 71ms. The web interface is at http://127.0.0.1:4040, and the forwarding URL is https://03f1-125-18-187-66.ngrok-free.app -> http://localhost:8080. The connections table shows 2 ttl, 0 opn, 0.00 rt1, 0.00 rt5, 30.47 p50, and 30.66 p90.

```
ngrok


♦ One gateway for every AI model. Available in early access *now*: https://ngrok.com/r/ai

Session Status      online
Account             Siddhi Kumbhar (Plan: Free)
Version             3.36.1
Region              India (in)
Latency              71ms
Web Interface        http://127.0.0.1:4040
Forwarding           https://03f1-125-18-187-66.ngrok-free.app -> http://localhost:8080

Connections          ttl    opn    rt1    rt5    p50    p90
                    2      0      0.00   0.00   30.47  30.66

HTTP Requests
```

Step 8: Configure GitHub Webhook

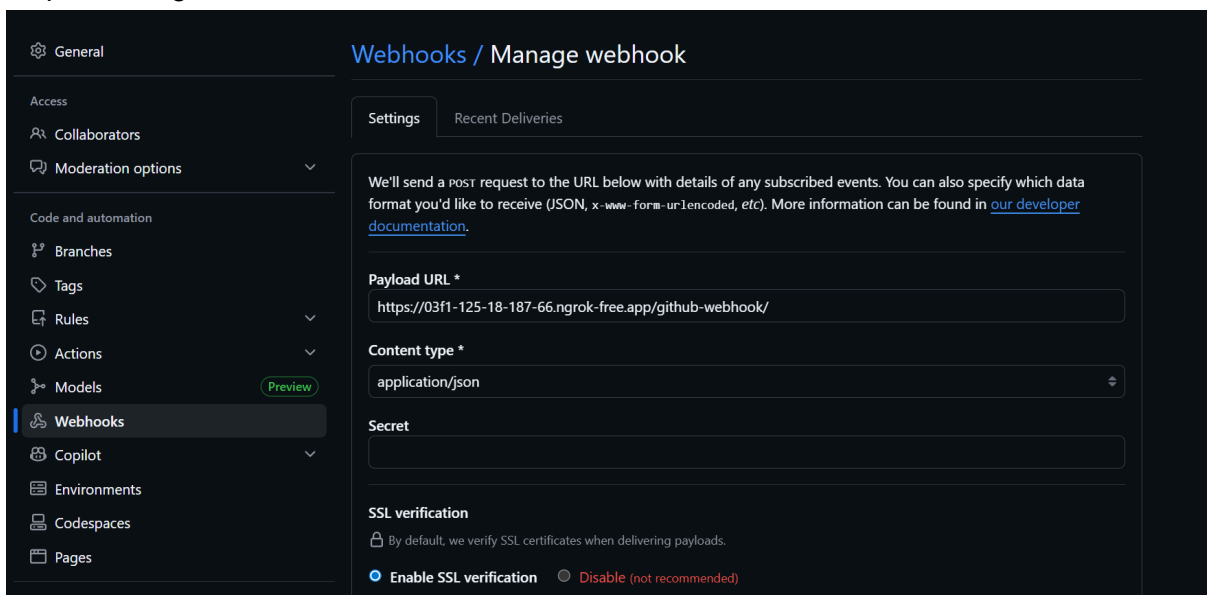

The image shows the GitHub Webhooks configuration page. The 'Webhooks' tab is selected, and the 'Settings' sub-tab is active. The 'Payload URL' is set to https://03f1-125-18-187-66.ngrok-free.app/github-webhook/. The 'Content type' is set to application/json. The 'Secret' field is empty. The 'SSL verification' section is checked, with the option 'Enable SSL verification' selected. The left sidebar shows the 'Webhooks' tab selected under the 'Code and automation' section.

Webhooks / Manage webhook

Settings **Recent Deliveries**

We'll send a POST request to the URL below with details of any subscribed events. You can also specify which data format you'd like to receive (JSON, x-www-form-urlencoded, etc). More information can be found in [our developer documentation](#).

Payload URL *

https://03f1-125-18-187-66.ngrok-free.app/github-webhook/

Content type *

application/json

Secret

SSL verification

☒ By default, we verify SSL certificates when delivering payloads.

☒ **Enable SSL verification** ☐ **Disable (not recommended)**

Step 9: Configure Build Step in Jenkins

The screenshot shows the Jenkins configuration page for a job named 'calApp'. The 'Build Steps' tab is selected in the left sidebar. The main area shows the 'Build Steps' configuration. There are two checkboxes at the top: 'Terminate a build if it's stuck' and 'With Ant'. Below these, the 'Build Steps' section is titled 'Automate your build process with ordered tasks like code compilation, testing, and deployment.' A single build step is configured with the type 'Execute Windows batch command'. The command field contains the following text:

```
cd calculatorapp
mvn clean test
```

Below the command field is an 'Advanced' dropdown menu. At the bottom of the configuration area is a '+ Add build step' button.

Validation

The screenshot shows an IDE with a project named 'DUMMY'. The 'calculatorapp' folder is expanded, showing the 'src' directory. The 'CalculatorTest.java' file is open in the editor. The code in the file is as follows:

```
public class CalculatorTest {
    Calculator cal = new Calculator();

    // @Test
    // void testAdd() {

```

The terminal window at the bottom shows the output of a series of git commands:

```
modified: calculatorapp/src/test/java/com/demo/calculatorapp/CalculatorTest.java
no changes added to commit (use "git add" and/or "git commit -a")
PS C:\Users\Wissen\Desktop\DUMMY> git push -u origin main
branch 'main' set up to track 'origin/main'.
Everything up-to-date
PS C:\Users\Wissen\Desktop\DUMMY> git add .
PS C:\Users\Wissen\Desktop\DUMMY> git commit -m "trying webhook"
[main 453a709] trying webhook
4 files changed, 1 insertion(+), 30 deletions(-)
delete mode 100644 Add.java
delete mode 100644 CalculatorMain.java
delete mode 100644 Sub.java
PS C:\Users\Wissen\Desktop\DUMMY> git push -u origin main
Enumerating objects: 19, done.
Counting objects: 100% (19/19), done.
Counting objects: 100% (19/19), done.
Delta compression using up to 12 threads
Compressing objects: 100% (5/5), done.
Writing objects: 100% (10/10), 723 bytes | 241.00 KiB/s, done.
Total 10 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (2/2), completed with 2 local objects.
To https://github.com/siddhiK30/Jenkins_Assign
ddf9a81..453a709 main -> main
branch 'main' set up to track 'origin/main'.
PS C:\Users\Wissen\Desktop\DUMMY>
```

```
ngrok

♦ One gateway for every AI model. Available in early access *now*: https://ngrok.com/r/ai

Session Status      online
Account             Siddhi Kumbhar (Plan: Free)
Version             3.36.1
Region              India (in)
Latency             168ms
Web Interface       http://127.0.0.1:4040
Forwarding           https://03f1-125-18-187-66.ngrok-free.app -> http://localhost:8080

Connections          ttl      opn      rt1      rt5      p50      p90
2                   0        0.00     0.00     30.47    30.66

HTTP Requests
-----

13:20:59.943 IST POST /github-webhook/      200 OK
13:17:21.259 IST POST /github-webhook/      200 OK
```

 Jenkins

calApp

#7

Search

Settings

Help

Status

Changes

Console Output

Edit Build Information

Delete build '#7'

Polling Log

Timings

Git Build Data

Previous Build

✓ #7 (25 Feb 2026, 13:21:08)

Add description

Keep this build forever

Started by GitHub push by siddhiK30

Started 20 min ago
Took 19 sec

This run spent:

- 7 sec waiting;
- 19 sec build duration;
- 26 sec total from scheduled to completion.

 Revision: 453a709d1ce4a522b27e8133636b6cb8dec615e5

 Repository: https://github.com/siddhiK30/Jenkins_Assign

- refs/remotes/origin/main

 trying webhook

453a709

kumbharsiddhi30 at 13:20 25/02/2026