Agenda

- recap
- css variables
- advance grid positioning
- build animated navigation and progress bar

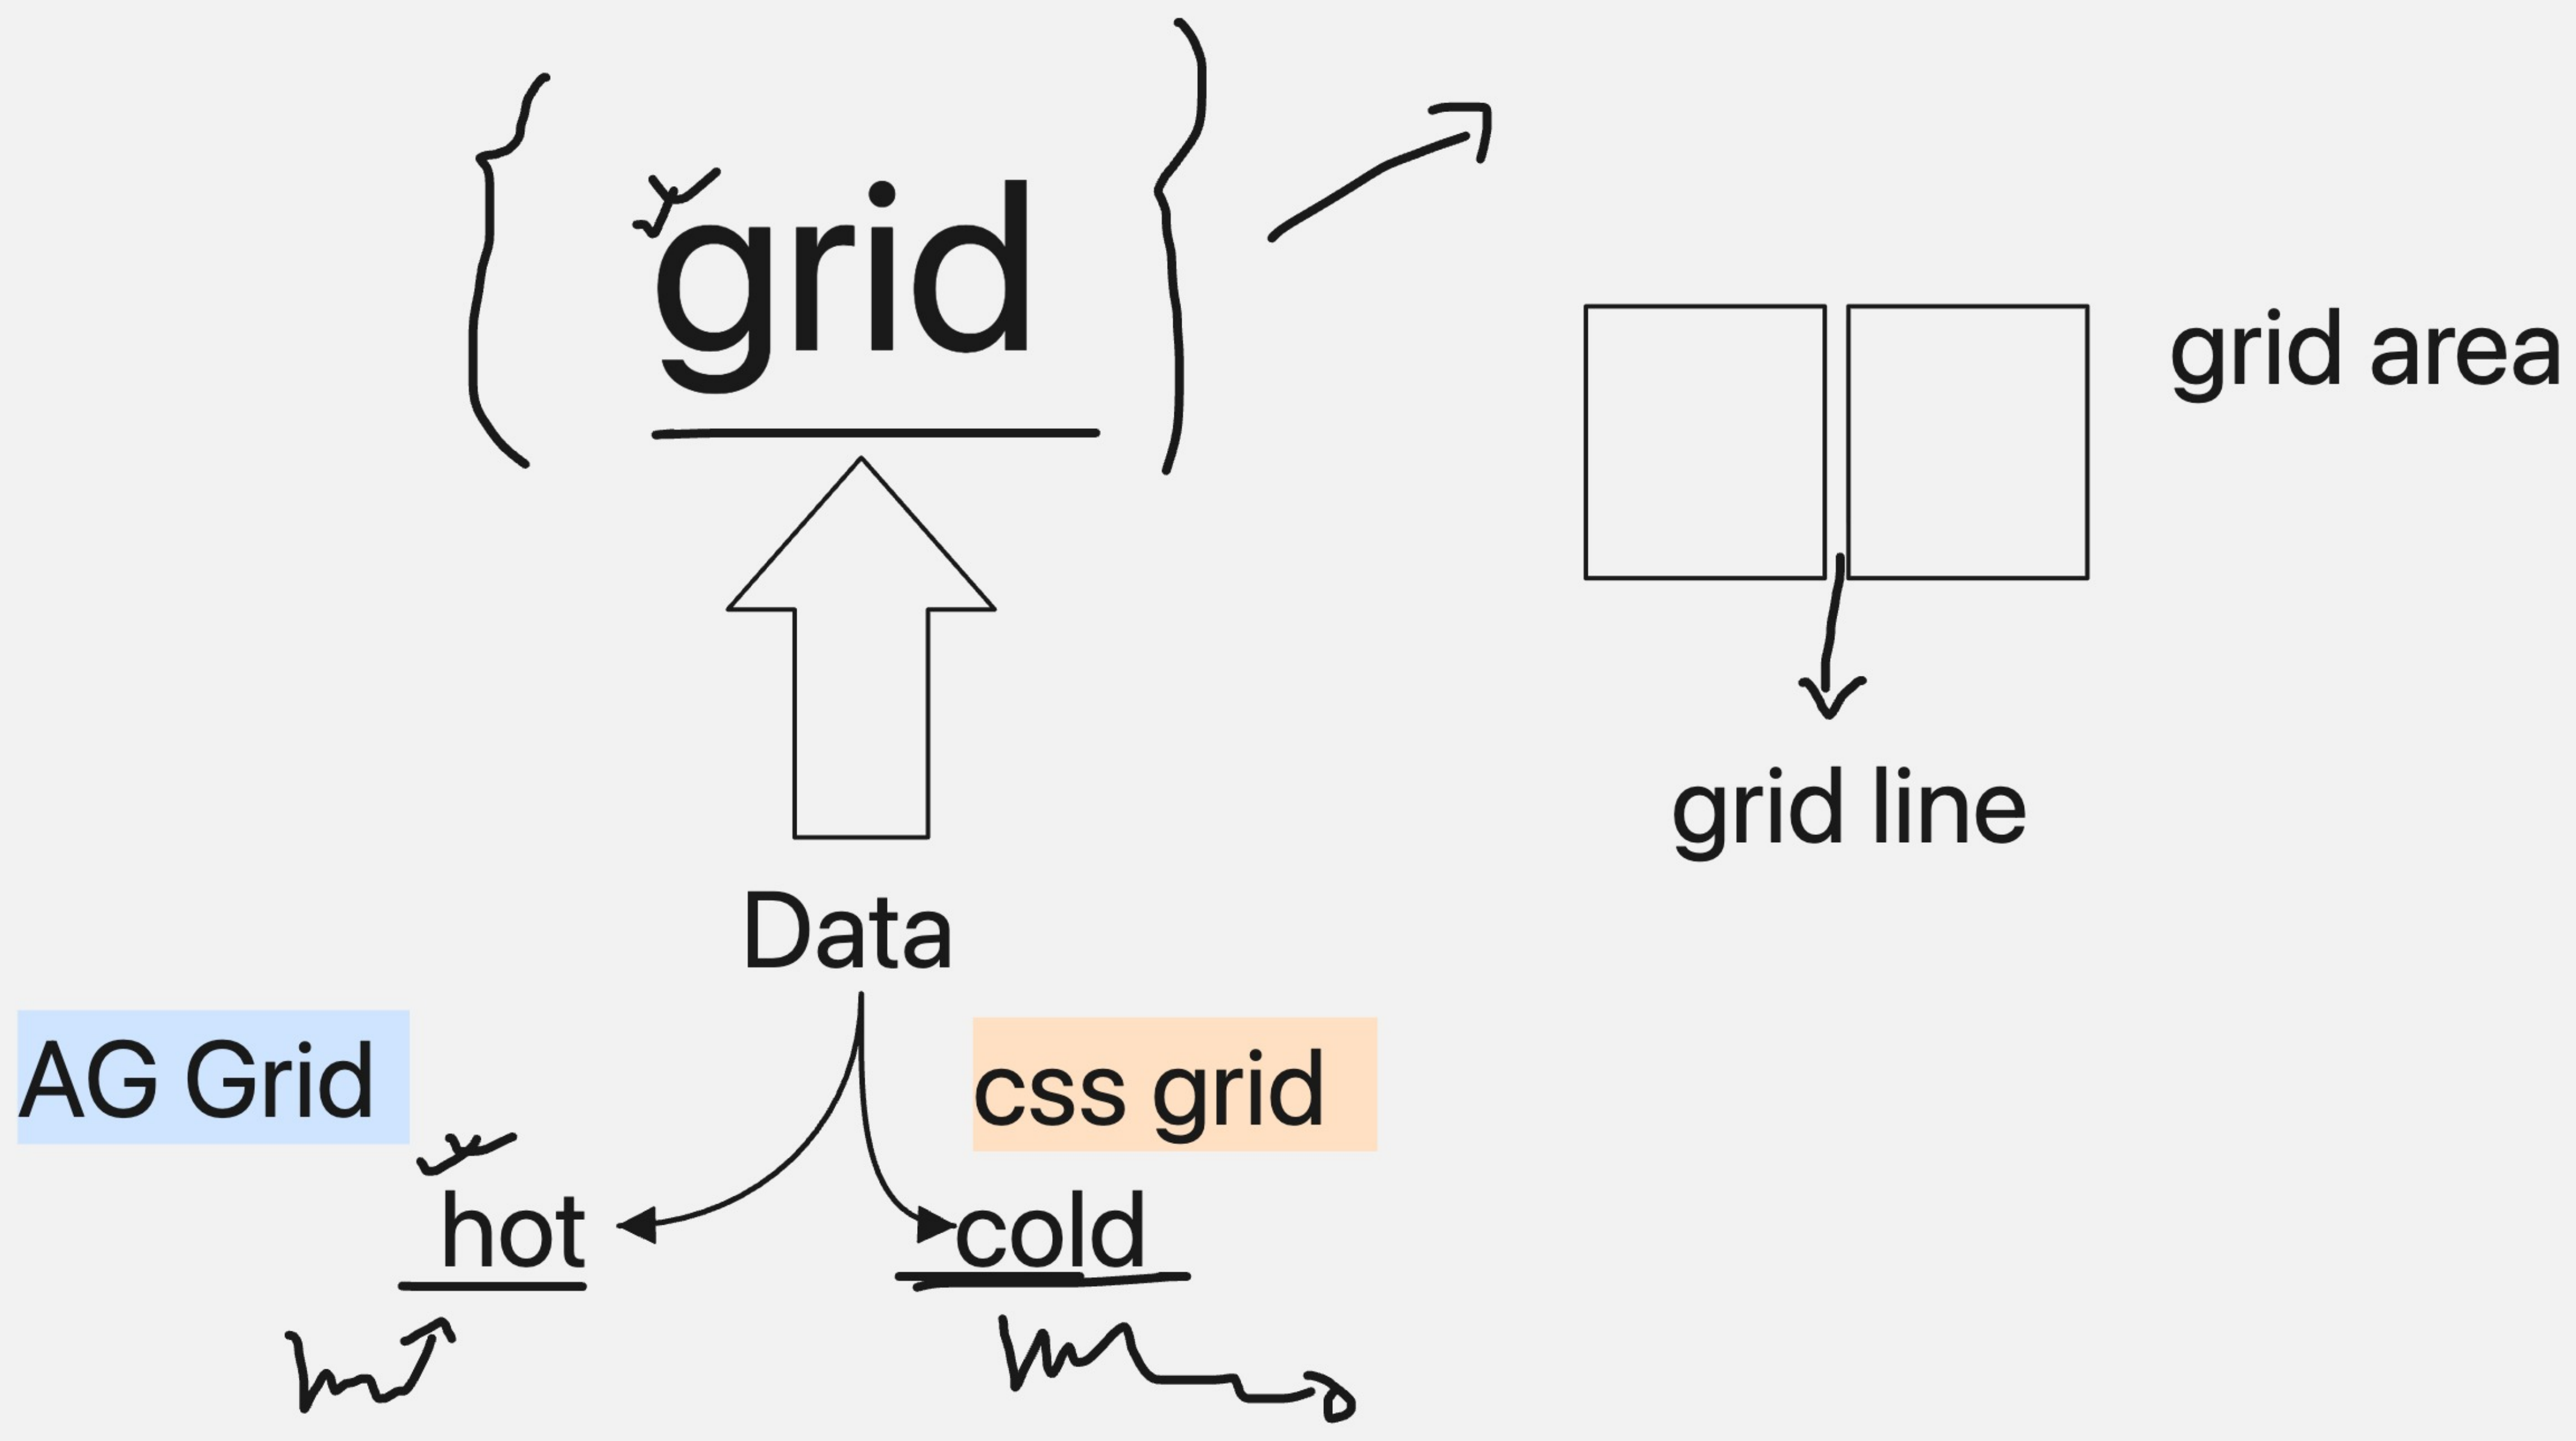

css variable : styling

variable = contain a value

a=5 | B = 101
value
-value

reUsable values

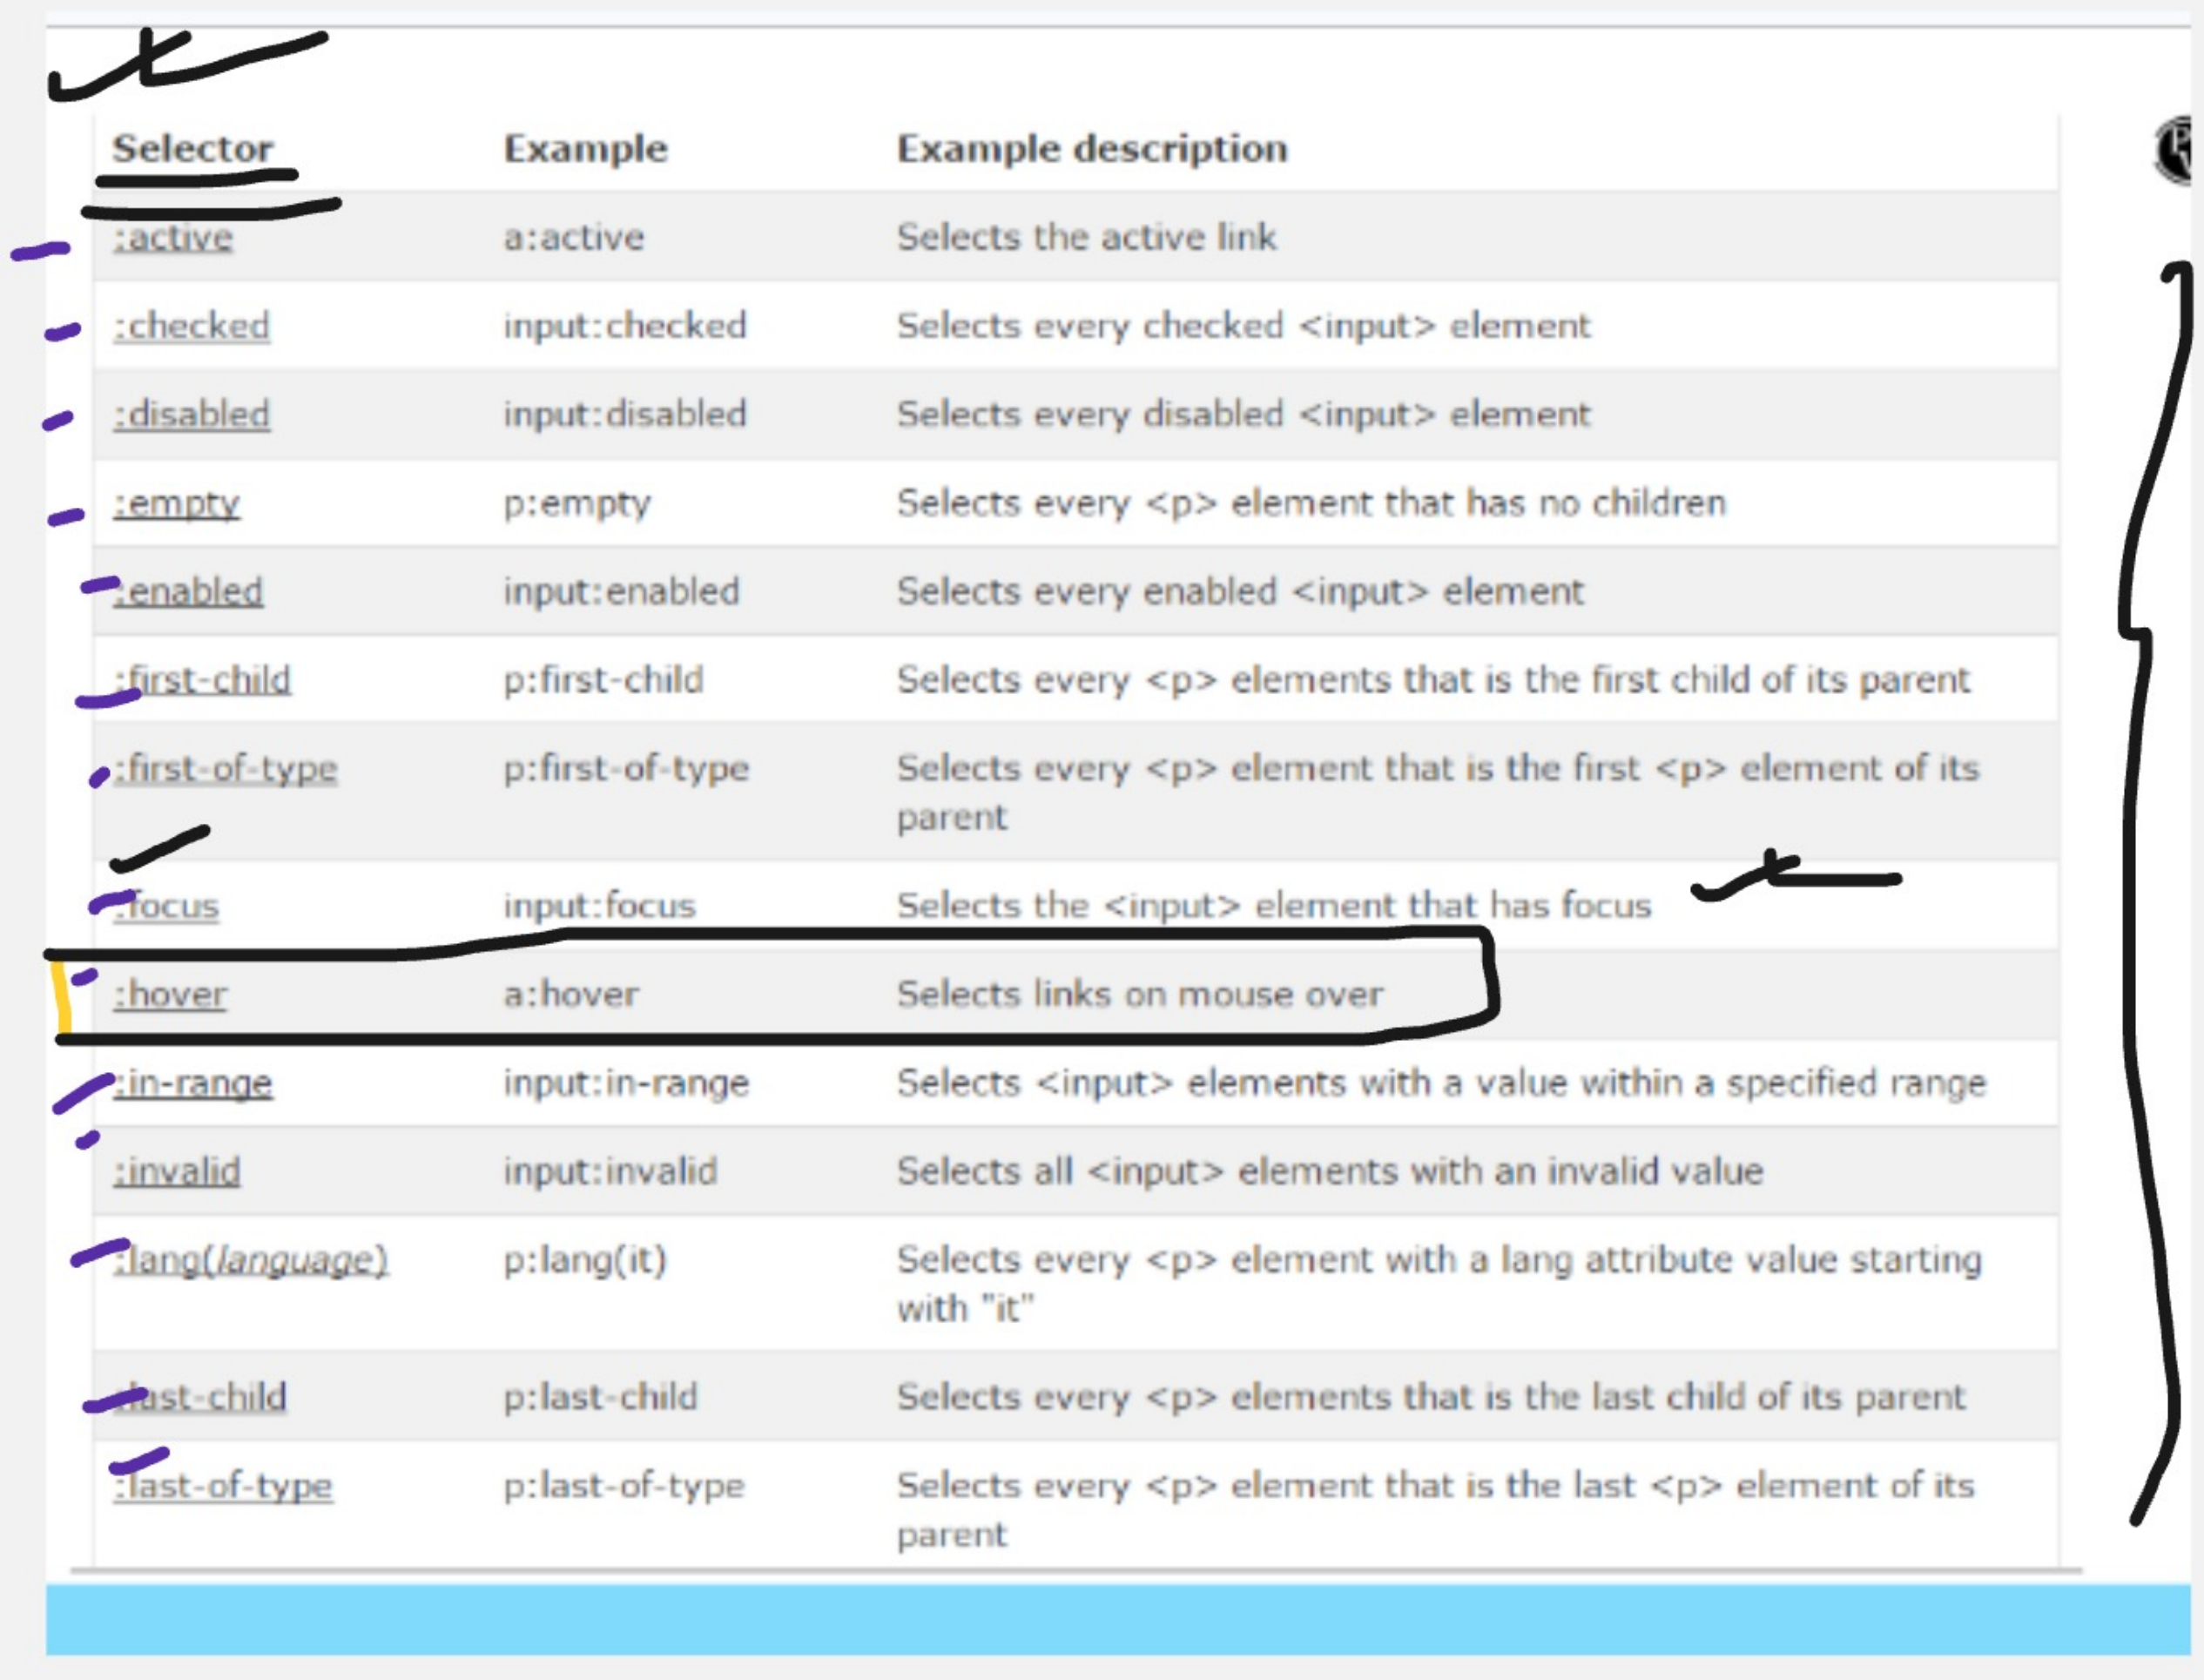

Selector	Example	Example description
:active	a:active	Selects the active link
:checked	input:checked	Selects every checked <input> element
:disabled	input:disabled	Selects every disabled <input> element
:empty	p:empty	Selects every <p> element that has no children
:enabled	input:enabled	Selects every enabled <input> element
:first-child	p:first-child	Selects every <p> elements that is the first child of its parent
:first-of-type	p:first-of-type	Selects every <p> element that is the first <p> element of its parent
:focus	input:focus	Selects the <input> element that has focus
:hover	a:hover	Selects links on mouse over
:in-range	input:in-range	Selects <input> elements with a value within a specified range
:invalid	input:invalid	Selects all <input> elements with an invalid value
:lang(*language*)	p:lang(it)	Selects every <p> element with a lang attribute value starting with "it"
:last-child	p:last-child	Selects every <p> elements that is the last child of its parent
:last-of-type	p:last-of-type	Selects every <p> element that is the last <p> element of its parent

4

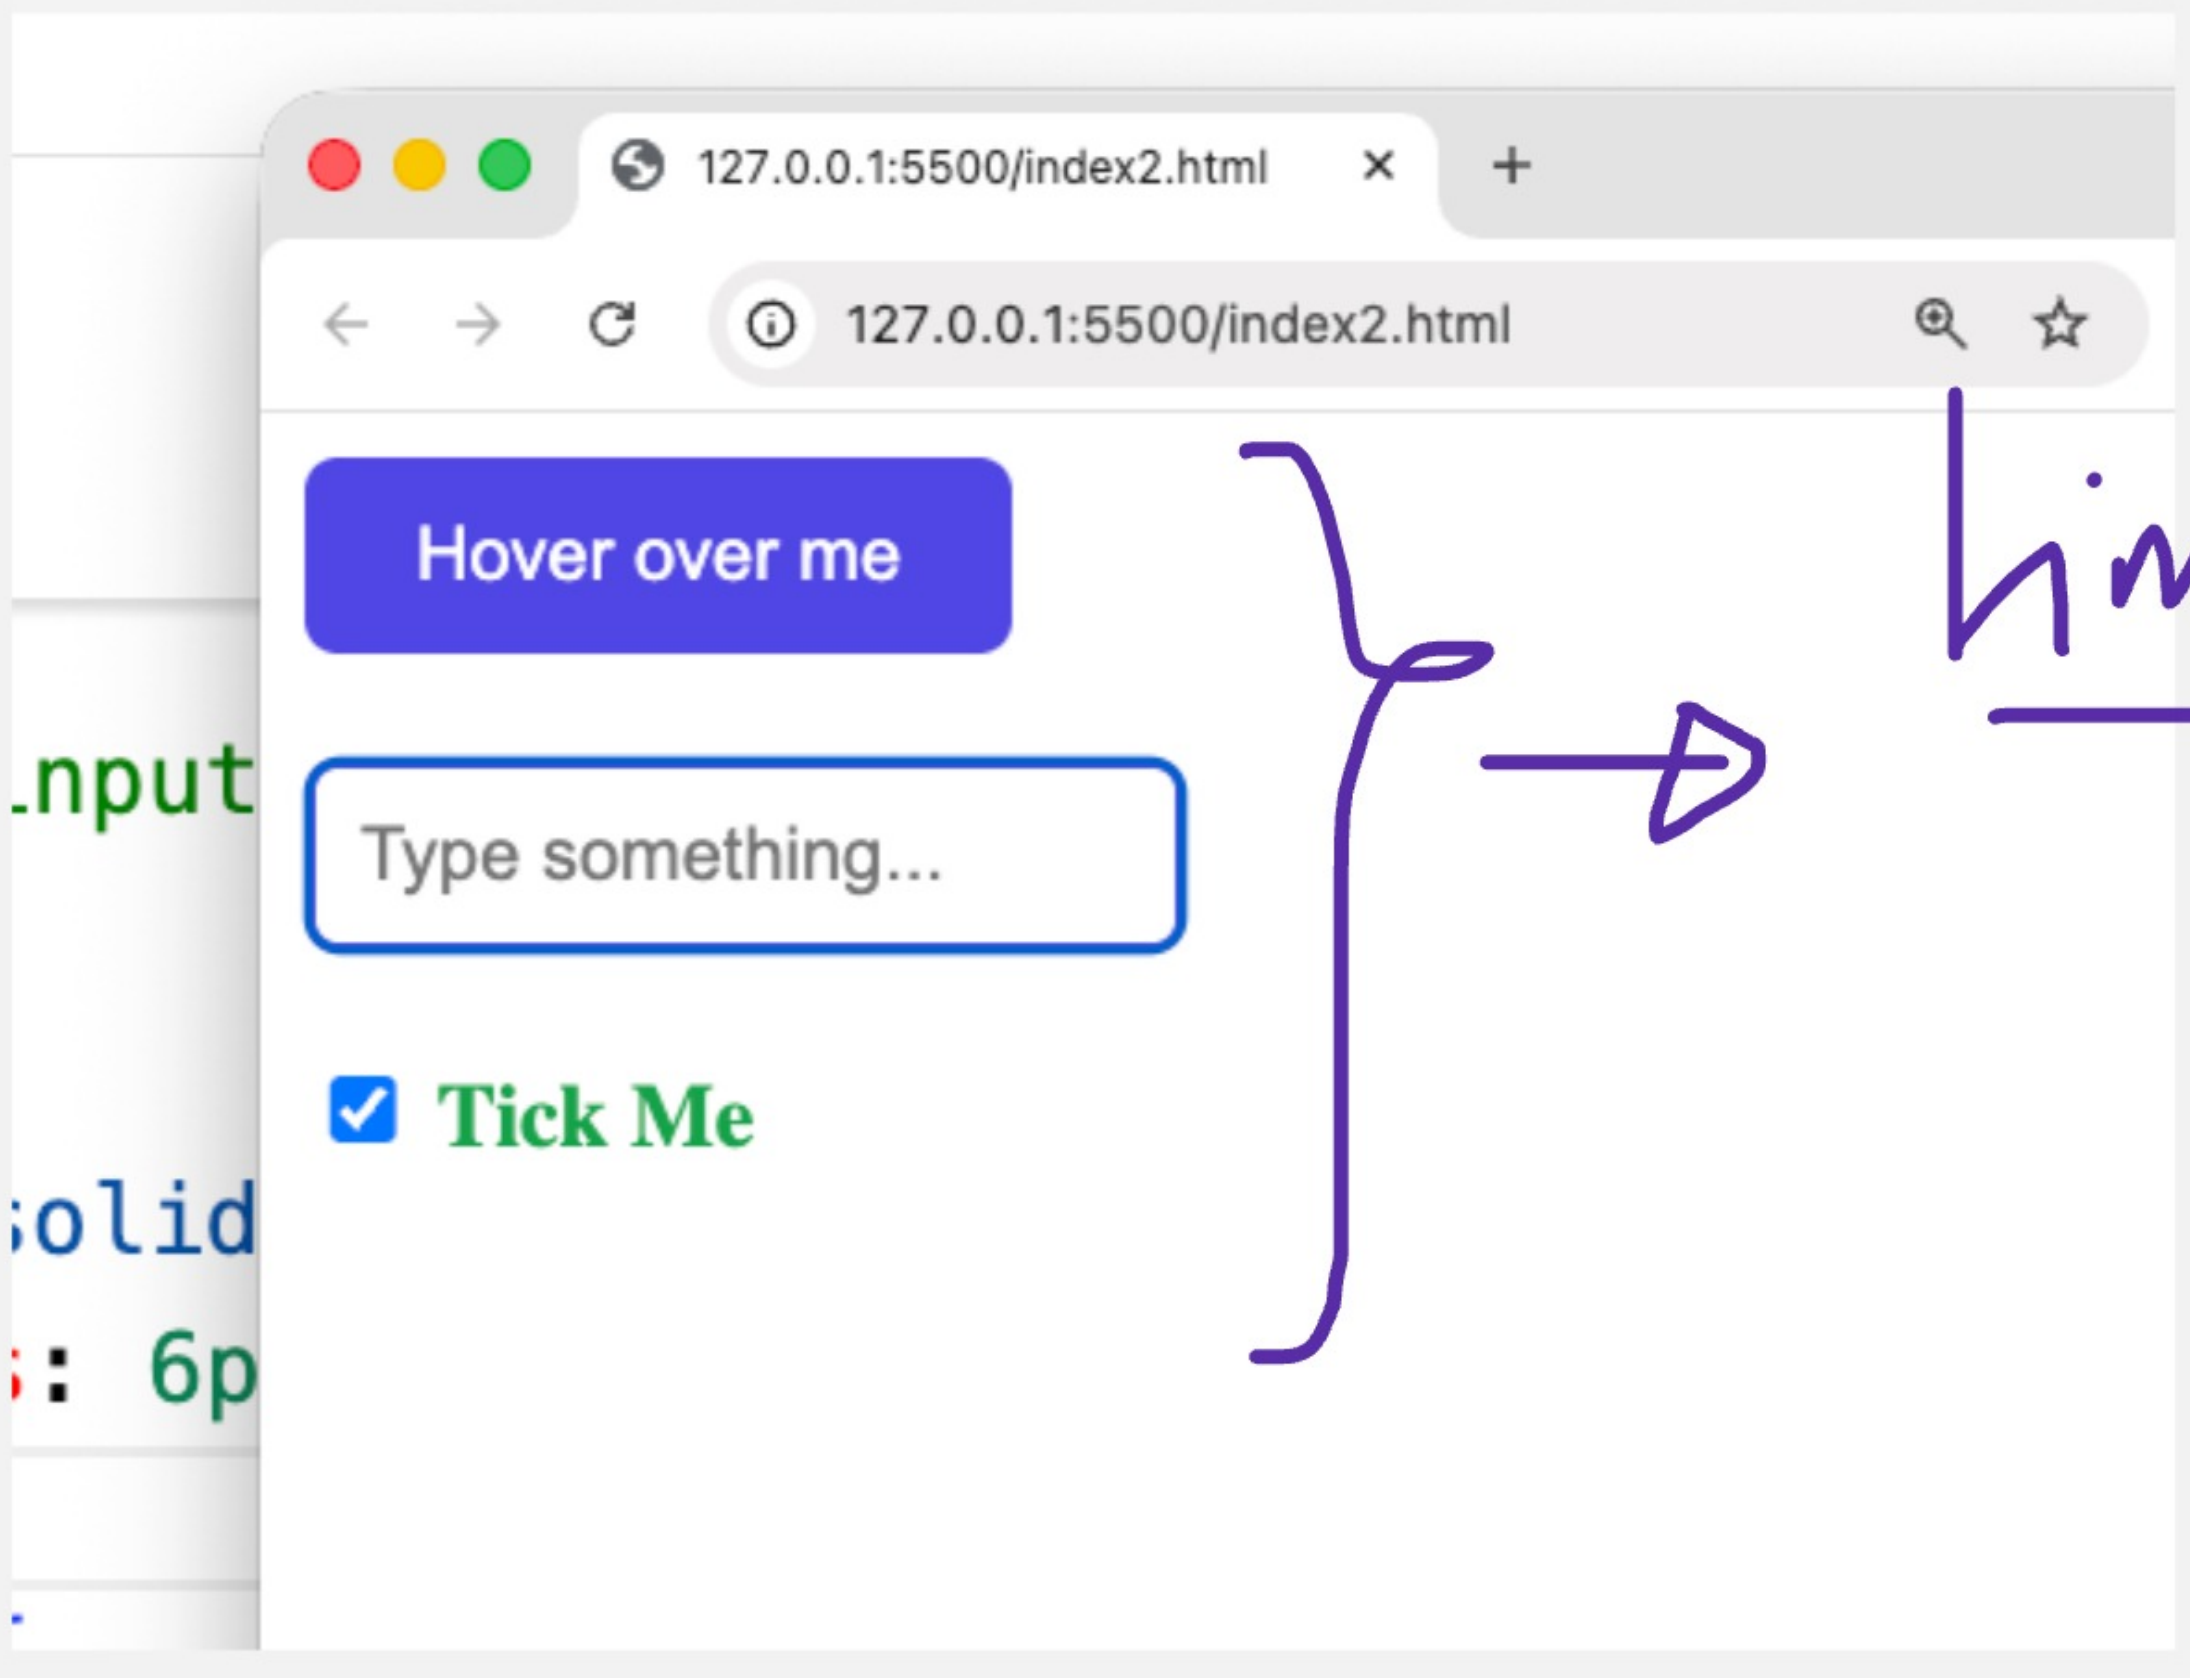

limitations

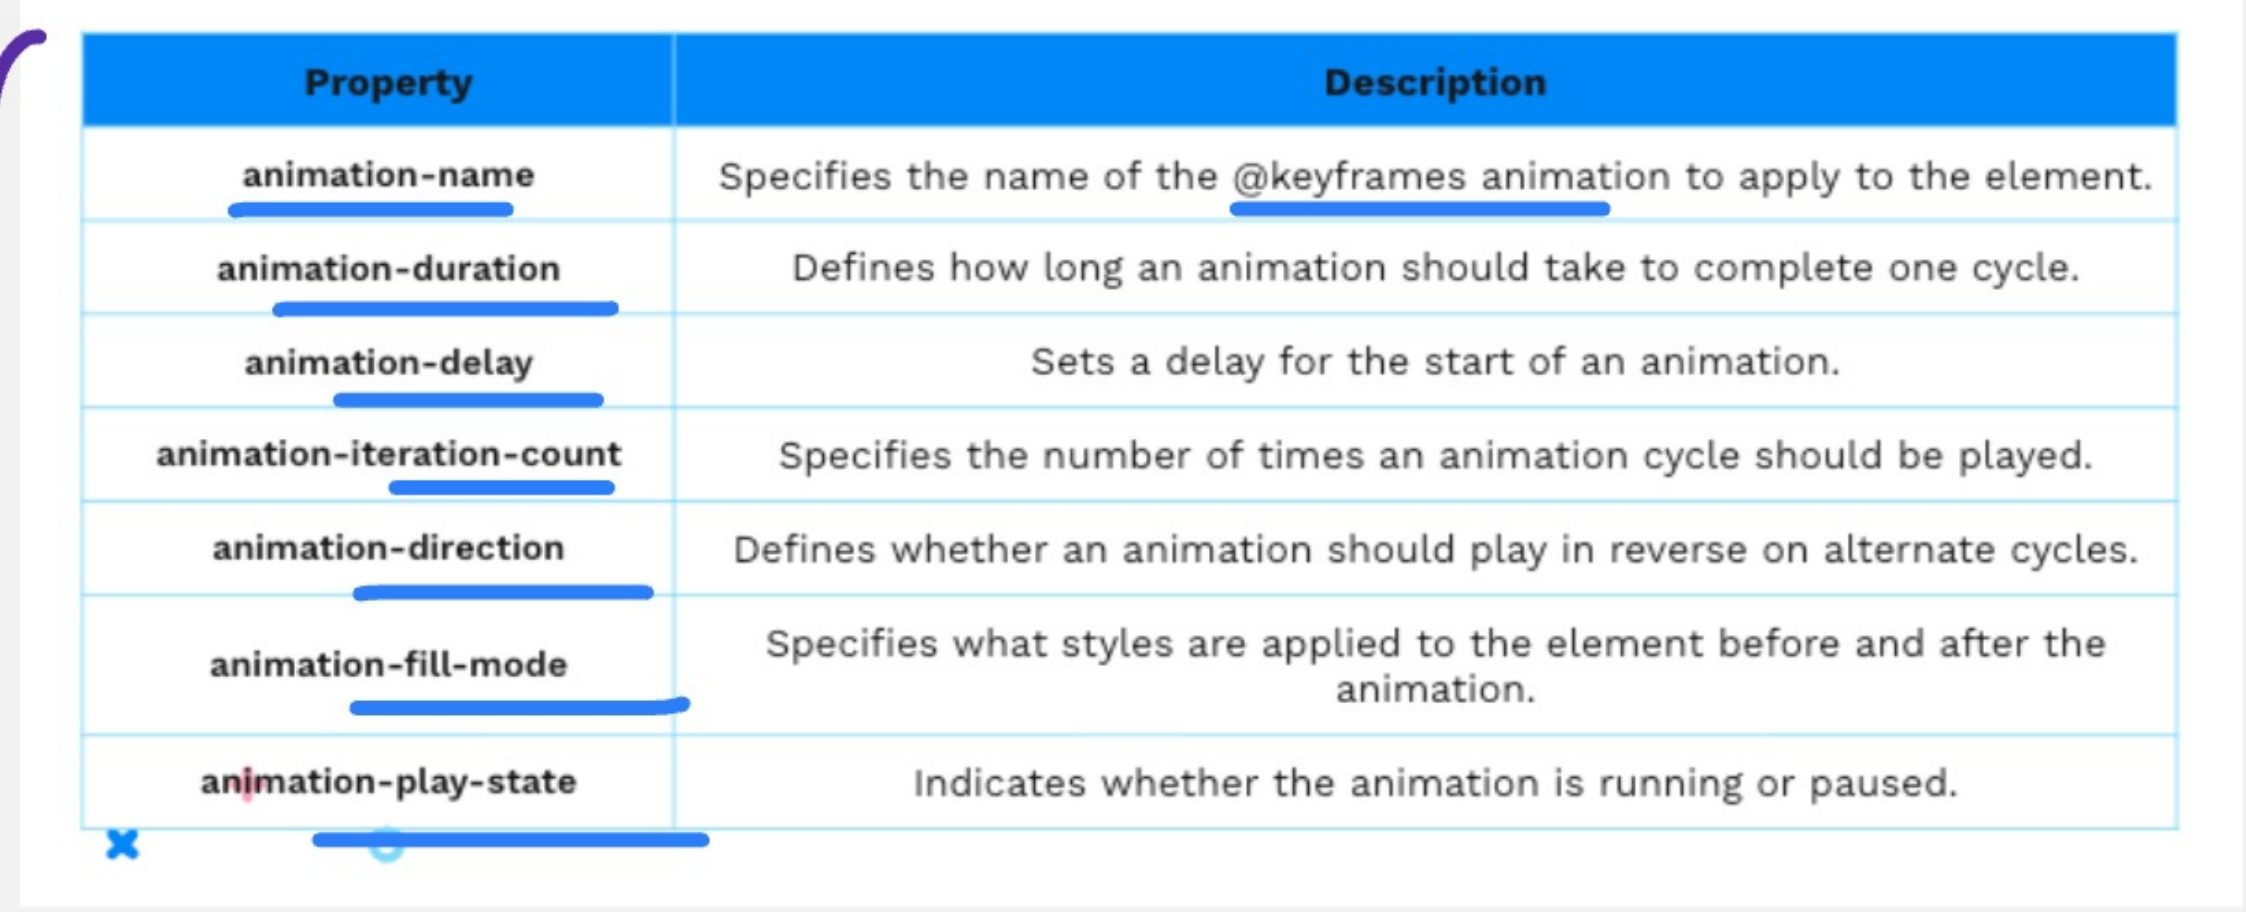

Property	Description
animation-name	Specifies the name of the @keyframes animation to apply to the element.
animation-duration	Defines how long an animation should take to complete one cycle.
animation-delay	Sets a delay for the start of an animation.
animation-iteration-count	Specifies the number of times an animation cycle should be played.
animation-direction	Defines whether an animation should play in reverse on alternate cycles.
animation-fill-mode	Specifies what styles are applied to the element before and after the animation.
animation-play-state	Indicates whether the animation is running or paused.

Right

Left