

# PIZZA SALES ANALYSIS

@SIDDHESH SINGH

# Hello!

Greetings, I am Siddhesh Singh, and in this project, I leverage SQL to address queries pertaining to a comprehensive Pizza Sales Report. Through SQL, I analyze and extract insights from the dataset, focusing on sales trends, customer behavior, and business performance within the pizza industry.



# Project's Aim

This **SQL** project on sales analysis aim to leverage data analysis techniques to extract valuable insights from a database, enabling stakeholders to make informed decisions and drive business growth in the competitive pizza industry.

# Retrieve the total number of orders placed.

```
SELECT  
    COUNT(order_id) AS total_orders  
FROM  
    orders;
```

	total_orders
▶	21350

# Calculate the total revenue generated from pizza sales.

```
SELECT  
    ROUND(SUM(order_details.quantity * pizzas.price),  
        2) AS total_revenue  
FROM  
    order_details  
    JOIN  
    pizzas ON order_details.pizza_id = pizzas.pizza_id;
```

	total_revenue
▶	817860.05

# Identify the highest-priced pizza.

```
SELECT  
    pizza_types.name, pizzas.price  
FROM  
    pizza_types  
        JOIN  
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id  
ORDER BY pizzas.price DESC  
LIMIT 1;
```

	name	price
▶	The Greek Pizza	35.95

# Identify the most common pizza size ordered.

```
SELECT  
    pizzas.size,  
    COUNT(order_details.order_details_id) AS order_count  
FROM  
    pizzas  
        JOIN  
            order_details ON pizzas.pizza_id = order_details.pizza_id  
GROUP BY pizzas.size  
ORDER BY order_count DESC;
```

	size	order_count
▶	L	18526
	M	15385
	S	14137
	XL	544
	XXL	28

# List the top 5 most ordered pizza types along with their quantities.

```
SELECT  
    pizza_types.name, SUM(order_details.quantity) AS quantity  
FROM  
    pizza_types  
        JOIN  
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id  
        JOIN  
    order_details ON order_details.pizza_id = pizzas.pizza_id  
GROUP BY pizza_types.name  
ORDER BY quantity DESC  
LIMIT 5;
```

name	quantity
The Classic Deluxe Pizza	2453
The Barbecue Chicken Pizza	2432
The Hawaiian Pizza	2422
The Pepperoni Pizza	2418
The Thai Chicken Pizza	2371

# Join the necessary tables to find the total quantity of each pizza category ordered.

SELECT


```
    pizza_types.category,  
    SUM(order_details.quantity) AS quantity  
FROM  
    pizza_types  
        JOIN  
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id  
        JOIN  
    order_details ON order_details.pizza_id = pizzas.pizza_id  
GROUP BY pizza_types.category  
ORDER BY quantity DESC;
```

	category	quantity
▶	Classic	14888
	Supreme	11987
	Veggie	11649
	Chicken	11050

# Determine the distribution of orders by hour of the day.

```
SELECT  
    HOUR(order_time) AS hour, COUNT(order_id) AS order_count  
FROM  
    orders  
GROUP BY HOUR(order_time);
```


	hour	order_count
▶	11	1231
	12	2520
	13	2455
	14	1472
	15	1468
	16	1920
	17	2336
	18	2399
	19	2009
	20	1642
	21	1198
	22	663
	23	28
	10	8
	9	1

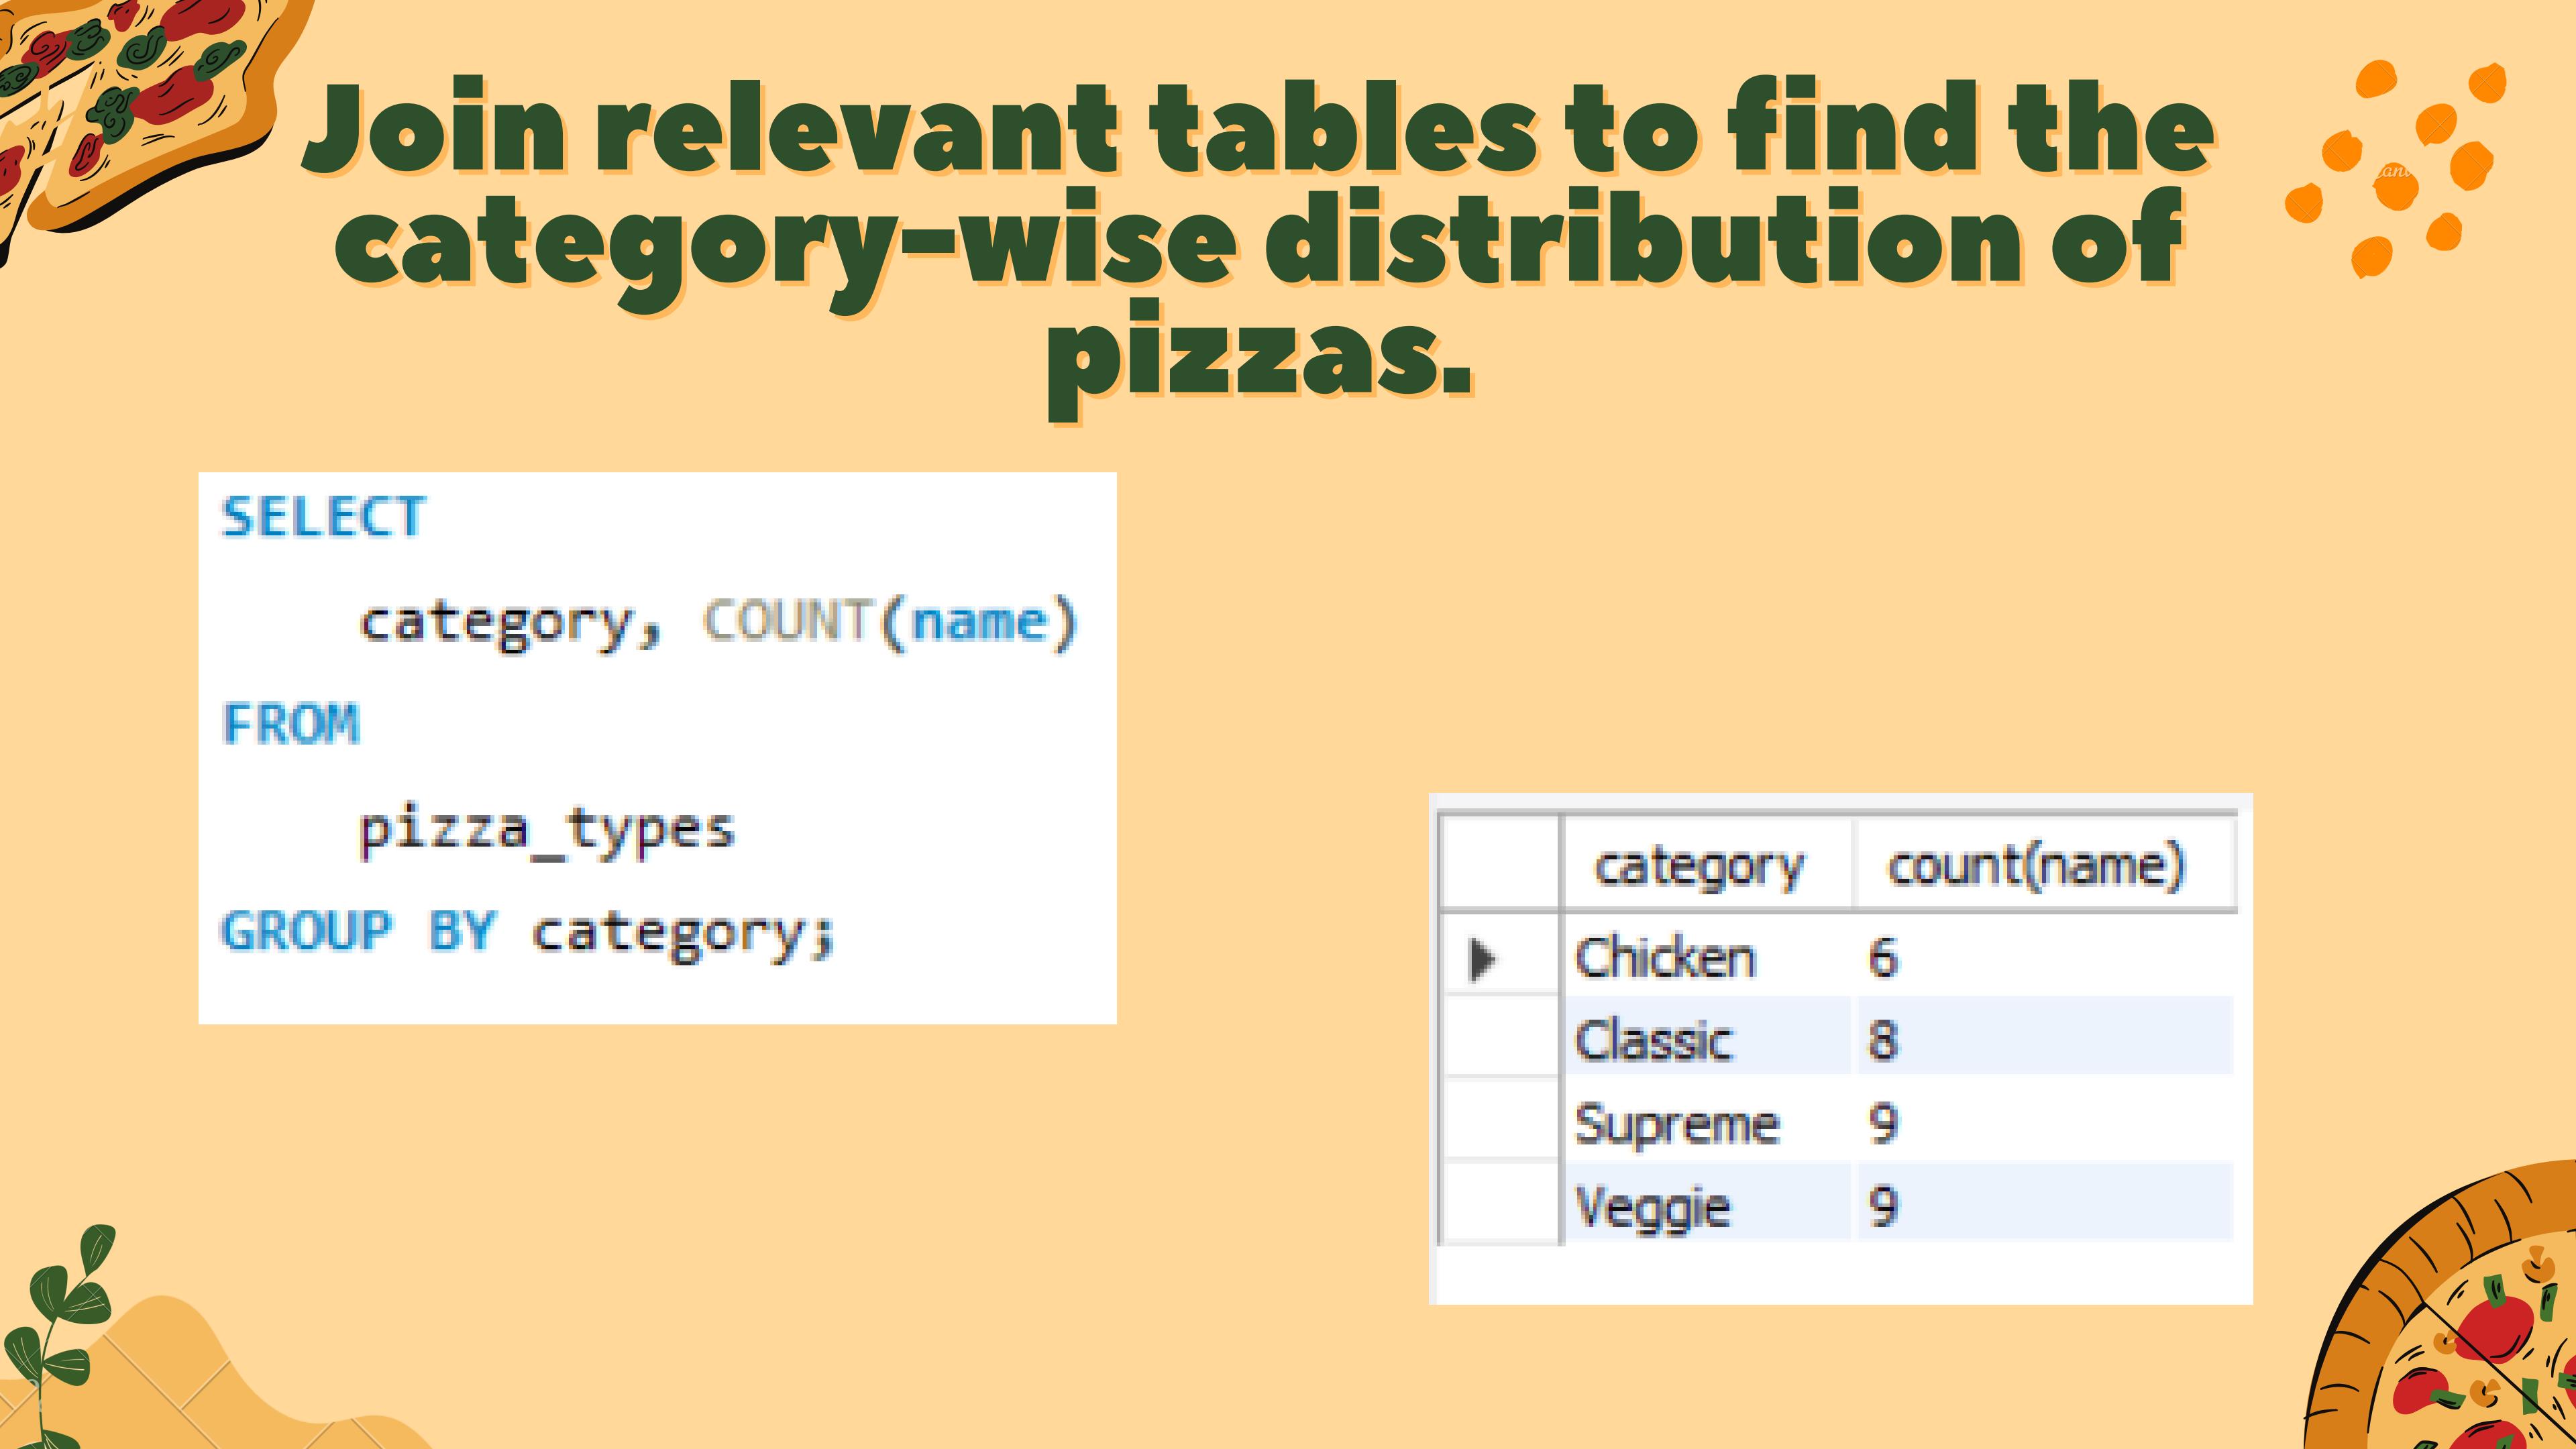

# Join relevant tables to find the category-wise distribution of pizzas.

```
SELECT  
    category, COUNT(name)  
FROM  
    pizza_types  
GROUP BY category;
```

	category	count(name)
▶	Chicken	6
	Classic	8
	Supreme	9
	Veggie	9

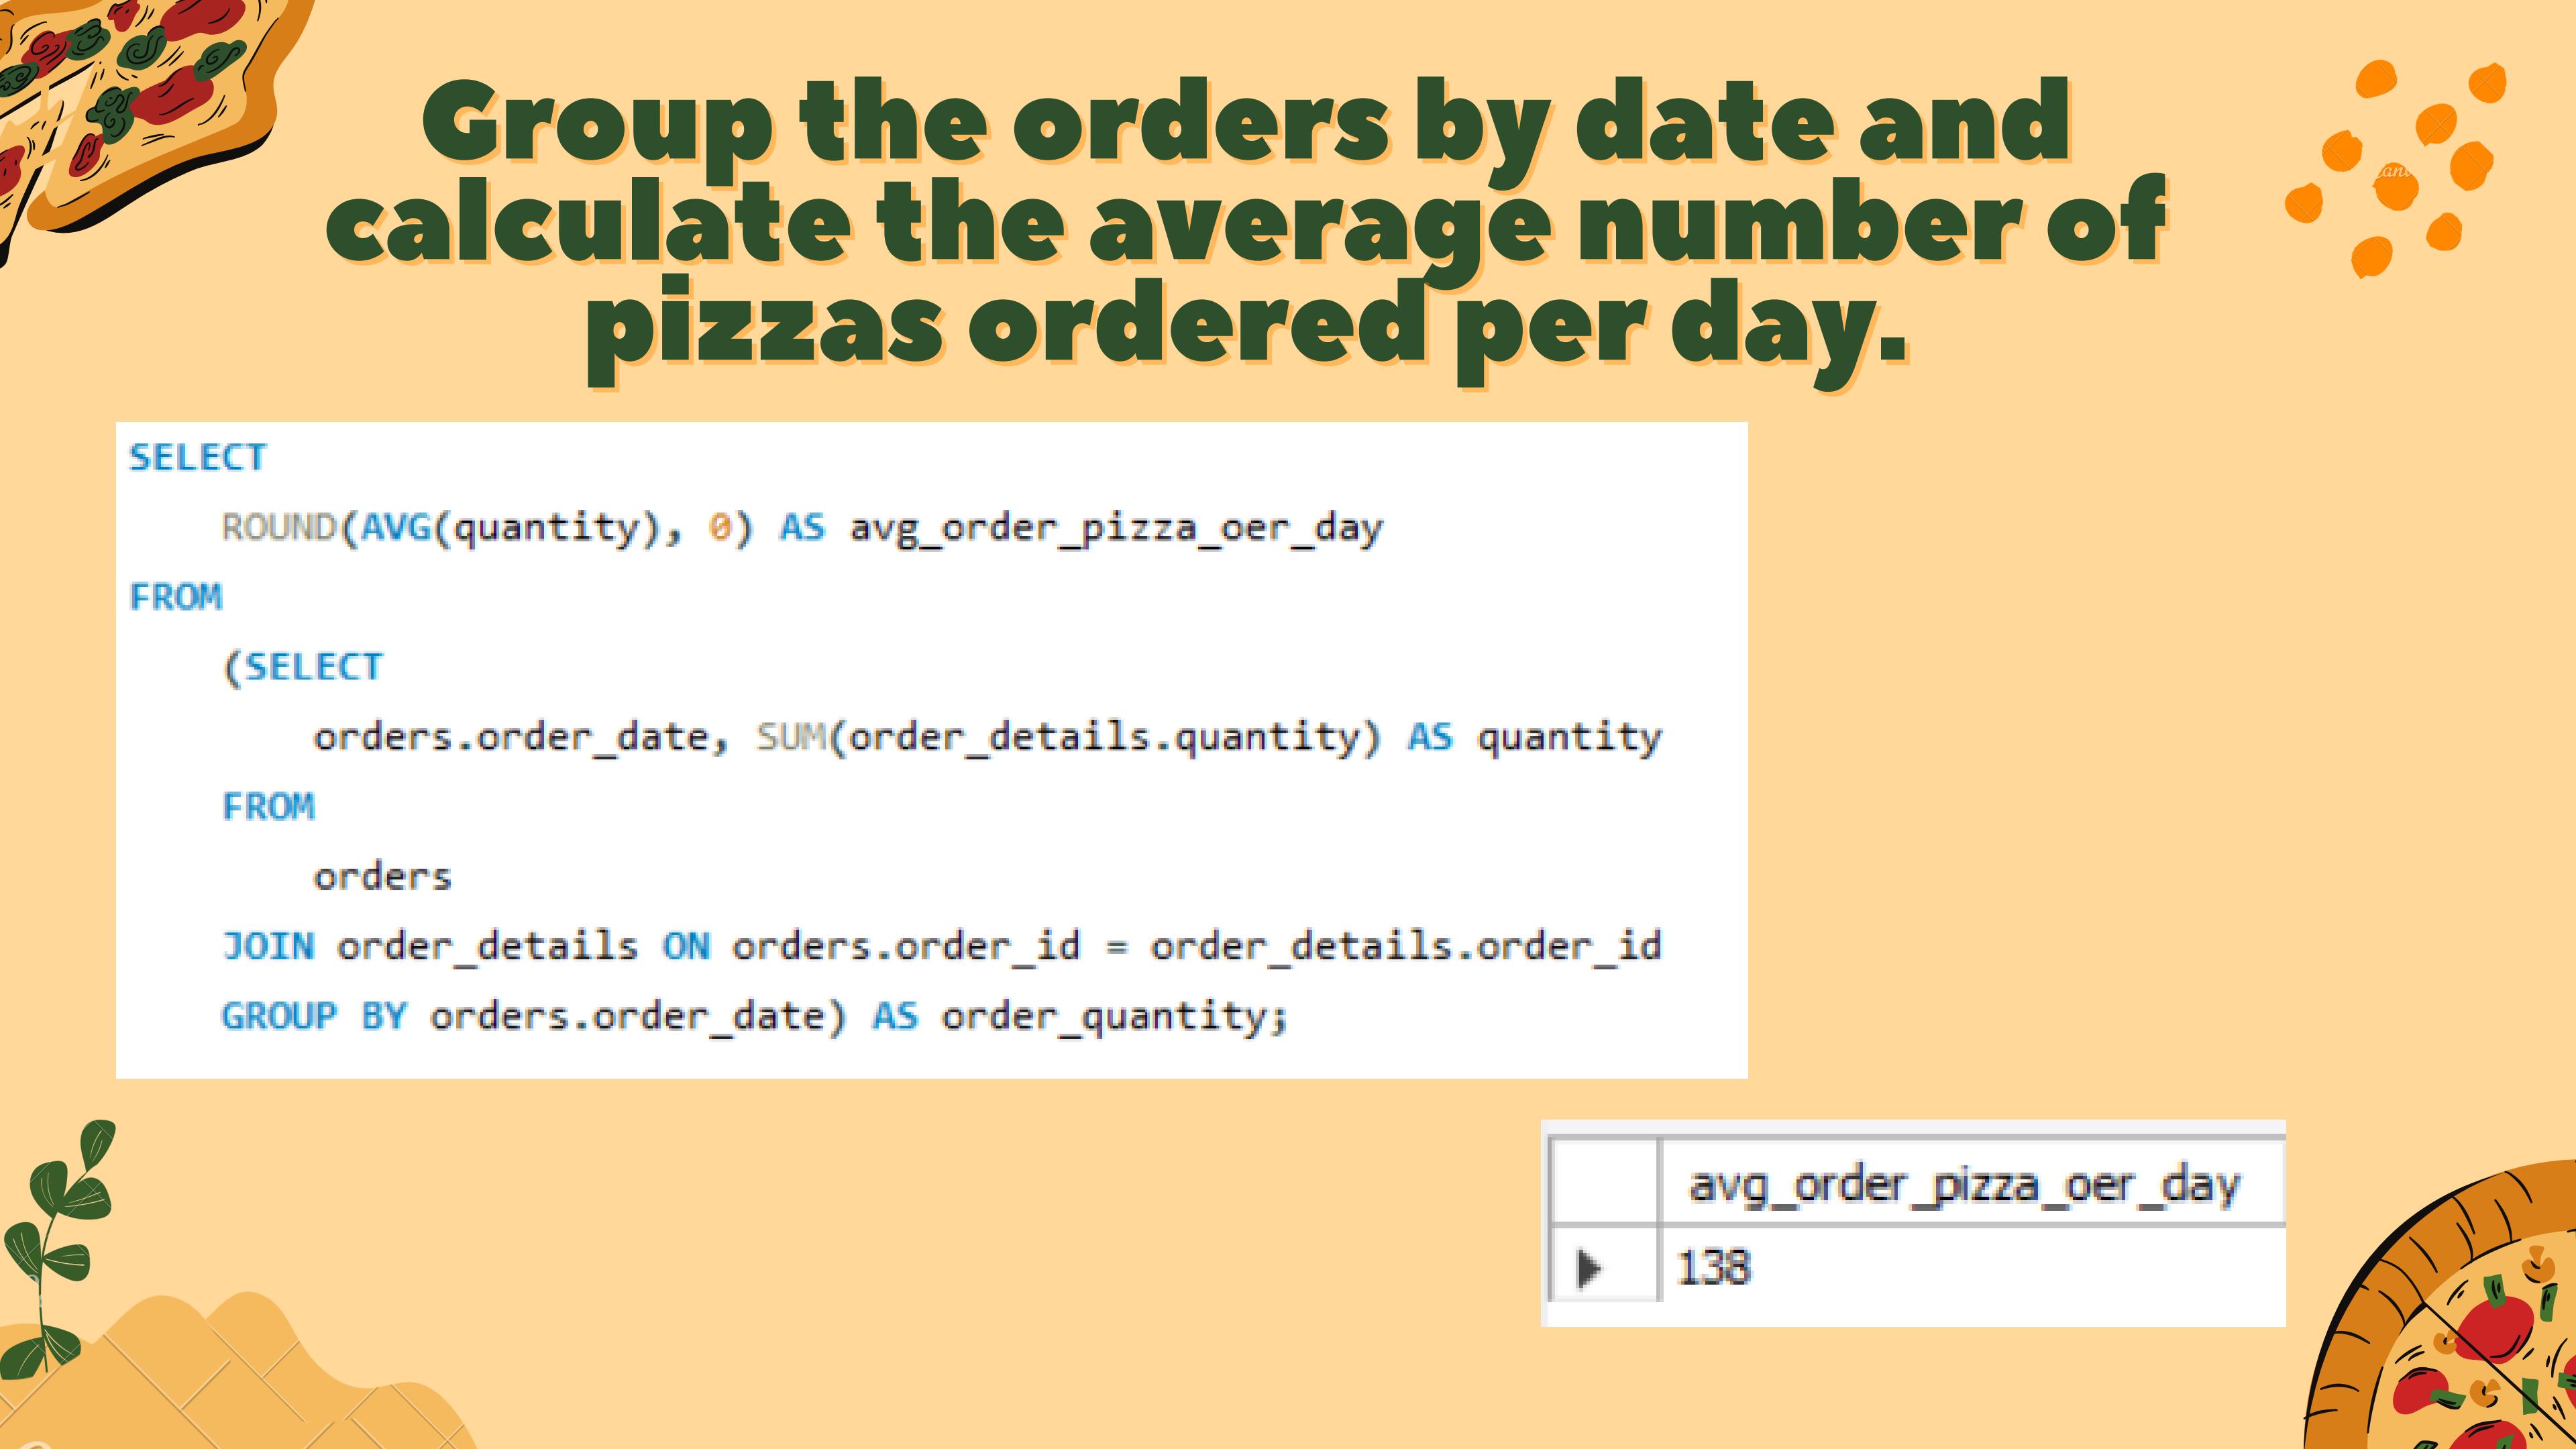

# Group the orders by date and calculate the average number of pizzas ordered per day.


```
SELECT  
    ROUND(AVG(quantity), 0) AS avg_order_pizza_oer_day  
FROM  
    (SELECT  
        orders.order_date, SUM(order_details.quantity) AS quantity  
    FROM  
        orders  
    JOIN order_details ON orders.order_id = order_details.order_id  
    GROUP BY orders.order_date) AS order_quantity;
```

	avg_order_pizza_oer_day
▶	138

# Determine the top 3 most ordered pizza types based on revenue.

```
SELECT  
    pizza_types.name,  
    SUM(order_details.quantity * pizzas.price) AS revenue  
FROM  
    pizza_types  
        JOIN  
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id  
        JOIN  
    order_details ON order_details.pizza_id = pizzas.pizza_id  
GROUP BY pizza_types.name  
ORDER BY revenue DESC  
LIMIT 3;
```

name	revenue
The Thai Chicken Pizza	43434.25
The Barbecue Chicken Pizza	42768
The California Chicken Pizza	41409.5

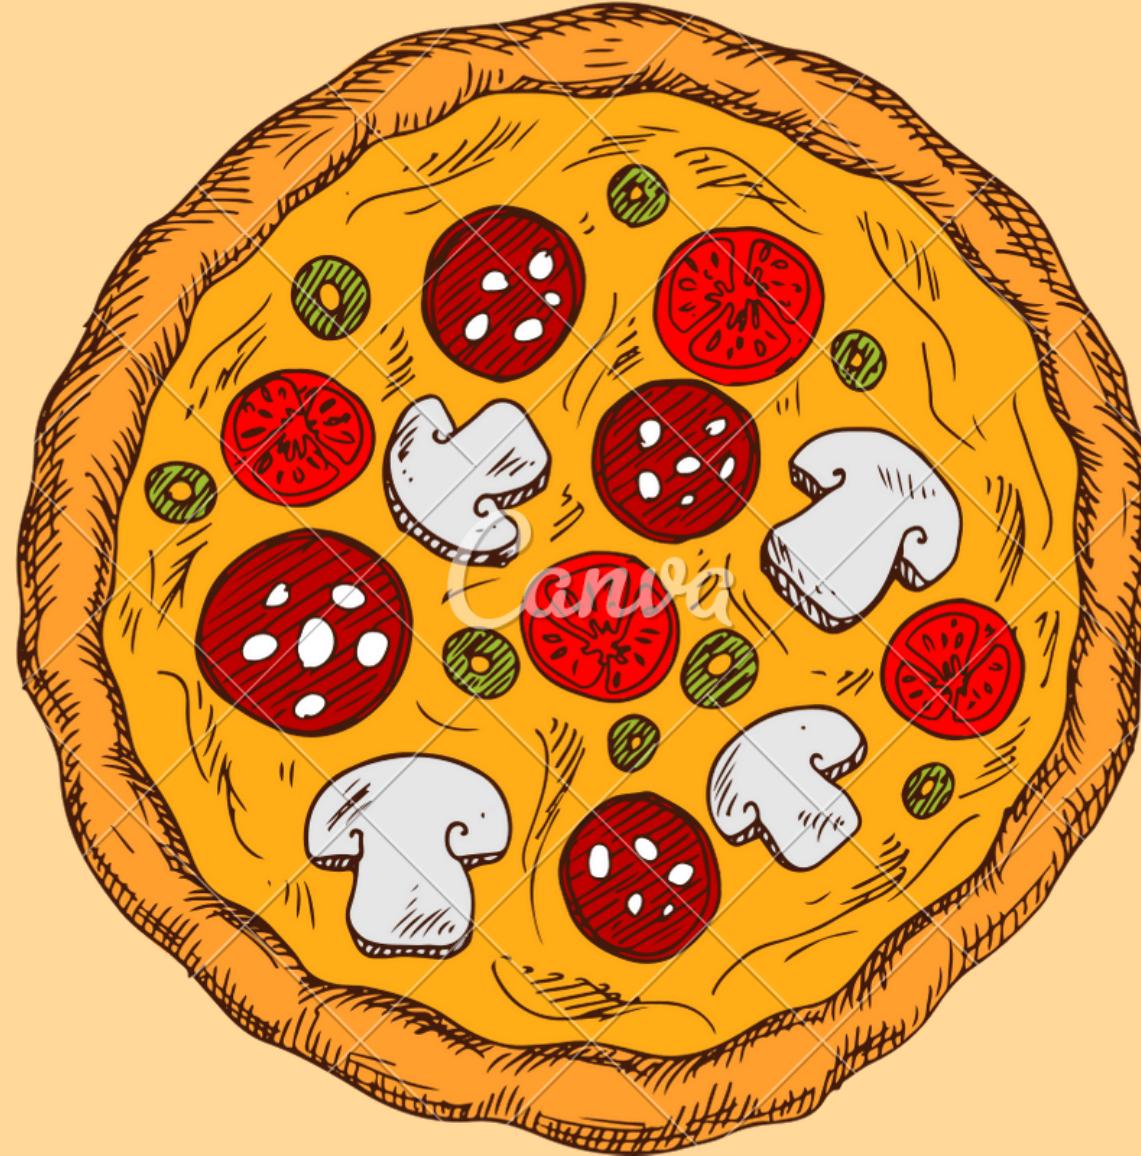

Pizza Sales Analysis

**THANK  
YOU**