Doubt class

17 September 2025 20:19

```
public class ContinueExample
{
    public static void main(String[] args){
        int i;
        System.out.print("\f");
        for(i = 1 ; i < 50; i++){
            if(i % 3 == 0 || i % 5 == 0 || i % 7 == 0){
                continue; //will skip the statements written after it,
            }
            System.out.print(i+" ");
        }
    }
}
```

false

BlueJ: Terminal Window - AaditClass7

Options

```
1 2 4 8 11 13 16 17 19 22 23 26 29 31 32 34 37 38 41 43 44 46 47
```

```
public class ContinueExample
{
    public static void main(String[] args){
        int i;
        System.out.print("\f");
        for(i = 1 ; i < 50; i++){
            if(i % 3 == 0 || i % 5 == 0 || i % 7 == 0){
                break; //will terminate the current loop block,
            }
            System.out.print(i+" ");
        }
    }
}
```

BlueJ: Terminal Window - AaditClass7

Options

```
1 2
```

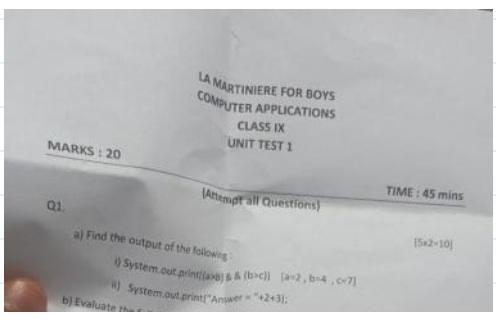
LA MARTINIERE FOR BOYS
COMPUTER APPLICATIONS
CLASS IX
UNIT TEST 1

MARKS : 20

TIME : 45 mins

(Attempt all Questions)

Q1.

a) Find the output of the following : [5x2=10]

i) System.out.print((a>b) && (b>c)) [a=2 , b=4 , c=7]

ii) System.out.print("Answer = "+2+3);

b) Evaluate the

String > int

"Answer = " + 2 + 3

String

int

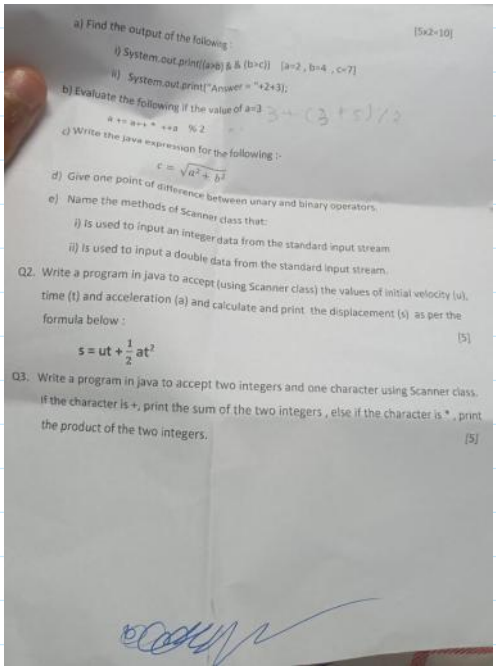

a) Find the output of the following : [5x2=10]

i) System.out.print((a>b) && (b>c)) [a=2 , b=4 , c=7]

ii) System.out.print("Answer = "+2+3);

b) Evaluate the following if the value of a=3 3+(3+5)/2

a += a++ * ++a % 2

c) Write the java expression for the following :-

$c = \sqrt{a^2 + b^2}$

d) Give one point of difference between unary and binary operators.

e) Name the methods of Scanner class that:

i) Is used to input an integer data from the standard input stream

ii) Is used to input a double data from the standard input stream.

Q2. Write a program in java to accept (using Scanner class) the values of initial velocity (u), time (t) and acceleration (a) and calculate and print the displacement (s) as per the formula below : [5]

$s = ut + \frac{1}{2}at^2$

Q3. Write a program in java to accept two integers and one character using Scanner class. If the character is +, print the sum of the two integers , else if the character is *, print the product of the two integers. [5]

"Answer = " + 2 + 3

String

int

string

PEDMAS.

() ← use to upated the precedence of a particular expression.

int, char, string.

changing the precedence

"Answer = " + (2 + 3)

String > Double > Float > Long > int > short > char > byte > boolean.

d = Math.PI

P%2 * 3

*3

P*2 % 3

a = 3 4 5

→ a += a++ * ++a %2

→ a = a + (a++ * ++a %2)

= 3 + (3 * 5 %2)

= 3 + 1

= 4

a += a++ * ++a %2

a = a + (a++ * ++a %2)

= 3 + (3 + 5 %2)

= 3 + (3+1)

= 7

Logical Error → solution is wrong

Syntax Error(s) → are detected by the compiler.

Runtime Errors → are detected during the execution of the code.

default or implicit is same, when we convert lower data type to higher data type.

double d = 10; // implicit type casting (int → double)

int x = d; // Compiler will complain. double cannot be convert to int

int x = (int) d; // explicit type casting

char c = 'A';

double d = 2.5;

implicit type int alpha = c;

int alpha = c;

IEEE 64bit type

IEEE 32bit type

8 byte

double > float > long >

double d = 2.5;

→ String x = d;

class

primitive type

not allowed.