Introduction to BlueJ IDE

Thursday, November 2, 2023 8:09 PM

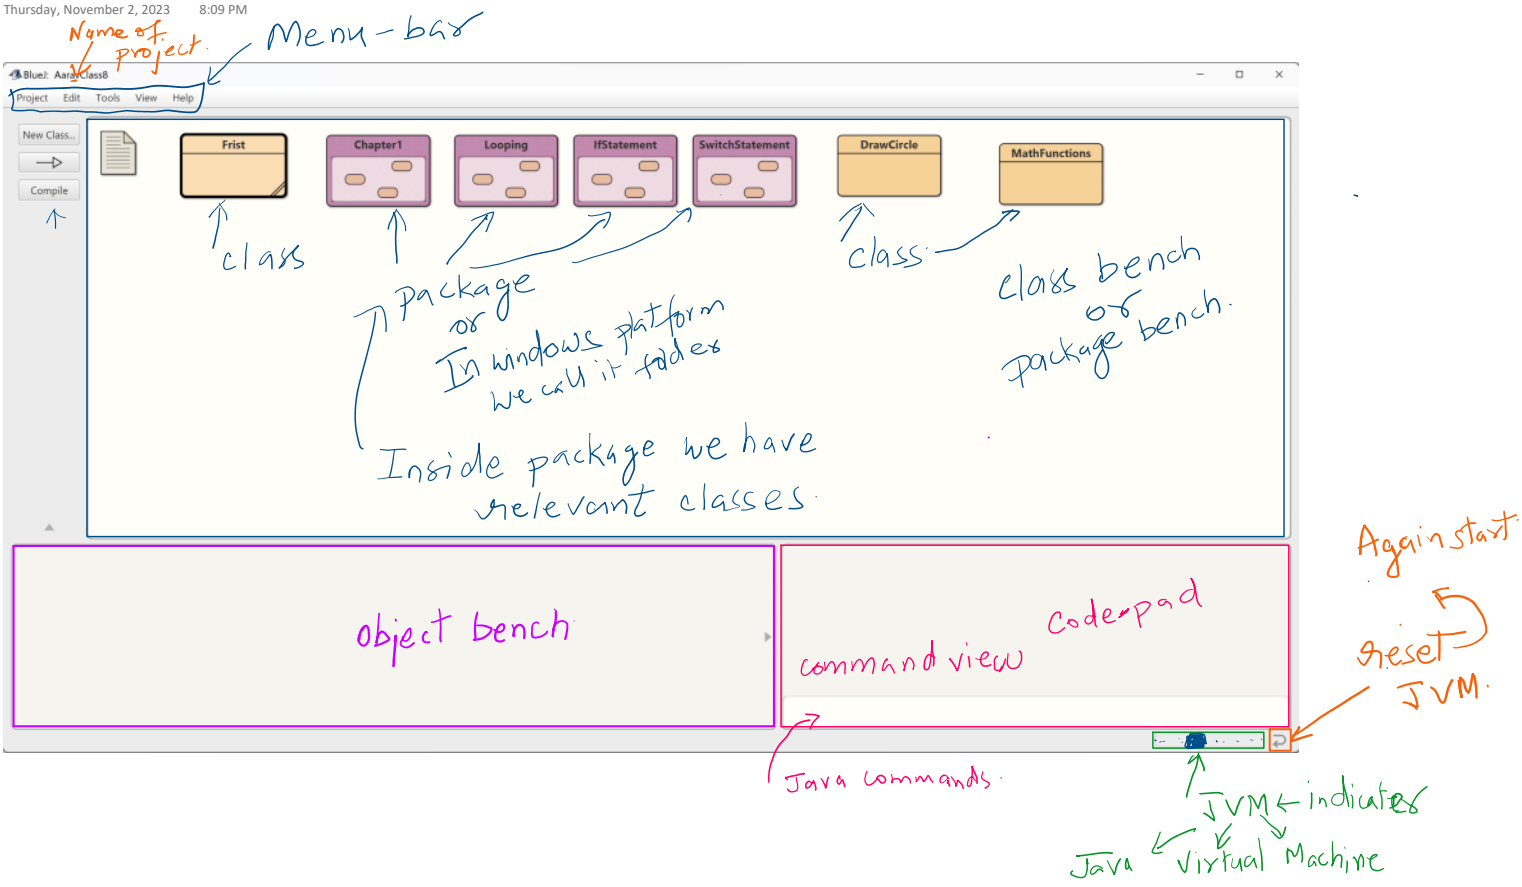

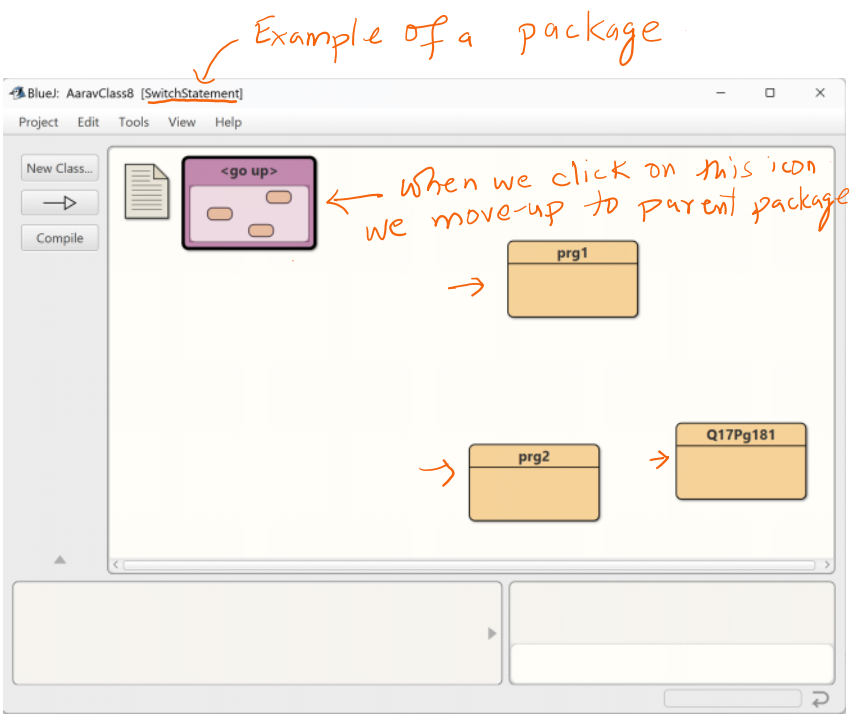

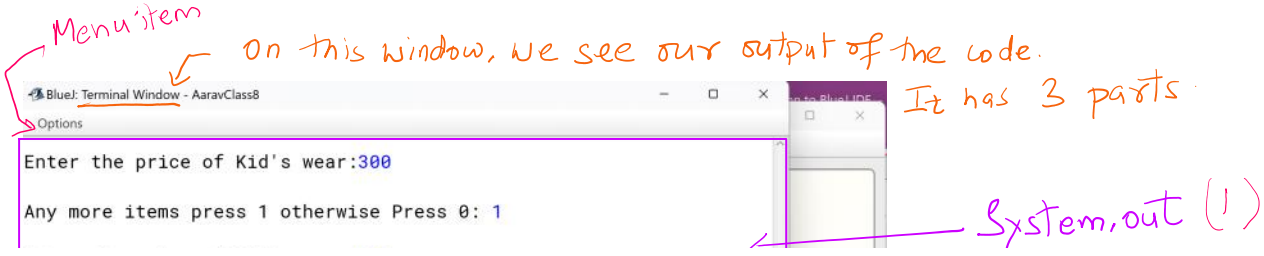

```
Enter the price of Kid's wear:300

Any more items press 1 otherwise Press 0: 1

Enter the price of Kid's wear:320

Any more items press 1 otherwise Press 0: 1

Enter the price of Kid's wear:450

Any more items press 1 otherwise Press 0: 0

1. Ground floor: Kids Wear
2. First floor: Ladies Wear
3. Second floor: Designer Sarees
4. Thrid floor: Men's Wear
5. Exit and Print the Bill
Enter the floor number:
Type input and press Enter to send to program
```

System.out (1)

System.in. (2)

BlueJ: Terminal Window - AaravClass8

Options

```
Any more items press 1 otherwise Press 0: 1

Enter the price of Kid's wear:320

Any more items press 1 otherwise Press 0: 1

Enter the price of Kid's wear:450

Any more items press 1 otherwise Press 0: 0

1. Ground floor: Kids Wear
2. First floor: Ladies Wear
3. Second floor: Designer Sarees
4. Thrid floor: Men's Wear
5. Exit and Print the Bill
Enter the floor number: A

Can only enter input while your program is running
java.util.InputMismatchException
        at java.base/java.util.Scanner.throwFor(Scanner.java:939)
        at java.base/java.util.Scanner.next(Scanner.java:1594)
        at java.base/java.util.Scanner.nextByte(Scanner.java:2002)
        at java.base/java.util.Scanner.nextByte(Scanner.java:1956)
```

System.err (3)

Java program which we write is called source code. (.java file) This program is send to compiler for syntax checking, if syntax is correct the compiler will generate another file, which is the Byte code file (.class file). This Byte code file is executed by the JVM. And, we see the outcome of the code.

Syntax Error

the outcome of the code.

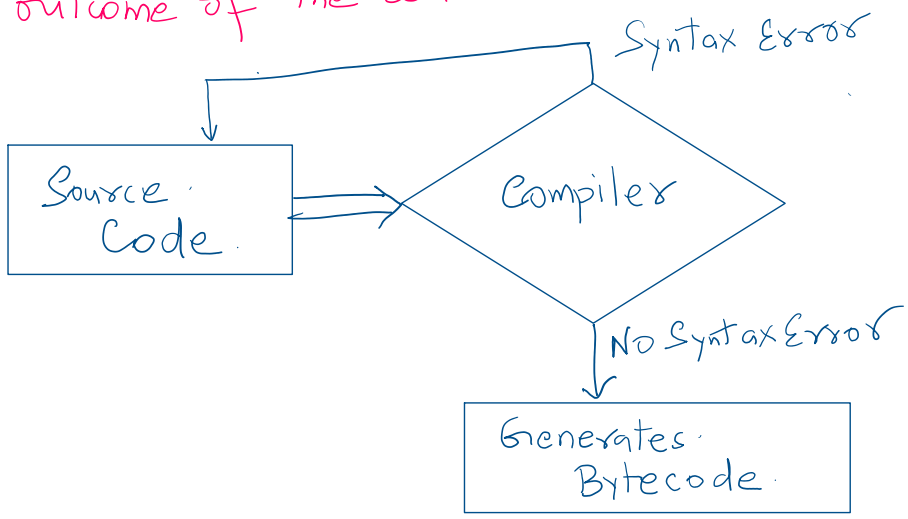

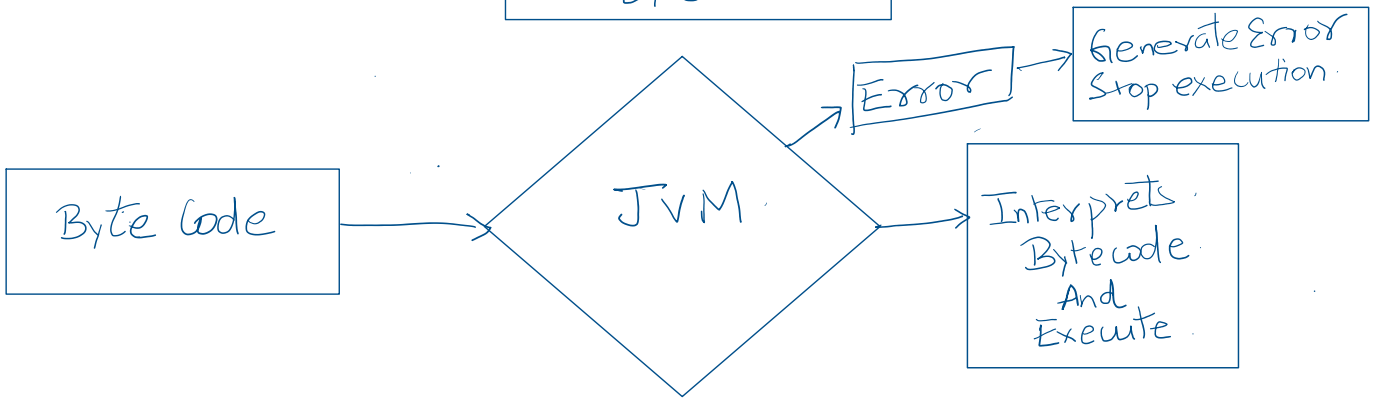

BLUEJ

IDE → Development, Environment, Integrated

VS CODE

Eclipse

Intellj

Environment

Classmate

Camlin

Doms

Copy

Maths concept

loose sheet

Eng

Aadit

Aadit