


File Handling in C language

06 May 2026 20:24



File handling in C is about persisting data to a secondary storage (disk) and retrieving it later using standard IO functions from `<stdio.h>`. It revolves around the **FILE** abstraction and a set of APIs for opening, reading, writing and managing files.

What is a File in C?

A file is a named collection of data stored on disk. C treats files as a stream of bytes.

Types of Files:

1. Text files -> human readable (e.g., .py, .txt, .c, .cpp etc.)
2. Binary files -> raw bytes (not comfortable to read by humans) (e.g., .dat, .bin, .png, .mp4, .mp3, .doc, .pdf, etc.)

File Pointer


C uses a pointer of type **FILE** to work with files.

```
FILE *fp;
```

- It stores meta data (buffer position mode, etc.)
- Must be associated with real file via `fopen()`

Opening a file using `fopen()` function:

```
fp = fopen("filename", "mode");
```

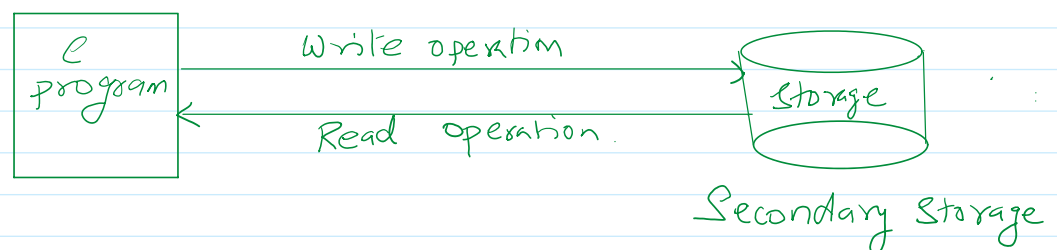

File Mode	Meaning
"r"	Read(file must exist)
"w"	Write(create/overwrite)
"a"	Append(if file is existing then add the data, after existing data, otherwise it will create a new file)
"r+"	Read + Write
"w+"	Read + Write(overwrite)
"a+"	Read + Append

```
FILE *fp = fopen("data.txt", "r");
```

Closing the file

```
fclose(fp);
```

Always close files to:

- Flush buffers
- Release resources

How to create a file by using C-language?

```
#include<stdio.h>
#include<string.h>
#include<stdlib.h>
#define SIZE 200
int main(int argc, char const *argv[])
{
    char fileName[SIZE];
    printf("Enter file name: ");
    scanf("%s", fileName);
    char path[SIZE] = "../Files/";
    strcat(path, fileName);
    FILE *fp = fopen(path, "w");
    if(fp == NULL){
        printf("File not created!");
        exit(1);
    }
    char name[SIZE];
    printf("Enter your name: ");
    scanf("%s", name);
    fprintf(fp, "Name: %s\n", name);
    return 0;
}
```

is common code in every file handling program.

function to write data into the file.

file pointer

data written in the file

Read data from file

```
char buffer[SIZE];
fscanf(fp, "%s", buffer);
```

Example:

```
#include<stdio.h>
#include<string.h>
#include<stdlib.h>
#define SIZE 200
```

```

int main(int argc, char const *argv[])
{
    char fileName[SIZE];
    printf("Enter file name: ");
    scanf("%s", fileName);
    char path[SIZE] = "../Files/";
    strcat(path, fileName);
    FILE *fp = fopen(path, "r");
    if(fp == NULL){
        printf("File not found on the specified path!");
        exit(1);
    }
    char name[SIZE];
    // fscanf(fp, "%s", name);
    printf("\nData from file:\n");
    while(fgets(name, SIZE, fp) != NULL){
        printf("%s", name);
    }
    return 0;
}

```

Output:

```

Enter file name: name.txt

Data from file:
Name: Shiv
Address: Garia
City: Kolkata

```

```

#include<stdio.h>
#include<string.h>
#include<stdlib.h>
#define SIZE 200
int main(int argc, char const *argv[])
{
    char fileName[SIZE];
    printf("Enter file name: ");
    scanf("%s", fileName);
    char path[SIZE] = "../Files/";
    strcat(path, fileName);
    FILE *fp = fopen(path, "a");
    if(fp == NULL){
        printf("File not created!");
        exit(1);
    }
    char name[SIZE];
    printf("Enter your name: ");
    scanf("%s", name);
    strcat(name, "\n");
    fputs(name, fp);
    return 0;
}

```

Writing Data to Files

fprintf(): Works like printf()

```
#include<stdio.h>
#include<string.h>
#include<stdlib.h>
#define SIZE 200
int main(int argc, char const *argv[])
{
    FILE *fp;
    char fileName[SIZE];
    printf("Enter file name: ");
    scanf("%s", fileName);
    char path[SIZE] = "../Files/";
    strcat(path, fileName);
    fp = fopen(path, "a");
    if(fp == NULL){
        perror("File not created!");
    }
    else{
        char name[SIZE], about[SIZE];
        int age;
        fflush(stdin);
        printf("Enter name: ");
        fgets(name, SIZE, stdin);
        printf("Enter age: ");
        scanf("%d", &age);
        fflush(stdin);
        printf("Enter few details of yourself: ");
        fgets(about, SIZE, stdin);
        fprintf(fp, "Name: %s", name);
        fprintf(fp, "Age: %d\n", age);
        //fputs(about, fp);
        fprintf(fp, "About: %s", about);
    }
    return 0;
}
```

Reading Data from files using fscanf(), works like scanf()

```
#include<stdio.h>
#include<string.h>
#include<stdlib.h>
#define SIZE 200
int main(int argc, char const *argv[])
{
    FILE *fp;
```

```

char fileName[SIZE];
printf("Enter file name: ");
scanf("%s", fileName);
char path[SIZE] = "../Files/";
strcat(path, fileName);
fp = fopen(path, "r");
if(fp == NULL){
    perror("File not found!");
}
else{
    char name[SIZE], about[SIZE], age[SIZE];
    //fscanf(fp, "%s %s %s", name, age, about);
    while(
        fgets(name, SIZE, fp)!=NULL &&
        fgets(age, SIZE, fp)!=NULL&&
        fgets(about, SIZE, fp)!=NULL){
        printf("%s",name);
        printf("%s",age);
        printf("%s",about);
    }
}
return 0;
}

```

Homework:

Read a text file and find how many words are present in the file,
 Create a list of unique words and store it in another file called unique.txt.
 Find the longest word. Find the words which is greater than 5 characters and store
 then in file greaterThan5.txt

Use FiveAnimals.txt file to write your code.