HTML elements

17 March 2026 20:11

An HTML document is composed of elements. These elements are responsible for creating web pages and defining content on that web page. An element in HTML usually consists of a start tag <Tag name> a closed tag </tag name> , and content inserted between them. Technically, an element is a collection of start tags, attributes, end tag and content between them.

Note: Some elements do not have end tag and content. These elements are termed empty elements, self-closing elements or void elements.

** Hello world!! **

Example:

```html
<!DOCTYPE html>
<html lang="en">
    <head>
        <meta charset="UTF-8">
        <meta name="viewport" content="width=device-width, initial-scale=1.0">
        <title>WebPage</title>
    </head>
    <body>
        <h1>This is my page</h1>
        <h2>How it looks?</h2>
        <p>It looks nice!!!!</p>
    </body>
</html>
```

Output:

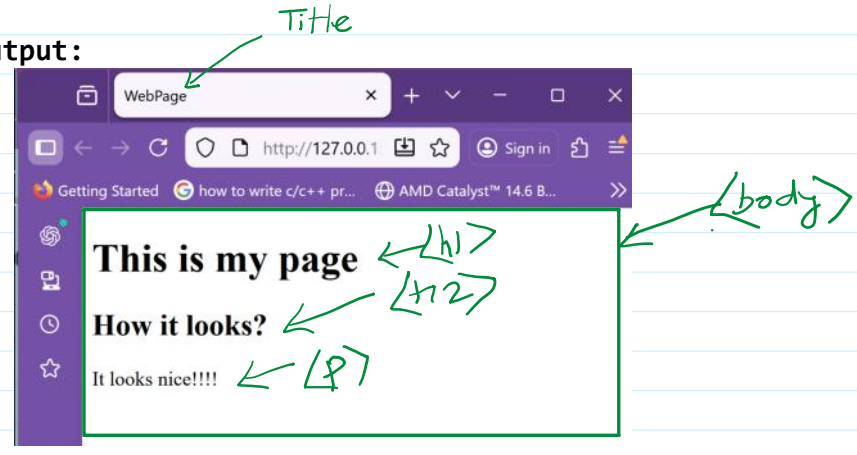

All the content written between body elements is visible on the web page.

Void element

Void elements are HTML elements that do not require a closing tag or content, such as
 Or <IMG> Such elements are known as void elements or empty elements. These elements are also referred to as unpaired tags. Some void elements include:

-
: Inserts a line break
- <hr>: Adds a horizontal rule
- <input>, <link> and <img> : Provide specific functionalities without the need for content.

Nested html elements

HTML can be nested, which means an element can contain another element. This means that HTML makes it possible for elements to be placed within other elements. Creating a hierarchy make it possible to sort things into order.

The <html> element is the root of an HTML document and contains all other elements including <head> and <body>. The documents element include an encloser of <head> and <body> inside the <html>. Both <h1> and <p> elements are inside <body>.

To structured nesting, browsers will correctly display the page.

Block-level and Inline HTML elements

For the default display and styling purpose in HTML, all the elements are divided into two categories:

1. Block-level element

2. Inline Element

Block-level element: HTML pages are built from the basic elements called block level elements. They arrange the main content on the page by breaking it into helpful and organized sections. Usually each block element sits alone on a new line and runs the entire width of the page, no matter how wide or narrow the content is. It results in areas on your site that are clearly arranged and visually attractive.

They are flexible as they are able to include different types of elements inside them. As a result, developers can place related content together inside small containers. For example , <section> or <article> and format them with inline elements.

```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>WebPage</title>
</head>
<body>
    <div style="background-color: cornflowerblue;">
        <h1>This is my page</h1>
    </div>
    <div style="background-color: beige;">
        <h2>How it looks?</h2>
    </div>
    <div style="background-color: cadetblue; text-align: center;">
        <p>It looks nice!!!!</p>
        <hr>
        <p>
            div tag is division tag
        </p>
    </div>
</body>
</html>
```

Output:

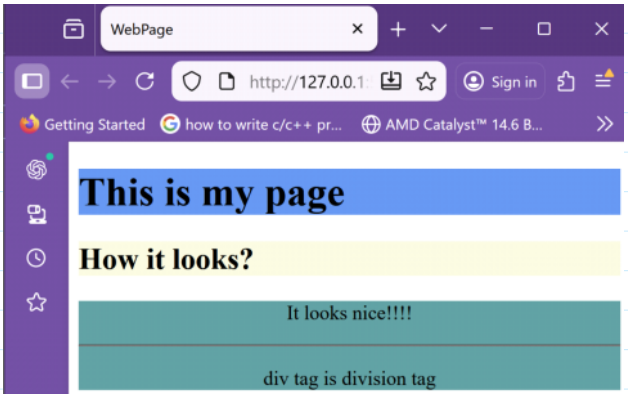

In the above example we have used tag, Which defines a section in a web page and takes the full width of the page. Also we have used the style attribute which is used to style the HTML content and the background color shows that it's a block level element.

Inline elements: Without disturbing how content is displayed inline elements help you highlight and modify different parts of your text. Like how an inline element appears next to its surrounding words and only takes as much space as needed, unlike block elements that have a new line. A reason to do this is to add styles, link or interactivity inside paragraphs or element type that use blocks.
They are applied along with the block level element to make some parts of the web page stand out. For instance elements such as <a>, , and can we applied inside a paragraph to generate links, emphasize parts or add styling without changing the rest of the text structure. Because you have so much control, you can make your HTML documents more informative.

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>WebPage</title>
</head>
<body>
    <div style="background-color: cornflowerblue;">
        <h1>This is my page</h1>
    </div>
    <div style="background-color: beige;">
        <h2>How it looks?</h2>
    </div>
    <div style="background-color: cadetblue; text-align: center;">
        <p>It looks nice!!!!</p>
        <hr>
        <p>
            div tag is division tag
        </p>
    </div>
    <div>
        <p>
            <span style="color: rgb(0, 64, 255);">
```

```
                <strong style="color: chocolate;">Inline elements:</strong> Without
disturbing how content is displayed inline elements help you highlight and modify
different parts of your text. Like how an inline element appears next to its surrounding
words and only takes as much space as needed, unlike block elements that have a new line.
A reason to do this is to add styles, link or interactivity inside paragraphs or element
type that use blocks.
            </span>
        </p>
        <p>
            They are applied along with the block level element to make some parts of the
web page stand out. For instance elements such as <strong>&lta>, &ltstrong>, &ltem> and
&ltspan> </strong>can we applied inside a paragraph to generate links, emphasize parts or
add styling without changing the rest of the text structure. Because you have so much
control, you can make your HTML documents more informative.
        </p>
        <a href="https://www.w3schools.com/html/default.asp">W3Schools</a>
        <h3>HTML References</h3>
        <p>
            At W3Schools you will find complete references about HTML elements,
attributes, events, color names, entities, character-sets, URL encoding, language codes,
HTTP messages, browser support, and more:
        </p>
    </div>
</body>
</html>
```

Output:

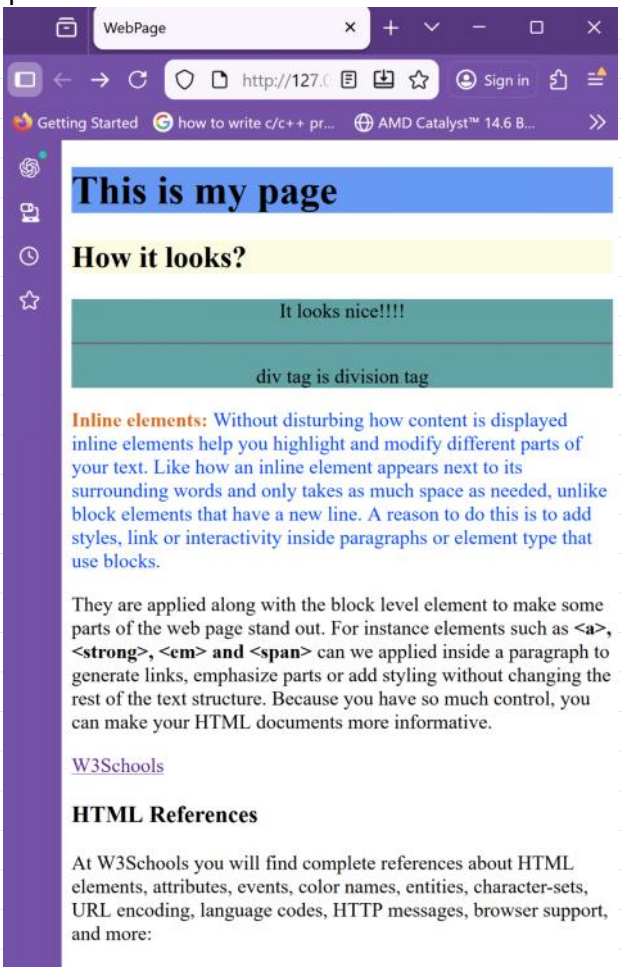

```
    <h3>Python Code</h3>
    <pre>
# Write a program to input three angles of a
# triangle and check whether its construction is
# possible or not. If possible, then check and
# display whether it is an acute angle triangle,
# right angled or an obtuse angle triangle.
# Otherwise, display a "triangle is not possible".
a = float(input('Enter first angle: '))
b = float(input('Enter second angle: '))
c = float(input('Enter third angle: '))
sum = a + b + c
if a == 0 or b == 0 or c == 0 or sum != 180:
    print('Triangle is not possible')
else:
    print('Triangle is possible')
    if a == 90 or b == 90 or c == 90 :
        print('Right Angled Triangle')
    elif a > 90 or b > 90 or c > 90 :
        print('Obtuse Angled Triangle')
    else:
        print('Acute Angled Triangle')

    </pre>
```

Output:

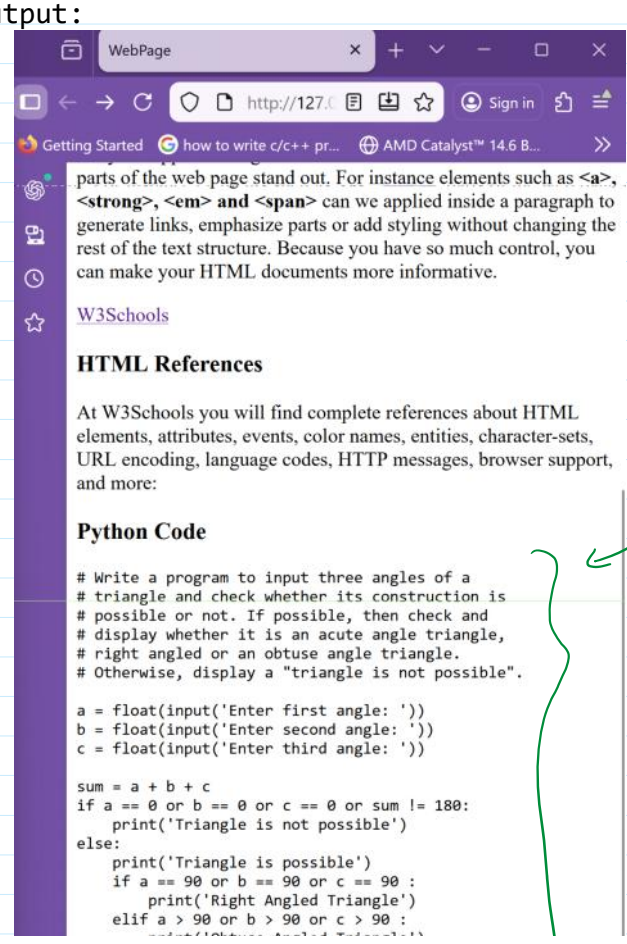

<pre>
The <pre> tag preserves the literal layout of the text, spaces and line breaks. It work best with code blocks, poetry, or any other content that needs to maintain a specific format.

```
else:
    print('Triangle is possible')
    if a == 90 or b == 90 or c == 90 :
        print('Right Angled Triangle')
    elif a > 90 or b > 90 or c > 90 :
        print('Obtuse Angled Triangle')
    else:
        print('Acute Angled Triangle')
```

 tag nested inside <a> anchor tag.

```
<p>
At <a href="https://www.w3schools.com/html/default.asp"><em>W3Schools</em></a> you will find complete references about HTML elements, attributes, events, color names, entities, character-sets, URL encoding, language codes, HTTP messages, browser support, and more:
</p>
```

Output:

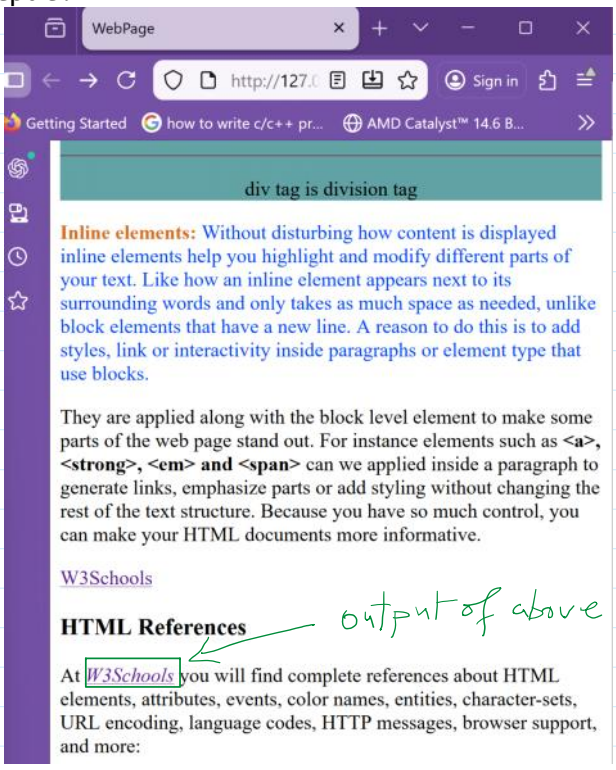

output of above code

a ² ⇒ a^2

a ₂ ⇒ a_2

```
<p>
    a<sup>2</sup> + 2ab + b<sup>2</sup>
</p>
<p>
    R = A<sub>1</sub> + A<sub>2</sub>
</p>
<p>
    <abbr title="HyperText Markup Language">HTML</abbr> is used for web development.
</p>
```

Output:

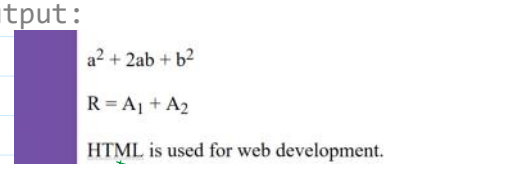

$R = A_1 + A_2$

HTML is used for web development.

HyperText Markup Language