HTML Table

10 April 2026 20:10

```html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>Table</title>
</head>
<body>
    <table>
        <tr>
            <th>Company</th>
            <th>Contact</th>
            <th>Country</th>
        </tr>
        <tr>
            <td>IBM</td>
            <td>ibm.com/contact</td>
            <td>USA</td>
        </tr>
        <tr>
            <td>Microdoft</td>
            <td>microsoft.com/contact</td>
            <td>India</td>
        </tr>
        <tr>
            <td>Amazon</td>
            <td>amazon.com/contact</td>
            <td>Brazil</td>
        </tr>
        <tr>
            <td>Meta</td>
            <td>meta.com/contact</td>
            <td>Isreal</td>
        </tr>
        <tr>
            <td>Armeco</td>
            <td>armeco.com/contact</td>
            <td>UAE</td>
        </tr>
    </table>
</body>
</html>
```

A table in HTML consists of tables cells inside rows and columns.

table row

table header element.

Every thing between <td> and <\td> is the content of a table cell.

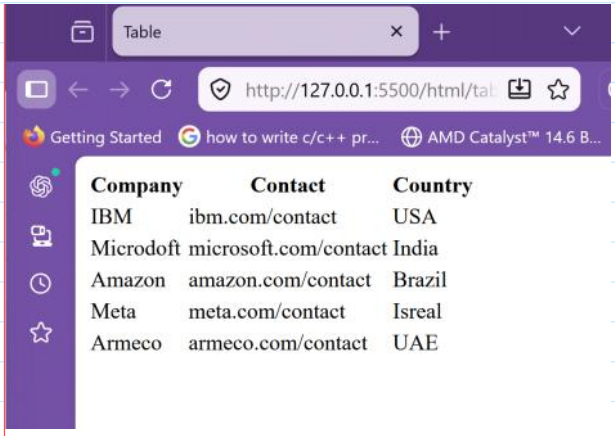


```
<p>
    <h2>Books Table</h2>
</p>
<table>
    <colgroup>
        <col span="2" style="background-color: coral;">
        <col style="background-color: yellowgreen;">
    </colgroup>
    <tr>
        <th>ISBN</th>
        <th>Title</th>
        <th>Price</th>
    </tr>
    <tr>
        <td>3476896</td>
        <td>HTML 5</td>
        <td>&#x20b9 200</td>
    </tr>
    <tr>
        <td>1376896</td>
        <td>Python 3.x</td>
        <td>&#x20b9 600</td>
    </tr>
    <tr>
        <td>3476222</td>
        <td>C++</td>
        <td>&#x20b9 1000</td>
    </tr>
    <tr>
        <td>3436696</td>
        <td>Java</td>
        <td>&#x20b9 1200</td>
    </tr>
    <tr>
        <td>3874316</td>
        <td>Operating System</td>
        <td>&#x20b9 990</td>
    </tr>
</table>
```

Specifies the number of columns a column group should span.

Specifies column properties for each column within a <colgroup> element.

The <colgroup> tag specifies a group of one or more columns in a table for formatting.
The <colgroup> tag is useful for applying styles to entire columns, instead of repeating the styles of each cell, for each row.

Note: The <colgroup> tag must be a child of <table> element, after any <caption> elements and before any<thead>, <tbody>, <tfoot> and <tr> elements.

Tip: To define different properties to a column within a <callgroup> use the <col> tag within the <callgroup> tag.

HTML <thead>, <tbody>, <tfoot> tags

```
<p>
        <h3>An HTML table with thead, tbody and tfoot element</h3>
    </p>
    <table>
        <thead>
            <tr>
                <th>Month</th>
                <th>Savings</th>
            </tr>
        </thead>
        <tbody>
            <tr>
                <td>January</td>
                <td>&#x20b9 1000</td>
            </tr>
            <tr>
                <td>February</td>
                <td>&#x20b9 2000</td>
            </tr>
            <tr>
                <td>March</td>
                <td>&#x20b9 3000</td>
            </tr>
        </tbody>
        <tfoot>
            <tr>
                <td>Sum</td>
                <td>&#x20b9 6000</td>
            </tr>
        </tfoot>
    </table>
```

The <thead> tag is used to group the header content

The <thead> element is used in conjunction with <tbody> and <tfoot> Elements to specify each part of the table (header, body, and footer).

Browser can use these elements to enable scrolling of the table body independently of the header and footer. Also, when printing a large table that spans multiple pages, these elements can enable the table header and footer to be printed at the top and the bottom of each page.

Useful CSS for tables:

```
caption{
    caption-side: bottom;
    font-style: italic;
}
thead{
    color: green;
    display: table-header-group;
    vertical-align: middle;
    background-color: aquamarine;
}
tbody{
    color: blue;
}
tfoot{
    color: blueviolet;
    background-color: burlywood;
}
table, th, td{
    border: 1px solid darkgreen;
    /* border-collapse: collapse; */
    border-radius: 10px;
}
```

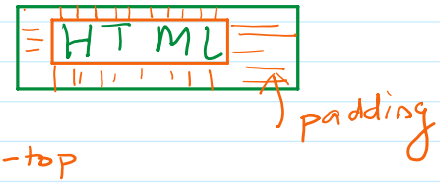

1. padding-top
2. padding-bottom
3. padding-left.
4. padding-right.

HTML Table Padding and Spacing

HTML Table - Cell Padding

Cell padding is the space between the cell edges and the cell content.

By default the padding is set to 0.

To add padding on table cells use the CSS padding property.

```
caption{
    caption-side: bottom;
    font-style: italic;
}
thead{
    color: green;
    display: table-header-group;
    vertical-align: middle;
    background-color: aquamarine;
```

```
}
tbody{
    color: blue;
}
tfoot{
    color: blueviolet;
    background-color: burlywood;
}
table, th, td{
    border: 1px solid darkgreen;
    /* border-collapse: collapse; */
    border-radius: 10px;
    border-spacing: 10px;
}
td, th{
    /* padding-bottom: 20px;
    padding-top: 15px;
    padding-left: 10px;
    padding-right: 15px; */
    padding: 20px 15px 10px 15px;
    /* same job as above */
}
tr:hover{
    background-color: aquamarine;
}
```

Homework:

1. Create an HTML page to display a Student Information table with the columns Roll Number, Name, Class, Section, Age, and Percentage. Add at least 8 student records. Use table borders, padding, spacing, rounded corners, and a hover effect on rows. Also use a caption at the bottom of the table.

2. Create a Books Inventory table using HTML. The table should contain Book ID, Book Name, Author, Price, and Availability columns. Use the <colgroup> and <col> tags to apply different background colors to the first two columns and the remaining columns. Add at least 6 book records and style the table using CSS.

3. Create an Employee Salary Report table using <thead>, <tbody>, and <tfoot>. The table should contain Employee ID, Employee Name, Department, and Salary columns. Add at least 5 employees in the body section and calculate the total salary in the footer section. Apply different background colors for the header, body, and footer.

4. Create a Monthly Expense Report table that contains Month, Food Expense, Travel Expense, Electricity Bill, and Total Expense columns. Add data for 6 months. Use CSS padding, border-spacing, and hover effects. Also display the grand total of all expenses in the <tfoot> section.

5. Design an HTML table for a School Timetable. The first column should contain days of the week and the remaining columns should contain periods. Use merged cells with rowspan and colspan wherever necessary, such as for lunch break or laboratory sessions. Style the table with borders, cell padding, spacing, and different colors for different subjects.

6. Create a Product Price List table for an electronics shop. Include columns such as Product ID, Product Name, Brand, Quantity, Price, and Discount. Use <colgroup> to color the Price and Discount columns differently. Add at least 10 products and apply hover effects when the mouse is placed over a row.

7. Create a Cricket Scoreboard table using <thead>, <tbody>, and <tfoot>. The table should include Player Name, Runs, Balls, Fours, Sixes, and Strike Rate columns. Add records for at least 6 players. In the footer section, display the total runs scored by the team. Style the table with CSS properties such as border-radius, padding, border-spacing, and background colors.

8. Create a College Result table that displays Student Roll Number, Student Name, Subject 1 Marks, Subject 2 Marks, Subject 3 Marks, Total Marks, Percentage, and Grade. Add at least 8 student records. Use CSS to style the table with different colors for header and footer sections, add padding inside cells, and apply hover effects. Also show the class average percentage in the footer row.