

Programming Practice

19 March 2026 18:37

WAP to input scores of 11 batters in a match. And, find total score. Print the name of batsman who scored most runs.

WAP to input runs scored in an over.

- Use a loop to take input
- Display total runs.
- Display number of wickets taken
- Use if-else to check if the over is a high-scoring over (≥ 15 runs)

Groups (Arrays)

We need to store data of multiple students, average marks.

double am1, am2, ..., am500;

↑
data type


100. — —

98.4

Array is a group of variables, to store multiple data of same type.

↓
Homogenous (same type) data.

It allocates memory in contiguous fashion.

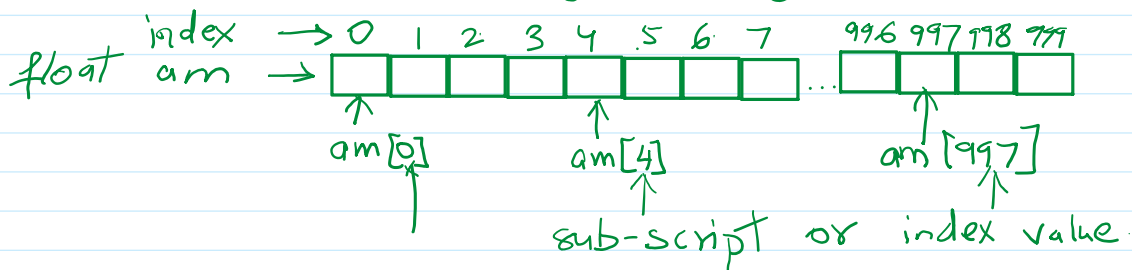

Index value starts from '0' & ends at N-1. Where 'N' is the value decided by the programmer.

Java Syntax:

data-type array-name[] = new data-type[N];

OR

data-type[] array-name = new data-type[N];

Example

float am[] = new float[N];



OR

float[] am = new float[N];

↑

`float[] am = new float[N];`

↑ Java keyword, which allocates memory on the Heap memory. (big size memory)

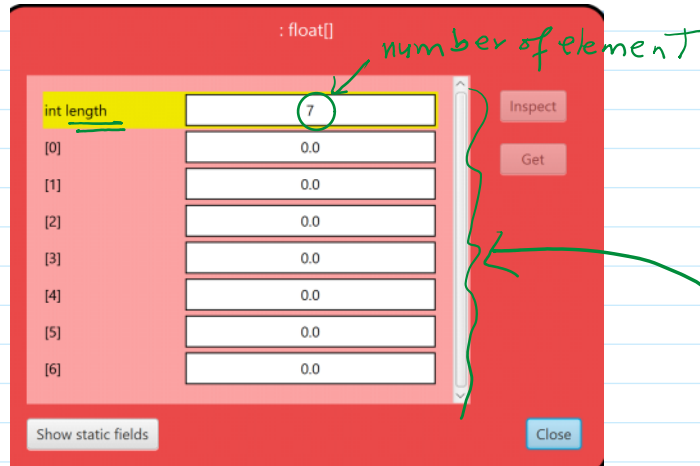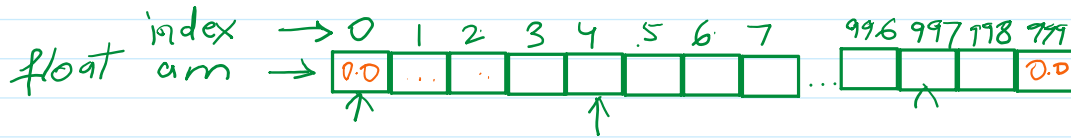

```
public class Demo
{
    public static void main(String[] args){
        float am[] = new float[7];
        int i;
        System.out.print("\f");
        for(i = 0; i < am.length; i++){
            System.out.print("\n" + am[i]);
        }
    }
}
```

`am.length`

↑
Variable which keep the value, which denotes number of elements in array.

```
package MyArrays;
```

```
/**
 * Write a description of class Demo here.
 *
 * @author (your name)
 * @version (a version number or a date)
 */
public class Demo
{
    public static void main(String[] args){
        float am[] = new float[7];
        int i;
```

```
        System.out.print("\f");
        for(i = 0; i < am.length; i++){
            System.out.print("\n" + am[i]);
        }
    }

    public static int findSum(int num[]){
        int sum = 0, i;
        for(i = 0; i < num.length; i++){
            sum += num[i];
        }
        return sum;
    }
}
```