


Java Variables, Data Types and Operators

14 September 2026 06:30

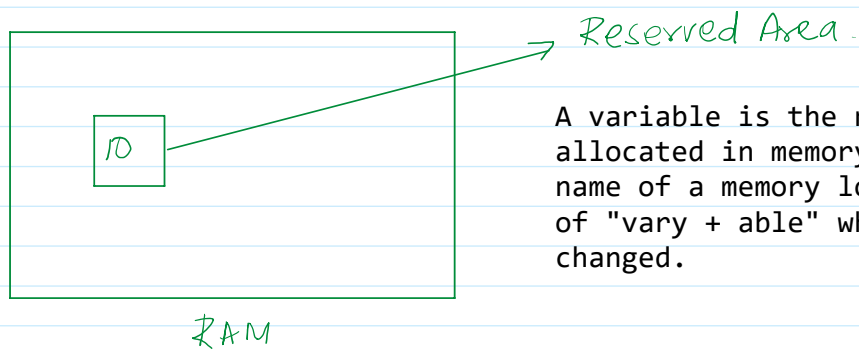

A variable is the name of a reserved area allocated in memory. In other words, it is a name of a memory location. It is a combination of "vary + able" which means its value can be changed.

`int data = 10;`
↑ ↑ ↑
data type variable information stored inside variable

Types of variables:

There are 3 types of variables in Java:

- o Java local variable
- o Java Instance variable
- o Java Static variable

Local Variable: A variable declared inside the body of the method is called local variable. You can use this variable only within that method and the other method in the class and even aware of that variable exist.

A local variable cannot be defined with "static" keyword.

Example:


```
int x = 10;  
System.out.print("\nx = " + x);
```

Output:

x = 10

Java Instance variable: A variable declared inside the class but outside the body of the method is called an instance variable. It is not declared as static.

It is called an instance variable because its value is in instance-specific and is not shared among instances.



class

keyword use to create instance of a class

constructor method

name is same as class
it won't have any return type.
it is created by JVM. (Java Virtual Machine)

Java Compiler + Interpreter

or instance

BlueJ: Create Object

One()

Name of Instance: first

OK Cancel

class bench or package bench

Object or instance bench

code pad
JShell

JVM indicator.

reset JVM button.

object / instance are used to call methods present in class.

Code editor

One X

Compile Undo Cut Copy Paste Find... Close

Source Code

```
1 package Chapter1;
2
```

One - ProjectOne

Code editor

Class Edit Tools Options

One X


Compile Undo Cut Copy Paste Find... Close Source Code

```
1 package Chapter1;
2
3
4 /**
5  * Write a description of class One here.
6  *
7  * @author (your name)
8  * @version (a version number or a date)
9  */
10 public class One
11 {
12     public static void main(String[] args){
13
14     }
15     /**
16     * Input integer value in x
17     * Input integer value in y
18     */
19     public void printValues(int x , int y){
20         System.out.print("\nx = " + x);
21         System.out.print("\ny = " + y);
22     }
23 }
```


Class compiled - no syntax errors

saved




Msg box

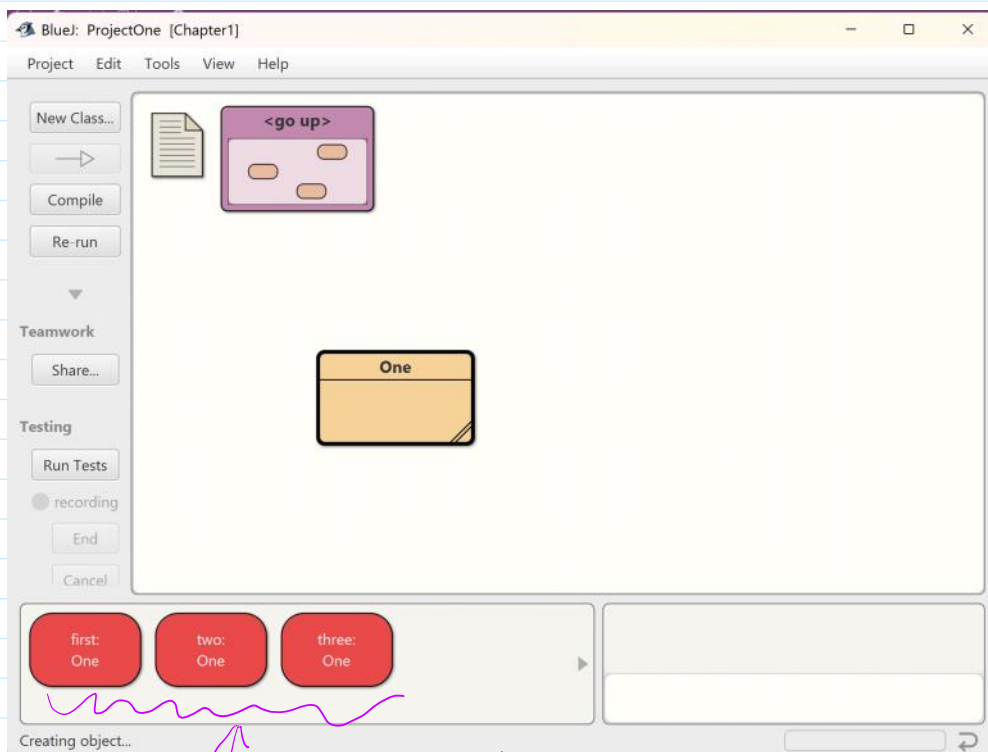

We can create multiple objects or instances.



← This method is present in my class, we can call or invoke this method using the object or instance.

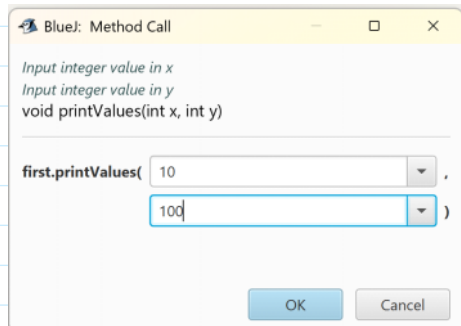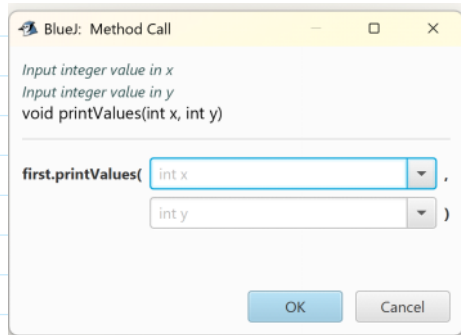





x = 10
y = 100 } ← System.out

System.out.^{printf} print(
println)

← The terminal window is divided into 3-area

Can only enter input while your program is running

← System.in

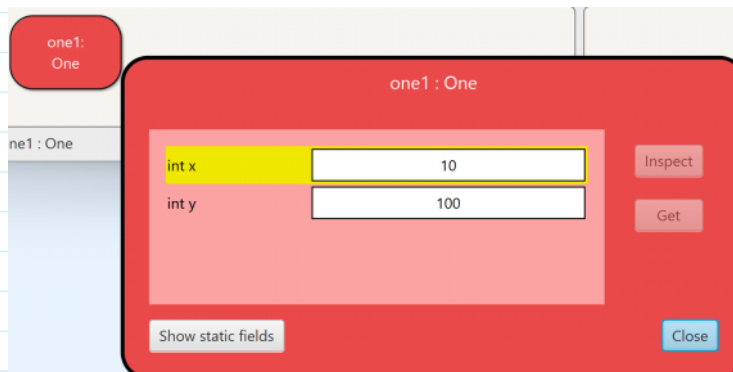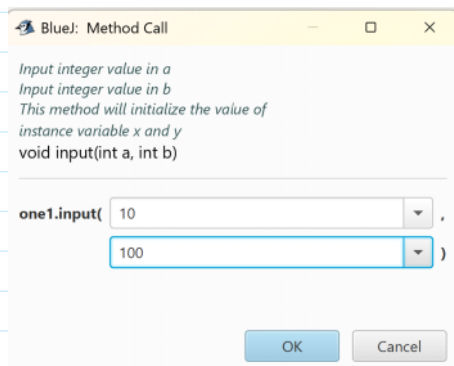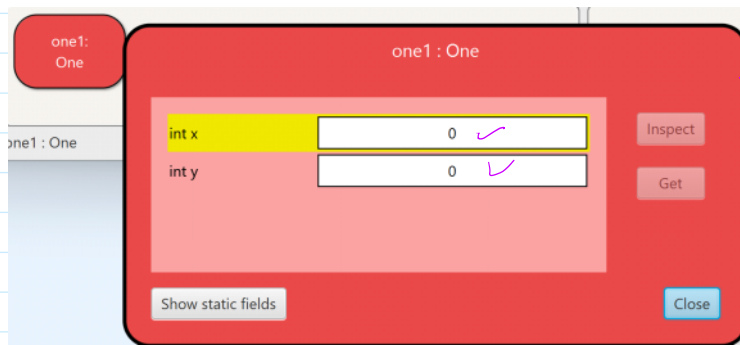

package Chapter1;

```
/**
 * Write a description of class One here.
 *
 * @author (your name)
 * @version (a version number or a date)
 */
public class One
{
    //instance variables
```

```
int x;
int y;
public static void main(String[] args){

}
/**
 * Input integer value in a
 * Input integer value in b
 * This method will initialize the value of
 * instance variable x and y
 */

public void input(int a, int b){
    x = a;
    y = b;
}

public void printValues(){
    System.out.print("\nx = " + x);
    System.out.print("\ny = " + y);
}
}
```