

# Asheninka User Documentation

*H. Andrew Black*

*SIL International*

asheninka\_support@sil.org

29 January 2019

Version: 0.7.0 Alpha

## Contents

1	Introduction . . . . .	2
2	General user interface items . . . . .	2
2.1	Creating a new project . . . . .	3
2.2	Opening an existing project . . . . .	3
2.3	Saving a project . . . . .	3
2.4	Save a project as a new project . . . . .	3
2.5	Setting fonts for vernacular and analysis language display . . . . .	3
2.6	Setting hyphenation parameters . . . . .	4
2.7	User interface language . . . . .	4
2.8	Help menu items . . . . .	4
3	Approaches to syllabification . . . . .	5
4	CV pattern approach . . . . .	5
4.1	CV segment inventory . . . . .	6
4.2	CV natural classes . . . . .	7
4.3	CV syllable patterns . . . . .	7
4.4	Grapheme natural classes . . . . .	8
4.5	Environments . . . . .	8
4.6	CV words . . . . .	10
4.7	CV Try a Word . . . . .	11
4.8	Predicted vs. correct CV words . . . . .	16
5	Sonority hierarchy approach . . . . .	16
5.1	SH segment inventory . . . . .	18
5.2	Sonority hierarchy . . . . .	18
5.3	Grapheme natural classes . . . . .	18
5.4	Environments . . . . .	18
5.5	Sonority hierarchy words . . . . .	18
5.6	Sonority hierarchy Try a Word . . . . .	19
5.7	Predicted vs. correct Son. Hier. words . . . . .	21
6	Onset-nucleus-coda approach . . . . .	21

7	Moraic approach . . . . .	21
8	Nuclear projection approach . . . . .	22
9	Optimality theory approach . . . . .	22
10	Converting predicted syllabification to correct syllabification . . . . .	22
11	Project management . . . . .	22
12	Importing and exporting words . . . . .	23
	12.1 Import words . . . . .	23
	12.2 Export words . . . . .	24
13	Other tools . . . . .	25
	13.1 Find a word . . . . .	25
	13.2 Remove all words . . . . .	25
	13.3 Remove correct syllable breaks in all words . . . . .	26
	13.4 Compare two implementations . . . . .	26
	13.4.1 CV pattern approach comparison . . . . .	27
	13.4.2 Sonority hierarchy approach comparison . . . . .	28
	13.5 Compare syllabification results between approaches . . . . .	29
A.	Why is it called <b>Asheninka</b> ? . . . . .	31
	References . . . . .	32
	Index . . . . .	32

## 1 Introduction



The **Asheninka** program is a linguistic tool with two goals:

1. Explore various syllabification algorithms.
2. Provide a principled way to insert discretionary hyphens in a list of words (which can then be used for typesetting text).

The first is clearly a linguistic research goal. The second is a practical application of the first goal. While one probably will want to use IPA (IPA 2016) for the first, the second should be done using the practical orthography.

## 2 General user interface items

This section notes some common items found in various places throughout the user interface. It also discusses some of the more basic **File**, **Settings**, and **Help** menu items.

While editing data, you add a new item by using the **Edit / New item** menu item or clicking on the  button. To delete an item, use the **Edit / Remove item** menu item or click on the  button.


A number of these have a field called “Active”. If the checkbox is checked, then this item will be used when syllabifying. If it is not checked, then it will not be used. This lets you experiment with various possibilities.

When the view contains a pane with rows and columns, you can click on a column header to sort by that column (it currently only sorts by Unicode code point). You can even hold the Shift key down and click on another column header to get a secondary sort (or on a third column to get a tertiary sort). There are some tables which cannot be sorted because the user controls the order manually. In such cases (such as **CV Syllable Patterns**), the sorting is disabled.

**Asheninka** will attempt to remember the location and size of the main window and most dialog boxes. So if you find that a dialog box is too small or too large, try resizing it (by dragging the edges of the window). Usually the next time you use that dialog box, it will be at the location and size you changed it to.

## 2.1 Creating a new project

**Asheninka** comes with a stock set of segments, etc. That is, when you create a new project, **Asheninka** will fill this new project with this stock set of segments, etc. You can then edit them, delete them, and add any needed items.


When you want to create a new project, use **File / New Project** menu item or click on the  toolbar button. This brings up a standard “Save as...” dialog box so you can save this stock set of data as your new project. The expected file extension to use with all **Asheninka** files is “.ashedata” (for **Asheninka** data). Key the file name you want and press OK.

We suggest you create a directory called “My Asheninka” in your normal documents directory and put all your **Asheninka** projects in it.

## 2.2 Opening an existing project

When you already have an existing **Asheninka** project and you want to open it into **Asheninka**, use the **File / Open Project...** menu item or click on the  toolbar button. This brings up a standard “File Open...” dialog box. Find the file you want and click on OK.

## 2.3 Saving a project

While **Asheninka** will automatically save your work about every 30 seconds, you can also use the **File / Save Project** menu item or click on the  button in the toolbar.

## 2.4 Save a project as a new project

When you decide to save the current project with a different name, use the **File / Save Project As...** menu item. The resulting file will have all the data that the original project did except it will have a new name.

## 2.5 Setting fonts for vernacular and analysis language display

Use the **Settings** menu item to set the font information for displaying the vernacular and/or the analysis languages. Currently, only font family, font size, and font style can be set. We do plan to include color and sorting information in a later version.

## 2.6 Setting hyphenation parameters

When one exports syllabified words in one of three possible formats (as explained in section 12.2), one can also control three variables for each of the three formats:

1. The discretionary hyphen character sequence used.
2. The number of printable characters from the beginning of the word after which hyphenation starts.
3. The number of printable characters from the end of the word where hyphenation stops.

The default values for these can be changed by using the **Settings / Hyphenation Parameters** menu item. This then shows the three export options. Choosing one brings up a dialog box showing the current hyphenation parameter settings for this export method. You can change the values and then click on the **OK** button.

## 2.7 User interface language

You can set the user interface language by using the **Settings / Change the interface language** menu item. This brings up a dialog box showing the current interface language in a drop down chooser. Click on the chooser's drop down button to see other interface language choices. The choices given use the name of the language in the current interface language followed by the name of the language in its own language. So if the current interface language is English, then it will show “Spanish (español)” as an option; if the current interface language is Spanish, it will show English as “inglés (English)”. When you click on the "OK" button, the program will "flash" and show with the new user interface language.

The current version has English, French<sup>1</sup> and a rough, most likely often inaccurate version of Spanish. Any corrections to any of the languages are welcome.

## 2.8 Help menu items

Currently, there are four **Help** menu items:

1. **User Documentation** which shows this document.
2. **Suggested Steps** which has some suggestions on how to be effective when using **Asheninka**.
3. **Introduction to syllabification** which has some general discussion of syllabification issues.
4. **About Asheninka** which has some standard information about the current version of **Asheninka**.

---

<sup>1</sup>Many thanks to the folks at [Mission Assist](#).

### 3 Approaches to syllabification


**Asheninka** will eventually offer six different syllabification algorithms or approaches. These are covered in sections 4–9. Only two are implemented in the current version. See sections 4 and 5.

The various approaches or algorithms are explained and illustrated in the “Overview” document. You can read this document by clicking [here](#) or by using the **Help / Introduction to syllabification** menu item.

### 4 CV pattern approach

In the CV pattern approach, you need to define the following items:

1. segments (section 4.1)
2. natural classes (section 4.2)
3. syllable patterns (section 4.3)
4. grapheme natural classes (section 4.4)
5. environments (section 4.5)

After that, you import a word list (see section 12) or enter a list of words by hand. Then you use the **Parser / Syllabify Words** menu item or click on the  tool bar button. This will apply the algorithm of the CV pattern approach to all the words. You can then see the results in the **CV Words** view. See sections 4.6 and 4.7 for ideas on how to check the results, among other things.

The main “game” to play with the CV pattern approach in **Asheninka** is to adjust the segment inventory (including graphemes and their environments), natural classes, and syllable patterns so that one gets most, if not all, words to syllabify correctly.

The main algorithm is as follows:

1. It does a left-to-right sweep of the word, trying to find the sequence of segments which covers the whole word. It uses the graphemes defined in the segment information to determine a match with a segment. It tries all graphemes which match at the current point it is looking at in the left-to-right sweep. It tries the longest match first, but also applies any environments associated with the grapheme. See section 4.1 for more on this. If it cannot find a sequence that covers the whole word, it reports an error of **“Failure: could not parse into segments beginning at 'some characters'”** and quits. The *'some characters'* part indicates the place in the word where it could not find a character or character sequence that matched any graphemes in any of the segments. Most likely, either there was a typo in the word or a grapheme is missing from some segment or its environment was not met. You can use the **Try a Word** tool to get more details (see section 4.7).

2. If it succeeded in finding a sequence of segments, it then performs a left-to-right sweep of the segments it posited, trying to find a sequence of natural classes that covers the entire sequence of segments. It uses the set of segments or natural (sub-)classes defined within a natural class to determine a match with a natural class. If two or more natural classes match, it tries each of them in turn. If it cannot find a sequence of natural classes that covers the entire sequence of posited segments, it reports an error of “**Failure: could not parse into natural classes; did find classes 'some classes' covering graphemes 'some graphemes'**” and quits. The 'some classes' part indicates the sequence of natural classes that were found and the 'some graphemes' part indicates which graphemes were included in those natural classes. Hopefully this will help you figure out why other natural classes were not found for this word.
3. If it succeeded in finding a sequence of natural classes, it performs a left-to-right sweep of the sequence of the natural classes it posited, trying to find a sequence of syllable patterns that covers the entire sequence. It tries the syllable patterns in the order they are arranged in the **CV Syllable Patterns** view (see section 4.3 below). If it cannot find a sequence of syllable patterns that covers the entire sequence of posited natural classes, it reports an error of “**Failure: could not parse natural classes into syllables**” and quits.
4. If it succeeded in finding a sequence of syllable patterns, it outputs the syllabification into the **Predicted Syllable Breaks** field and reports “**Success**”.

We now give more information on the various views available in the user interface for the CV pattern approach.


#### 4.1 CV segment inventory

Make sure that what is in the **Segment Inventory** view covers all the segments you have in the orthography. **Asheninka** tries all graphemes which match at the current point it is looking at in the left-to-right sweep. It tries the longest match first, but also applies any environments associated with the grapheme.

In the “Segment” field, key a letter or letters that will help you remember this segment. For example, a low central unrounded vowel might be keyed as **a** while a voiceless alveopalatal affricate might be keyed as **tʃ** or as **ch**.

The “Description” field is for your benefit. Key whatever helps you (and anyone looking at your data) know what the segment is. For example, you could key its phonetic or phonological description.

In the “Graphemes” field, key all the ways the particular segment appears in your orthography, including any upper case forms. Separate each one by a space. When you leave this field (e.g., by clicking in the “Description” field or by pressing the **Tab** key or using **Shift-Tab**), **Asheninka** automatically shows the graphemes in the table at the bottom. You can choose to disable one or more of the graphemes by clicking on the check box in the table at the beginning of the row for the grapheme. You can also select one or more environments where the given grapheme is valid by clicking on the chooser button at the end of the row (see section 4.5 and also

section 4.4 for more on environments). The chooser button looks like . Note that whenever a given grapheme can occur as more than one segment, then be sure to include the appropriate environments for the grapheme in every such segment.

To remove a grapheme from the table, merely remove it from the “Graphemes” field. Note that when you uncheck a grapheme check box at the beginning of the row, **Asheninka** will automatically remove that grapheme from the “Graphemes” field. When you check that check box, **Asheninka** will automatically add it back to the “Graphemes” field. Thus, you can uncheck the box to see what might happen if this grapheme is no longer present. This can be useful when testing environments to condition a grapheme.


It is possible to have the same grapheme occur for more than one segment. If you do this, you may well want to add environments for when each grapheme is valid for a given segment.

## 4.2 CV natural classes

Make sure that in the **CV Natural Classes** view, every segment is in a natural class. A given segment may be in more than one class.

The “Name” field is for you to define how this natural class will appear in syllable patterns. We suggest using something short and if there is more than one character in it, make the first one be capitalized and the rest be in lower case.<sup>2</sup> While it is possible to use the same name more than once, it will most likely turn out to be confusing. So we recommend you make the name be unique.


The “Description” field is for your use to document anything special about this natural class.

The “Segment or Natural Class” field has a chooser button on the far right which looks like . Click on it to bring up a dialog box which lets you select segments and/or natural classes which belong to this natural class. Note that it is possible to insert one entire natural class within another natural class. For example, if you have a class of nasal consonants, you can include that class within another class that has all consonants.

## 4.3 CV syllable patterns

Use the **CV Syllable Patterns** view to create CV syllable patterns that cover the kinds of syllables you think the language has. Be sure to allow for vowel-initial syllables if there are vowel-initial syllables in the language.

The “Name” field is for you to define a short name for this syllable pattern. We suggest using something short. The “Description” field is for your use to document anything special about this syllable pattern.

The “Natural Classes” field shows the sequence of any natural classes this pattern consists of. It has a chooser button on the far right which looks like . Click on it to bring up a dialog box which lets you select natural classes which constitute this syllable pattern. This chooser consists of one or more drop-down boxes. Click on the drop-down arrow in the box. It will show you the list of possible natural

<sup>2</sup>This is not required, it is just a suggestion.



classes to choose from. In addition, if this is the very first drop-down box or the last one currently being shown, it will also include “Word boundary”. When you choose “Word boundary”, the pattern shown above the drop-down box(es), will show “#” to indicate a word boundary.


Finally, the order in which the syllable patterns occur is important, as mentioned in section 4. Recall that with the CV pattern approach, as *Asheninka* parses a word, it tries to match the patterns in the order in which they appear. You control the order of the syllable patterns by clicking on a pattern in the middle pane and then using the up and down arrows to change its order. Note that the normal way of sorting by a column via clicking on a column header is disabled for this view.

#### 4.4 Grapheme natural classes

When your orthography is such that you need to condition some graphemes by one or more environments and you want to capture a generalization about which graphemes can occur around that grapheme via a natural class, then create one or more grapheme natural classes. Note that these are not the same as CV natural classes. The grapheme natural classes are based on the set of graphemes defined in all the segments. The CV natural classes, on the other hand, are defined based on the segments in the segment inventory. The first can be used to determine if a given grapheme is valid for its segment in a given orthographic environment. The second is used to define a class for a segment during the parsing process of a word into syllables.

The “Name” field is for you to define how this grapheme natural class will appear in environments. We suggest using something short and if there is more than one character in it, make the first one be capitalized and the rest be in lower case. The name should be unique among all the grapheme natural classes. If two or more grapheme natural classes share the same name, then any environment which refers to such a grapheme natural class will always use the first one *Asheninka* happens to find.

The “Description” field is for your use to document anything special about this grapheme natural class.

The “Grapheme or natural class” field has a chooser button () at the right edge. Clicking on this brings up a chooser where you can select the graphemes and/or other grapheme natural classes that should belong to the grapheme natural class you are defining. Note that it is possible to insert one entire grapheme natural class within another grapheme natural class. For example, if you have a class of nasal consonants, you can include that class within another class that has all consonants.

#### 4.5 Environments

When your orthography is such that you need to condition some graphemes by one or more environments, you add the environments here. Besides the usual Active check box, there are three fields.

The “Name” field is for you to give a short name for this environment.

The “Description” field is for your use to document anything special about this environment, including why it is needed.



The “Environment” field is where you key the environment. Any error message will appear below the Active check box as you type. (When you create a new environment, this field contains “/ \_” which causes an error message of **A class or a grapheme is missing; detected at or about position 6**. This is because the environment is not valid until it has at least one grapheme, grapheme natural class, or word boundary symbol.)

The content of the “Environment” field follows a special notation. This notation is one that is reminiscent of what is used in many generative-style rules. The basic rules of thumb are:

- (1)
  1. Begin each environment with the forward slash character /
  2. The location of the grapheme itself is indicated by an underscore character \_
  3. Any letters or grapheme natural classes that must come before the grapheme are typed in before this underscore character. Type them in the order in which they must appear.
  4. Any letters or grapheme natural classes that must come after the grapheme are typed in after this underscore character. Type them in the order in which they must appear.
  5. Any letter is indicated by typing it the way it appears in the practical orthography.
  6. Any grapheme natural classes are indicated by
    - a. typing a left square bracket [,
    - b. typing the name of the grapheme natural class,<sup>3</sup> and
    - c. then typing a right square bracket ]

When you type a left square bracket, a drop-down box will appear which has the list of grapheme natural class names. You can click on this drop-down box and then click on the name you want to use.<sup>4</sup>
  7. Optional letters or grapheme natural classes are indicated by
    - a. typing an opening parenthesis (,
    - b. typing the letter or grapheme natural class as above, and
    - c. then typing a closing parenthesis )
    - d. Note that one should not nest optional items. The **Asheninka** parser will not handle these properly. You must enter each optional item after the other.

Example (2) gives some sample environments along with what they mean.

<sup>3</sup>This is another reason why you should use unique names for grapheme natural classes. If you have two or more grapheme natural classes with the same name, it is not clear which one you mean. **Asheninka** will automatically select one, but it may not be the one you intended.

<sup>4</sup>You can also press the **Tab** key two times to get to the drop-down box. Then use the **down-arrow** key to move to the one you want and press the **Enter** key. Please note that currently if you click on the drop-down box with the mouse and then use the **down-arrow** key, it will choose the first item in the list. I have yet to figure out how to avoid this poor behavior.

(2)	Environment	Meaning
	/ m _	after an m
	/ [V] _	after a vowel (assuming there is a grapheme natural class of vowels called v)
	/ # i _	after a word initial i
	/ # [V] _	after a word initial vowel (assuming there is a grapheme natural class of vowels called v)
	/ [V] y _	after a vowel (assuming there is a grapheme natural class of vowels called v) and a y
	/ _ i	before an i
	/ _ [C]	before a consonant (assuming there is a grapheme natural class of consonants called c)
	/ _ y #	before a y which is word final
	/ _ [C] #	before a word final consonant (assuming there is a grapheme natural class of consonants called c)
	/ m _ w	between an m and a w
	/ [C] _ [C]	between two consonants (assuming there is a grapheme natural class of consonants called c)
	/ ai _	after an a and an i
	/ _ ai	before an a and an i
	/ _ (a) i	before an optional a and an i; that is, either before ai or before i
	/ _ ([C]) #	before an optional word final consonant (assuming there is a grapheme natural class of consonants called c); that is, either before a word final consonant or word finally

A given grapheme may have more than one environment, in which case the various environments are logically ORed with each other. That is, if any one of the environments for the grapheme are found, then the grapheme is considered to be valid (as far as its environments are concerned). For example, if a given grapheme can appear either before a consonant or word finally, then you can list both an environment for “before a consonant” and one for “before a word boundary.” Example (3) shows what this might look like, assuming that you have a grapheme natural class of consonants with an abbreviation of C.

(3)	/ _ [C]	/ _ #
-----	---------	-------

## 4.6 CV words

In the **CV Words** view, the middle pane of the display shows all the words with three other columns:

### 1. Predicted Syllable Breaks

2. **Correct Syllable Breaks**
3. **Parser Result**


When you click on a word in the middle pane, the same fields are shown on the right where you can edit them.

Please note that until you either manually add words to the project or until you import a set of words, the list will be empty. See section 12.1 for how to import a set of words.

The **Predicted Syllable Breaks** column/field contains the result of the last time you ran the **Parse all Words** tool. When it is empty, it means either that the parser has never been invoked or that the parser failed to produce a result. If the parser failed to produce a result, the **Parser Result** column/field should have some kind of explanation for where the parser ran into a problem (this will be in red).

When the **Predicted Syllable Breaks** column/field contains a result, it shows how this word was syllabified the last time you ran the **Parse all Words** tool, given the state of the segments, natural classes, and syllable patterns when it was invoked. When there is a result in this column/field, then the **Parser Result** column/field should have “Success” (in green).

Remember that you can click on a column header to sort the contents of the column. If you click on the **Parser Result** header, then any error messages should show at the top. You might find this useful when figuring out how to set the set of segments, natural classes, and syllable patterns to get a desired result.


The **Correct Syllable Breaks** column/field contains what you have indicated to be the correct syllabification for this word. It may be filled in if you imported words from a **ParaText** hyphenatedWords.txt file and that file indicated that this word's hyphenation had been approved. See section 13.3 for how to clear the set of **Correct Syllable Breaks**. Otherwise, this column/field is expected to be blank until you either manually enter the correct syllabification or run the **Convert Predicted to Correct Syllabification** tool by using **Tools / Convert predicted to correct syllabification** menu item or clicking on the  tool bar button.

When you run the **Convert Predicted to Correct Syllabification** tool, it brings up a dialog box listing all the words which have a non-empty **Predicted Syllable Breaks** field. See section 10 for more on this.

## 4.7 CV Try a Word

There are times when it may be difficult to know just why a given word is not syllabifying correctly. That's where the **Try a Word** dialog box can be useful. To see it, use the **Parser / Try a Word** menu item. This brings up a dialog box like the one shown in example (4). (Note: unlike most dialog boxes, you can keep the **Try a Word** dialog box open while still editing other views in the main window. Unfortunately, the minimize button does not currently work so you cannot minimize the dialog, but you can drag it around and resize it.)

(4)

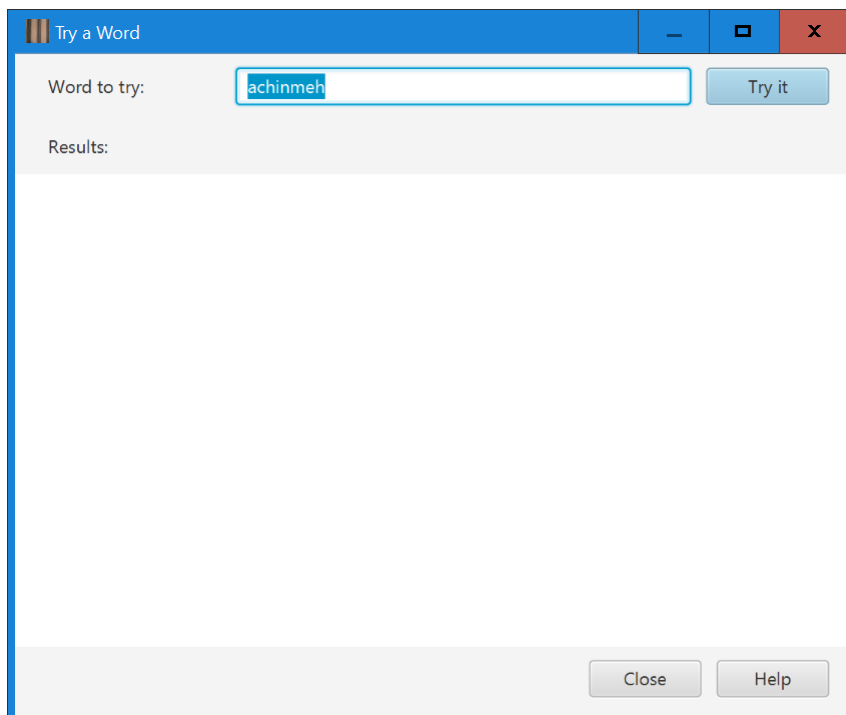

You can key a word to try in the text box. By default, **Asheninka** shows the current word selected in the **CV Words** view (if you are showing that view) or the last word you used (or nothing if you've never used **Try a Word** before and are not showing the **CV Words** view).


When you either press the **Enter** key or click on the **Try it** button, **Asheninka** will try to parse the word in the text box and report the result in the Results portion of the dialog box.

For the CV pattern approach, there are at most three steps that are tried:

1. Parsing into segments.
2. Parsing segments into natural classes.
3. Parsing natural classes into syllables.

The results portion always shows the parsing into segments. If this succeeded, then it also shows the parsing of segments into natural classes. If this succeeded, it shows the result of parsing natural classes into syllables. Successful steps are shown in **green** while unsuccessful ones are shown in **red**. An example of a successful parse is shown in example (5).

(5)

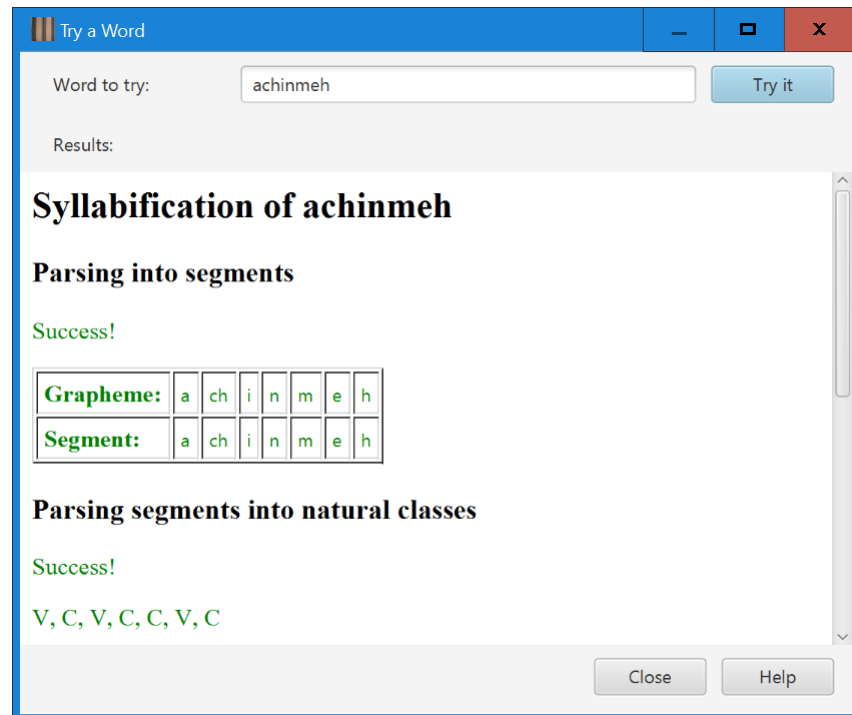

The parsing into segments part shows which grapheme was matched with what segment, Example (6) shows a case where the grapheme differs from the segment in shape.

(6)


<b>Grapheme:</b>	a	a	ng	u
<b>Segment:</b>	a	a	n	u

The parsing segments into natural classes part shows which natural classes were matched. Sometimes a given segment may be in more than one natural class. In that case, the possible natural classes are shown inside of curly braces as shown in example (7).

(7) V, V, {C,N}, V

Scrolling the results window down shows the last part:

(8)

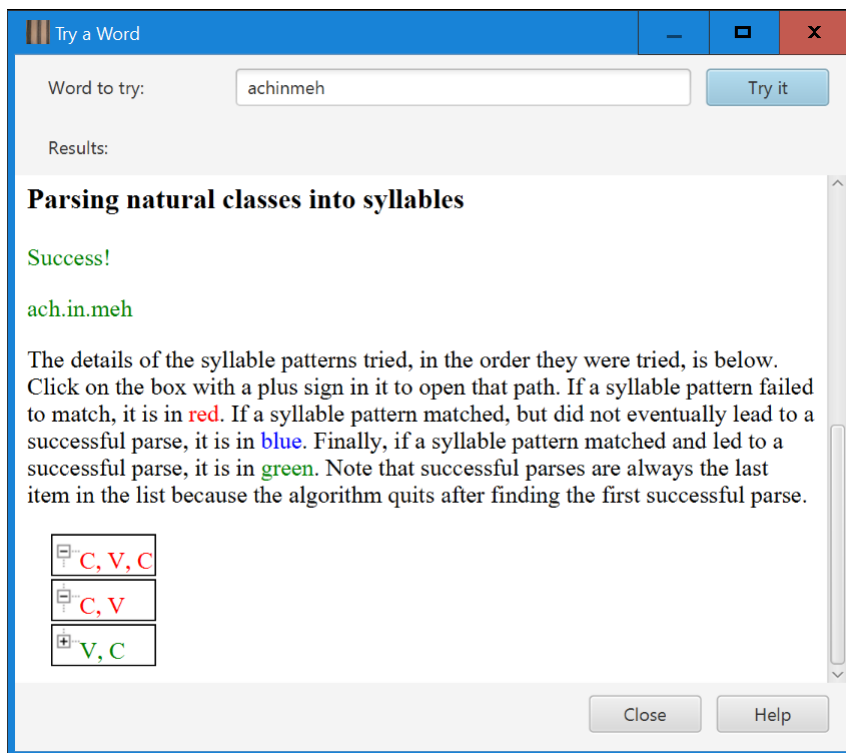

In the last part, it shows which syllable patterns were tried in the order they were tried. Successful ones are shown in **green** (and begin with a small box with a plus sign in it). These will always be the last one shown because **Asheninka** stops looking whenever it finds a successful match. Failed ones are shown in **red** (and begin with a small box with a minus sign in it). Whenever a particular pattern matched the word at a particular point in the parsing process but it did not ultimately lead to a successful parse, it is shown in **blue** (and begins with a small box with a plus sign in it).

To examine a particular path, click on the small box with a plus sign in it. This will expand that path and show the next set of syllable patterns tried, in the order they were tried.

As mentioned above, whenever one of the three steps fails, there is an error message shown for that step (and no following steps will be tried).


For example, if a word contains a grapheme that is not defined in any segment, when trying to parse the word into segments, it will show a message such as what is in example (9).

(9) **Failure: could not parse into segments beginning at 'qap'.**

In this case, the word was **aanguqap** but the **q** was not defined in any segment. Note that it shows where the problem was initially found.

It will also show the steps it took in trying to parse the word into segments, but failed as in example (10).

(10)

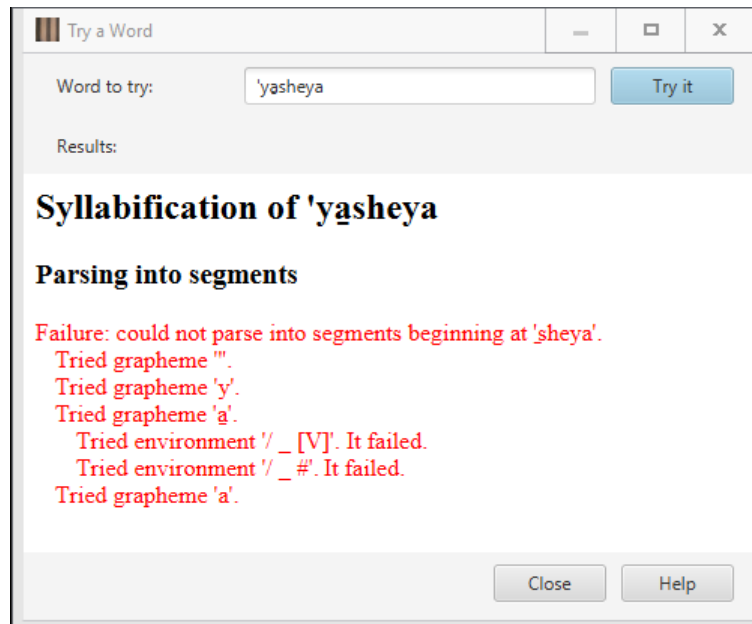

In this case, the grapheme **a** has two environments: either before a vowel or word finally. Neither succeeded.

As another example, if a word contains a segment that is not in any natural class, it will display a message such as what is shown in example (11).

(11) **Failure: could not parse into natural classes; did find classes 'V, C' covering graphemes 'am'.**

In this case, the word was **ambu**, but no natural class has the segment **b** in it. So when it tried to find a natural class for **b**, it failed. Notice that it does show what was found. (If the segment is the first item in the word, the found classes will be "" and the covered graphemes will be ".)

For the final step, if the sequence of natural classes could not be parsed into syllables per the ordered syllable patterns, then the following message is reported:

(12) **Failure: could not parse natural classes into syllables**


What follows this is an explanatory paragraph as noted above for example (8) and then the list of syllable patterns tried. In one project, this looked like what is in example (13) for the word **yanjkuik**.

(13)

	<b>K</b>
	<b>C, V</b>
	<b>C, V, C</b>
	<b>V</b>
	<b>V, C</b>
	<b>K, C</b>



Notice that none of the patterns are in green. Four are in red and two are in blue. Recall from above that this means that none of the red patterns matched the beginning of the sequence of natural classes (which was **C, V, C, C, K, C**). The two blue ones did match the beginning of the sequence, but did not ultimately lead to a successful parse. Example (14) shows what it looked like when opening the second blue pattern (**C, V, C**).



Notice that all the embedded patterns are in red: none of them matched the beginning of the natural class sequence after removing the initial **C, V, C** part that had matched (i.e., with **C, K, C**).

#### 4.8 Predicted vs. correct CV words

The **Predicted vs. Correct CV Words** view shows any words which have both a predicted value and a correct value and, in addition, the two values differ. This is intended to give you a way to quickly see how the predictions of the current set of segments, natural classes, and syllable patterns differ from the expected results. In this view, by the way, the predicted and correct words are aligned in pairs with the predicted syllabification immediately above the correct syllabification. This is an attempt to make it easier to see the differences between the two.

### 5 Sonority hierarchy approach

In the Sonority hierarchy approach, you need to define the following items:

1. segments (section 5.1)
2. a sonority hierarchy via natural classes (section 5.2)
3. grapheme natural classes (section 5.3)
4. environments (section 5.4)

After that, you either use a existing word list, import a word list (see section 12) or enter a list of words by hand. Then you use the **Parser / Syllabify Words** menu item or click on the tool bar button. This will apply the algorithm of the Sonority hierarchy approach to all the words. You can then see the results in the **Son. Hier. Words** view. See sections 5.5 and 5.6 for ideas on how to check the results, among other things.

The main “game” to play with the Sonority hierarchy approach in [Asheninka](#) is to adjust the segment inventory (including graphemes and their environments), and the sonority hierarchy (i.e., its ordered set of natural classes) so that one gets most, if not all, words to syllabify correctly. Depending on the needs of the language you are modeling, you may find that this algorithm is less than you need as noted in the “Overview” document.

The main algorithm is as follows:

1. It does a left-to-right sweep of the word, trying to find the sequence of segments which covers the whole word. It uses the graphemes defined in the segment information to determine a match with a segment. It tries all graphemes which match at the current point it is looking at in the left-to-right sweep. It tries the longest match first, but also applies any environments associated with the grapheme. See section 4.1 for more on this. If it cannot find a sequence that covers the whole word, it reports an error of “**Failure: could not parse into segments beginning at 'some characters'**” and quits. The ‘some characters’ part indicates the place in the word where it could not find a character or character sequence that matched any graphemes in any of the segments. Most likely, either there was a typo in the word or a grapheme is missing from some segment or its environment was not met.<sup>5</sup> You can use the [Try a Word](#) tool to get more details (see section 5.6).
2. If it succeeded in finding a sequence of segments, it then performs a left-to-right sweep of the segments it posited. It places the first segment of the word in the first syllable. It then tries to find the natural class of the current segment and the natural class of the following segment (unless the current segment is at the end of the word and also not already in a syllable; in this case, it adds the current segment to the current syllable). It then compares the “level” in the sonority hierarchy of these two natural classes and processes them as follows:
  - a. If they are at the same level, it adds the following segment to the current syllable.<sup>6</sup>
  - b. If the natural class of the current segment is less sonorous than the natural class of the following segment, then it adds the following segment to the current syllable.
  - c. If the natural class of the current segment is more sonorous than the natural class of the following segment, then it looks at the segment after the following segment. There are two cases considered:
    - i. If the second segment's natural class is the same or more sonorous than the third segment's natural class, then the second segment is added to the current syllable. A new syllable is created and the third segment is added to it.
    - ii. Otherwise, a new syllable is created and the second segment is added to it.

---

<sup>5</sup>This is the exact same algorithm used by the CV pattern approach.

<sup>6</sup>One implication of this is that if all vowels are in the same natural class, then a sequence of two or more vowels will all be put in the same syllable.

3. Whenever a segment is not found in any natural class, an error is reported.
4. If it succeeded in finding natural classes for all segments, it outputs the syllabification into the **Predicted Syllable Breaks** field and reports “Success”.

We now give more information on the various views available in the user interface for the Sonority hierarchy approach.


### 5.1 SH segment inventory

The **Segment Inventory** view works exactly like the **Segment Inventory** view for the CV pattern approach. See section 4.1 for details.

### 5.2 Sonority hierarchy

Use the **Sonority Hierarchy** view to create an ordered set of natural classes that constitute the sonority hierarchy you wish to use. More sonorous classes are above less sonorous classes.

The “Name” field is for you to define a short name for this natural class. We suggest using something short. The “Description” field is for your use to document anything more specific about this class.

The “Segments” field shows the set of segments this class consists of. It has a chooser button on the far right which looks like . Click on it to bring up a dialog box which lets you select the segments which constitute this class. Note that **Asheninka** currently does not check to see if a given segment has already been used in some other class. It is up to you to avoid using the same segment in more than one class. If a given segment is in more than one class, the syllabification algorithm will use the topmost class containing that segment.

Finally, the order in which the classes occur is important. The items are in order of sonority: the most sonorous at top and the least sonorous at the bottom. You control the order of the classes by clicking on a class in the middle pane and then using the up and down arrows to change its order. Note that the normal way of sorting by a column via clicking on a column header is disabled for this view.

### 5.3 Grapheme natural classes

This works exactly like the **Grapheme Natural Classes** view for the CV pattern approach. See section 4.4 for details.

### 5.4 Environments


This works exactly like the **Environments** view for the CV pattern approach. See section 4.5 for details.

### 5.5 Sonority hierarchy words

This works like the **CV Words** view for the CV pattern approach, except that the **Predicted Syllable Breaks** values and the **Parser Result** values are the result of the Sonority hierarchy approach algorithm. See section 4.6 for more on this view.

## 5.6 Sonority hierarchy Try a Word

There are times when it may be difficult to know just why a given word is not syllabifying correctly. That's where the **Try a Word** dialog box can be useful. To see it, use the **Parser / Try a Word** menu item. This brings up a dialog box like the one shown in example (15). (Note: unlike most dialog boxes, you can keep the **Try a Word** dialog box open while still editing other views in the main window. Unfortunately, the minimize button does not currently work so you cannot minimize the dialog, but you can drag it around and resize it. Further, the size and location of the **Try a Word** dialog box for the CV pattern approach and the one for the Sonority hierarchy approach can be set independently; you can have both **Try a Word** dialog boxes open at the same time if you wish.)

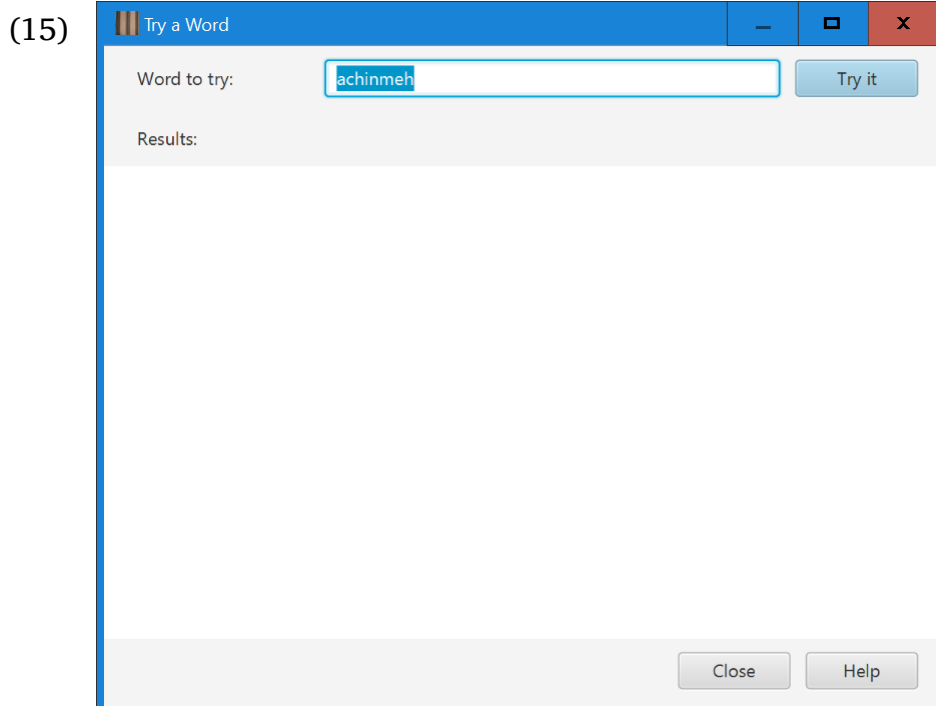

You can key a word to try in the text box. By default, **Asheninka** shows the current word selected in the **Son. Hier. Words** view (if you are showing that view) or the last word you used (or nothing if you've never used **Try a Word** before and are not showing the **Son. Hier. Words** view).

When you either press the **Enter** key or click on the **Try it** button, **Asheninka** will try to parse the word in the text box and report the result in the Results portion of the dialog box.

For the Sonority hierarchy approach, there are at most two steps that are tried:

1. Parsing into segments.
2. Parsing segments into syllables (via their natural classes).

The results portion always shows the parsing into segments. If this succeeded, then it also shows the parsing of segments into syllables. Successful steps are shown

in **green** while unsuccessful ones are shown in **red**. An example of a successful parse is shown in example (16).

(16)

Try a Word

Word to try:  Try it

Results:

### Syllabification of achinmeh

#### Parsing into segments

Success!

<b>Grapheme:</b>	a	ch	i	n	m	e	h
<b>Segment:</b>	a	ch	i	n	m	e	h

Success!

a.chin.meh

Close Help

The parsing into segments part is exactly the same as it is for the CV pattern approach.

Scrolling the results window down shows the last part:

(17)

Try a Word

Word to try:  Try it

Results:

a.chin.meh

The details of the segment to natural class mappings and the sonority comparison between pairs of natural classes is below. If a segment failed to map to a natural class, it is in **red**. Otherwise it is in **green**.

Segment 1	Relation	Segment 2	Starts Syllable
a (Vowels)	>	ch (Obstruents)	$\sigma$
ch (Obstruents)	<	i (Vowels)	$\sigma$
i (Vowels)	>	n (Nasals)	
n (Nasals)	=	m (Nasals)	
m (Nasals)	<	e (Vowels)	$\sigma$
e (Vowels)	>	h (Obstruents)	

Close Help

In the last part, it shows the sequence of segment pairs that were found along with their respective natural class and relationship. The **Relation** column uses mathematical symbols to indicate the relationship as given in example (18).

(18)

Relation	Meaning
<	Segment 1 is less sonorous than segment 2.
=	Segment 1 is equal in sonority to segment 2.
>	Segment 1 is more sonorous than segment 2.
!!!	The segment was not in any natural class.

The **Starts Syllable** column shows a syllable symbol ( $\sigma$ ) when the algorithm began a new syllable.

As mentioned above, whenever one of the two steps fails, there is an error message shown for that step (and no following steps will be tried). See section 4.7 for examples where the segments could not be parsed.

If a word contains a segment that is not in any natural class, the sonority hierarchy results table will end with a row whose **Relation** column contains “!!!” in red and one of the offending segments will have “(No Natural Class)” after it as shown in example (19).

(19)

Segment 1	Relation	Segment 2	Starts Syllable
a (Vowels)	>	m (Nasals)	$\sigma$
m (Nasals)	!!!	b (No Natural Class)	$\sigma$

In this case, the word was **ambu**, but no natural class has the segment **b** in it. So when it tried to find a natural class for **b**, it failed

### 5.7 Predicted vs. correct Son. Hier. words

The **Predicted vs. Correct Son. Hier. Words** view shows any words which have both a predicted value and a correct value and, in addition, the two values differ. This is intended to give you a way to quickly see how the predictions of the current set of segments and sonority hierarchy differ from the expected results. In this view the predicted and correct words are aligned in pairs with the predicted syllabification immediately above the correct syllabification. This is an attempt to make it easier to see the differences between the two.

## 6 Onset-nucleus-coda approach

This approach has not been implemented yet.

## 7 Moraic approach

This approach has not been implemented yet.


## 8 Nuclear projection approach

This approach has not been implemented yet.

## 9 Optimality theory approach

This approach has not been implemented yet.

## 10 Converting predicted syllabification to correct syllabification

When you run the **Convert Predicted to Correct Syllabification** tool either by using the **Tools / Convert predicted to correct syllabification** menu item or by clicking on the  tool bar button, it brings up a dialog box listing all the words which have a non-empty **Predicted Syllable Breaks** field. You can select which words should be converted by manually checking the box before them<sup>7</sup> or by clicking on the checkbox in the header row and choosing to “Select All”, “Clear All”, or “Toggle”:


1. “Select All” checks every word.
2. “Clear All” unchecks every word.
3. “Toggle” makes every word that is checked be unchecked and every word that is unchecked be checked.

When you click on the OK button, **Asheninka** will copy the value in the **Predicted Syllable Breaks** field of every word that is checked to the corresponding **Correct Syllable Breaks** field.

## 11 Project management

Feel free to make frequent (labeled) backups via the **File / Project Management / Back up this project** menu item. It will bring up a dialog box like the one shown in example (20). Please give it a descriptive label so you can later identify the state of your project when you made the backup. (You can key language data if you wish.) You won't see the label on the file name, though. Rather, you'll see it when you go to the **File / Project Management / Restore a project** menu item.

(20)

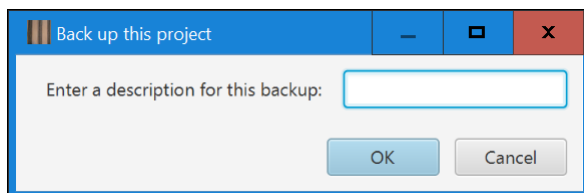


<sup>7</sup>To check the box, either click in it or click in the row and press the space bar.



When you restore a project, you will see a dialog box something like the one shown in example (21).

(21)

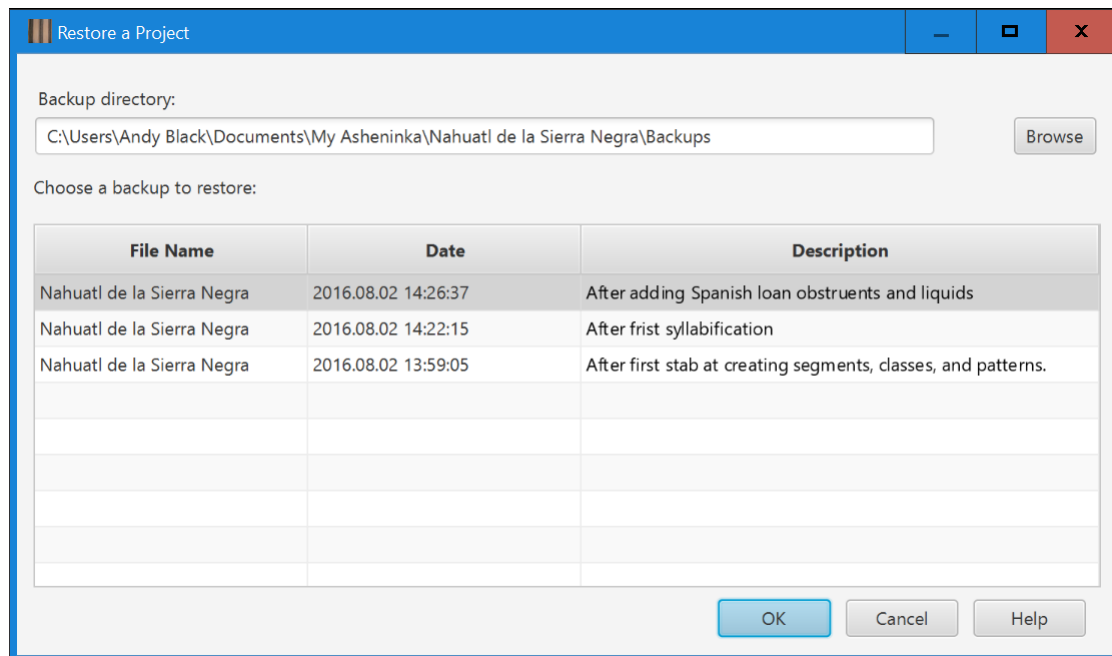

The backups you have made for this project will be shown in the list. The content in the Description column is the description you keyed while making the backup.

The idea here is that you can make a backup, try something else (e.g., add a segment or class; or re-order the syllable patterns or add a new one), and see how it goes. If it's worse, just restore to the previous state. If it's better, make a backup of that and go on.

## 12 Importing and exporting words

When using **Asheninka**, of course, you need words to parse. Once they are parsed and you have set the correct syllabifications for them (see section 10), you may want to export the set of words to be used by a typesetting tool. Such a tool can use the syllabified words as a list of words with discretionary hyphens so that it can know when to hyphenate long words at ends of lines.

### 12.1 Import words

**Asheninka** allows you to import a list of words in the following forms:

1. A text file with one word per line
2. A word list exported from **ParaText**
3. The hyphenatedWords.txt file from **ParaText**
4. A word list exported from **FieldWorks Language Explorer** (aka FLE<sub>x</sub>) (in tab-delimited form)

You can use any or all of these to add words to **Asheninka**'s list of words. A given word form will only be inserted once. By “word form” we mean that word pairs such as **achto** and **Achto** will be considered different since their capitalization is distinct.

To import a word list, use **File / Import Words** menu item and then choose the type of import to use. In each case, a standard file open dialog will appear. Find the file that has the format you need, choose it, and click on “Open”. Depending on the number of words in the imported file, this may take a while to complete.

If you are working on a word list found in **ParaText**, we recommend using the **hyphenatedWords.txt** file method. This file includes both upper and lower case forms of words and also will include any hyphenation the **ParaText** user has manually approved. At least with some versions of **ParaText**, this file can be found in the “My Paratext Projects” folder and then in the folder of your project name.

Newly added words will appear in the **CV Words** view with a **Parser Result** showing “**Untested**”. This means that the parser has not yet been run on the word.

## 12.2 Export words

When you want to export the word list in **Asheninka** to some kind of typesetting tool, use the **File / Export Hyphenated Words** menu item. The list of hyphenated words can be exported in three formats:

1. Export for **InDesign** (simple list)
2. Export for **ParaText** (**hyphenatedWords.txt**)
3. Export for **XLingPaper** (hyphenations exception file)

**Asheninka** exports hyphenated words in the following way:

1. When the word has a value in **Correct Syllable Breaks**, that value is used.
2. If **Correct Syllable Breaks** is empty, then if there is a value in **Predicted Syllable Breaks**, it uses that value.
3. Otherwise, it does not export the word.

It also will replace the periods used to demarcate syllables with whatever you have set as the discretionary hyphen character(s) in the hyphenation parameters (see section 2.6). By default, **Asheninka** uses an equals sign for both **ParaText** and **InDesign** and a hyphen for the **XLingPaper** output.

Further, **Asheninka** will not insert a discretionary hyphen if it appears too close to the front or too close to the end of a word, depending on the hyphenation parameters set. By default, the **InDesign** export uses zero characters from the front and zero characters from the end (i.e., every potential discretionary hyphen position is used).<sup>8</sup> By default, both the **ParaText** and **XLingPaper** export methods limit discretionary hyphens from two characters from front and two characters from the back.


---


<sup>8</sup>This is because the **InDesign** program has its own way of letting the typesetter control where discretionary hyphens will be used.

## 13 Other tools

**Asheninka** also offers three other tools not previously covered.

### 13.1 Find a word

Use the **Tools / Find Word** menu item or key **Ctrl F** or click on the  button on the toolbar to find a particular word. This brings up a dialog box which allows you to start typing the word you are looking for. As you type, it has a drop down area showing all words which contain the sequence of characters you have typed. Note that it shows all words which have this sequence anywhere in them, not just at the beginning. For example, with one project when I typed “**ach**”, what is in example (22) showed.

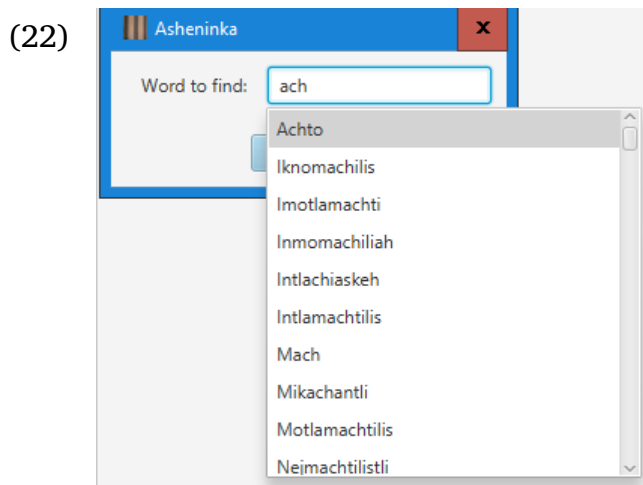


This can be very useful not only for finding a particular word, but also for looking for particular sequences of characters.

When you press the **Enter** key or click on the **OK** button, **Asheninka** will show the selected word in the approach you last used: either via the **CV Words** view of the CV pattern approach or the **Son. Hier. Words** view of the Sonority hierarchy approach.

### 13.2 Remove all words

Use the **Tools / Remove all words** menu item to completely clear the list of words in both the **CV Words** view and the **Son. Hier. Words** view. When you invoke this menu item, it will show the dialog box shown in example (23).

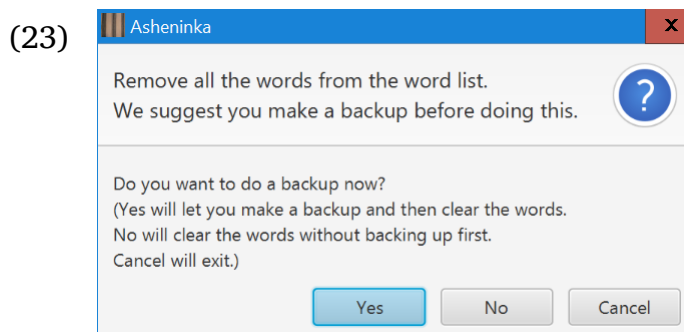

When you click on the **Yes** button, **Asheninka** will then show you the backup dialog box (see section 11). When you have done the backup, **Asheninka** will immediately remove all the words from the list of words.

If, instead, you click on the **No** button, **Asheninka** will immediately remove all the words from the list of words.


Note that when the words are removed, it will happen whether or not the **CV Words** view or the **Son. Hier. Words** view is currently being shown. It usually happens very quickly.

If you click on the **Cancel** button (or close the dialog box using the X in the red area), the dialog box will exit and nothing will change.

### 13.3 Remove correct syllable breaks in all words

Use the **Tools / Remove correct syllable breaks in all words** menu item to completely clear the **Correct Syllable Breaks** column in both the **CV Words** view and the **Son. Hier. Words** view. When you invoke this menu item, it will show the dialog box shown in example (24).

(24)

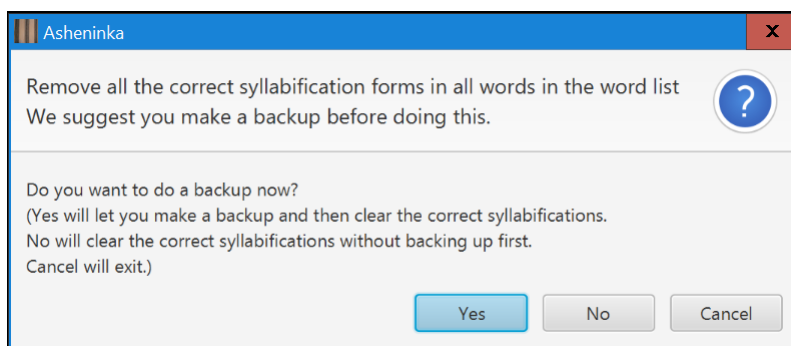

Like the dialog box for removing all words in section 13.2, you are asked whether or not to make a backup. When you click on the **Yes** button, **Asheninka** will then show you the backup dialog box (see section 11). When you have done the backup, **Asheninka** will immediately remove all the **Correct Syllable Breaks** forms from the list of words.

If, instead, you click on the **No** button, **Asheninka** will immediately remove all the **Correct Syllable Breaks** forms from the list of words.


Note that when the **Correct Syllable Breaks** forms are removed, it will happen whether or not the **CV Words** view or the **Son. Hier. Words** view is currently being shown. It usually happens very quickly.

If you click on the **Cancel** button (or close the dialog box using the X in the red area), the dialog box will exit and nothing will change.

### 13.4 Compare two implementations

**Asheninka** offers a way to more easily see what some changes to an approach have on how the words are syllabified. Use the **Tools / Compare Implementations** menu item to do this. It brings up a dialog box which looks like what is in example (25).

(25)

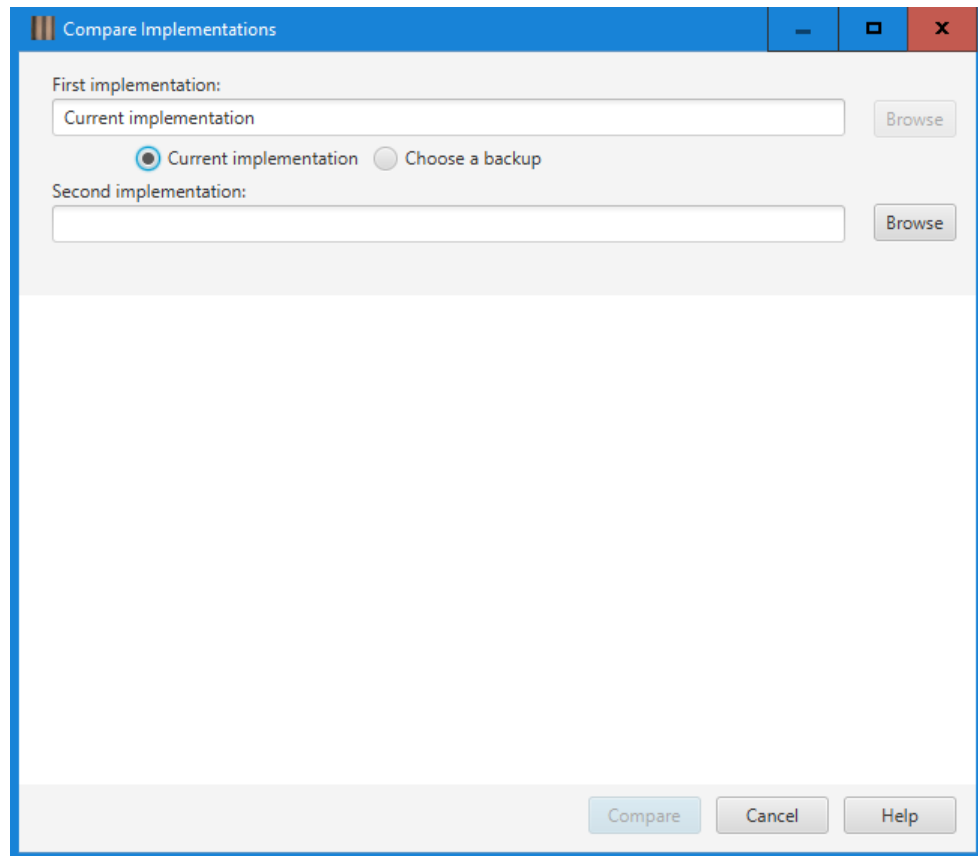

You can compare the current implementation (i.e., what is showing in the user interface right now) with what is in a backup file (see section 11) or you can compare two different backups. As you can see in example (25), the current implementation is set by default. To compare two backups, click on the “Choose a backup” radio button.

Whenever you need to select a backup file, click on the “Browse” button. This will bring up the “Restore a Project” dialog. Choose the backup you want and click OK.

When you have chosen the two implementations to compare, click on the “Compare” button. Depending on how many differences there are, the comparison process can take quite a long time so please be patient. When it is done, a report is shown in the bottom part of the dialog. The dialog box will stay visible until you close it (e.g., by clicking on the “Cancel” button). This lets you examine the report while still being able to make changes to the data in the user interface.

Which approach is used in the comparison is the current one being shown.

#### **13.4.1 CV pattern approach comparison**

When I did this for one project using the CV pattern approach, I got what is shown in example (26).

(26)

**Compare Implementations**

First implementation:

☒ Current implementation ☐ Choose a backup

Second implementation:

**CV Approach Comparison between:**

1. Current implementation
2. C:\Users\Andy Black\Documents\My Asheninka\Nahuatl de la Sierra Negra\Backups\Nahuatl de la Sierra Negra\220160802-151207.ashebackup (After adding kua, kue, kui as V (work-around for kw))

Performed on November 11, 2016 11:38 AM

**Segment Inventory**

Both have the same segment inventory.

**Natural Classes**

The following natural classes differ between the two.

First	Second
K (kua, kue, kui)	
V (a, aa, e, ee, i, ii, o, oo, u)	V (a, aa, e, ee, i, ii, kua, kue, kui, o, oo, u)

**Syllable Patterns**

The following syllable patterns differ between the two.

First	Second
K (K)	
KC (K, C)	

The order of the syllable patterns is shown below.

First	Second
K (K)	CV (C, V)
CV (C, V)	CVC (C, V, C)

### 13.4.2 Sonority hierarchy approach comparison

When I did this for one project while showing the Sonority hierarchy approach, I got what is shown in example (27).

(27)

Compare Implementations

First implementation:

Current implementation

Browse

☒ Current implementation
 ☐ Choose a backup

Second implementation:

C:\Users\Andy Black\Documents\My Asheninka\SonorityHierarchy\Backups\SHtsting20190122-

Browse

**Sonority Hierarchy Approach Comparison between:**

1. Current implementation
2. C:/Users/Andy Black/Documents/My Asheninka/SonorityHierarchy/Backups/SHtsting20190122-103443.ashebackup (null)

Performed on January 29, 2019 11:13 AM

**Segment Inventory**

Both have the same segment inventory.

**Grapheme Natural Classes**

Both have the same set of grapheme natural classes.

**Environments**

Both have the same set of environments.

**Sonority Hierarchy**

The following natural classes differ between the two.

First	Second
	Voiced Obstruants (b, d, g, z)
Voiced Obstruants (b, d, g, z)	

The order of the sonority hierarchy is shown below.

Compare

Cancel

Help

### 13.5 Compare syllabification results between approaches

**Asheninka** also offers a way to more easily see how the words are syllabified between the approaches. Use the **Tools / Compare Syllabification Results between Approaches** menu item to do this. This immediately does a comparison of the predicted syllabification of all words and shows the result in a dialog box. In one implementation I did, it looked like what is in example (28).



(28)

**Compare Syllabification Results between Approaches**

### Comparison of CV and Sonority Hierarchy approaches to Syllabification

Performed on January 29, 2019 11:16 AM

#### Syllabifications

The following words have different syllabifications.

CV Pattern	Sonority Hierarchy	Syllabification
failed	a	a
failed	a.da	a.da
failed	a.dad	a.dad
failed	a.dan	a.dan
failed	a.dar	a.dar
failed	a.du.lam.te.ko	a.du.lam.te.ko
failed	a.gar	a.gar

Cancel Help

Note that there are three columns. The first is the result of the CV pattern approach, the second is the result of the Sonority hierarchy approach, and the third shows these two one on top of the other for better comparison. In the case above, no vowel initial words were allowed in the CV pattern approach so that's why there were so many failures. Scrolling down more in the dialog, there was the following portion, which better illustrates the differences:

(29)

me.he.ta.bel	failed	me.he.ta.bel
meh.me.lap.tik	me.hme.lap.tik	meh.me.lap.tik
meh.me.la.wak	me.hme.la.wak	meh.me.la.wak
failed	me.hu.yael	me.hu.yael
meh.wan.te	me.hwan.te	meh.wan.te
meh.wa.ti	me.hwa.ti	meh.wa.ti
failed	me.hwn.te	me.hwn.te
failed	me.sias	me.sias
me.so.po.tam.ya	me.so.po.ta.mya	me.so.po.tam.ya
mes.yas	me.syas	mes.yas

Like several other dialog boxes in *Asheninka*, you can keep this dialog box open while doing other things.

### A. Why is it called *Asheninka*?

This syllable parsing program is called *Asheninka* for historic reasons. (The word is pronounced a.<sup>9</sup>ʃɛ.nɪŋ.ka.)

In late 1983 my family and I were living in the jungles of Peru and David Payne came and asked me if I would create a **Consistent Changes** table for him that would insert discretionary hyphens in *Asheninka* text.<sup>9</sup> The algorithm he suggested was the CV Patterns approach (see section 4). *Asheninka* has long words and typesetting material in that language would improve readability with such a table. In 1984 I wrote such a table.

While it was functional, it ran slowly. I then wrote the **Hyphen** program (Black et al. 1987) to improve the efficiency. It implemented the same basic approach. Amazingly, the **Hyphen** program is still being used (albeit occasionally) today.

Because of this beginning, I chose to call this tool *Asheninka*. The program icon (shown in example (30) below) is the kind of material used for clothing by *Asheninka* people.<sup>10</sup>

<sup>9</sup>A more current version of this program is SIL International (2005).

<sup>10</sup>This image was gratefully taken from [here](#) on 12 November, 2015.

(30)



## References

- Black, H. Andrew, Fred Kuhl, Kathy Kuhl, and David J. Weber. 1987. *Document preparation aids for non-major languages*. Occasional publications in academic computing Issue 7. Dallas, TX: Summer Institute of Linguistics. <http://www.sil.org/resources/publications/entry/29601> (accessed 24 Feb. 2017)
- IPA. 2016. International Phonetic Association. <https://www.internationalphoneticassociation.org/> (accessed 9 November 2016)
- SIL International. 2005. Consistent Changes Program. [http://scripts.sil.org/cms/scripts/page.php?site\\_id=nrsi&id=cc-grkuni](http://scripts.sil.org/cms/scripts/page.php?site_id=nrsi&id=cc-grkuni) (accessed 24 Feb. 2017)

## Index

- Active field, 2
- Add data item, 2
- Analysis language, *see* Language, Analysis.
- Compare approaches, 29
- Compare two implementations, 26
- CV pattern approach, 5
  - Algorithm, 5
  - Compare two implementations, 27
  - Environments, 8
  - Grapheme natural classes, 8
  - Graphemes, 6
  - Natural classes, 7
  - Predicted vs. correct syllabification, 16
  - Segments, 6
  - Syllable Patterns, 7
  - Try a Word, 11
  - Words, 10
- Delete data item, 2
- Discretionary hyphen character(s), *see* Hyphenation parameters, Discretionary hyphen character(s).
- Export words, *see* Words, Export.

## Failure messages

## CV Pattern approach

Parse into natural classes, 6, 15

Parse into segments, 5, 14, 17

Parse into syllables, 6, 15

## Sonority hierarchy approach

Parse into natural classes, 21

Parse into segments, 20

Fonts, *see* Language.French, *see* Language, User interface, French.

## Help, 4

Introduction to syllabification, 4, 5

Tutorial, 4

User documentation, 4

## Hyphenation parameters, 4

Discretionary hyphen character(s), 4, 24

Start hyphenating at *i* characters from the front, 4, 24Stop hyphenating at *j* characters from the end, 4, 24Import words, *see* Words, Import.Insert data item, *see* Add data item.

## Language

Analysis, 3

User interface, 4

English, 4

French, 4

Spanish, 4

Vernacular, 3

## Moraic approach, 21

New project, *see* Project, New.

## Nuclear projection approach, 22

## Onset-nucleus-coda approach, 21

Open a project, *see* Project, Open.

## Optimality Theory approach, 22

Ordering data in display, *see* Sorting data in display.

## Parsing

Characters into segments, 6

CV algorithm, *see* CV pattern approach, Algorithm.

Parsing result failure messages, 5, 17

Sonority hierarchy algorithm, *see* Sonority hierarchy approach, Algorithm.

## Predicted syllabification

Comparing with correct (CV), 16

Comparing with correct (Son. Hier.), 21

Converting to correct, 22

## Project

Management

- Backup, 22
- Restore, 22
- New, 3
- Open, 3
- Save, 3
- Save project as a new project, 3
- Remove data item, *see* Delete data item.
- Save a project, *see* Project, Save.
- Save a project as a new project, *see* Project, Save project as a new project.
- Sonority hierarchy approach, 16
  - Algorithm, 17
  - Environments, 18
  - Graphemes, 18
  - Predicted vs. correct syllabification, 21
  - Segments, 18
  - Sonority hierarchy, 18
  - Try a Word, 19
- Sorting data in display, 3
- Spanish, *see* Language, User interface, Spanish.
- Start hyphenating at *i* characters from the front, *see* Hyphenation parameters, Start hyphenating at *i* characters from the front.
- Stop hyphenating at *j* characters from the end, *see* Hyphenation parameters, Stop hyphenating at *j* characters from the end.
- Syllabification, *see* Help, Introduction to syllabification.
- Try a Word, 11, 19
- Tutorial, *see* Help, Tutorial.
- User documentation, *see* Help, User documentation.
- User interface language, *see* Language, User interface.
- Vernacular language, *see* Language, Vernacular.
- Words
  - Export, 4, **24**
    - To **InDesign**, 24
    - To **ParaText**, 24
    - To **XLingPaper**, 24
    - To a text file (plain text), 24
  - Find a word, 25
  - Import, 23
    - From **ParaText**, 23
    - From a text file (plain text), 23
    - From **FieldWorks Language Explorer**, 23
  - Remove all words, 25
  - Remove correct syllable breaks in all words, 26