

***Use PC-PATR with FLEx* User Documentation**

H. Andrew Black

SIL International

blackhandrew@gmail.com

8 August, 2019

Version 1.2.5 Beta

Copyright © 2018-2020 SIL International

Contents

1	Introduction	2
1.1	Installation	2
1.2	Invoking <i>Use PC-PATR with FLEx</i> from within <i>FLEx</i>	2
1.3	Initial invocation	2
1.4	Appearance	3
2	Buttons	3
2.1	PC-PATR grammar Browse button	3
2.2	Rootgloss choices	3
2.3	Help button	4
2.4	Disambiguate button	4
2.5	Parse button	4
3	Parsing a segment	4
4	Disambiguating a text	4
5	Restarting <i>Use PC-PATR with FLEx</i>	5
6	Error messages	5
7	Known problems	6
8	Support	7
A.	The <i>PcPatr Browser</i> tool	7
A.1	Overview	7
A.2	Right-to-left script	8
B.	Another way to edit a PC-PATR grammar file	9

1 Introduction

Use PC-PATR with FLEX is a tool that works as a utility in *FieldWorks Language Explorer* (aka *FLEX*). *Use PC-PATR with FLEX* can use a PC-PATR grammar to disambiguate a text or a portion of a text that has been analyzed in a *FLEX* project. You tell *Use PC-PATR with FLEX* the PC-PATR grammar file to use. Then you can choose a text or a portion of that text and ask *Use PC-PATR with FLEX* to try and disambiguate it.

Use PC-PATR with FLEX works with version 9.0.4 Beta or higher of *FLEX* and is only available on 64-bit Windows computers.

While you can use any PC-PATR grammar file, *Use PC-PATR with FLEX* expects that you will have used the *PAWS* program to create the PC-PATR grammar file. See <https://software.sil.org/paws/> for more on *PAWS*.

1.1 Installation

To install *Use PC-PATR with FLEX*, obtain the installer from <https://github.com/sillsdev/pcpatrflex/tree/master/Installer/Output/UsePcPatrWithFLEXDllSetup.exe>. The installer will check to see if you have installed *FieldWorks Language Explorer* version 9. If not, it will abort.

We recommend that you close *FieldWorks Language Explorer* before running the *Use PC-PATR with FLEX* installer.

1.2 Invoking *Use PC-PATR with FLEX* from within *FLEX*

While running *FLEX*, use **Tools** menu item / **Utilities....** Find the “Use PC-PATR with FLEX” item, check it, and then click on the “Run Checked Utilities Now” button.

1.3 Initial invocation

The first time you invoke *Use PC-PATR with FLEX* on a *FLEX* database, it will automatically add to your *FLEX* database the following:


1. a custom field to each sense (called “PCPATR”) and
2. a custom list (called “PCPATR Feature Descriptors”) containing the template names that the PC-PATR grammar generated by the *PAWS* program expects.

The names shown above are always in the English analysis writing system and English is the only writing system containing these names.

You can find the custom list by clicking on the “Lists” button in *FLEX*.

1.4 Appearance

Use PC-PATR with FLEX looks like what is shown in (1).

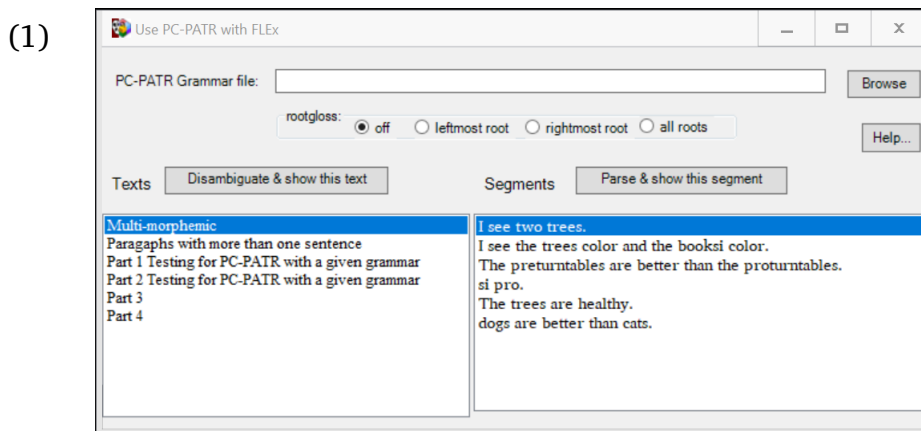

The texts in the *FLEX* database are shown in the left pane and the segments of the first text are shown in the right pane.

There are buttons you can click. Each is discussed in section 2 below.

2 Buttons

You control *Use PC-PATR with FLEX* by using the various buttons. This section briefly describes them. See sections 3–4 for more on what happens for the segment and text buttons, respectively.

2.1 PC-PATR grammar Browse button

To choose which PC-PATR grammar file to use, click on the Browse button. By convention, PC-PATR grammar files have an extension of “.grm” so this is what the file browser uses.

2.2 Rootgloss choices

PC-PATR allows you to have “rootglosses” in rules. This section allows you to set one of four options with respect to how rootglosses are handled. See section 3.2.14.22 “set rootgloss” in the PC-PATR Reference Manual.¹ The four options are:

1. off: rootglosses are not used; this is the default;
2. leftmost root: the first / leftmost root is used;
3. rightmost root: the last / rightmost root is used;
4. all: every root is used.

¹Use the **Help** menu item / **PC-PATR Reference Manual** to see this document.

2.3 Help button

The “Help...” button is used to get this user documentation file, show the PC-PATR Reference Manual, or to show the “About” dialog box.

2.4 Disambiguate button


Above the pane containing the texts is a button labeled “Disambiguate & show this text.” You use this button to try and use the PC-PATR grammar to disambiguate this entire text. See section 4 for more.


2.5 Parse button

Above the pane containing the segments of the selected text is a button labeled “Parse & show this segment.” You use this button to try and use the PC-PATR grammar to parse this particular segment. See section 3 for more.

3 Parsing a segment

When you use the “Parse & show this segment” button for a segment, *Use PC-PATR with FLE_x* will pass the parsing information that you entered in *FLE_x* to *PC-PATR*, along with the PC-PATR grammar, and process that segment. The result will be shown in a slightly newer version of the *PcPatr Browser* tool (<https://software.sil.org/carla/pc-patr-browser/>). See appendix A for more information on this tool.

You use this tool to see all the parses the *PC-PATR* program produced for this segment using the PC-PATR grammar file. When there are two or more parses, you can show the correct one and then use **Parse / Use This Parse** menu item (or click on the  tool bar button) to have this analysis be recorded in the *FLE_x* database for this segment. That is, this segment will be disambiguated, using the information from this parse.


If you are using the *TreeTran* program, you can save the results of the disambiguated parses in a file called *Invoker.xml* in the %TEMP% directory. You do this by using **File / Save for TreeTran** to make sure there is a check mark before it. Alternatively, you can click on the  item in the tool bar.

When you are done looking at the results, close the *PcPatr Browser* tool and you will return to *Use PC-PATR with FLE_x*.

4 Disambiguating a text

When you use the “Disambiguate & show this text” button, *Use PC-PATR with FLE_x* will pass the parsing information for all segments in the text to *PC-PATR*, along with the PC-PATR grammar, and process all those segments. Since all the segments are processed, this will probably take a while. So please be patient. The result will be shown in the slightly newer version of the *PcPatr Browser* tool. See appendix A for more information on this tool.

Unlike with parsing a segment (see section 3), the result will have as many “sentences” as there are segments in the text.

By default, *Use PC-PATR with FLEx* will disambiguate a segment in the *FLEx* database whenever the result of the parsing uniquely identifies the analysis of each word in the segment. For those cases where there are still ambiguities, you can use the *PcPatr Browser* tool to select a given parse to use. Like with parsing a segment, you show the correct parse and then use **Parse / Use This Parse** menu item (or click on the  tool bar button) to have this analysis be recorded in the *FLEx* database for this segment. That is, this segment will be disambiguated, using the information from this parse.

When you are done looking at the results, close the *PcPatr Browser* tool and you will return to *Use PC-PATR with FLEx*.

5 Restarting *Use PC-PATR with FLEx*

Whenever you exit and restart *Use PC-PATR with FLEx*, it will do the following:

1. remember which PC-PATR grammar file you last chose;
2. remember which text in that project you last selected; and
3. remember which segment in that text you last selected.

6 Error messages

In certain situations, *Use PC-PATR with FLEx* will issue an error message.

Example (2) lists the errors *Use PC-PATR with FLEx* reports along with a brief description of what the error might mean.

(2)	Error	Meaning
	The PC-PATR grammar file had an error in it and failed to load. We will show the error log after you click on OK. Please fix all errors in the grammar file and then try again.	The PC-PATR grammar file being used has at least one error in it so the <i>PC-PATR</i> program could not load and use it. The list of errors (and any warning messages, too) will be shown as soon as you click on the OK button. Note that in the error message file, the grammar file's location may look odd, but it is the same as what is showing before the "Browse" button. ² Also, the error messages and warnings may be a bit cryptic. See the PC-PATR Reference Manual for (some possible) help on this. (The manual is available via the "Help" button; see section 2.3.)

If you get an error message not in the list above, please report it. See section 8.

7 Known problems

The following items are known to be less than desirable with this version of *Use PC-PATR with FLE_x*:

1. *Use PC-PATR with FLE_x* only works with version 9.0.4 Beta or higher of *FLE_x*.
2. *Use PC-PATR with FLE_x* assumes that the comment character in the PC-PATR grammar file is a vertical bar |. If you use something else, the parser will fail every segment.
3. When a word in *FLE_x* does not have the "Word Cat" field filled out for a word in the interlinear, *Use PC-PATR with FLE_x* will try and guess what the category of the word should be. It does this as follows:
 - a. If there is only one morpheme, use its category.
 - b. If there are two or more morphemes and only one stem/root, find the stem and use its category. (This could be incorrect if one of the affixes is derivational and changes the category.)
 - c. If there are two or more stems, use the category of the left-most one. (This could be incorrect if some other stem is the correct category to use or if the stem compounding results in a different category or if one of the affixes is derivational and changes the category.)

Therefore, it is always a good idea to overtly fill out the "Word Cat" field in *FLE_x*.

²This happens for long file names or folder names. *PC-PATR* is a "DOS" program and uses this cryptic format.

4. When a morpheme in a word analysis has just the form but no sense or grammatical info, then the gloss showing in the output will be the gloss of the first sense of the entry for the morpheme.
5. When a morpheme in a word analysis has the form and grammatical info but no sense overtly indicated and there are two or more senses using the grammatical info in the entry, then the gloss showing in the output will be the gloss of the first sense which uses the grammatical info.
6. The user interface is in English only.

8 Support

If you have any questions with *Use PC-PATR with FLEx* or find bugs in it, please send an email to blackhandrew@gmail.com.

A. The *PcPatr Browser* tool

This appendix briefly covers the various parts of the *PcPatr Browser* tool.

A.1 Overview

Example (3) is a screen shot of what it looks like for one segment using one PC-PATR grammar.

(3)

The screenshot shows the PcPatr Browser tool interface. The title bar reads "PcPatrBrowser - C:\Users\ANDYBL~1\AppData\Local\Temp\Invoker.and (Default Language)". The menu bar includes File, View, Sentence, Parse, Language, and Help. The toolbar contains various icons for file operations and parsing. The main window displays "Sentence 1 of 1" with a table of words and their grammatical features:

we	want	to	get	married	and	be	happy
we	want	to	get	married	and	be	happy
1PL-nom	v	aux	get-cop	marry-PART	conj	v	happy
pro	sentential_-finiteIP_or_transitive	-finite	v	v	plur	copular	adj
first nominative plural			copular	participle			

Below the table, "Parse 1 of 2" shows a hierarchical parse tree structure:

```

S
|
IP
|
DP+
|
D'+
|
Pron
|
we
|
1PL-nom
|
want
|
V
|
want
|
VP
|
IP
|
I'
|
Aux
|
VP

```

On the right, a text box explains: "When you click on a node in the tree shown in the panel to the left, any feature structure associated with that node will show up here. (Note: if you do not have PC-PATR include feature structures in the output, then no features will ever show here.)"

At the bottom, a text area contains the following information:

DO NOT EDIT THIS FILE UNTIL YOU HAVE COMPLETED THE ENTIRE STARTER KIT!
 (Otherwise your changes will get over-written the next time you save.)

PC-PATR Grammar file for PAWS Starter Kit
 C Black July 2012

Phrase structure rules

Let ablative be <head case> = ablative

Sentence 1 of 1 Parse 1 of 2

Language menu item, though, and uncheck and then check the “Use right-to-left orientation in parse tree and interlinear” option.

B. Another way to edit a PC-PATR grammar file

One challenge with editing a PC-PATR grammar file is that it is a plain text file. If one wants to try and debug a grammar, one has to comment off a large amount of lines. It can get to be tricky.

Some tentative work has been done on a tool that will take a PC-PATR grammar file and convert it to a form that can be used in a tool like the *XMLmind XML Editor*. Some advantages of this are that one can:

1. Quickly enable/disable given rules
2. Quickly enable/disable given templates

A major disadvantage is that once converted to this form, large PC-PATR grammar files are quite slow to load into the *XMLmind XML Editor*s.

If you are interested in trying this, please contact blackhandrew@gmail.com.