

Identitying a commit





X~3 X~2 X~


X^3

X^2

X^2~

Identifying a commit

- Many commands take commits as arguments (log, cherry-pick, diff)
- Ways to identify a commit: HEAD, branch, tag, hash

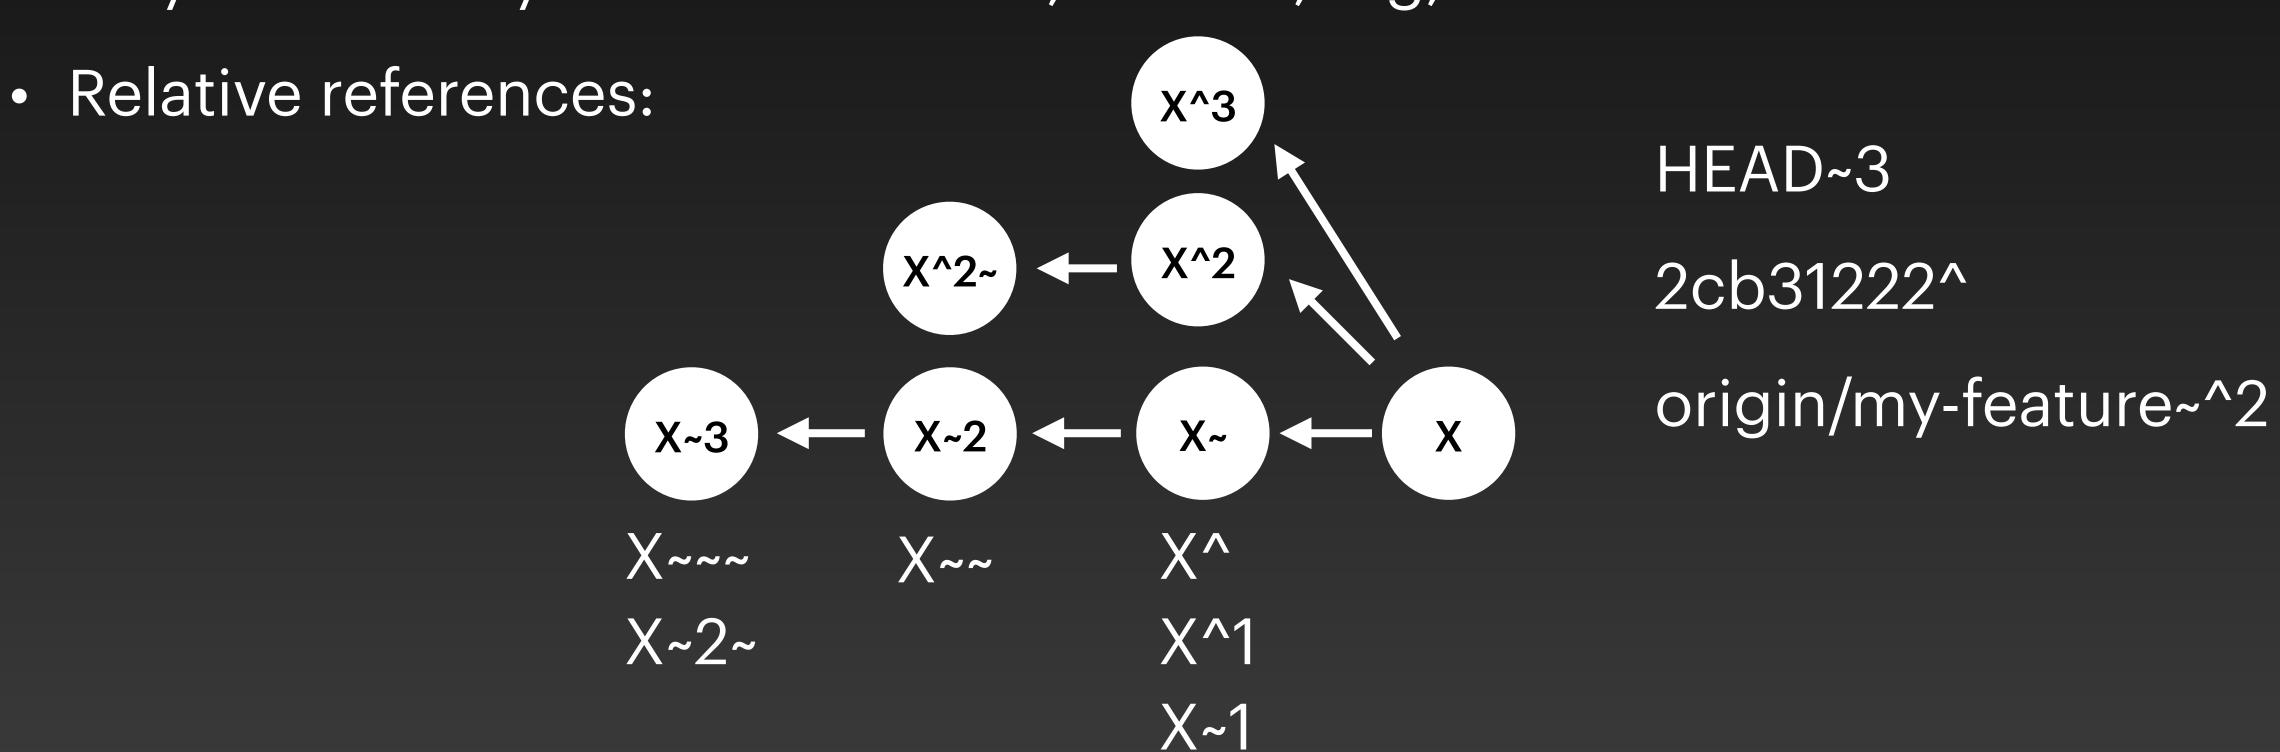

diff/apply