TASK 1

Algorithm

1. Start
2. Input the scores of Quiz 1, Quiz 2, and Quiz 3
3. Compute total = Quiz1 + Quiz2 + Quiz3
4. Compute average = total / 3
5. Display total and average
6. End

Pseudocode

START

Declare quiz1, quiz2, quiz3, total, average

Input quiz1
Input quiz2
Input quiz3

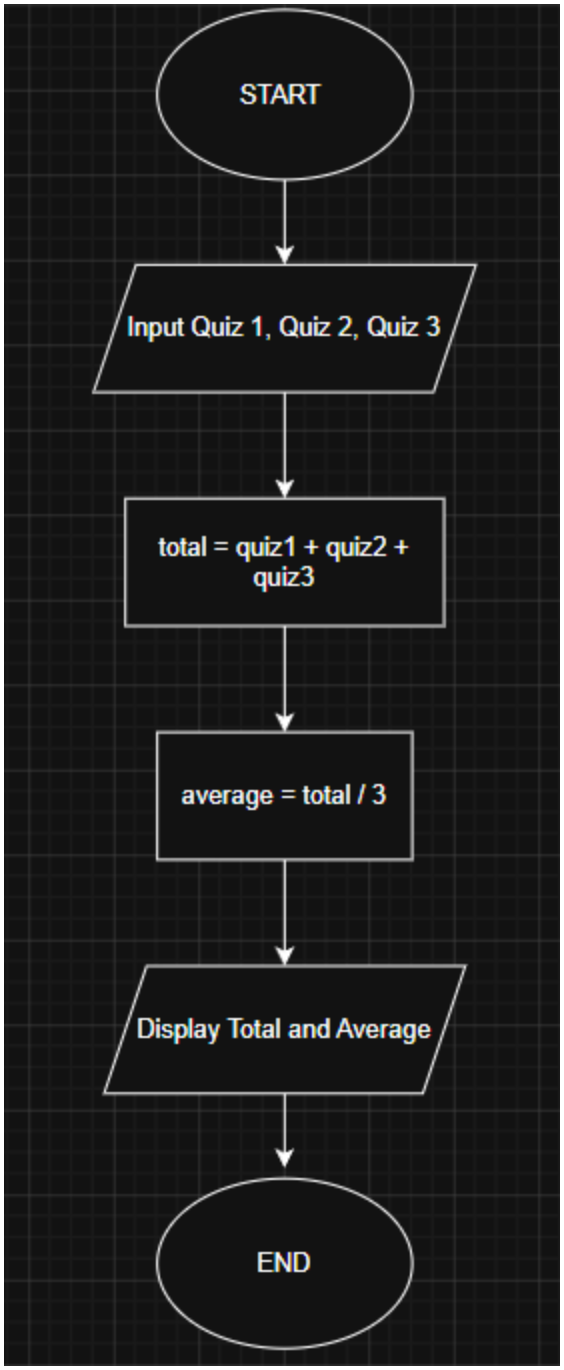
total = quiz1 + quiz2 + quiz3

average = total / 3

Display total
Display average

END

Flowchart


START
Input Quiz 1, Quiz 2, Quiz 3
total = quiz1 + quiz2 + quiz3
average = total / 3
Display Total and Average
END

TASK 2

Algorithm

1. Start.
2. Input the prices of three items.
3. Compute the total price of the items.
4. Display the total price.
5. Accept customer's payment.
6. Compute the change by subtracting total price from payment.
7. Display the transaction details including total, payment, and change.
8. End.

Pseudocode

START

INPUT item1, item2, item3

total = item1 + item2 + item3

DISPLAY total

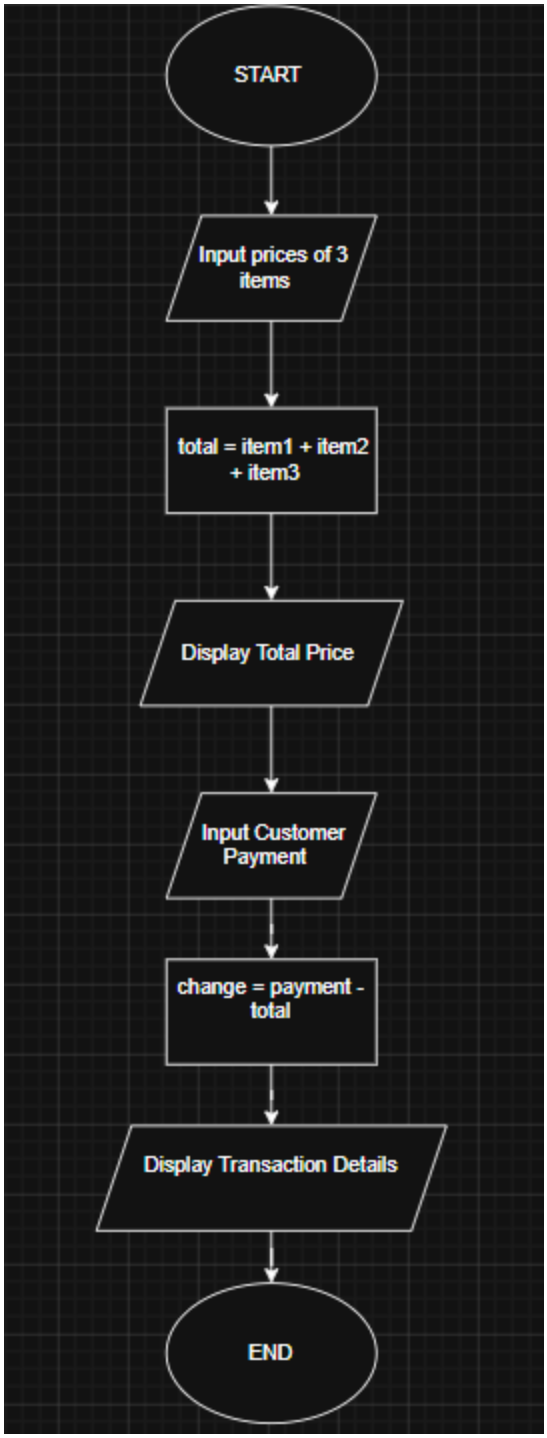
INPUT payment

change = payment - total

DISPLAY item prices
DISPLAY total price
DISPLAY payment
DISPLAY change

END

Flowchart


START
Input prices of 3 items
total = item1 + item2 + item3
Display Total Price
Input Customer Payment
change = payment - total
Display Transaction Details
END

I created the cashiering system by first thinking about the steps involved in a real buying process. I started by asking the user to enter the prices of the three items, then added them together to calculate the total cost. After that, I asked for the payment amount so the program could compute the correct change. I organized these steps into an algorithm to keep the process clear and easy to follow. Next, I converted the algorithm into pseudocode using simple commands such as INPUT, DISPLAY, and basic calculations. This made it easier to understand how the program works, from entering the item prices to displaying the total amount, payment, and change at the end of the transaction.