

C++26 Reflection for JSON Serialization

A Practical Journey

- Daniel Lemire, *University of Quebec* 
- Francisco Geiman Thiesen , *Microsoft* 

CppCon 2025

JSON

- Portable, simple
- Used by ~97% of API requests. [Landscape of API Traffic 2021 - Cloudflare](#)
- scalar values
 - strings (must be escaped)
 - numbers (but not NaN or Inf)
- composed values
 - objects (key/value)
 - arrays (list)

```
{  
  "username": "Alice",  
  "level": 42,  
  "health": 99.5,  
  "inventory": ["sword", "shield", "potion"]  
}
```

JSON downside?

Reading and writing JSON can be *slow*. E.g., 100 MB/s to 300 MB/s.

- Slower than fast disks or fast networks

```
$ go run parse_twitter.go  
Parsed 0.63 GB in 6.961 seconds (90.72 MB/s)
```

REST = HTTP + JSON = SLOW

Filmed at
QCon San Francisco 2019
Brought to you by
InfoQ

Source: Gwen (Chen) Shapira

Micron shows off world's fastest PCIe 6.0 SSD, hitting 27 GB/s speeds — Astera Labs PCIe 6.0 switch enables impressive sequential reads

News

By [Sunny Grimm](#) published March 8, 2025

The next-gen of networking and storage is hitting the trade shows

Performance

- simdjson was the first library to break the gigabyte per second barrier
 - Parsing Gigabytes of JSON per Second, VLDB Journal 28 (6), 2019
 - On-Demand JSON: A Better Way to Parse Documents? SPE 54 (6), 2024
- JSON for Modern C++ can be $100\times$ slower!



SIMD (Single Instruction, multiple data)

- Allows us to process 16 (or more) bytes or more with one instruction
- Supported on all modern CPUs (phone, laptop)
- <Add a bullet point for language support voted on C++26>

Not all processors are equal

processor	year	arithmetic logic units	SIMD units
Apple M*	2019	6+	4×128
Intel Lion Cove	2024	6	4×256
AMD Zen 5	2024	6	4×512

SIMD support in simdjson

- x64: SSSE3 (128-bit), AVX-2 (256-bit), AVX-512 (512-bit)
- ARM NEON
- POWER (PPC64)
- Loongson: LSX (128-bit) and LASX (256-bit)
- RISC-V: *upcoming*

simdjson: Parsing design

- First scan identifies the structural characters, start of all strings at about 10 GB/s using SIMD instructions.
- Validates Unicode (UTF-8) at 30 GB/s.
- Rest of parsing relies on the generated index.
- Allows fast skipping. (Only parse what we need)



<https://openbenchmarking.org/test/pts/simdjson>

Usage

The simdjson library is found in...

- Node.js
- ClickHouse
- Velox
- Milvus
- QuestDB
- StarRocks
- ...



The Problem

Imagine you're building a game server that needs to persist player data.



Player

username: string

level: int

health: double

inventory: string, string, ...

You start simple:

```
struct Player {  
    std::string username;  
    int level;  
    double health;  
    std::vector<std::string> inventory;  
};
```

The Traditional Approach: Manual Serialization

Without reflection, you may write this tedious code:

```
// Serialization - converting Player to JSON
fmt::format(
    "{{"
    "\"username\": \"{}\", "
    "\"level\": {}, "
    "\"health\": {}, "
    "\"inventory\": {}"
    "}}",
    escape_json(p.username),
    p.level,
    std::isfinite(p.health) ? p.health : -1.0,
    p.inventory | std::views::transform(escape_json)
);
```


Manual Deserialization (simdjson)

```
object obj = val.get_object();
p.username = obj["username"].get_string();
p.level = obj["level"].get_int64();
p.health = obj["health"].get_double();
array arr = obj["inventory"].get_array();
for (auto item : arr) {
    p.inventory.emplace_back(item.get_string());
}
```

When Your Game Grows...

```
struct Equipment {  
    std::string name;  
    int damage; int durability;  
};  
struct Achievement {  
    std::string title; std::string description; bool unlocked;  
    std::chrono::system_clock::time_point unlock_time;  
};  
struct Player {  
    std::string username;  
    int level; double health;  
    std::vector<std::string> inventory;  
    std::map<std::string, Equipment> equipped;           // New!  
    std::vector<Achievement> achievements;              // New!  
    std::optional<std::string> guild_name;              // New!  
};
```



The Pain Points

This manual approach has several problems:

1. **Maintenance Nightmare:** Add a new field? Update both functions!
2. **Error-Prone:** Typos in field names, forgotten fields, type mismatches

Our goal: Seamless Serialization/Deserialization



How do other
languages do
it?

C#

```
string jsonString = JsonSerializer.Serialize(player, options);  
Player deserializedPlayer = JsonSerializer.Deserialize<Player>(jsonInput, options);
```




Why can C# implementation be so elegant?

It is using **reflection** to access the attributes of a struct during runtime.

Rust (serde)

```
// Rust with serde  
let json_str = serde_json::to_string(&player)?;  
let player: Player = serde_json::from_str(&json_str)?;
```













Rust reflection

- Rust does not have any built-in reflection capabilities.
- Serde relies on annotation and macros.



Reflection as accessing the attributes of a struct.

language	runtime reflection	compile-time reflection
C++ 26		
Go		
Java		
C#		
Rust		

Now it's our turn to have reflection!

With C++26 reflection and simdjson, **all that boilerplate disappears:**

```
// Just define your struct - no extra code needed!  
struct Player {  
    std::string username;  
    int level;  
    double health;  
    std::vector<std::string> inventory;  
    std::map<std::string, Equipment> equipped;  
    std::vector<Achievement> achievements;  
    std::optional<std::string> guild_name;  
};
```

Automatic Serialization

```
// Serialization - one line!  
void save_player(const Player& p) {  
    std::string json = simdjson::to_json(p); // That's it!  
    // Save json to file...  
}
```

Automatic Deserialization

```
// Deserialization - one line!  
Player load_player(std::string& json_str) {  
    return simdjson::from(json_str); // That's it!  
}
```

Runnable example at <https://godbolt.org/z/Efr7bK9jn>

Benefits of our implementation

- No manual field mapping
- Minimal maintenance burden
- Handles nested and user-defined structures and containers automatically
- You can still customize things if and when you want to

What Happens Behind the Scenes

```
// What you write:
Player p = simdjson::from(runtime_json_string);

// What reflection generates at COMPILE TIME (conceptually):
Player deserialize_Player(const json& j) {
    Player p;
    p.username = j["username"].get<std::string>();
    p.level = j["level"].get<int>();
    p.health = j["health"].get<double>();
    p.inventory = j["inventory"].get<std::vector<std::string>>();
    // ... etc for all members
    return p;
}
```


The Actual Reflection Magic

```
// Simplified snippet, members stores information about the class
// obtained via std::define_static_array(std::meta::nonstatic_data_members_of(^^T, ...))...
ondemand::object obj;

template for (constexpr auto member : members) {
    // These are compile-time constants
    constexpr std::string_view field_name = std::meta::identifier_of(member);
    constexpr auto member_type = std::meta::type_of(member);

    // This generates code for each member
    obj[field_name].get(out.[:member:]);
}
```

See full implementation on [GitHub](#)

Compile-Time vs Runtime: What Happens When

```
struct Player {  
    std::string username;    // ← Compile-time: reflection sees this  
    int level;              // ← Compile-time: reflection sees this  
    double health;          // ← Compile-time: reflection sees this  
};  
  
// COMPILE TIME: Reflection reads Player's structure and generates:  
// - Code to read "username" as string  
// - Code to read "level" as int  
// - Code to read "health" as double  
  
// RUNTIME: The generated code processes actual JSON data  
std::string json = R("{\"username\":\"Alice\",\"level\":42,\"health\":100.0}");  
Player p = simdjson::from(json);  
// Runtime values flow through compile-time generated code
```

Try It Yourself

```
struct Meeting {
    std::string title;
    long long start_time;
    std::vector<std::string> attendees;
    std::optional<std::string> location;
    bool is_recurring;
};

// Automatically serializable/deserializable!
std::string json = simdjson::to_json(Meeting{
    .title = "CppCon Planning",
    .start_time = std::chrono::duration_cast<std::chrono::milliseconds>(
        std::chrono::system_clock::now().time_since_epoch()
    ).count(),
    .attendees = {"Alice", "Bob", "Charlie"},
    .location = "Denver",
    .is_recurring = true
});

Meeting m = simdjson::from(json);
```

The Container Challenge

We can say that serializing/parsing the basic types and custom classes/structs is pretty much effortless.

How do we automatically serialize ALL these different containers?

- `std::vector<T>` , `std::list<T>` , `std::deque<T>`
- `std::map<K, V>` , `std::unordered_map<K, V>`
- `std::set<T>` , `std::array<T, N>`
- Custom containers from libraries
- **Future containers not yet invented**

The Naive Approach

```
// The OLD way - repetitive and error-prone! 🙄  
void serialize(string_builder& b, const std::vector<T>& v) { /* ... */ }  
void serialize(string_builder& b, const std::list<T>& v) { /* ... */ }  
void serialize(string_builder& b, const std::deque<T>& v) { /* ... */ }  
void serialize(string_builder& b, const std::set<T>& v) { /* ... */ }  
// ... 20+ more overloads for each container type!
```

Problem: New container type? Write more boilerplate!

The Solution: Concepts as Pattern Matching

Concepts let us say: "If it walks like a duck and quacks like a duck..."

```
// The NEW way - one function handles ALL array-like containers!
template<typename T>
    requires(has_size_and_subscript<T>) // "If it has .size() and operator[]"
void serialize(string_builder& b, const T& container) {
    b.append('[');
    for (size_t i = 0; i < container.size(); ++i) {
        serialize(b, container[i]);
    }
    b.append(']');
}
```

✓ Works with `vector`, `array`, `deque`, custom containers...

Concepts + Reflection = Automatic Support

When you write:


```
struct GameData {  
    std::vector<int> scores;           // Array-like → [1,2,3]  
    std::map<string, Player> players; // Map-like → {"Alice": {...}}  
    MyCustomContainer<Item> items;    // Your container → Just works!  
};
```

The magic:

1. **Reflection** discovers your struct's fields
2. **Concepts** match container behavior to serialization strategy
3. **Result**: ALL containers work automatically - standard, custom, or future!

Write once, works everywhere™

Current JSON Serialization Landscape

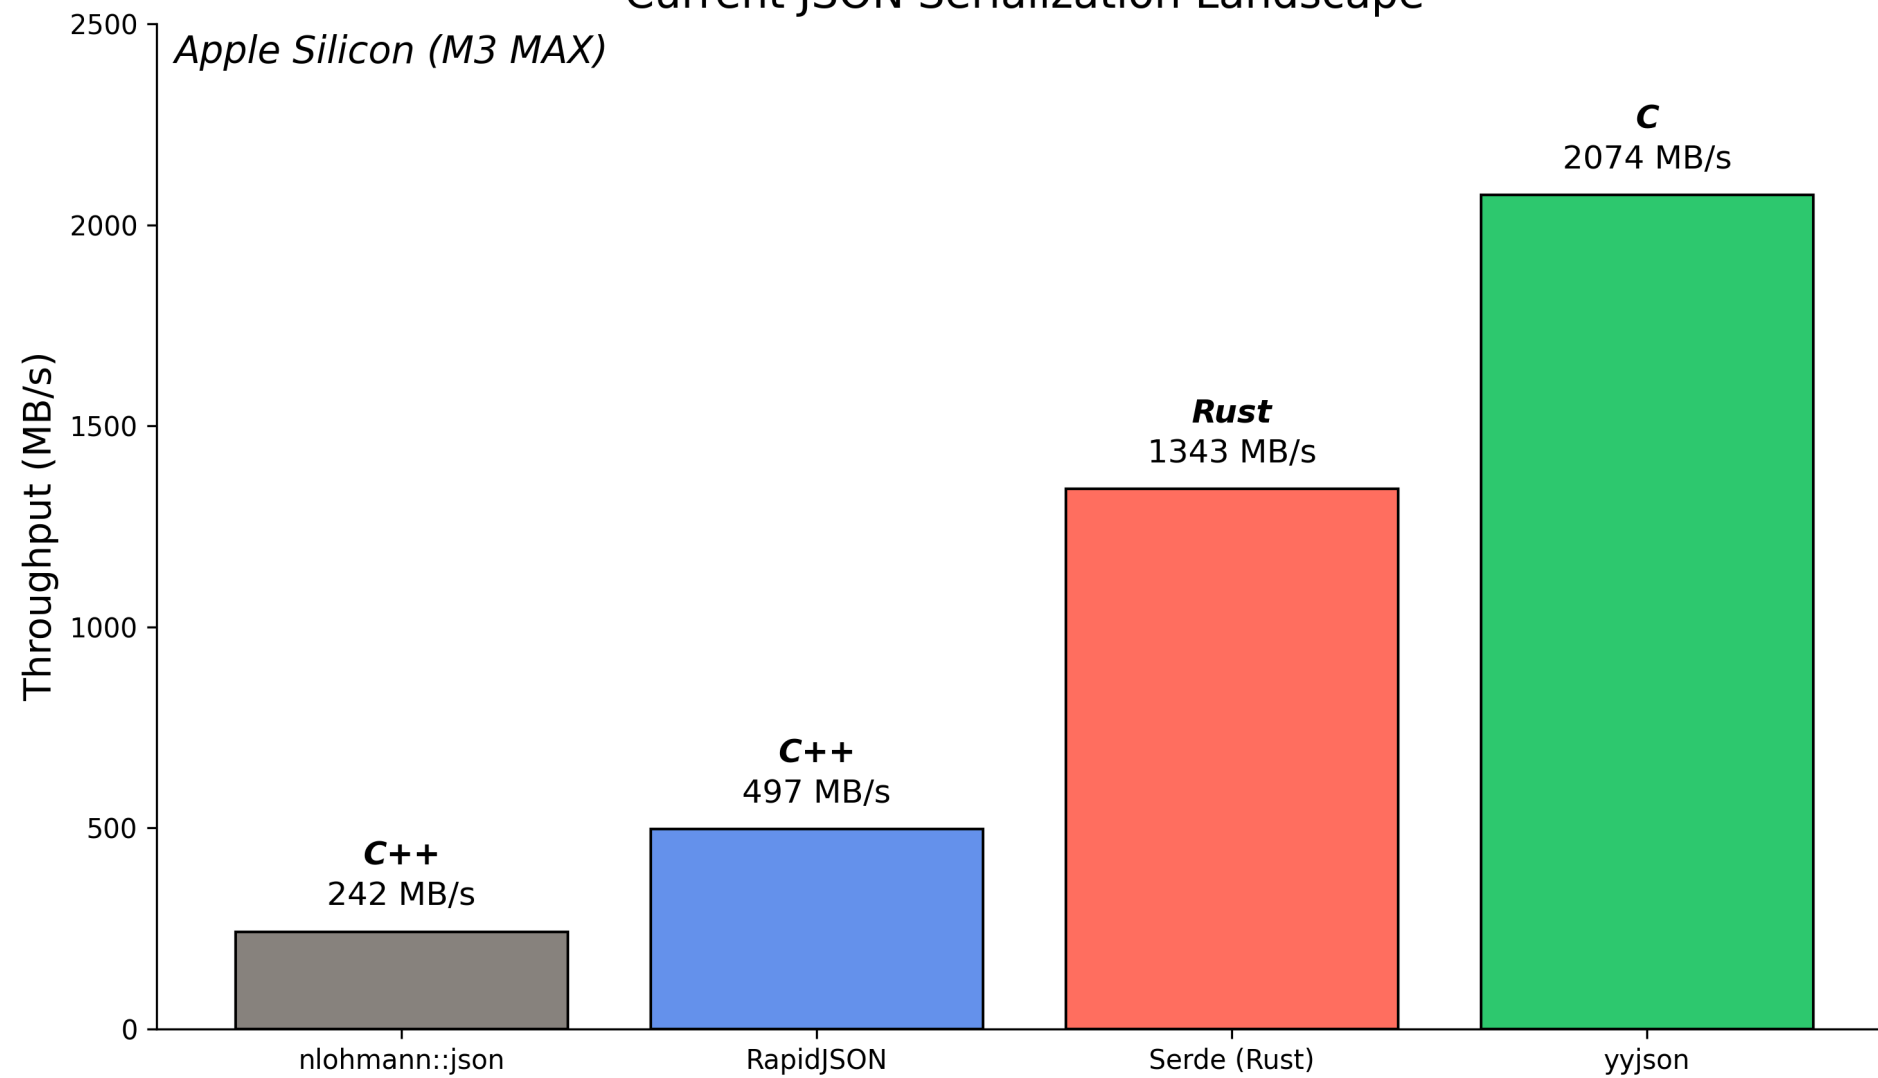

How fast are we?



Ablation Study: How We Achieved 3.4 GB/s

What is Ablation?

From neuroscience: systematically remove parts to understand function

Our Approach (Apple Silicon M3 MAX):

1. **Baseline:** All optimizations enabled (3,400 MB/s)
2. **Disable one optimization** at a time
3. **Measure performance impact**
4. **Calculate contribution:** $(\text{Baseline} - \text{Disabled}) / \text{Disabled}$

Five Key Optimizations

1. **Consteval**: Compile-time field name processing
2. **SIMD String Escaping**: Vectorized character checks
3. **Fast Digit Counting**: Optimized digit count
4. **Branch Prediction Hints**: CPU pipeline optimization
5. **Buffer Growth Strategy**: Smart memory allocation

Optimization #1: Consteval

The Power of Compile-Time

The Insight: JSON field names are known at compile time!

Traditional (Runtime):

```
// Every serialization call:  
write_string("\"username\""); // Quote & escape at runtime  
write_string("\"level\"");    // Quote & escape again!
```

With Consteval (Compile-Time):

```
constexpr auto username_key = "\"username\""; // Pre-computed!  
b.append_literal(username_key); // Just memcpy!
```

Consteval Performance Impact (Apple Silicon)

Dataset	Baseline	No Consteval	Impact	Speedup
Twitter	3,211 MB/s	1,607 MB/s	-50%	2.00x
CITM	2,360 MB/s	978 MB/s	-59%	2.41x

Twitter Example (100 tweets):

- 100 tweets × 15 fields = **1,500 field names**
- Without: 1,500 runtime escape operations
- With: **0 runtime operations**

Result: 2-2.6x faster serialization!

Optimization #2: SIMD String Escaping

The Problem: JSON requires escaping `"`, `\`, and control chars

Traditional (1 byte at a time):

```
for (char c : str) {  
    if (c == '"' || c == '\\ ' || c < 0x20)  
        return true;  
}
```

SIMD (16 bytes at once):

```
__m128i chunk = load_16_bytes(str);  
__m128i needs_escape = check_all_conditions_parallel(chunk);  
if (!needs_escape)  
    return false; // Fast path!
```

SIMD Escaping Performance Impact (Apple Silicon)

Dataset	Baseline	No SIMD	Impact	Speedup
Twitter	3,211 MB/s	2,269 MB/s	-29%	1.42x
CITM	2,360 MB/s	2,259 MB/s	-4%	1.04x

Why Different Impact?

- **Twitter:** Long text fields (tweets, descriptions) → Big win
- **CITM:** Mostly numbers → Small impact

Optimization #3: Fast Digit Counting

Traditional:

```
std::to_string(value).length(); // Allocates string just to count!
```

Optimized:

```
fast_digit_count(value); // Bit operations + lookup table
```

Dataset	Baseline	No Fast Digits	Speedup
Twitter	3,211 MB/s	3,035 MB/s	1.06x
CITM	2,360 MB/s	1,767 MB/s	1.34x

CITM has ~10,000+ integers!

Optimizations #4 & #5: Branch Hints & Buffer Growth

Branch Prediction:

```
if (UNLIKELY(buffer_full)) { // CPU knows this is rare
    grow_buffer();
}
// CPU optimizes for this path
```

Buffer Growth:

- Linear: 1000 allocations for 1MB
- Exponential: 10 allocations for 1MB

Both Optimizations	Impact	Speedup
Twitter & CITM	~1%	1.01x

Combined Performance Impact

All Optimizations Together:

Optimization	Twitter Contribution	CITM Contribution
Consteval	+100% (2.00x)	+141% (2.41x)
SIMD Escaping	+42% (1.42x)	+4% (1.04x)
Fast Digits	+6% (1.06x)	+34% (1.34x)
Branch Hints	+1%	+5%
Buffer Growth	-0.4%	+2%
TOTAL	~2.9x faster	~3.4x faster

From Baseline to Optimized:

- Twitter: ~1,100 MB/s → 3,211 MB/s

Key Technical Insights

1. Compile-Time optimizations can be awesome

- Consteval: 2-2.6x speedup alone
- C++26 reflection enables unprecedented optimization

2. SIMD Everywhere

- Not just for parsing anymore
- String operations benefit hugely

3. Avoid Hidden Costs

- Hidden allocations: `std::to_string()`
- Hidden divisions: `log10(value)`
- Hidden mispredictions: rare conditions

Thank You!

Special Recognition

C++ Reflection Paper Authors

- The authors of P2996 for making compile-time reflection a reality

Compiler Implementation Teams

- Everyone that implemented P2996 and made it publicly available.
- Early adopters testing and providing feedback

Compiler Explorer Team

- Matt Godbolt and contributors
- Essential for validating our reflection approach
- Enabling rapid prototyping before integration

Questions?

Daniel Lemire and Francisco Geiman Thiesen

GitHub: github.com/simdjson/simdjson

Thank you!

