AI505

Optimization

Marco Chiarandini

Department of Mathematics & Computer Science
University of Southern Denmark

List of Lectures

1. Introduction
2. Derivatives and Gradients
3. Bracketing
4. Local Descent
5. First-Order Methods
6. Second-Order Methods
7. Direct Methods
8. Stochastic Methods
9. Population Methods
10. Sampling Plans
11. Machine Learning Applications
12. Convergence Analysis of SG
13. Constrained Optimization
14. Linear Programming
15. Integer Linear Programming
16. Dynamic and Constraint Programming
17. Constructive Heuristics
18. Local Search
19. Metaheuristics

1. Introduction

Who is here?

44 in total registered in ItsLearning

- **AI505 (7.5 ECTS)**
  31 from Bachelor in AI

- **AI801 (10 ECTS)** or **AI505 (7.5 ECTS)** + **IAAI501 (2.5 ECTS)**
  13 from Master Educations (which ones?)

Prerequisites

- Calculus
- Linear Algebra
- Programming

Outline

1. Course Organization

2. Introduction

Aims of the course

Learn about **optimization**:

- continuous multivariate optimization
- discrete optimization

Optimization is an important tool in **machine learning**, **decision making** and in analysing physical systems.
In mathematical terms, an **optimization problem** is the problem of finding the **best solution** from the set of all **feasible solutions**.

The first step in the optimization process is constructing an appropriate **mathematical formulation**. The second is devising an **algorithm** for solving the mathematical formulation.

Contents of the Course (Pensum)

Unit	Main topic
1	Introduction, Univariate Problems
2	Multivariate Problems, Gradient-Based Methods
3	Derivative-Free Methods
4	Optimization for Machine Learning
5	Constrained Optimization, Linear Programming
6	Sampling Methods
7	Discrete Optimization and Heuristics

Practical Information

Teacher: Marco Chiarandini (imada.sdu.dk/u/marco/)
Instructor: Sai Ganesh Nagarajan (H21)

Schedule, alternative views:

- mitsdu.sdu.dk, SDU Mobile
- Official course description (skemaplanen)
- ItsLearning
- https://ai-505.github.io

Schedule (16 weeks):

- Introductory classes: 16 classes (32 hours)
- Training classes: 16 classes (32 hours)
- Scheduled: $(16 \times 2) + 2$ classes $\times 2 = 68$ hours

Communication Means

- ItsLearning ⇔ External Web Page
  (link `https://ai-505.github.io`)
- Announcements + Discussion Board + Submissions in ItsLearning
- Write to Marco (`marco@imada.sdu.dk`) or to instructor
- Collaborate with peers

⇝ **It is good to ask questions!!**

⇝ **Let me know if you think we should do things differently!**

Sources — Reading Material

Main reference:

[KW] Mykel J. Kochenderfer, Tim A. Wheeler. Algorithms for Optimization 2019. The MIT Press.



Others

[NW] J. Nocedal and S. J. Wright, Numerical Optimization, Second Edition. Springer Series in Operations Research, 2006



Course Material

External Web Page is the main reference for list of contents (ie[1], syllabus, pensum).

It will collect:

- slides
- list of topics and references
- exercises
- links
- tutorials for programming tasks

[1] ie = id est = that is; eg = exempli gratia = for example; wrt = with respect to; et al. = et alii = and others

Assessment

Portfolio consisting of:

- mandatory assignments in groups of 2:
  1. assignment
  2. assignment

  Time line to be announced.

- oral exam on June 29-30, 2026

The oral examination consists of questions on the basis of the handed in assignments and can be extended to other parts of the course curriculum.

Both elements must individually meet the learning objectives.

Final grade: primarily based on element 1, but element 2 may adjust the grade up or down by one grade level.

(language: Danish and/or English)

Exercise Sessions (1/2)

For exercises in general:

- Both theoretical, modelling and programming tasks
- No mandatory hand-ins, voluntary participation, but all lectures and exercises are relevant for the exam
- Help each other! Teaching others is the best form of learning
- Sai will be there to help. First hour: you work and Sai gives personalize help. Second hour: Sai presents a subset of solutions in plenary.
- Exercises should help you to learn - find the setting that works best for you, don't hesitate to extend with other material that works better for you. You can use Gen AI tools.

Exercises are group work:

- Exercises best done in pairs of 2-3 people
- Try to gather in different groups every now and then

Exercise Sessions (1/2)

Notation: $^{+}$, *, ' '

- plus exercises are to be done before the class
- starred exercises are done in class. They are good examples of assignment questions
- unmarked exercises are for self study

Coding

Set up your local Python programming environment and use the available tutorial to:

- Brush up some knowledge on Python-IDEs and Git
- Grasp some basics on jupyter notebooks
- Recap basics of data processing and visualization

We will span several programming modes: functional, imperative, object oriented, small scripts, large code bases, use of modules and libraries. We will use git.

Outline

1. Course Organization

2. Introduction

Introduction

- Applications of Optimization
  - Physics
  - Business
  - Biology
  - Engineering
  - Machine Learning
  - Logistics and Scheduling
- Objectives to Optimize
  - Efficiency
  - Safety
  - Accuracy
- Constraints
  - Cost
  - Weight
  - Structural Integrity
- Challenges
  - High-Dimensional Search Spaces
  - Multiple Competing Objectives
  - Model Uncertainty

Real World, Model, Representation, Implementation

The Real World: That messy thing we are trying to study (with computers).

Model: Mathematical object in some class M.

Representation: An object of an abstract data type R used to store the model.

Implementation: An object of a concrete type used to store the model.

Any object from the real world might have different models.
Any model might have several representations (exact).
And representation might have different implementations (exact).

We will focus on the algorithmic aspects of optimization that arise after the problem has been properly formulated

Optimization Process

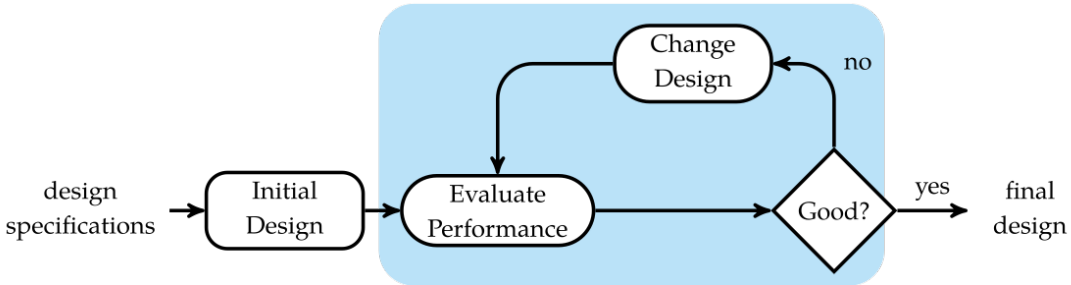

An optimization algorithm is used to incrementally improve the design until it can no longer be improved or until the budgeted time or cost has been reached.

Optimization Process

Search the space of possible designs with the aim of finding the best one.

Depending on the application, this search may involve:

- evaluating an analytical expression (white or glass box)
- running physical experiments, such as wind tunnel tests (black box)
- running computer simulations

Modern optimization techniques can be applied to problems with millions of variables and constraints.

Definitions – Functions

- Univariate single-valued function: $f : \mathbb{R} \to \mathbb{R}$ is a function that takes as input a single real number, say x, and produces a single real number as output.
- Multivariate single-valued function: $f : \mathbb{R}^n \to \mathbb{R}$ is a function that takes as input a vector $\mathbf{x}$ of n real numbers and produces a single real number as output.
- (Multivariate) Vector-valued function: $f : \mathbb{R}^n \to \mathbb{R}^m$ is a function that takes as input a vector $\mathbf{x}$ of n real numbers and produces a vector $\mathbf{y}$ of m real numbers as output.

We will work primarily with multivariate single-valued functions.

Basic Optimization Problem

$$\begin{aligned} &\underset{\mathbf{x}}{\text{minimize}}\ f(\mathbf{x}) \\ &\text{subject to } \mathbf{x} \in \mathcal{X} \end{aligned}$$

- Feasible Set $\mathcal{X} \subseteq \mathbb{R}^n$
- Design Point $\mathbf{x}$
- Design Variables
- Objective Function: $f : \mathbb{R}^n \to \mathbb{R}$ (scalar-valued function)
- Minimizer

Any value of $\mathbf{x}$ from among all points in the feasible set $\mathcal{X}$ that minimizes the objective function is called a **solution** or **minimizer**. A particular solution is written $\mathbf{x}^*$.

$$\mathbf{x}^* = \operatorname{argmin} f(\mathbf{x}) \text{ subject to } \mathbf{x} \in \mathcal{X}$$

There is only one minimum but there can be many minimizers

maximize $f(\mathbf{x})$ subject to $\mathbf{x} \in \mathcal{X} \equiv$ minimize $-f(\mathbf{x})$ subject to $\mathbf{x} \in \mathcal{X}$

Basic Optimization Problem

$$\begin{aligned} &\underset{\mathbf{x}}{\text{minimize}} && f(\mathbf{x}) \\ &\text{subject to} && \mathbf{x} \in \mathcal{X} \end{aligned}$$

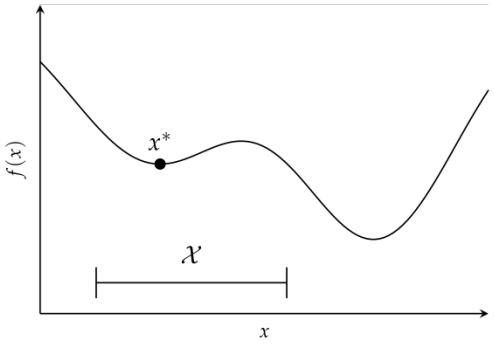

Constraints

$$\begin{aligned} \underset{x_1, x_2}{\text{minimize}} \quad & f(x_1, x_2) \\ \text{subject to} \quad & x_1 \geq 0 \\ & x_2 \geq 0 \\ & x_1 + x_2 \leq 1 \end{aligned}$$

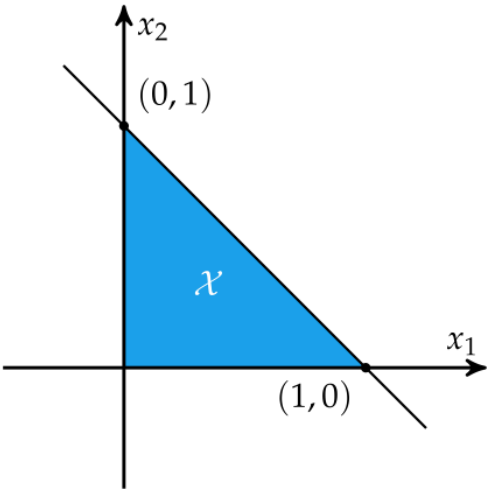

Constraints

$$\begin{aligned} &\underset{x}{\text{minimize}} && f(x) \\ &\text{subject to} && x > 1 \end{aligned}$$

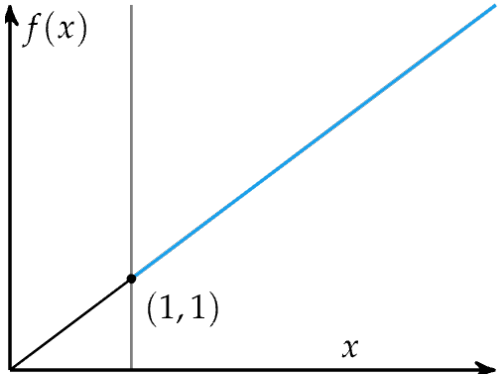

The problem has no solution.
$x = 1$ would not be feasible.

$x = 1$ would be the solutions to

$$\underset{x}{\text{infimum}}\, f(x) \text{ subject to } x > 1$$

infimum of a subset $\mathcal{X}$ of a partially ordered set $\mathcal{P}$ is the greatest element in P that is less than or equal to each element of $\mathcal{X}$, if such an element exists. Aka, **greatest lower bound**.

Decision Space and Objective Space

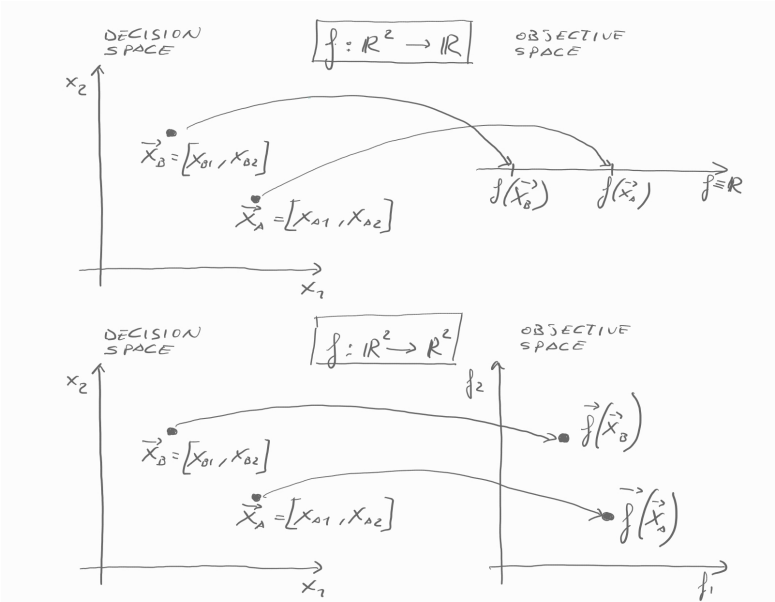

Critical Points

Univariate function
global vs local minimum
Def. A point $\mathbf{x}^*$ is at a **local minimum** (or is a local minimizer) if there exists a $\delta > 0$ such that $f(\mathbf{x}^*) \leq f(\mathbf{x})$ for all $\mathbf{x}$ with $\|\mathbf{x} - \mathbf{x}^*\| < \delta$.

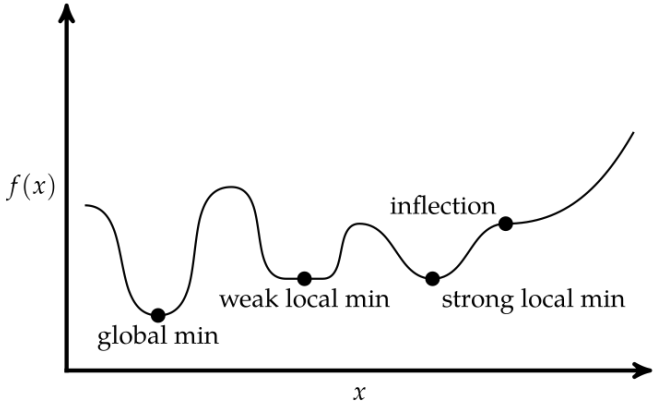

Conditions for Local Minima

Univariate objective functions, assuming they are differentiable (Derivatives exist), without constraints

Local minimum: Necessary condition but not sufficient condition:

1. $f'(x^*) = 0$, the first-order necessary condition (FONC)
2. $f''(x^*) \geq 0$, the second-order necessary condition (SONC)



SONC but not FONC



FONC and SONC



FONC and SONC

Conditions for Local Minima

Multivariate objective functions, assuming they are differentiable (gradients and Hessians exist), without constraints

Local minimum: Necessary condition but not sufficient condition:

1. $\nabla f(\mathbf{x}^*) = 0$, the first-order necessary condition (FONC)
2. $\nabla^2 f(\mathbf{x}^*) \geq 0$, the second-order necessary condition (SONC)







Contour Plots

$$f(x_1, x_2) = x_1^2 - x_2^2$$

can be rendered in a 3D space but convenient to represent it also in 2D showing the lines of constant output value

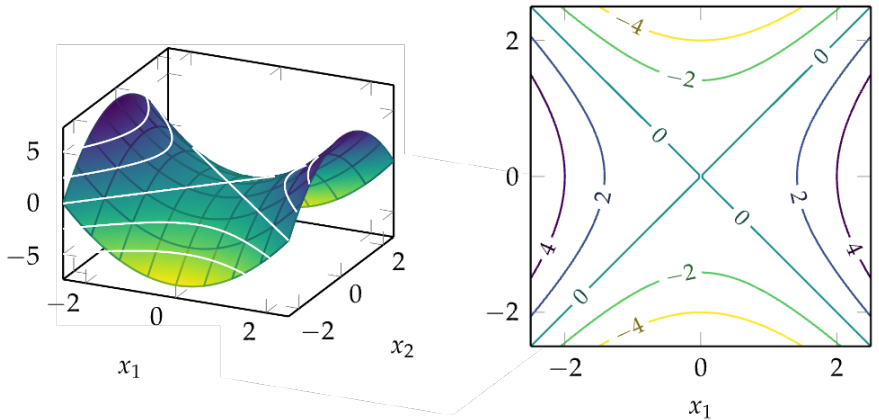

Taylor Expansion

From the *first fundamental theorem of calculus*,[2] we know that

$$f(x+h) = f(x) + \int_0^h f'(x+a)\,da$$

Nesting this definition produces the Taylor expansion of f about x:

$$\begin{aligned}
f(x+h) &= f(x) + \int_0^h \left(f'(x) + \int_0^a f''(x+b)\,db \right) da \\
&= f(x) + f'(x)h + \int_0^h \int_0^a f''(x+b)\,db\,da \\
&= f(x) + f'(x)h + \int_0^h \int_0^a \left(f''(x) + \int_0^b f'''(x+c)\,dc \right) db\,da \\
&= f(x) + f'(x)h + \frac{f''(x)}{2!}h^2 + \int_0^h \int_0^a \int_0^b f'''(x+c)\,dc\,db\,da \\
&\quad\vdots \\
&= f(x) + \frac{f'(x)}{1!}h + \frac{f''(x)}{2!}h^2 + \frac{f'''(x)}{3!}h^3 + \dots \\
&= \sum_{n=0}^{\infty} \frac{f^{(n)}(x)}{n!}h^n
\end{aligned}$$

Taylor Expansion

A smooth function looks like a polynomial when you zoom in closely enough.

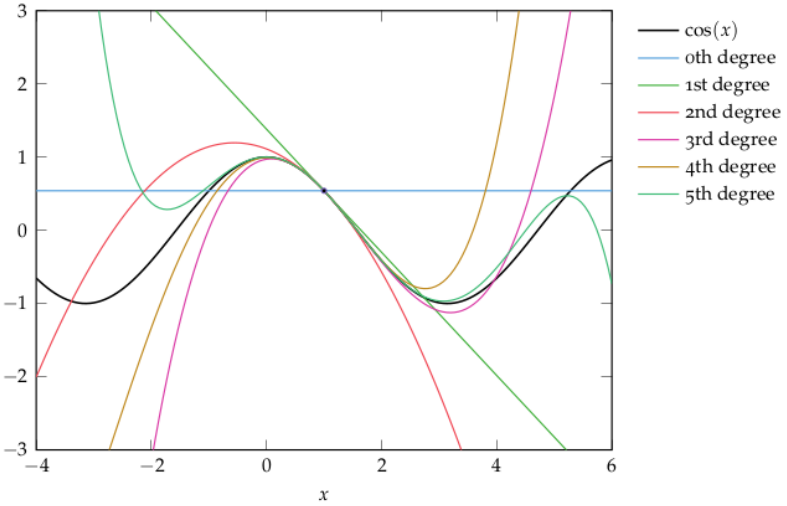

Taylor Expansion for Multivariate Scalar-Valued Functions

The Taylor expansion of a multivariate function $f : \mathbb{R}^n \to \mathbb{R}$ around a point $\mathbf{a}$ is given by:

In multiple dimensions, the Taylor expansion about $\mathbf{a}$ generalizes to

$$f(\mathbf{x}) = f(\mathbf{a}) + \nabla f(\mathbf{a})^\top (\mathbf{x} - \mathbf{a}) + \frac{1}{2}(\mathbf{x} - \mathbf{a})^\top \nabla^2 f(\mathbf{a})(\mathbf{x} - \mathbf{a}) + \dots$$

- $\nabla f(\mathbf{a})$ is the gradient vector of f at $\mathbf{a}$, and
- $\nabla^2 f(\mathbf{a})$ is the Hessian matrix of f at $\mathbf{a}$.
- $O(||\mathbf{h}||^2)$ denotes the error by omitting higher-order terms. It becomes negligible as h approaches 0.

Example: Rosenbrock function

$$f(x, y) = (a - x)^2 + b(y - x^2)^2$$

It has a global minimum at $(x, y) = (a, a^2)$, where $f(x, y) = 0$. Usually, these parameters are set such that $a = 1$ and $b = 100$. Only in the trivial case where $a = 0$ the function is symmetric and the minimum is at the origin.

Multivariate generalization
sum of $N/2$ uncoupled 2D Rosenbrock problems, and defined only for even N:

$$f(\mathbf{x}) = f(x_1, x_2, \ldots, x_N) = \sum_{i=1}^{N/2} \left[100(x_{2i-1}^2 - x_{2i})^2 + (x_{2i-1} - 1)^2\right].$$

This variant has predictably simple solutions.

Example: Rosenbrock function

Consider the Rosenbrock banana function,

$$f(\mathbf{x}) = (1 - x_1)^2 + 5(x_2 - x_1^2)^2$$

Does the point $(1, 1)$ satisfy the FONC and SONC?

The gradient is:

$$\nabla f(\mathbf{x}) = \begin{bmatrix} \frac{\partial f}{\partial x_1} \\ \frac{\partial f}{\partial x_2} \end{bmatrix} = \begin{bmatrix} 2\left(10x_1^3 - 10x_1x_2 + x_1 - 1\right) \\ 10(x_2 - x_1^2) \end{bmatrix}$$

and the Hessian is:

$$\nabla^2 f(\mathbf{x}) = \begin{bmatrix} \frac{\partial^2 f}{\partial x_1 \partial x_1} & \frac{\partial^2 f}{\partial x_1 \partial x_2} \\ \frac{\partial^2 f}{\partial x_2 \partial x_1} & \frac{\partial^2 f}{\partial x_2 \partial x_2} \end{bmatrix} = \begin{bmatrix} -20(x_2 - x_1^2) + 40x_1^2 + 2 & -20x_1 \\ -20x_1 & 10 \end{bmatrix}$$

We compute $\nabla(f)([1, 1]) = 0$, so the FONC is satisfied. The Hessian at $[1, 1]$ is:

$$\begin{bmatrix} 42 & -20 \\ -20 & 10 \end{bmatrix}$$

which is positive definite, so the SONC is satisfied.

Example: Rosenbrock function

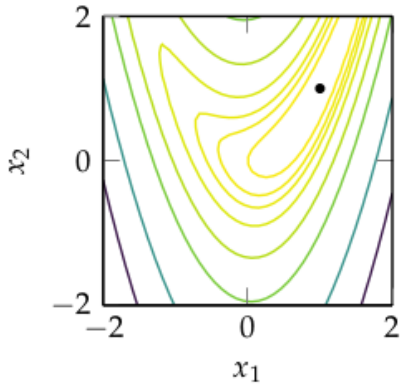

Overview

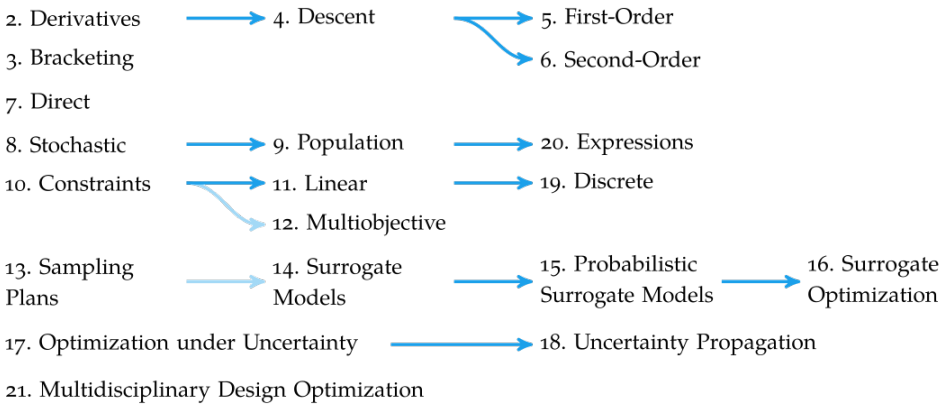
2. Derivatives
3. Bracketing
4. Descent
5. First-Order
6. Second-Order
7. Direct
8. Stochastic
9. Population
20. Expressions
10. Constraints
11. Linear
19. Discrete
12. Multiobjective
13. Sampling Plans
14. Surrogate Models
15. Probabilistic Surrogate Models
16. Surrogate Optimization
17. Optimization under Uncertainty
18. Uncertainty Propagation
21. Multidisciplinary Design Optimization

Optimization Problem Types

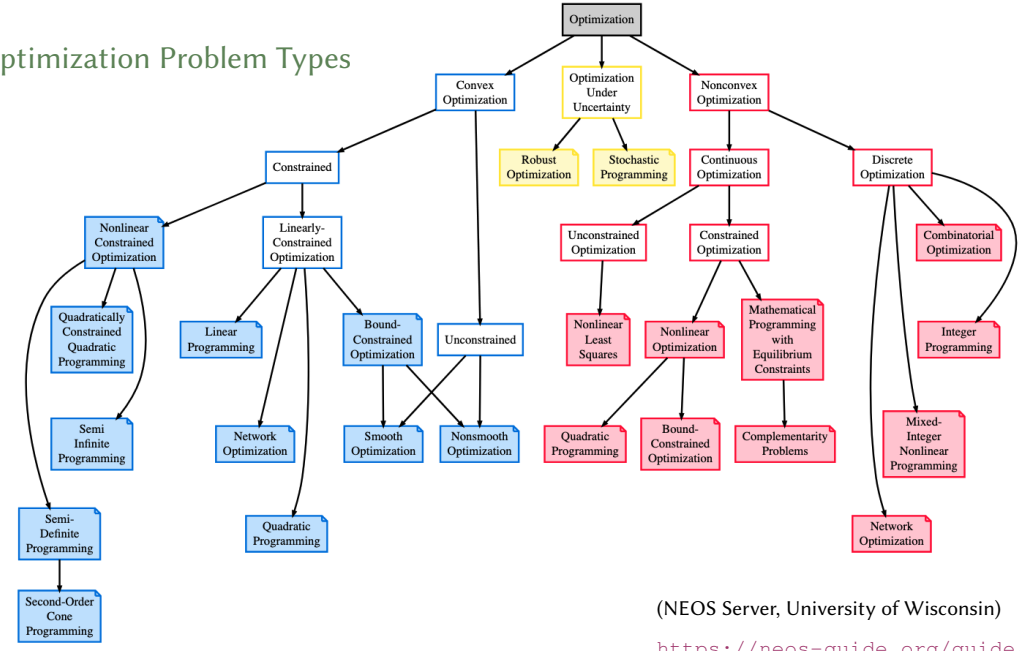

(NEOS Server, University of Wisconsin)

https://neos-guide.org/guide/types/

Problem classification

Different classification factors:

- Univariate $f : \mathbb{R} \to \mathbb{R}$ vs Multivariate $f : \mathbb{R}^n \to \mathbb{R}$
- Scalar-valued $f : \mathbb{R}^n \to \mathbb{R}$ vs vector-vector functions $f : \mathbb{R}^n \to \mathbb{R}^m$
- Linear vs Nonlinear
- Nonlinear: Convex vs Nonconvex, unimodal vs multimodal
- Constrained vs unconstrained
- Smooth (differentiable) vs non smooth (non differentiable)
- Continuous vs Discrete
- Deterministic vs Uncertain

Application Example

In robotics, an autonomous agent (e.g., a drone, robotic arm, or self-driving car) needs to determine an **optimal path** from a starting position to a target while satisfying constraints such as avoiding obstacles, minimizing energy consumption, or optimizing smoothness.

Formulating the Optimization Problem

The goal is to find a smooth trajectory $x(t)$ that minimizes a cost function:

$$J = \int_{t_0}^{t^f} C(\mathbf{x}(t), \mathbf{u}(t))dt$$

$\mathbf{x}(t)$ is the state (e.g., position, velocity), $\mathbf{u}(t)$ is the control input (e.g., force, acceleration), $C(\mathbf{x}, \mathbf{u})$ is the cost function, which could represent energy usage, time, or distance.

Constraints:

- Dynamic Constraints: Governed by the system's physics (e.g., Newton's laws for a robot arm or quadcopter): $\mathbf{x}' = f(\mathbf{x}, \mathbf{u})$
- Obstacle Avoidance: Ensures that the trajectory does not collide with obstacles: $g(\mathbf{x}(t)) \geq 0, \forall t$
- Boundary Conditions: The system must start and end at given positions with certain velocities.

Summary

- Optimization is the process of finding the best system design subject to a set of constraints
- Optimization is concerned with finding global minima of a function
- Minima can occur where the gradient is zero, but zero-gradient does not imply optimality

2. Derivatives and Gradients

Definitions

- $[a, b] = \{x \in \mathbb{R} \mid a \leq x \leq b\}$ closed interval
  $(a, b) = \{x \in \mathbb{R} \mid a < x < b\}$ open interval
- We denote vectors in bold, eg, $\mathbf{x}$ and matrices in uppercase letters, eg, A
- Given a vector $\mathbf{x} \in \mathbb{R}^n$, x_i is its i-th component
- We invariably assume that $\mathbf{x}$ is a **column vector**,
  which we also write with parentheses as $\mathbf{x} = (x_1, x_2, \ldots, x_n)$ or $\mathbf{x} = [x_1, x_2, \ldots, x_n]$.
- The transpose $\mathbf{x}^T$ is a row vector

$$\mathbf{x}^T = \begin{bmatrix} x_1 & x_2 & \ldots & x_n \end{bmatrix}$$

- Scalar product: $\mathbf{v} \cdot \mathbf{x} = \langle \mathbf{v}, \mathbf{x} \rangle = \mathbf{y}^T \mathbf{x} = \sum_{i=1}^{n} y_i x_i$

Definitions

- **linear combination**

$$\begin{matrix} \mathbf{v}_1, \mathbf{v}_2 \ldots, \mathbf{v}_k \in \mathbb{R}^n \\ \boldsymbol{\lambda} = [\lambda_1, \ldots, \lambda_k]^T \in \mathbb{R}^k \end{matrix} \qquad \mathbf{x} = \lambda_1 \mathbf{v}_1 + \cdots + \lambda_k \mathbf{v}_k = \sum_{i=1}^{k} \lambda_i \mathbf{v}_i$$

moreover:

$\boldsymbol{\lambda} \geq \mathbf{0}$		**conic combination**
	$\boldsymbol{\lambda}^T \mathbf{1} = 1$	**affine combination**
$\boldsymbol{\lambda} \geq \mathbf{0}$	and $\boldsymbol{\lambda}^T \mathbf{1} = 1$	**convex combination**

$$\left(\sum_{i=1}^{k} \lambda_i = 1 \right)$$

- $A\mathbf{x}$ column vector combination of the columns of A;
  $\mathbf{u}^T A$ row vector combination of the rows of A

Definitions

- **convex set**: if $\mathbf{x}, \mathbf{y} \in S$ and $0 \leq \lambda \leq 1$ then $\lambda\mathbf{x} + (1-\lambda)\mathbf{y} \in S$



nonconvex



convex

Alternative definition:

- **convex function**
  - if its epigraph $\{(x, y) \in \mathbb{R}^2 : y \geq f(x)\}$ is a convex set or
  - if $f : \mathbb{R}^n \to \mathbb{R}$ and
    if $\forall \mathbf{x}, \mathbf{y} \in \mathbb{R}^n, \alpha \in [0, 1]$ it holds that
    $f(\alpha\mathbf{x} + (1-\alpha)\mathbf{y}) \leq \alpha f(\mathbf{x}) + (1-\alpha)f(\mathbf{y})$

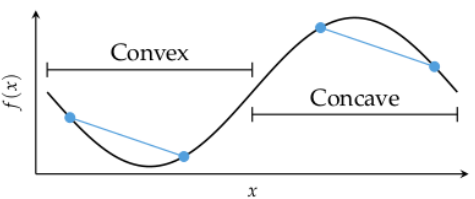

Definitions: Convexity

f is **differentiable** if $\mathbf{dom}\, f$ is open and the gradient

$$\nabla f(x) = \left(\frac{\partial f(x)}{\partial x_1}, \frac{\partial f(x)}{\partial x_2}, \ldots, \frac{\partial f(x)}{\partial x_n}\right)$$

exists at each $x \in \mathbf{dom}\, f$

1st-order condition: differentiable f with convex domain is convex iff

$$f(y) \geq f(x) + \nabla f(x)^T (y - x) \quad \text{for all } x, y \in \mathbf{dom}\, f$$



first-order approximation of f is global underestimator

Alternative definition: $(\nabla f(\mathbf{x}) - \nabla f(\mathbf{y})) \cdot (\mathbf{x} - \mathbf{y}) \geq 0$ for all $\mathbf{x}, \mathbf{y}$ in the domain of f.

Definitions

- For a set of points $S \subseteq \mathbb{R}^n$

  $\text{lin}(S)$ linear hull (span)
  $\text{cone}(S)$ conic hull
  $\text{aff}(S)$ affine hull
  $\text{conv}(S)$ convex hull





the convex hull of X

$$\textbf{conv}(X) = \left\{ \lambda_1 \mathbf{x}_1 + \lambda_2 \mathbf{x}_2 + \ldots + \lambda_n \mathbf{x}_n \mid \mathbf{x}_i \in X,\ \lambda_1, \ldots, \lambda_n \geq 0 \text{ and } \textstyle\sum_i \lambda_i = 1 \right\}$$

Norms

Def. A **norm** is a function that assigns a length to a vector.

A function f is a norm if:

1. $f(\mathbf{x}) = 0$ if and only if $\mathbf{x}$ is the zero vector
2. $f(a\mathbf{x}) = |a|f(\mathbf{x})$, such that lengths scale
3. $f(\mathbf{x} + \mathbf{y}) \leq f(\mathbf{x}) + f(\mathbf{y})$, also known as triangle inequality

L_p norms are commonly used set of norms parameterized by a scalar $p \geq 1$:

$$\|\mathbf{x}\|_p = \lim_{\rho \to p} \left(|x_1|^\rho + |x_2|^\rho + \ldots + |x_n|^\rho\right)^{\frac{1}{\rho}}$$

L_∞ is also called the max norm, Chebyshev distance or chessboard distance.

L_1: $\|\mathbf{x}\|_1 = |x_1| + |x_2| + \cdots + |x_n|$



L_2: $\|\mathbf{x}\|_2 = \sqrt{x_1^2 + x_2^2 + \cdots + x_n^2}$



L_∞: $\|\mathbf{x}\|_\infty = \max(|x_1|, |x_2|, \cdots, |x_n|)$



Matrix Norms

$$\|A\| \stackrel{\text{def}}{=} \sup_{x \neq 0} \frac{\|Ax\|}{\|x\|}. \tag{A.7}$$

The matrix norms defined in this way are said to be *consistent* with the vector norms (A.2). Explicit formulae for these norms are as follows:

$$\|A\|_1 = \max_{j=1,\ldots,n} \sum_{i=1}^{m} |A_{ij}|, \tag{A.8a}$$

$$\|A\|_2 = \text{largest eigenvalue of } (A^T A)^{1/2}, \tag{A.8b}$$

$$\|A\|_\infty = \max_{i=1,\ldots,m} \sum_{j=1}^{n} |A_{ij}|. \tag{A.8c}$$

The Frobenius norm $\|A\|_F$ of the matrix A is defined by

$$\|A\|_F = \left(\sum_{i=1}^{m} \sum_{j=1}^{n} A_{ij}^2 \right)^{1/2}. \tag{A.9}$$

Condition Number

For a nonsingular matrix A, the **condition number** $\kappa(A)$ is defined as

$$\kappa(A) = \|A\| \left\|A^{-1}\right\|$$

where $\|\cdot\|$ is any matrix norm. The condition number of a matrix is a measure of how close the matrix is to being singular. A matrix with a large condition number is said to be ill-conditioned, and small changes in the input can lead to large changes in the output when solving linear systems or performing matrix operations involving that matrix.

Outline

3. Derivatives

4. Symbolic Differentiation

5. Numerical Differentiation

6. Automatic Differentiation

Derivatives

- Derivatives tell us which direction to search for a solution

- Slope of Tangent Line

$$f'(x) := \frac{\mathrm{d}f(x)}{\mathrm{d}x}$$

(Leibniz notation)

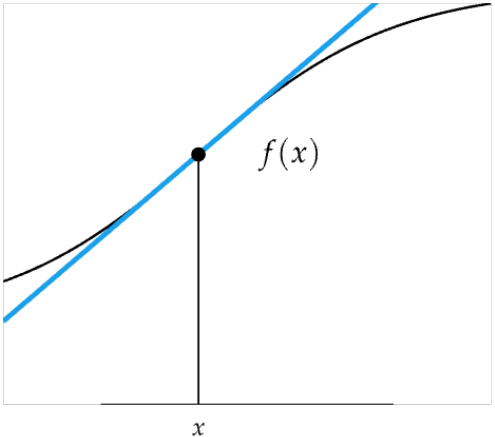

Derivatives

$$f(x + \Delta x) \approx f(x) + f'(x)\Delta x$$

$$f'(x) = \frac{\Delta f(x)}{\Delta x}$$







Symbolic Differentiation

$$f'(x) \equiv \underbrace{\lim_{h \to 0} \frac{f(x+h) - f(x)}{h}}_{\text{forward difference}} = \underbrace{\lim_{h \to 0} \frac{f(x+h/2) - f(x-h/2)}{h}}_{\text{central difference}} = \underbrace{\lim_{h \to 0} \frac{f(x) - f(x-h)}{h}}_{\text{backward difference}}$$

Symbolic Differentiation

```
import sympy as sp

# Define the variable
x = sp.symbols('x')

# Define the function
f = x**2 + x/2 - sp.sin(x)/x

# Compute the derivative
df_dx = sp.diff(f, x)

# Display the result
print("The symbolic derivative of f is:")
print(df_dx)
```

Derivatives in Multiple Dimensions

- Gradient Vector

$$\nabla f(\mathbf{x})^T = \begin{bmatrix} \frac{\partial f(\mathbf{x})}{\partial x_1} & \frac{\partial f(\mathbf{x})}{\partial x_2} & \cdots & \frac{\partial f(\mathbf{x})}{\partial x_n} \end{bmatrix}$$

- Hessian Matrix

$$\nabla^2 f(\mathbf{x}) = \begin{bmatrix} \frac{\partial^2 f(\mathbf{x})}{\partial x_1 \partial x_1} & \frac{\partial^2 f(\mathbf{x})}{\partial x_1 \partial x_2} & \cdots & \frac{\partial^2 f(\mathbf{x})}{\partial x_1 \partial x_n} \\ \frac{\partial^2 f(\mathbf{x})}{\partial x_1 \partial x_2} & \frac{\partial^2 f(\mathbf{x})}{\partial x_2 \partial x_2} & \cdots & \frac{\partial^2 f(\mathbf{x})}{\partial x_2 \partial x_n} \\ \vdots & \ddots & & \vdots \\ \frac{\partial^2 f(\mathbf{x})}{\partial x_1 \partial x_n} & \frac{\partial^2 f(\mathbf{x})}{\partial x_2 \partial x_n} & \cdots & \frac{\partial^2 f(\mathbf{x})}{\partial x_n \partial x_n} \end{bmatrix}$$

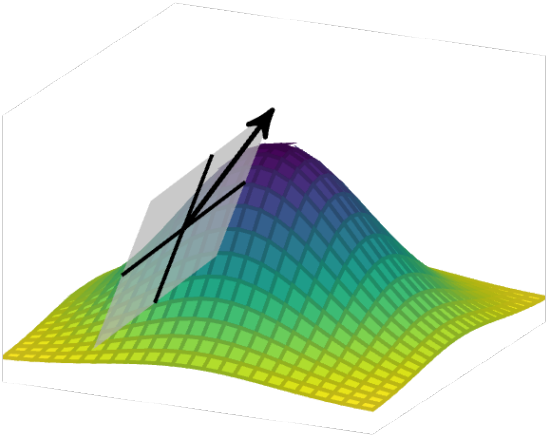

Directional derivative

The **directional derivative** $\nabla_{\mathbf{s}} f(\mathbf{x})$ of a multivariate function $f : \mathbb{R}^n \to \mathbb{R}$ is the instantaneous rate of change of $f(\mathbf{x})$ as $\mathbf{x} = [x_1, x_2, \ldots, x_n]$ is moved with velocity $\mathbf{s} = [s_1, s_2, \ldots, s_n]$.

$$\nabla_{\mathbf{s}} f(\mathbf{x}) \equiv \underbrace{\lim_{h \to 0} \frac{f(\mathbf{x} + h\mathbf{s}) - f(\mathbf{x})}{h}}_{\text{forward difference}} = \underbrace{\lim_{h \to 0} \frac{f(\mathbf{x} + h\mathbf{s}/2) - f(\mathbf{x} - h\mathbf{s}/2)}{h}}_{\text{central difference}} = \underbrace{\lim_{h \to 0} \frac{f(\mathbf{x}) - f(\mathbf{x} - h\mathbf{s})}{h}}_{\text{backward difference}}$$

To compute $\nabla_{\mathbf{s}} f(\mathbf{x})$:

- compute $\boxed{\nabla_{\mathbf{s}} f(\mathbf{x}) = \frac{\partial f(\mathbf{x})}{\partial x_1} s_1 + \frac{\partial f(\mathbf{x})}{\partial x_2} s_2 + \ldots + \frac{\partial f(\mathbf{x})}{\partial x_n} s_n = \nabla f(\mathbf{x})^T \mathbf{s} = \nabla f(\mathbf{x}) \cdot \mathbf{s}}$
- $g(\alpha) := f(\mathbf{x} + \alpha \mathbf{s})$ and then compute $g'(0)$

We wish to compute the directional derivative of $f(\mathbf{x}) = x_1 x_2$ at $\mathbf{x} = [1, 0]$ in the direction $\mathbf{s} = [-1, -1]$:

$$\nabla f(\mathbf{x}) = \left[\frac{\partial f}{\partial x_1}, \quad \frac{\partial f}{\partial x_2}\right] = [x_2, x_1]$$

$$\nabla_{\mathbf{s}} f(\mathbf{x}) = \nabla f(\mathbf{x})^\top \mathbf{s} = \begin{bmatrix} 0 & 1 \end{bmatrix} \begin{bmatrix} -1 \\ -1 \end{bmatrix} = -1$$

We can also compute the directional derivative as follows:

$$g(\alpha) = f(\mathbf{x} + \alpha \mathbf{s}) = (1 - \alpha)(-\alpha) = \alpha^2 - \alpha$$
$$g'(\alpha) = 2\alpha - 1$$
$$g'(0) = -1$$

Matrix Calculus

Common gradient:

$$\nabla_{\mathbf{x}} \mathbf{b}^T \mathbf{x} = ?$$

$$\mathbf{b}^T \mathbf{x} = [b_1 x_1 + b_2 x_2 + \ldots + b_n x_n]$$

$$\frac{\partial \mathbf{b}^T \mathbf{x}}{\partial x_i} = b_i$$

$$\nabla_{\mathbf{x}} \mathbf{b}^T \mathbf{x} = \nabla_{\mathbf{x}} \mathbf{x}^T \mathbf{b} = \mathbf{b}$$

Matrix Calculus

Common gradient:

$$\nabla_{\mathbf{x}} \mathbf{x}^T A\mathbf{x} = ?$$

$$\mathbf{x}^T A\mathbf{x} = \begin{bmatrix} x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix}^T \begin{bmatrix} a_{11} & a_{12} & \dots & a_{1n} \\ a_{21} & a_{22} & \dots & a_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ a_{n1} & a_{n2} & \dots & a_{nn} \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix} = \begin{bmatrix} x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix}^T \begin{bmatrix} x_1 a_{11} + x_2 a_{12} + \dots + x_n a_{1n} \\ x_1 a_{21} + x_2 a_{22} + \dots + x_n a_{2n} \\ \vdots \\ x_1 a_{n1} + x_2 a_{n2} + \dots + x_n a_{nn} \end{bmatrix}$$

$$= \begin{matrix} x_1^2 a_{11} + x_1 x_2 a_{12} + \dots + x_1 x_n a_{1n} + \\ x_1 x_2 a_{21} + x_2^2 a_{22} + \dots + x_2 x_n a_{2n} + \\ \vdots \\ x_1 x_n a_{n1} + x_2 x_n a_{n2} + \dots + x_n^2 a_{nn} \end{matrix}$$

$$\frac{\partial}{\partial x_i}\mathbf{x}^T A\mathbf{x} = \sum_{j=1}^{n} x_j \left(a_{ij} + a_{ji}\right)$$

$$\nabla_x \mathbf{x}^T A\mathbf{x} = \begin{bmatrix} \sum_{j=1}^{n} x_j \left(a_{1j} + a_{j1}\right) \\ \sum_{j=1}^{n} x_j \left(a_{2j} + a_{j2}\right) \\ \vdots \\ \sum_{j=1}^{n} x_j \left(a_{nj} + a_{jn}\right) \end{bmatrix} = \begin{bmatrix} a_{11} + a_{11} & a_{12} + a_{21} & \dots & a_{1n} + a_{n1} \\ a_{21} + a_{12} & a_{22} + a_{22} & \dots & a_{2n} + a_{n2} \\ \vdots & \vdots & \ddots & \vdots \\ a_{n1} + a_{1n} & a_{n2} + a_{2n} & \dots & a_{nn} + a_{nn} \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ \vdots \\ x_n \end{bmatrix} = \left(A + A^T\right)\mathbf{x}$$

Smoothness

Def. The **smoothness** of a function is a property measured by the number of continuous derivatives (differentiability class) it has over its domain.

A function of **class** C^k is a function of smoothness at least k; that is, a function of class C^k is a function that has a kth derivative that is continuous in its domain.

The term **smooth function** refers to a C^∞-function. However, it may also mean "sufficiently differentiable" for the problem under consideration.

Smoothness

- Let U be an open set on the real line and a function f defined on U with real values. Let k be a non-negative integer.
- The function f is said to be of **differentiability class** C^k if the derivatives $f', f'', \ldots, f^{(k)}$ exist and are continuous on U.
- If f is k-differentiable on U, then it is at least in the class C^{k-1} since $f', f'', \ldots, f^{(k-1)}$ are continuous on U.
- The function f is said to be **infinitely differentiable**, **smooth**, or of **class** C^∞, if it has derivatives of all orders (continuous) on U.
- The function f is said to be of **class** C^ω, or **analytic**, if f is smooth and its Taylor series expansion around any point in its domain converges to the function in some neighborhood of the point.
- There exist functions that are smooth but not analytic; C^ω is thus strictly contained in C^∞. Bump functions are examples of functions with this property.

Example: continuous (C^0) but not differentiable [edit]

The function

$$f(x) = \begin{cases} x & \text{if } x \geq 0, \\ 0 & \text{if } x < 0 \end{cases}$$

is continuous, but not differentiable at $x = 0$, so it is of class C^0, but not of class C^1.



The C^0 function $f(x) = x$ for $x \geq 0$ and 0 otherwise.

Example: finitely-times differentiable (C^k) [edit]

For each even integer k, the function

$$f(x) = |x|^{k+1}$$

is continuous and k times differentiable at all x. At $x = 0$, however, f is not $(k + 1)$ times differentiable, so f is of class C^k, but not of class C^j where $j > k$.

Example: differentiable but not continuously differentiable (not C^1) [edit]

The function

$$g(x) = \begin{cases} x^2 \sin\left(\frac{1}{x}\right) & \text{if } x \neq 0, \\ 0 & \text{if } x = 0 \end{cases}$$

is differentiable, with derivative

$$g'(x) = \begin{cases} -\cos\left(\frac{1}{x}\right) + 2x \sin\left(\frac{1}{x}\right) & \text{if } x \neq 0, \\ 0 & \text{if } x = 0. \end{cases}$$

Because $\cos(1/x)$ oscillates as $x \to 0$, $g'(x)$ is not continuous at zero. Therefore, $g(x)$ is differentiable but not of class C^1.

The function $g(x) = x^2 \sin(1/x)$ for $x > 0$.

Example: differentiable but not Lipschitz continuous [edit]

The function

$$h(x) = \begin{cases} x^{4/3} \sin\left(\frac{1}{x}\right) & \text{if } x \neq 0, \\ 0 & \text{if } x = 0 \end{cases}$$

is differentiable but its derivative is unbounded on a compact set. Therefore, h is an example of a function that is differentiable but not locally Lipschitz continuous.



The function $f : \mathbb{R} \to \mathbb{R}$ with $f(x) = x^2 \sin\left(\frac{1}{x}\right)$ for $x \neq 0$ and $f(0) = 0$ is differentiable. However, this function is not continuously differentiable.

Example: analytic (C^ω) [edit]

The exponential function e^x is analytic, and hence falls into the class C^ω (where ω is the smallest transfinite ordinal). The trigonometric functions are also analytic wherever they are defined, because they are linear combinations of complex exponential functions e^{ix} and e^{-ix}.

A smooth function that is not analytic.

Example: smooth (C^∞) but not analytic (C^ω) [edit]

The bump function

$$f(x) = \begin{cases} e^{-\frac{1}{1-x^2}} & \text{if } |x| < 1, \\ 0 & \text{otherwise} \end{cases}$$

is smooth, so of class C^∞, but it is not analytic at $x = \pm 1$, and hence is not of class C^ω. The function f is an example of a smooth function with compact support.

Positive Definteness

Def. A square, symmetric matrix A is **positive definite** if $\mathbf{x}^T A\mathbf{x}$ is positive for all points other than the origin: $\mathbf{x}^T A\mathbf{x} > 0$ for all $x \neq 0$.
Def. A square, symmetric matrix A is **positive semidefinite** if $\mathbf{x}^T A\mathbf{x}$ is always non-negative: $\mathbf{x}^T A\mathbf{x} \geq 0$ for all $\mathbf{x}$.

A matrix A is positive definite if and only if all its eigenvalues are positive. (This can be used for recognition.)

If the matrix A is positive definite in the function $f(\mathbf{x}) = \mathbf{x}^T A\mathbf{x}$, then f has a unique global minimum.

Recall that the second order Taylor approximation of a twice-differentiable function f at $\mathbf{x}_0$ is

$$f(\mathbf{x}) \approx f(\mathbf{x}_0) + \nabla f(\mathbf{x}_0)^T(\mathbf{x} - \mathbf{x}_0) + \frac{1}{2}(\mathbf{x} - \mathbf{x}_0)^T H_0(\mathbf{x} - \mathbf{x}_0)$$

where H_0 is the Hessian evaluated at $\mathbf{x}_0$. If $(\mathbf{x} - \mathbf{x}_0)^T H_0(\mathbf{x} - \mathbf{x}_0)$ has a unique global minimum, then the overall approximation has a unique global minimum.

Non-symmetric matrices can be positive definite:
Every real matrix A decomposes uniquely as a symmetric matrix and a skew-symmetric matrix:

$$A = S + K, \quad S = \frac{1}{2}(A + A^T), \quad K = \frac{1}{2}(A - A^T).$$

Then:

$$\mathbf{x}^T A x = \mathbf{x}^T S \mathbf{x},$$

because

$$\mathbf{x}^T K \mathbf{x} = 0 \text{ for all } \mathbf{x}.$$

However, all local optimization algorithms are based, explicitly or implicitly, on the second-order Taylor expansion. The matrix governing local curvature is the Hessian and Hessians are necessarily symmetric

LU Decomposition

The LU factorization of a matrix $A \in \mathbf{R}^{n \times n}$ is defined as

$$PA = LU, \tag{A.20}$$

where

P is an $n \times n$ permutation matrix (that is, it is obtained by rearranging the rows of the $n \times n$ identity matrix),

L is unit lower triangular (that is, lower triangular with diagonal elements equal to 1, and

U is upper triangular.

- This factorization can be used to solve efficiently a linear system of the form $A\mathbf{x} = \mathbf{b}$ by first solving $L\mathbf{y} = \mathbf{b}$ for y and then solving $U\mathbf{x} = \mathbf{y}$ for $\mathbf{x}$.
- It can be found by using Gaussian elimination with row partial pivoting, an algorithm that requires approximately $2n^3/3$ floating-point operations when A is dense. Done by standard software LAPACK.

Cholesky Decomposition

When $A \in \mathbf{R}^{n \times n}$ is symmetric positive definite, it is possible to compute a similar but more specialized factorization at about half the cost—about $n^3/3$ operations. This factorization, known as the Cholesky factorization, produces a matrix L such that

$$A = LL^T. \tag{A.23}$$

(If we require L to have positive diagonal elements, it is uniquely defined by this formula.)

- It can also be used to solve systems of linear equations
- The Cholesky factorization can also be used to verify positive definiteness of a symmetric matrix A.

Outline

3. Derivatives

4. Symbolic Differentiation

5. Numerical Differentiation

6. Automatic Differentiation

Symbolic Derivatives

- Symbolic derivatives can give valuable insight into the structure of the problem domain and, in some cases, produce analytical solutions of extrema (e.g., solving for $\frac{\mathrm{d}}{\mathrm{d}x} f(x) = 0$) that can eliminate the need for derivative calculation altogether.

- But they do not lend themselves to efficient runtime calculation of derivative values, as they can get exponentially larger than the expression whose derivative they represent

Outline

3. Derivatives

4. Symbolic Differentiation

5. Numerical Differentiation

6. Automatic Differentiation

Numerical Differentiation

Finite Difference Method

- Neighboring points are used to approximate the derivative

$$f'(x) \approx \underbrace{\frac{f(x+h)-f(x)}{h}}_{\text{forward difference}} \approx \underbrace{\frac{f(x+h/2)-f(x-h/2)}{h}}_{\text{central difference}} \approx \underbrace{\frac{f(x)-f(x-h)}{h}}_{\text{backward difference}}$$

- h too small causes numerical cancellation errors (square root or cube root of the machine precision for floating point values: `sys.float_info.epsilon` difference between 1 and closest representable number)

Derivation

from Taylor series expansion:

$$f(x+h) = f(x) + \frac{f'(x)}{1!}h + \frac{f''(x)}{2!}h^2 + \frac{f'''(x)}{3!}h^3 + \cdots$$

We can rearrange and solve for the first derivative:

$$f'(x)h = f(x+h) - f(x) - \frac{f''(x)}{2!}h^2 - \frac{f'''(x)}{3!}h^3 - \cdots$$

$$f'(x) = \frac{f(x+h) - f(x)}{h} - \frac{f''(x)}{2!}h - \frac{f'''(x)}{3!}h^2 - \cdots$$

$$f'(x) \approx \frac{f(x+h) - f(x)}{h}$$

- forward difference has error term $O(h)$, linear error as h approaches zero
- central difference has error term is $O(h^2)$

```python
import sys
import numpy as np

def diff_forward(f, x: float, h: float=np.sqrt(sys.float_info.epsilon)) -> float:
    return (f(x+h) - f(x))/h

def diff_central(f, x: float, h: float=np.cbrt(sys.float_info.epsilon)) -> float:
    return (f(x+h/2) - f(x-h/2))/h

def diff_backward(f, x: float, h: float=np.sqrt(sys.float_info.epsilon)) -> float:
    return (f(x) - f(x-h))/h

# Example usage
def func(x):
    return x**2 + np.sin(x)

x0 = 1.0
print(f"The derivative at x = {x0} is {diff_forward(func, x0)}")
```

Numerical Differentiation

Complex step method

Uses one single function evaluation after taking a step in the imaginary direction.

$$f(x+ih) = f(x) + ihf'(x) - h^2\frac{f''(x)}{2!} - ih^3\frac{f'''(x)}{3!} + \cdots$$

$$\begin{aligned}
\mathrm{Im}(f(x+ih)) &= hf'(x) - h^3\frac{f'''(x)}{3!} + \cdots \\
\Rightarrow f'(x) &= \frac{\mathrm{Im}(f(x+ih))}{h} + h^2\frac{f'''(x)}{3!} - \cdots \\
&= \frac{\mathrm{Im}(f(x+ih))}{h} + O(h^2) \text{ as } h \to 0
\end{aligned}$$

$$\begin{aligned}
\mathrm{Re}(f(x+ih)) &= f(x) - h^2\frac{f''(x)}{2!} + \ldots \\
\Rightarrow f(x) &= \mathrm{Re}(f(x+ih)) + h^2\frac{f''(x)}{2!} - \cdots
\end{aligned}$$

```python
import numpy as np

def diff_complex(f, x: float, h: float=1e-20) -> float:
    return np.imag(f(x + h * 1j)) / h

# Example usage
def func(x):
    return x**2 + np.sin(x)

x0 = 1.0
print(f"The derivative at x = {x0} is {diff_complex(func, x0)}")
```

Numerical Differentiation Error Comparison

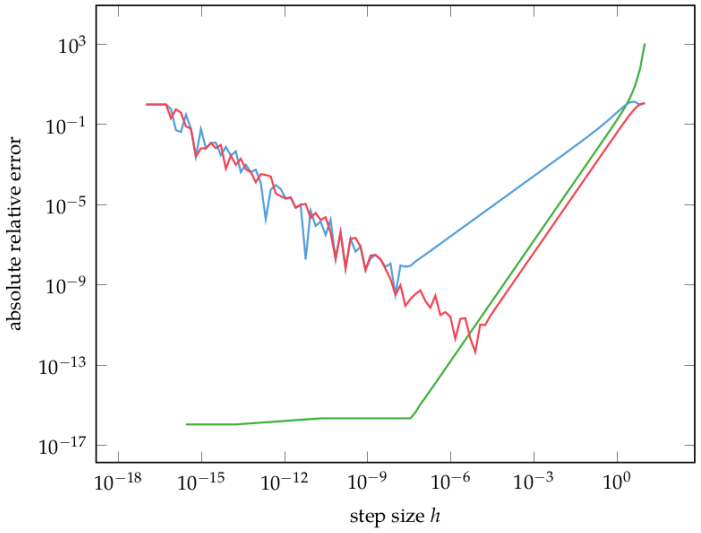

At small h, round off errors dominate, and at large h, truncation errors dominate.
Note the log transformation.

Numerical Differentiation in ML

- Approximation errors would be tolerated in a deep learning setting thanks to the well-documented error resiliency of neural network architectures (Gupta et al., 2015).
- The $O(n)$ complexity of numerical differentiation for a gradient in n dimensions is the main obstacle to its usefulness in machine learning, where n can be as large as millions or billions in state-of-the-art deep learning models (Shazeer et al., 2017).

Outline

3. Derivatives

4. Symbolic Differentiation

5. Numerical Differentiation

6. Automatic Differentiation

Automatic Differentiation

Automatic differentiation techniques are founded on the observation that any function is evaluated by performing a sequence of simple elementary operations involving just one or two arguments at a time:

- addition
- multiplication
- division
- power operation a^b
- trigonometric functions
- exponential functions
- logarithmic
- chain rule:

Chain Rule

The chain rule is a formula that expresses the derivative of the composition of two differentiable functions. More precisely, if $h = z \circ y$ is the composition such that $h(x) = z(y(x))$ for every x, then the chain rule is:

in Lagrange's notation:

$$h'(x) = z'(y(x))y'(x).$$

in Leibniz's notation:

$$\frac{dz}{dx} = \frac{dz}{dy} \cdot \frac{dy}{dx},$$

and

$$\left.\frac{dz}{dx}\right|_x = \left.\frac{dz}{dy}\right|_{y(x)} \cdot \left.\frac{dy}{dx}\right|_x,$$

for indicating at which points the derivatives have to be evaluated.

- Forward Accumulation is equivalent to expanding a function using the chain rule and computing the derivatives inside-out
- Requires n-passes to compute n-dimensional gradient
- Example:

$$f(a,b) = \ln(ab + \max(a,2))$$

$$\begin{aligned}
\frac{\partial f}{\partial a} &= \frac{\partial}{\partial a}\ln(ab + \max(a,2)) \\
&= \frac{1}{ab + \max(a,2)}\frac{\partial}{\partial a}(ab + \max(a,2)) \\
&= \frac{1}{ab + \max(a,2)}\left[\frac{\partial(ab)}{\partial a} + \frac{\partial \max(a,2)}{\partial a}\right] \\
&= \frac{1}{ab + \max(a,2)}\left[\left(b\frac{\partial a}{\partial a} + a\frac{\partial b}{\partial a}\right) + \left((2 > a)\frac{\partial 2}{\partial a} + (2 < a)\frac{\partial a}{\partial a}\right)\right] \\
&= \frac{1}{ab + \max(a,2)}[b + (2 < a)]
\end{aligned}$$

Automatic Differentiation

Computational graph: nodes are are operations and the edges are input-output relations. leaf nodes of a computational graph are input variables or constants, and terminal nodes are values output by the function

Forward accumulation for $f(a, b) = \ln(ab + \max(a, 2))$

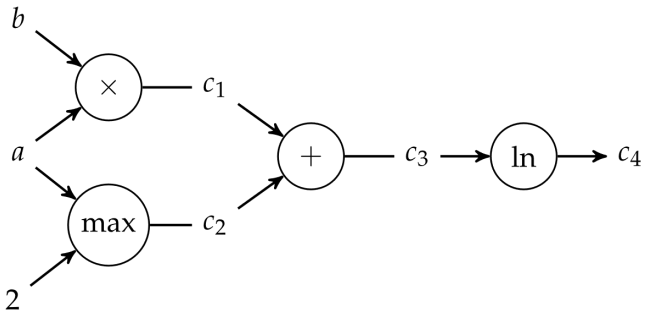

Automatic Differentiation

Computational graph: nodes are are operations and the edges are input-output relations. leaf nodes of a computational graph are input variables or constants, and terminal nodes are values output by the function

Forward accumulation for $f(a, b) = \ln(ab + \max(a, 2))$

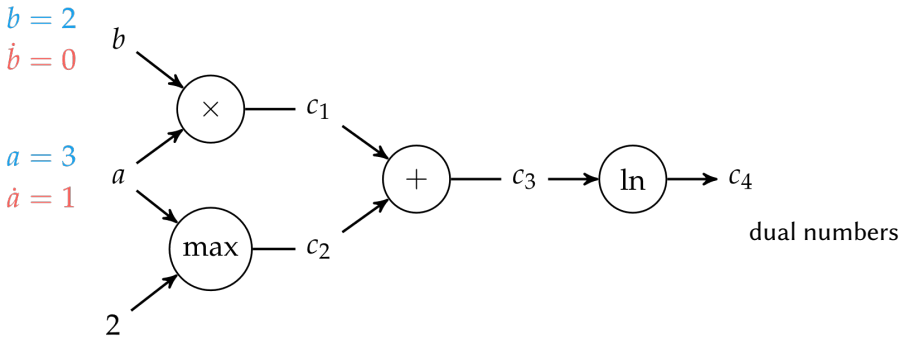

$\frac{\partial b}{\partial a} = \dot{b}$ Newton notation

Automatic Differentiation

Computational graph: nodes are are operations and the edges are input-output relations. leaf nodes of a computational graph are input variables or constants, and terminal nodes are values output by the function

Forward accumulation for $f(a, b) = \ln(ab + \max(a, 2))$

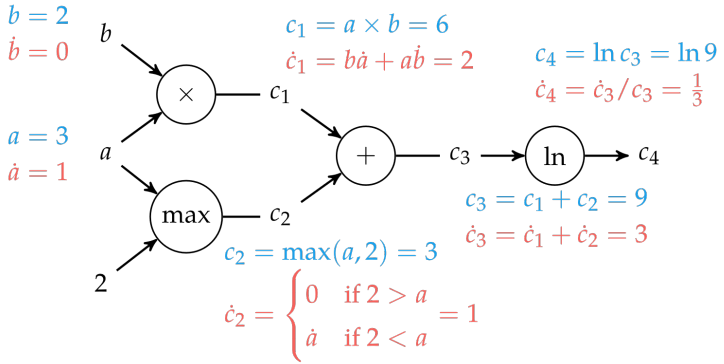

dual numbers

$\frac{\partial b}{\partial a} = \dot{b}$ Newton notation

Automatic Differentiation

Computational graph: nodes are are operations and the edges are input-output relations. leaf nodes of a computational graph are input variables or constants, and terminal nodes are values output by the function

Forward accumulation for $f(a, b) = \ln(ab + \max(a, 2))$

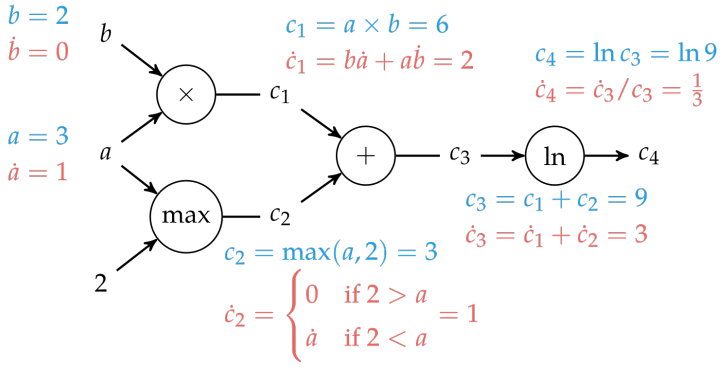

dual numbers

$\frac{\partial b}{\partial a} = \dot{b}$ Newton notation

for $\frac{\partial f}{\partial b}$ set $\dot{a} = 0, \dot{b} = 1$

Dual numbers

- Dual numbers can be expressed mathematically by including the abstract quantity ϵ, where ϵ^2 is defined to be 0.
- Like a complex number, a dual number is written $a + b\epsilon$ where a and b are both real values.
- $(a + b\epsilon) + (c + d\epsilon) = (a + c) + (b + d)\epsilon$
  $(a + b\epsilon) \times (c + d\epsilon) = (ac) + (ad + bc)\epsilon$
- by passing a dual number into any smooth function f, we get the evaluation and its derivative. We can show this using the Taylor series:

$$
\begin{aligned}
f(x) &= \sum_{k=0}^{\infty} \frac{f^{(k)}(a)}{k!}(x-a)^k \\
f(a+b\epsilon) &= \sum_{k=0}^{\infty} \frac{f^{(k)}(a)}{k!}(a+b\epsilon-a)^k \\
&= \sum_{k=0}^{\infty} \frac{f^{(k)}(a)b^k\epsilon^k}{k!} \\
&= f(a) + bf'(a)\epsilon + \epsilon^2 \sum_{k=2}^{\infty} \frac{f^{(k)}(a)b^k}{k!}\epsilon^{(k-2)} \\
&= f(a) + bf'(a)\epsilon
\end{aligned}
$$

Note that

$$(v + \dot{v}\epsilon) + (u + \dot{u}\epsilon) = (v + u) + (\dot{v} + \dot{u})\epsilon$$
$$(v + \dot{v}\epsilon)(u + \dot{u}\epsilon) = (vu) + (v\dot{u} + \dot{v}u)\epsilon \,,$$

satisfies the rules of differentiation

Setting:

$$f(v + \dot{v}\epsilon) = f(v) + f'(v)\dot{v}\epsilon$$

The chain rule follows:

$$\begin{aligned} f(g(v + \dot{v}\epsilon)) &= f(g(v) + g'(v)\dot{v}\epsilon) \\ &= f(g(v)) + f'(g(v))g'(v)\dot{v}\epsilon \,. \end{aligned}$$

Automatic Differentiation

- **Reverse accumulation** is performed in a single run using two passes $O(m \cdot \text{ops}(f))$ (forward and back) for $f : \mathbb{R}^n \to \mathbb{R}^m$
- Note: this is central to the back-propagation algorithm used to train neural networks because it needs only one pass for the n-dimensional function to find the gradient.
- implemented through two different operation overloading functions (for forward and backward)
- Many open-source software implementations are available: eg, Tensorflow

Forward implements:

$$\frac{df}{dx} = \frac{df}{dc_4}\frac{dc_4}{dx} = \frac{df}{dc_4}\left(\frac{dc_4}{dc_3}\frac{dc_3}{dx}\right) = \frac{df}{dc_4}\left(\frac{dc_4}{dc_3}\left(\frac{dc_3}{dc_2}\frac{dc_2}{dx} + \frac{dc_3}{dc_1}\frac{dc_1}{dx}\right)\right)$$

Backward implements:

$$\frac{df}{dx} = \frac{df}{dc_4}\frac{dc_4}{dx} = \left(\frac{df}{dc_3}\frac{dc_3}{dc_4}\right)\frac{dc_4}{dx} = \left(\left(\frac{df}{dc_2}\frac{dc_2}{dc_3} + \frac{df}{dc_1}\frac{dc_1}{dc_3}\right)\frac{dc_3}{dc_4}\right)\frac{dc_4}{dx}$$

Complementing each intermediate variable v_i with an **adjoint**

$$\bar{v}_i = \frac{\partial y_j}{\partial v_i}$$

which represents the sensitivity of a considered output y_j with respect to changes in v_i.

Example

$$y = f(x_1, x_2) = \ln(x_1) + x_1 x_2 - sin(x_2)$$

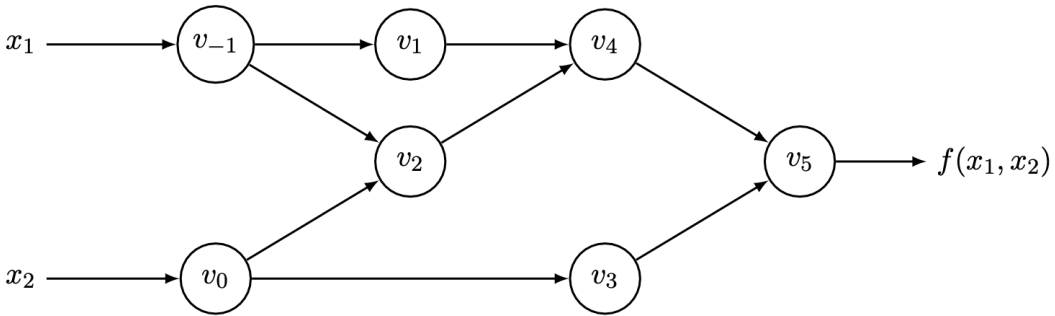

Example: Forward Accumulation

$$y = f(x_1, x_2) = \ln(x_1) + x_1 x_2 - sin(x_2)$$

Forward Primal Trace		
v_{-1}	$= x_1$	$= 2$
v_0	$= x_2$	$= 5$
v_1	$= \ln v_{-1}$	$= \ln 2$
v_2	$= v_{-1} \times v_0$	$= 2 \times 5$
v_3	$= \sin v_0$	$= \sin 5$
v_4	$= v_1 + v_2$	$= 0.693 + 10$
v_5	$= v_4 - v_3$	$= 10.693 + 0.959$
y	$= v_5$	$= 11.652$

Forward Tangent (Derivative) Trace		
$\dot{v}_{-1}$	$= \dot{x}_1$	$= 1$
$\dot{v}_0$	$= \dot{x}_2$	$= 0$
$\dot{v}_1$	$= \dot{v}_{-1}/v_{-1}$	$= 1/2$
$\dot{v}_2$	$= \dot{v}_{-1} \times v_0 + \dot{v}_0 \times v_{-1}$	$= 1 \times 5 + 0 \times 2$
$\dot{v}_3$	$= \dot{v}_0 \times \cos v_0$	$= 0 \times \cos 5$
$\dot{v}_4$	$= \dot{v}_1 + \dot{v}_2$	$= 0.5 + 5$
$\dot{v}_5$	$= \dot{v}_4 - \dot{v}_3$	$= 5.5 - 0$
$\dot{y}$	$= \dot{v}_5$	$= 5.5$

$O(n \cdot \text{ops}(f))$

Example: Reverse Accumulation

Forward Primal Trace

$v_{-1} = x_1$		$= 2$
$v_0 = x_2$		$= 5$
$v_1 = \ln v_{-1}$		$= \ln 2$
$v_2 = v_{-1} \times v_0$		$= 2 \times 5$
$v_3 = \sin v_0$		$= \sin 5$
$v_4 = v_1 + v_2$		$= 0.693 + 10$
$v_5 = v_4 - v_3$		$= 10.693 + 0.959$
$y = v_5$		$= 11.652$

Reverse Adjoint (Derivative) Trace

$\bar{x}_1 = \bar{v}_{-1}$		$= 5.5$
$\bar{x}_2 = \bar{v}_0$		$= 1.716$
$\bar{v}_{-1} = \bar{v}_{-1} + \bar{v}_1 \frac{\partial v_1}{\partial v_{-1}}$	$= \bar{v}_{-1} + \bar{v}_1 / v_{-1}$	$= 5.5$
$\bar{v}_0 = \bar{v}_0 + \bar{v}_2 \frac{\partial v_2}{\partial v_0}$	$= \bar{v}_0 + \bar{v}_2 \times v_{-1}$	$= 1.716$
$\bar{v}_{-1} = \bar{v}_2 \frac{\partial v_2}{\partial v_{-1}}$	$= \bar{v}_2 \times v_0$	$= 5$
$\bar{v}_0 = \bar{v}_3 \frac{\partial v_3}{\partial v_0}$	$= \bar{v}_3 \times \cos v_0$	$= -0.284$
$\bar{v}_2 = \bar{v}_4 \frac{\partial v_4}{\partial v_2}$	$= \bar{v}_4 \times 1$	$= 1$
$\bar{v}_1 = \bar{v}_4 \frac{\partial v_4}{\partial v_1}$	$= \bar{v}_4 \times 1$	$= 1$
$\bar{v}_3 = \bar{v}_5 \frac{\partial v_5}{\partial v_3}$	$= \bar{v}_5 \times (-1)$	$= -1$
$\bar{v}_4 = \bar{v}_5 \frac{\partial v_5}{\partial v_4}$	$= \bar{v}_5 \times 1$	$= 1$
$\bar{v}_5 = \bar{y}$	$= 1$	

$O(m \cdot \mathrm{ops}(f))$

Summary

- Derivatives are useful in optimization because they provide information about how to change a given point in order to improve the objective function
- For multivariate functions, various derivative-based concepts are useful for directing the search for an optimum, including the gradient, the Hessian, and the directional derivative
- computation of derivatives in computer programs can be classified into four categories:
  1. manually working out derivatives and coding them (error prone and time consuming)
  2. numerical differentiation using finite difference approximations
     Complex step method can eliminate the effect of subtractive cancellation error when taking small steps
  3. symbolic differentiation using expression manipulation in computer algebra systems
  4. automatic differentiation, (aka algorithmic differentiation)
     forward and reverse accumulation on computational graphs

3. Bracketing

Solutions and Recognizing Them for Smooth Functions

Definition

A point $\mathbf{x}^*$ is a global minimizer if $f(\mathbf{x}^*) \leq f(\mathbf{x})$ for all $\mathbf{x}$.

Definition

A point $\mathbf{x}^*$ is a local minimizer if there is a neighborhood N of $\mathbf{x}^*$ such that $f(\mathbf{x}^*) \leq f(\mathbf{x})$ for all $\mathbf{x} \in N$.

Solutions and Recognizing Them for Smooth Functions

Theorem (Taylor's Theorem)

Suppose that $f : \mathbb{R}^n \to \mathbb{R}$ *is continuously differentiable and that* $\mathbf{p} \in \mathbb{R}^n$*. Then we have that*

$$f(\mathbf{x} + \mathbf{p}) = f(\mathbf{x}) + \nabla f(\mathbf{x} + t\mathbf{p})^T \mathbf{p},$$

for some $t \in (0, 1)$*. Moreover, if* f *is twice continuously differentiable, we have that*

$$\nabla f(\mathbf{x} + \mathbf{p}) = \nabla f(\mathbf{x}) + \int_0^1 \nabla^2 f(\mathbf{x} + t\mathbf{p})\mathbf{p} dt,$$

and that

$$f(\mathbf{x} + \mathbf{p}) = f(\mathbf{x}) + \nabla f(\mathbf{x})^T \mathbf{p} + \frac{1}{2}\mathbf{p}^T \nabla^2 f(\mathbf{x} + t\mathbf{p})\mathbf{p},$$

for some $t \in (0, 1)$*.*

Solutions and Recognizing Them for Smooth Functions

Theorem (First-Order Necessary Conditions)

If $\mathbf{x}^*$ is a local minimizer and f is continuously differentiable in an open neighborhood of $\mathbf{x}^*$, then $\nabla f(\mathbf{x}^*) = 0$.

Definition (Stationary Point)

We call $\mathbf{x}^*$ a stationary point if $\nabla f(\mathbf{x}^*) = 0$.

Theorem (Second-Order Necessary Conditions)

If $\mathbf{x}^*$ is a local minimizer of f and $\nabla^2 f$ exists and is continuous in an open neighborhood of $\mathbf{x}^*$, then $\nabla f(\mathbf{x}^*) = 0$ and $\nabla^2 f(\mathbf{x}^*)$ is positive semidefinite.

Theorem (Second-Order Sufficient Conditions)

Suppose that $\nabla^2 f$ is continuous in an open neighborhood of $\mathbf{x}^*$ and that $\nabla f(\mathbf{x}^*) = 0$ and $\nabla^2 f(\mathbf{x}^*)$ is positive definite. Then $\mathbf{x}^*$ is a strict local minimizer of f.

Solutions and Recognizing Them for Smooth Functions

Theorem (Local Minimizers in Convex Functions)

Assume that $f : \mathbb{R}^n ß \mathbb{R}$ is convex, then $\mathbf{x}^*$ is a global minimizer of f if and only if it is a local minimizer. If in addition f is differentiable, then $\mathbf{x}^*$ is a global minimizer of f if and only if it is a stationary point of f, i.e., $\nabla f(\mathbf{x}^*) = 0$.

Thus, for convex functions, we only need to look for stationary points. This is not the case for potentially nonconvex functions. For example, in one dimension below, all red points are stationary points that are not the global minimum (shown is in green)

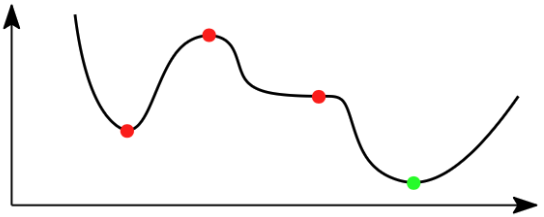

Unconstrained Optimization of Smooth Functions

Two main strategies for finding local minima of smooth functions are:

- Line search methods (gradient descent and its variants)
- Trust region methods

A component of both strategies is the ability to find a local minimum of a one-dimensional function, which is the topic of this lecture.

Bracketing: A derivative-free method to identify an interval containing a local minimum and then successively shrinking that interval

Unimodality

The algorithms in this class assume **unimodality**:

There exists a unique optimizer $\mathbf{x}^*$ such that f is monotonically decreasing for $\mathbf{x} \leq \mathbf{x}^*$ and monotonically increasing for $\mathbf{x} \geq \mathbf{x}^*$

Finding an Initial Bracket

Given a unimodal function, the global minimum is guaranteed to be inside the interval $[a, c]$ if we can find three points $a < b < c$ such that $f(a) > f(b) < f(c)$

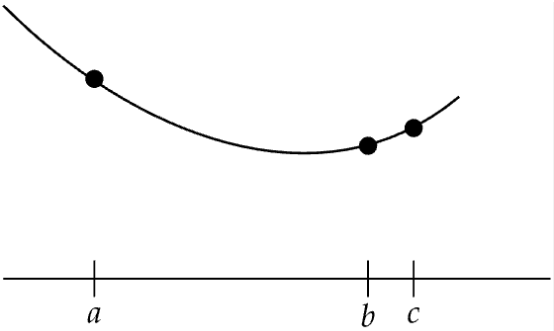


```
function bracket_minimum(f, x=0; s=1e-2, k=2.0)
    a, ya = x, f(x)
    b, yb = a + s, f(a + s)
    if yb > ya
        a, b = b, a
        ya, yb = yb, ya
        s = -s
    end
    while true
        c, yc = b + s, f(b + s)
        if yc > yb
            return a < c ? (a, c) : (c, a)
        end
        a, ya, b, yb = b, yb, c, yc
        s *= k
    end
end
```

Finding an Initial Bracket

Example of `bracket_minimum` on a function

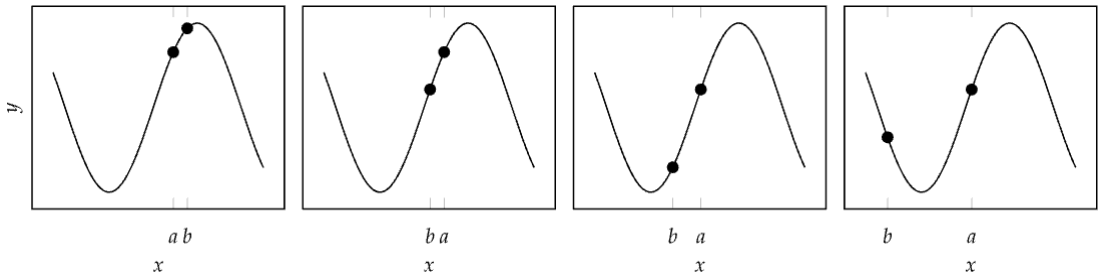

reverses direction between the first and second iteration and expands until a minimum is bracketed in the fourth iteration.

For unimodal functions, when function evaluations are limited, what is the maximal shrinckage we can achieve?

When restricted to only 2 function evaluations (queries) the most we can guarantee to shrink our interval is by just under a factor of 2.

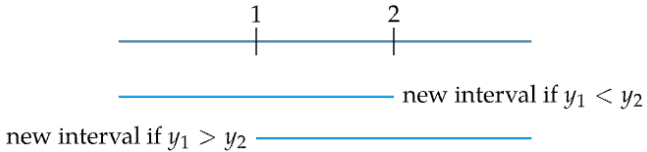

yeilds a factor of 3.

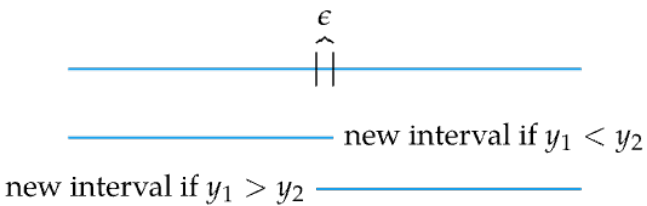

for $\epsilon \to 0$ yields a factor of just less than 2

When restricted to only 3 function evaluations (queries) the most we can guarantee to shrink our interval is by a factor of 3.

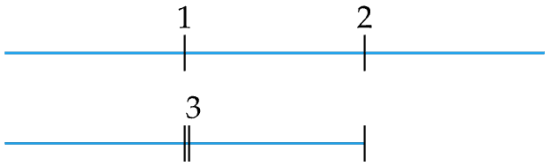

Fibonacci Search

When restricted to n functions evaluations following the previous strategy, we are guaranteed to shrink our interval by a factor of F_{n+1}.

Fibonacci numbers: sum of previous two,
$1, 1, 2, 3, 5, 8, 13, \ldots$

$$F_n = \begin{cases} 0 & \text{if } n = 0 \\ 1 & \text{if } n = 1, 2 \\ F_{n-1} + F_{n-2} & \text{otherwise} \end{cases}$$

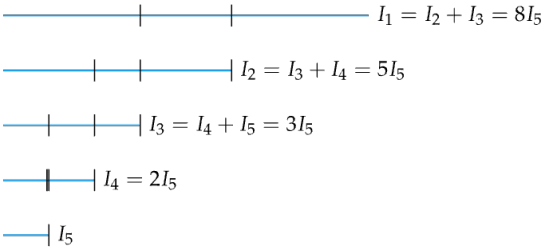

The length of every interval constructed can be expressed in terms of the final interval times a Fibonacci number.
- final, smallest interval has length I_n,
- second smallest interval has length $I_{n-1} = F_3 I_n$
- third smallest interval has length $I_{n-2} = F_4 I_n$,

and so forth.

Fibonacci Search Algorithm

For a unimodal function f in the interval $[a, b]$, we want to shrink the interval within n iterations. (At each iteration we want to shrink by a factor ϕ).

$$b_{k+1} - a_{k+1} = \frac{F_{n-k+1}}{F_{n-k+2}}(b_k - a_k)$$

Therefore:

$$\begin{aligned} b_n - a_n &= \frac{F_2}{F_3}(b_{n-1} - a_{n-1}) \\ &= \frac{F_2}{F_3}\frac{F_3}{F_4}\cdots\frac{F_n}{F_{n+1}}(b_1 - a_1) \\ &= \frac{1}{F_{n+1}}(b_1 - a_1) \end{aligned}$$

Closed-form expression (Binet's formula):

$$F_n = \frac{\phi^n - (1-\phi)^n}{\sqrt{5}},$$

$\phi = (1+\sqrt{5})/2 \approx 1.61803$ is the golden ratio.

$$\frac{F_{n+1}}{F_n} = \phi\frac{1 - s^{n+1}}{1 - s^n}, \quad s = (1-\sqrt{5})(1+\sqrt{5}) \approx -0.382$$

Suppose we have a unimodal function f in the interval $[a, b]$ and a tolerance $\epsilon = 0.01$. Let $k = 1$.

1. $d_k = a_k + \frac{F_{n-k+1}}{F_{n-k+2}}(b_k - a_k)$

2. if $k \neq n - 1$:

$$c_k = a_k + \left(1 - \frac{F_{n-k+1}}{F_{n-k+2}}\right)(b_k - a_k)$$

   otherwise: $c_k = d_k + \epsilon(a_k - d_k)$

3. if $f(c_k) < f(d_k)$: $b_{k+1} = d_k, \quad d_{k+1} = c_k, \quad a_{k+1} = a_k$
   otherwise: $a_{k+1} = b_k, \quad b_{k+1} = c_k, \quad d_{k+1} = d_k$

4. $k = k + 1$, if $k = n$ go to step 5, else go to step 2

5. return (a_k, b_k) if $(a_k < b_k)$ else (b_k, a_k)

$$\frac{F_n}{F_{n+1}} = \rho_n = \frac{1 - s^n}{\phi(1 - s^{n+1})} \approx 0.6$$

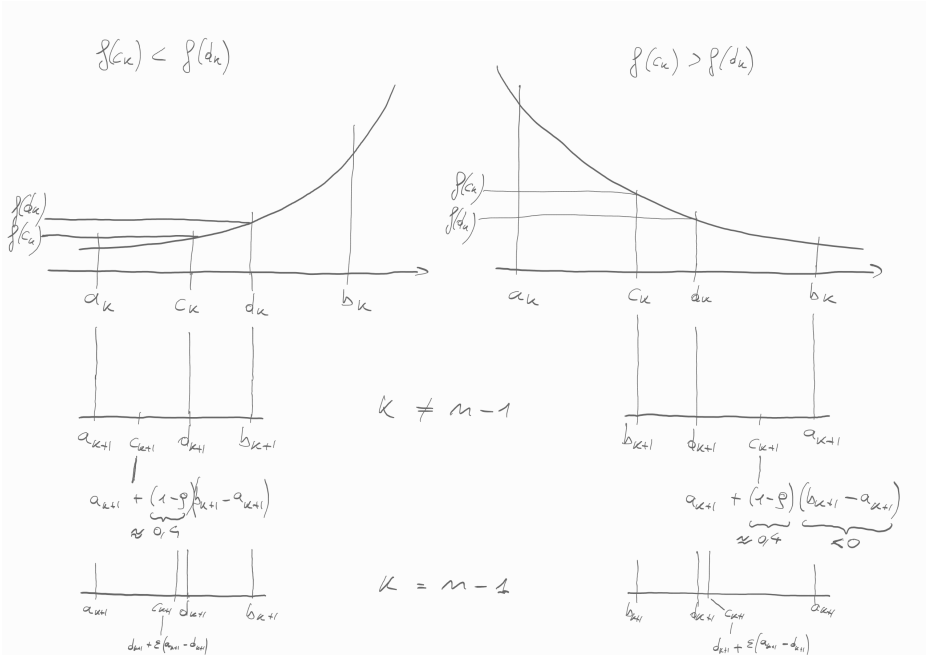
f(c_k) < f(d_k)
f(c_k) > f(d_k)
f(d_k)
f(c_k)
a_k
c_k
d_k
b_k
k ≠ n−1
a_{k+1}
c_{k+1}
d_{k+1}
b_{k+1}
a_{k+1} + (1−φ)(b_{k+1} − a_{k+1})
≈ 0,4
b_{k+1}
d_{k+1}
c_{k+1}
a_{k+1} + (1−φ)(b_{k+1} − a_{k+1})
≈ 0,4
<0
k = n−1
c_{n+1}
d_{n+1} + ε(a_{n+1} − d_{n+1})
d_{n+1}
c_{n+1}
d_{n+1} + ε(a_{n+1} − d_{n+1})

Golden Section Search

$$\lim_{n\to\infty}\frac{F_{n+1}}{F_n}=\lim_{n\to\infty}\frac{1}{\rho_n}=\lim_{n\to\infty}\phi\frac{1-s^{n+1}}{1-s^n}=\phi\approx 1.61803 \qquad \frac{1}{\phi}\approx 0.618$$

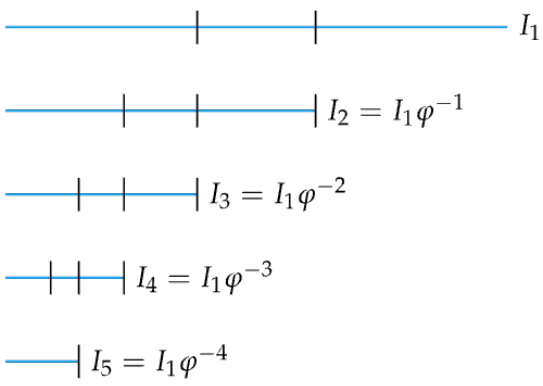

Comparison

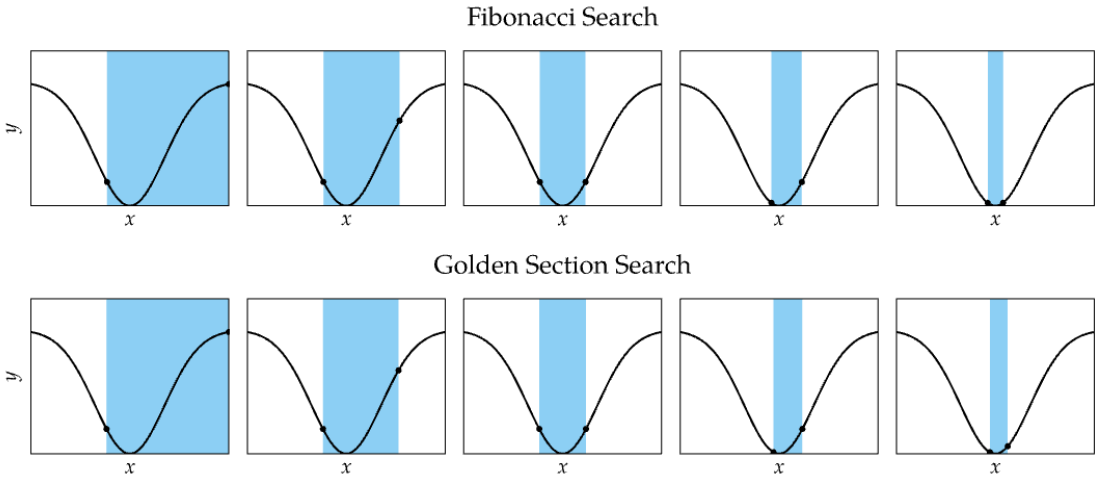

Comparison

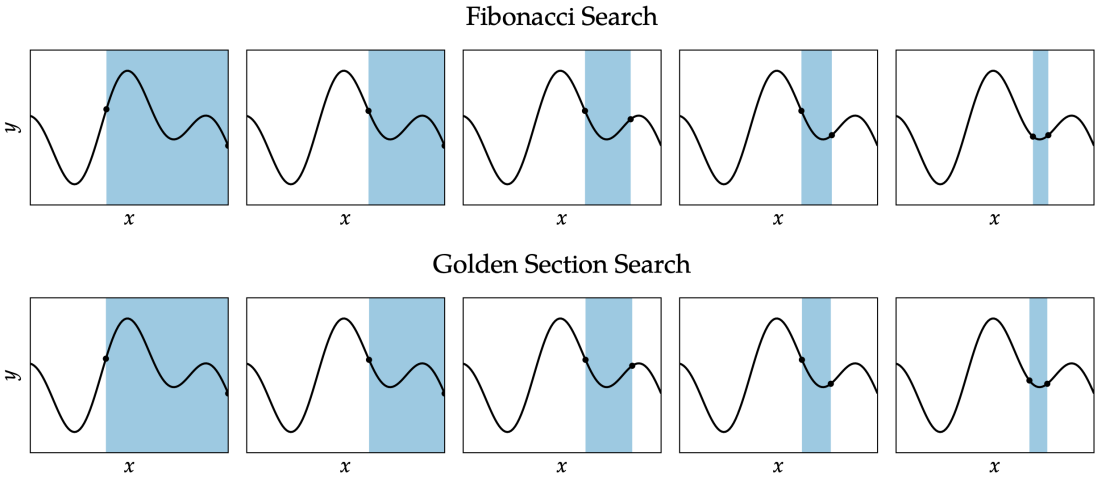

Quadratic Fit Search

- Leverages ability to analytically minimize quadratic functions
- Iteratively fits quadratic function to three bracketing points



Quadratic Fit Search

- If a function is locally nearly quadratic, the minimum can be found after several steps

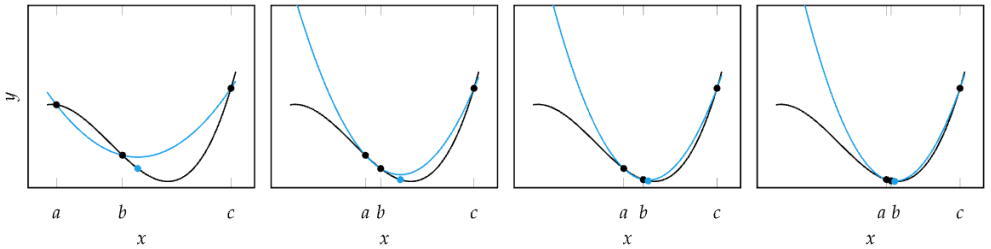

Maintain a bracketing interval $[a, c]$ with $a < b < c$ and $f(a) > f(b) < f(c)$.

```
if x > b
  if yx > yb
    c, yc = x, yx
  else
    a, ya, b, yb = b, yb, x, yx
```

```
elif x < b
  if yx > yb
    a, ya = x, yx
  else
    c, yc, b, yb = b, yb, x, yx
```

Using Linear Algebra

- We assume that the variable y is related to $x \in \mathbb{R}$ quadratically, so for some constants b_0, b_1, b_2:

$$y = b_0 + b_1 x + b_2 x^2$$

- Given the set of 3 points $(y_1, x_1,), \ldots, (y_3, x_3)$ in the ideal case, we have that $y_i = b_0 + b_1 x_i + b_2 x_i^2$, for all $i = 1, 2, 3$. In matrix form:

$$\begin{bmatrix} 1 & x_1 & x_1^2 \\ 1 & x_2 & x_2^2 \\ 1 & x_3 & x_3^2 \end{bmatrix} \begin{bmatrix} b_0 \\ b_1 \\ b_2 \end{bmatrix} = \begin{bmatrix} y_1 \\ y_2 \\ y_3 \end{bmatrix}$$

This can be written as $A\mathbf{z} = \mathbf{y}$ to emphasize that $\mathbf{z}$ are our unknowns and A and $\mathbf{y}$ are given.

In Python

In polynomial regression, the $m \times (n+1)$ matrix A is called a **Vandermonde matrix** (a matrix with entries $a_{ij} = x_i^{n+1-j}$, $j = 1..n+1$).
NumPy's `np.vander()` is a convenient tool for quickly constructing a Vandermonde matrix, given the values x_i, $i = 1..m$, and the number of desired columns $(n+1)$.

```
>>> print(np.vander([2, 3, 5], 2))
[[2 1]                              # [[2**1, 2**0]
 [3 1]                              #  [3**1, 3**0]
 [5 1]]                             #  [5**1, 5**0]]

>>> print(np.vander([2, 3, 5, 4], 3))
[[ 4  2  1]                         # [[2**2, 2**1, 2**0]
 [ 9  3  1]                         #  [3**2, 3**1, 3**0]
 [25  5  1]                         #  [5**2, 5**1, 5**0]
 [16  4  1]]                        #  [4**2, 4**1, 4**0]
```

In Python

```
A = np.vander(x,4)

coeff = np.linalg.solve(A,y) ## Error!! Why?

B = A.T @ A
z = np.linalg.inv(B) @ A.T @ y

coeff = np.linalg.lstsq(A, y)[0]
np.allclose(z,coeff)

f=np.poly1d(coeff)
plt.plot(x, y, 'o', label='Original data', ↪
    ↪markersize=2)
plt.plot(x, f(x), 'r', label='Fitted line')
plt.legend()
plt.show()
```

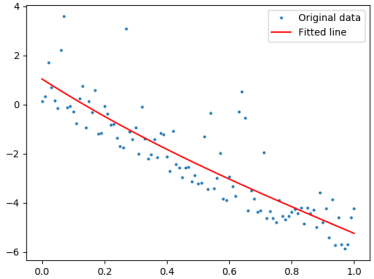

However, for three points the system $A\mathbf{z} = \mathbf{y}$ is solvable, also in closed form!

Shubert-Piyavskii Method

- The Shubert-Piyavskii method is guaranteed to find the global minimum of any bounded function
- but requires that the function be Lipschitz continuous
- A function is **Lipschitz continuous** if there is an upper bound on the magnitude of its derivative. A function f is Lipschitz continuous on $[a, b]$ if there exists an $\ell > 0$ such that:

$$|f(x) - f(y)| \leq \ell |x - y|, \quad \forall x, y \in [a, b]$$

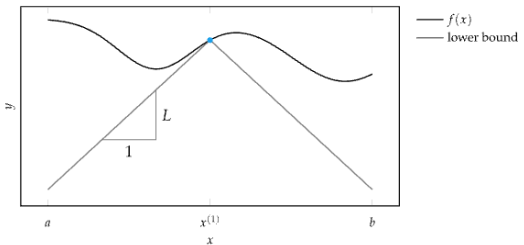

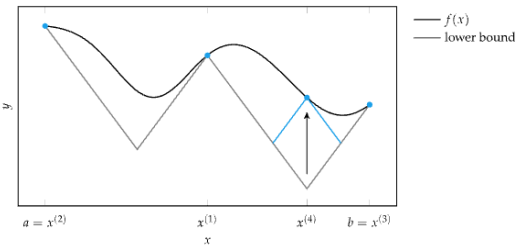

The Algorithm

Given a valid Lipschitz constant ℓ and an initial interval $[a, b]$:

Initialize:
Sample the midpoint, $x^{(1)} = (a + b)/2$.
Construct a sawtooth lower bound using lines of slope $\pm\ell$ from $x^{(1)}$. These lines will always lie below f if ℓ is a valid Lipschitz constant

Iterate:
Upper vertices in the sawtooth correspond to sampled points. Lower vertices correspond to intersections between the Lipschitz lines originating from each sampled point.
Further iterations find the minimum point in the sawtooth $(x^{(i)}, y^{(i)})$, evaluate the function at that $x^{(i)}$ value, $f(x^{(i)})$, and then use the result to update the sawtooth.

Terminate:

when: $|y^{(i)} - f(x^{(i)})| < \epsilon$.

For every peak, an uncertainty region (blue segments) can be computed according to:

$$\left[x^{(i)} - \frac{1}{\ell}\left(y_{\min} - y^{(i)}\right), \; x^{(i)} + \frac{1}{\ell}\left(y_{\min} - y^{(i)}\right) \right]$$

$\left(x^{(i)}, y^{(i)}\right)$ sawtooth lower vertex

$(x_{\min}, y_{\min})$ minimum sawtooth upper vertex

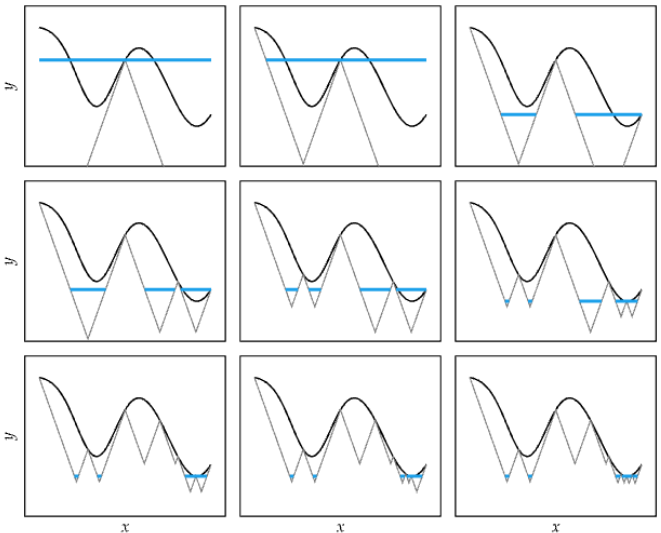

Bisection Method

- **Intermediate value theorem**: If f is continuous on $[a, b]$, and there is some $y \in [f(a), f(b)]$, then there exists at least one $x \in [a, b]$, such that $f(x) = y$.
- Used in root-finding methods
- When applied to $f'(x)$, can be used to find minimum of f
- if $\text{sign}(f'(a)) \neq \text{sign}(f'(b))$, or equivalently, $f'(a)f'(b) \leq 0$ then $[a, b]$ is guaranteed to contain a zero.

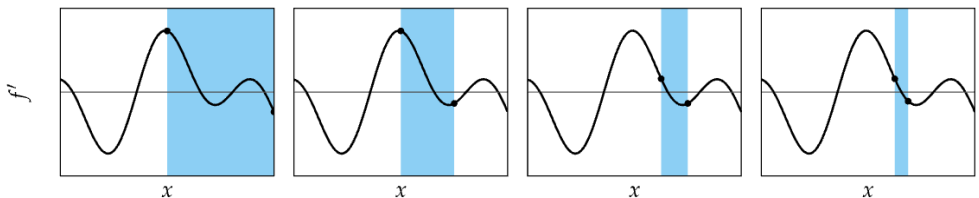

Bisection Method

- Cut the bracketed region $[a, b]$ in half with every iteration
- Evaluate the midpoint $(a + b)/2$
- form a new bracket from the midpoint and whichever side that continues to bracket a zero.
- Terminate after a fixed number of iterations.
- Guaranteed to converge within ϵ of x^* within $\lg_2(|b - a|/\epsilon)$

Summary

- Many optimization methods shrink a bracketing interval, including Fibonacci search, golden section search, and quadratic fit search
- The Shubert-Piyavskii method outputs a set of bracketed intervals containing the global minima, given the Lipschitz constant
- Root-finding methods like the bisection method can be used to find where the derivative of a function is zero

4. Local Descent

Preface

For multivariate functions, we have argued that:

- derivatives can have exponential growth in the resulting analytical expression
- calculating zeros might be challenging

Hence, minimizing by solving $\nabla f(\mathbf{x}) = 0$ may be computationally demanding.

Outline

7. Line Search Methods

8. Convergence Analysis

9. Trust Region Methods

Descent Direction Iteration

Descent Direction Methods use a local model to incrementally improve design point until some convergence criteria is met.

1. Check termination conditions at $\mathbf{x}_k$; if not met, continue.
2. Decide **descent direction** $\mathbf{d}_k$ using local information, commonly required that $\mathbf{d}_k^T \nabla f(\mathbf{x}_k) < 0$.
3. Decide **step size** (ie, magnitude of the overall step that depends on α_k, sometimes but not always $\|\mathbf{d}_k\|_2 = 1$)
4. Compute next design point $\mathbf{x}_{k+1}$

$$\mathbf{x}_{k+1} \leftarrow \mathbf{x}_k + \alpha_k \mathbf{d}_k$$

Descent Direction

The search direction often has the form

$$\mathbf{d}_k = -B_k^{-1} \nabla f(\mathbf{x}_k)$$

where B_k is a symmetric and nonsingular matrix.

- in the steepest descent method, B_k is the identity matrix I
- in Newton's method, B_k is the exact Hessian $\nabla^2 f(\mathbf{x}_k)$.
- in quasi-Newton methods, B_k is an approximation to the Hessian that is updated at every iteration by means of a low-rank formula.

When $\mathbf{d}_k = -B_k^{-1} \nabla f(\mathbf{x}_k)$ and B_k is positive definite, we have

$$\mathbf{d}_k^T \nabla f(\mathbf{x}_k) = -\nabla f(\mathbf{x}_k)^T B_k^{-1} \nabla f(\mathbf{x}_k) < 0$$

and therefore $\mathbf{d}_k$ is a descent direction. In fact, it is a double implication!

Outline

- We discuss how to choose α_k and $\mathbf{d}_k$ to promote convergence from remote starting points.
- We also consider the rate of convergence of steepest descent, quasi-Newton, and Newton methods.

Line Search for Step Size

Assuming we have the search direction:

- Use it to compute α
- Using the techniques discussed in the previous class, find the minimum of a univariate function:

$$\phi(\alpha) = f(\mathbf{x} + \alpha\mathbf{d}) \qquad \text{minimize}_{\alpha \geq 0}\ \phi(\alpha)$$

We assume that $\mathbf{p}_k$ is a descent direction, that is, $\phi'(0) < 0$, so that our search can be confined to positive values of α.

```
def line_search(f, x, d)
  objective = lambda alpha: f(x + alpha * d)
  a, b = bracket_minimum(objective)
  alpha = minimize(objective, a, b)
  return x + alpha * d
```

Often computationally costly, so approximate line search is used instead

Line Search: Alternatives

α is called to the **learning rate** or **step factor**:

Equal to the **step size** only when $\|\mathbf{d}_k\|_2 = 1$.

- Fixed learning rate
- **Decaying step factor**

$$\alpha_k = \alpha_1 \gamma^{k-1} \qquad \text{for } \gamma \in [0, 1]$$

Decaying step factor is often required in convergence proofs

Approximate Line Search

- If function calls are expensive, rather than finding the minimum along a search direction, find a point of sufficient decrease

$$f(\mathbf{x}_{k+1}) \leq f(\mathbf{x}_k) + \beta\alpha\nabla_{\mathbf{d}_k} f(\mathbf{x}_k)$$

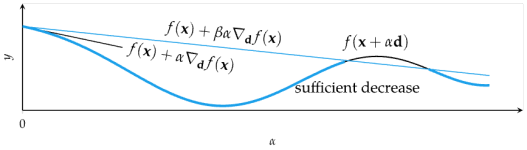

- $\beta \in [0, 1]$, usually $\beta = 1 \times 10^{-4}$
- Alone this condition is insufficient to guarantee convergence to a local minimum. It can converge prematurely.
- Backtracking line search starts with a large step and then backs off

```
def backtracking_line_search(f, grad, x, d, alpha_0=1, p=0.5, beta=1e-4):
    y, g, alpha = f(x), grad(x), alpha_0
    while ( f(x + alpha * d) > y + beta * alpha * np.dot(g, d) ) :
        alpha *= p
    return alpha
```

- Guaranteed to converge to a local minimum, but can be slow.

Approximate Line Search: Example

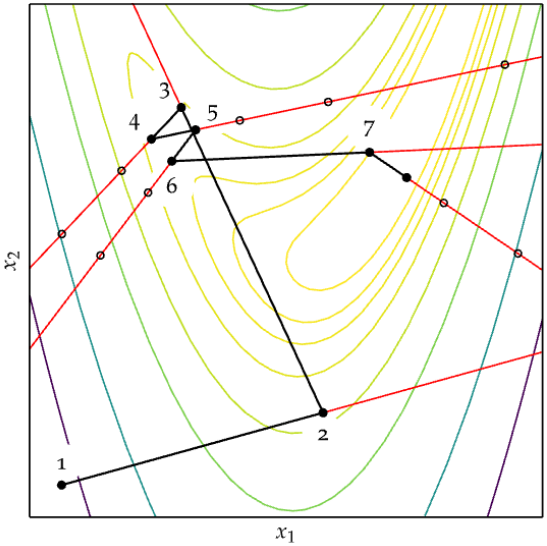

Approximate Line Search

Building on backtracking line search are the **Wolfe Conditions** together sufficient to guarantee convergence to a local minimum.

1. First Wolfe Condition: Sufficient Decrease (Armijo condition)

$$f(\mathbf{x}_{k+1}) \leq f(\mathbf{x}_k) + \beta\alpha\nabla_{\mathbf{d}_k} f(\mathbf{x}_k)$$

2. Second Wolfe Condition: Curvature Condition

$$\nabla_{\mathbf{d}_k} f(\mathbf{x}_{k+1}) \geq \sigma\nabla_{\mathbf{d}_k} f(\mathbf{x}_k)$$

$\beta < \sigma < 1$ with
- $\sigma = 0.1$ with conjugate gradient method
- $\sigma = 0.9$ with Newton method

Curvature Condition

Regions satisfying the curvature condition $\nabla_{\mathbf{d}_k} f(\mathbf{x}_{k+1}) \geq \sigma \nabla_{\mathbf{d}_k} f(\mathbf{x}_k)$

- Consider the univariate function $\phi(\alpha) = f(\mathbf{x}_k + \alpha \mathbf{d}_k)$.
- The left-hand-side is simply the derivative $\phi'(\alpha_k)$, so the curvature condition ensures that the slope of ϕ at α_k is greater than σ times the initial slope $\phi'(0)$.
- If the slope $\phi'(0)$ is negative, then we are looking for a step size α_k such that the slope of ϕ at that point is still negative but not too negative.
- If $\phi'(\alpha_k)$ is only slightly negative or even positive, it is a sign that we cannot expect much more decrease in f in this direction, so it makes sense to terminate the line search.

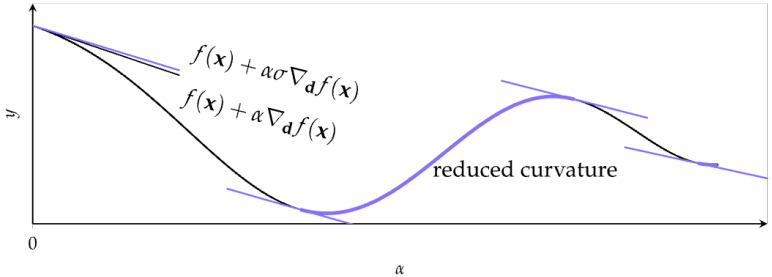

Curvature Condition

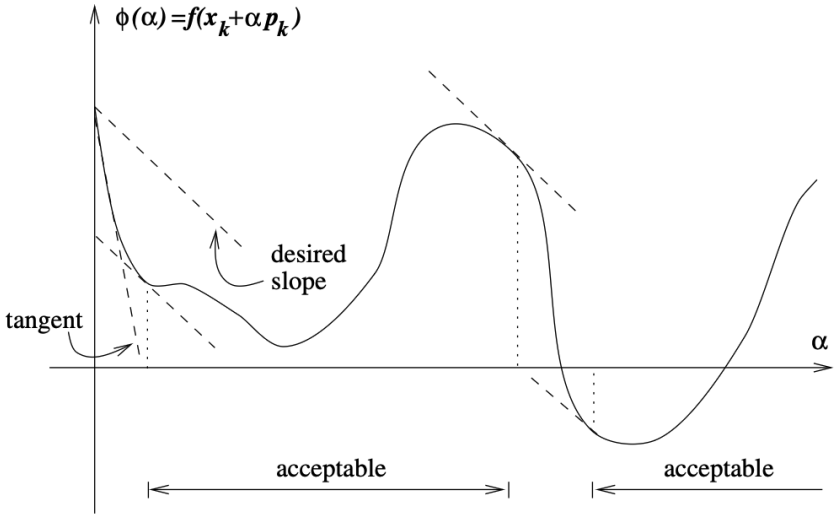

Wolfe Conditions

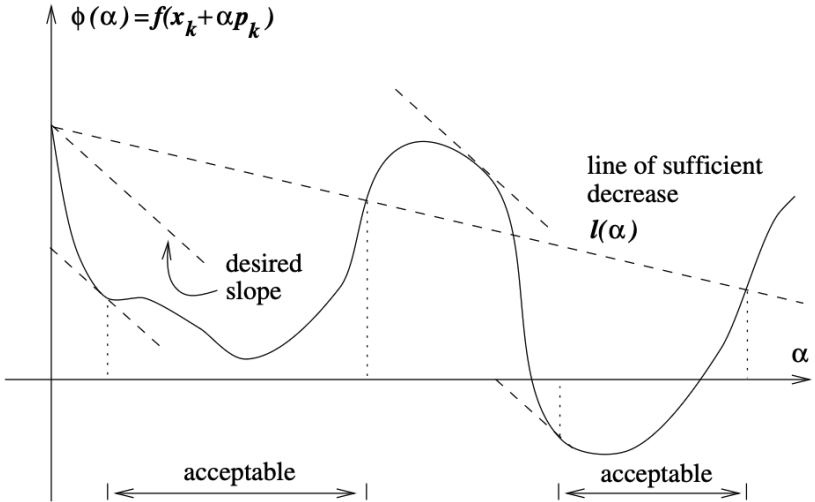

Approximate Line Search: Example

Consider approximate line search on $f(x_1, x_2) = x_1^2 + x_1 x_2 + x_2^2$
from $\mathbf{x} = [1, 2]$ in the direction $\mathbf{d} = [-1, -1]$, gradient at $\mathbf{x}$ is $\mathbf{g} = [4, 5]$
using a maximum step size of 10, a reduction factor of 0.5,
first Wolfe condition parameter $\beta = 1 \times 10^{-4}$, second Wolfe condition parameter $\sigma = 0.9$.

First Wolfe condition ($f(\mathbf{x} + \alpha\mathbf{d}) \leq f(\mathbf{x}) + \beta\alpha(\mathbf{g}^T \cdot \mathbf{d})$):

$$\begin{aligned}
\alpha = 10: &\quad f([1,2] + 10 \cdot [-1,-1]) \leq 7 + 1 \times 10^{-4} 10 [4,5]^T [-1,-1] \implies 217 \not\leq 6.991 \\
\alpha = 10 \cdot 0.5 = 5: &\quad f([1,2] + 5 \cdot [-1,-1]) \leq 7 + 1 \times 10^{-4} 5 [4,5]^T [-1,-1] \implies 37 \not\leq 6.996 \\
\alpha = 2.5: &\quad f([1,2] + 2.5 \cdot [-1,-1]) \leq 7 + 1 \times 10^{-4} 2.5 [4,5]^T [-1,-1] \implies 3.25 \leq 6.998
\end{aligned}$$

The candidate design point $\mathbf{x}' = \mathbf{x} + \alpha\mathbf{d} = [-1.5, -.0.5]$ is checked against the second Wolfe condition $\nabla_{\mathbf{d}} f(\mathbf{x}') \geq \sigma \nabla_{\mathbf{d}} f(\mathbf{x})$:

$$[-3.5, -2.5] \cdot [-1, -1] \geq \sigma [4, 5] \cdot [-1, -1] \implies 6 \geq -8.1$$

Approximate line search terminates with $\mathbf{x} = [-1.5, -0.5]$.

Strong Wolfe Conditions

A step length may satisfy the Wolfe conditions without being particularly close to a minimizer of $f(\mathbf{x}_k + \alpha \mathbf{d}_k)$.
We can modify the curvature condition to force $f(\mathbf{x}_{k+1})$ to exclude points that are far from stationary points of $f(\mathbf{x}_{k+1})$, ie, we no longer allow the gradient $\nabla_{\mathbf{d}_k} f(\mathbf{x}_{k+1})$ to be too positive.

Strong Wolf conditions:

$$f(\mathbf{x}_{k+1}) \leq f(\mathbf{x}_k) + \beta\alpha\nabla_{\mathbf{d}_k} f(\mathbf{x}_k) \qquad \text{and} \qquad |\nabla_{\mathbf{d}_k} f(\mathbf{x}_{k+1})| \leq \sigma |\nabla_{\mathbf{d}_k} f(\mathbf{x}_k)|$$

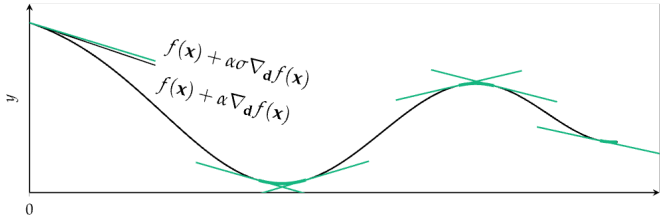

Approximate Line Search Goal

Given:

$$\mathbf{x}_{k+1} = \mathbf{x}_k + \alpha_k \mathbf{d}_k$$

with descent direction:

$$\nabla f(\mathbf{x}_k)^T \mathbf{d}_k < 0$$

Define:

$$\phi(\alpha) = f(\mathbf{x}_k + \alpha \mathbf{d}_k), \qquad \phi'(\alpha) = \nabla f(\mathbf{x}_k + \alpha \mathbf{d}_k)^T \mathbf{d}_k$$

Goal:

Find $\alpha > 0$ satisfying the **Strong Wolfe Conditions**.

Strong Wolfe Conditions

Two requirements:

Sufficient decrease (Armijo)

$$\phi(\alpha) \leq \phi(0) + \beta\alpha\phi'(0)$$

Strong curvature condition

$$|\phi'(\alpha)| \leq \sigma|\phi'(0)|$$

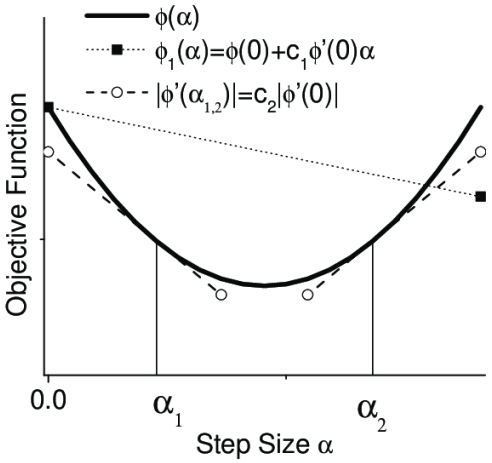

Ensures:

- sufficient decrease
- step near minimum

Strong Backtracking: Idea

Two phases:

1. Bracketing phase

- Start with $[\alpha_0 = 0, \alpha_1]$
- Increase step
- Find interval containing solution

2. Zoom phase

- Shrink interval
- Use bisection or interpolation
- Find Wolfe step

Idea:

Bracket minimum $\rightarrow$ Zoom to solution

Algorithm

Bracketing

- Start with $[\alpha_0 = 0, \alpha_1]$
- If Armijo fails or slope changes sign

  $\rightarrow$ Zoom

- If strong Wolfe satisfied

  $\rightarrow$ Stop

- Else increase step

Input : α_{max} maximum step allowed
Output: α^* set to a step length that satisfies the strong Wolfe condition

Initialize $k \leftarrow 0$;
Set $\alpha_0 \leftarrow 0$, choose $\alpha_{max} > 0$ and $\alpha_1 \in (0, \alpha_{max})$;
$i \leftarrow 1$;
while True **do**
  Evaluate $\phi(\alpha_i)$;
  if $\phi(\alpha_i) > \phi(0) + \beta\alpha_i\phi'(0)$ or $[\phi(\alpha_i) \geq \phi(\alpha_{i-1})$ and $i > 1]$ **then** // Armijo or next slide
    $\alpha^* \leftarrow$ zoom(α_{i-1}, α_i) and break;
  Evaluate $\phi'(\alpha_i)$;
  if $|\phi'(\alpha_i)| \leq -\sigma\phi'(0)$ **then**
    set $\alpha^* \leftarrow \alpha_i$ and break;
  if $\phi'(\alpha_i) \geq 0$ **then** // slope changes
    set $\alpha^* \leftarrow$ zoom(α_i, α_{i-1}) and break;
  Choose $\alpha_{i+1} \in (\alpha_i, \alpha_{max})$; // Eg, $\alpha_{i+1} \leftarrow 2\alpha_i$
  $i \leftarrow i + 1$;

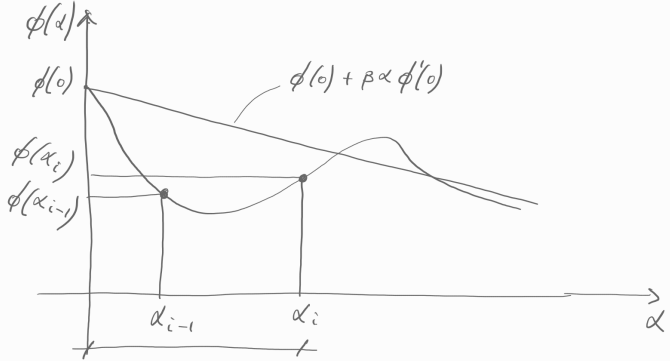
$\phi(\alpha)$
$\phi(0)$
$\phi(0) + \beta\alpha\phi'(0)$
$\phi(\alpha_i)$
$\phi(\alpha_{i-1})$
α_{i-1}
α_i
α

Algorithm

Zoom

- Interpolate inside bracket
- Shrink interval
- Stop when Wolfe satisfied

Iterate generating an $\alpha_j \in [\alpha_{lo}, \alpha_{hi}]$, and then replacing one of these endpoints by α_j maintaining the invariants:

1. $[\alpha_{lo}, \alpha_{hi}]$ satisfy the strong Wolfe conditions;
2. α_{lo} smallest function value $\phi(\alpha_{lo})$;
3. α_{hi} chosen so that $\phi'(\alpha_{lo})(\alpha_{hi} - \alpha_{lo}) < 0$.

Input : α_{lo}, α_{hi}
Output: α^* set to a step length that satisfies the strong Wolfe condition

while True **do**
  Interpolate (using quadratic, cubic or bisection) to find a trial step length α_j between α_{lo} and α_{hi} ;
  Evaluate $\phi(\alpha_j)$;
  if $\phi(\alpha_j) > \phi(0) + \beta\alpha_j\phi'(0)$ or $\phi(\alpha_j) \geq \phi(\alpha_{lo})$ **then** // next slide
    $\alpha_{hi} \leftarrow \alpha_j$;
  else
    Evaluate $\phi'(\alpha_j)$;
    if $|\phi'(\alpha_j)| \leq -\sigma\phi'(0)$ **then**
      Set $\alpha^* \leftarrow \alpha_j$ and break;
    if $\phi'(\alpha_j)(\alpha_{hi} - \alpha_{lo}) \geq 0$ **then** // violates 3., second next slide
      $\alpha_{hi} \leftarrow \alpha_{lo}$;
    $\alpha_{lo} \leftarrow \alpha_j$;

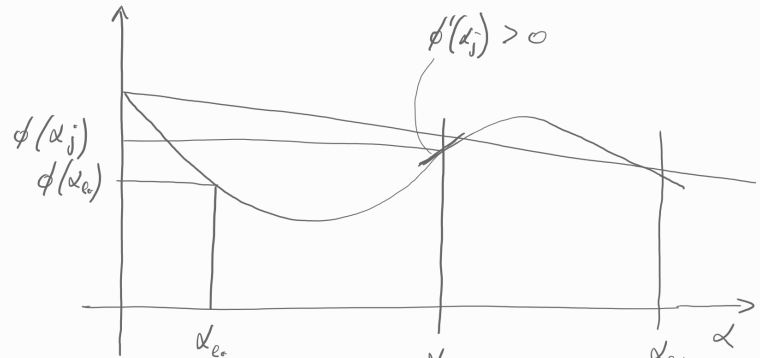
$\phi'(\alpha_j) > 0$
$\phi(\alpha_j)$
$\phi(\alpha_{l_0})$
α_{l_0}
α_j
α_{l_0}
α
α_{l_0}
α_{l_1}

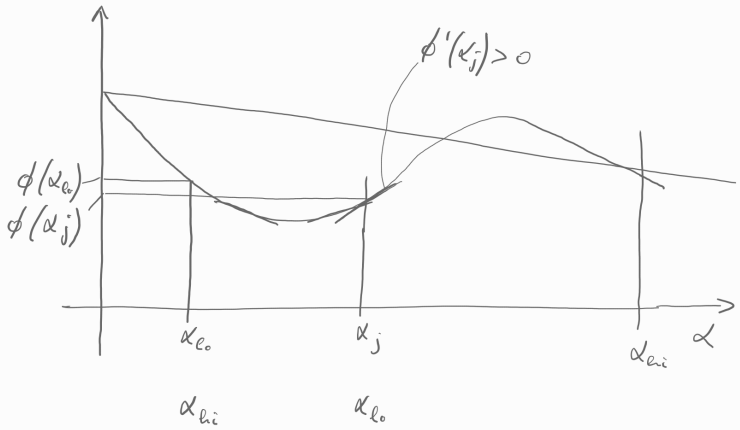
$\phi'(\alpha_j) > 0$
$\phi(\alpha_{l_0})$
$\phi(\alpha_j)$
α_{l_0}
α_j
α_{l_i}
α
α_{l_i}
α_{l_0}

Approximate Line Search: Python Implementation

```
def strong_backtracking(f, nabla, x: np.array, d: np.array, alpha: float=1,
  beta: float=1e-4, sigma: float=0.1) -> float:
  y0, g0, y_prev, alpha_prev = f(x), nabla(x) @ d, np.nan, 0
  alpha_lo, alpha_hi = np.nan, np.nan
```

```
  # bracket phase
  while True:
    y = f(x + alpha*d)
    if y > y0 + beta*alpha*g0 or (not math.isnan(↪
        ↪y_prev) and y >= y_prev):
      alpha_lo, alpha_hi = alpha_prev, alpha
      break
    g = nabla(x + alpha*d) @ d
    if abs(g) <= -sigma * g0:
      return alpha
    elif g <= 0:
      alpha_lo, alpha_hi = alpha, alpha_prev
      break
    y_prev, alpha_prev, alpha = y, alpha, 2 * alpha
```

```
  # zoom phase
  ylo = f(x + alpha_lo*d)
  while abs(alpha_hi - alpha_lo) > 1e-6:
    print(alpha_lo,alpha_hi)
    alpha = (alpha_lo + alpha_hi)/2
    y = f(x + alpha * d)
    if y > y0 + beta * alpha * g0 or y >=↪
        ↪ ylo:
      alpha_hi = alpha
    else:
      g = nabla(x + alpha * d) @ d
      if abs(g) <= -sigma * g0:
        return alpha
      elif g*(alpha_hi -alpha_lo) >= 0:
        alpha_hi = alpha_lo
      alpha_lo = alpha
```

Why Strong Backtracking?

Used in:

- Gradient descent
- Quasi-Newton: BFGS, L-BFGS
- Nonlinear Conjugate Gradient

Guarantees:

- global convergence
- stable steps
- fast convergence of quasi-Newton

Standard method in modern optimization.

Note: it is an algorithm that makes use of derivative information!

Outline

7. Line Search Methods

8. Convergence Analysis

9. Trust Region Methods

Convergence Analysis

Let $\{\mathbf{x}_k\}$ be a sequence of points belonging in $\mathbb{R}^n$.
We say that a sequence $\{\mathbf{x}_k\}$ **converges** to some point $\mathbf{x}$, written $\lim_{k\to\infty} \mathbf{x}_k = x$, if for any $\epsilon > 0$, there is an index K such that

$$\|\mathbf{x}_k - \mathbf{x}\| \leq \epsilon \qquad \text{for all } k \geq K$$

For example, the sequence $\mathbf{x}_k$ defined by $\mathbf{x}_k = (1 - 2^{-k}, 1/k^2)^T$ converges to $(1, 0)^T$.

Convergence of Line Search

Let θ_k be the angle between $\mathbf{d}_k$ and the steepest descent direction $-\nabla f_k$, defined by:

$$\cos\theta_k = \frac{-\nabla f_k^T \mathbf{d}_k}{\|\nabla f_k\| \, \|\mathbf{d}_k\|}$$

Theorem (Zoutendijk condition)

Consider any iteration of the form $\mathbf{x}_{k+1} \leftarrow \mathbf{x}_k + \alpha_k \mathbf{d}_k$, where $\mathbf{d}_k$ is a descent direction and α_k satisfies the Wolfe conditions. Suppose that f is bounded below in $\mathbb{R}^n$ and that f is continuously differentiable in an open set N containing the level set $\mathcal{L} = \{x : f(x) \leq f(x_0)\}$, where $\mathbf{x}_0$ is the starting point of the iteration. Assume also that the gradient ∇f is Lipschitz continuous on N, that is, there exists a constant $L > 0$ such that:

$$|f(x) - f(y)| \leq L|x - y|, \quad \forall x, y \in N$$

Then:

$$\sum_{k \geq 0} \cos^2\theta_k \, \|\nabla f_k\|^2 < \infty.$$

The Zoutendijk condition implies that

$$\cos^2 \theta_k \, \|\nabla f_k\|^2 \to 0$$

We can be sure that the gradient norms $\|\nabla f_k\|$ converge to zero, provided that the search directions are never too close to orthogonality with the gradient.

It is a **global convergence** result.
Here the strongest possible result: we cannot guarantee that the method converges to a minimizer, but only that it is attracted by stationary points (only introducing the Hessian we can prove convergence to a local minimum — see next slide)

In

$$\mathbf{d}_k = -B_k^{-1} \nabla f(\mathbf{x}_k)$$

assume that the matrices B_k are **positive definite** with a uniformly bounded condition number. That is, there is a constant M such that $\|B_k\| \left\|B_k^{-1}\right\| \leq M$ for all k.

Then from the definition of θ_k:

$$\cos\theta_k \geq 1/M$$

By combining this bound with $\cos^2\theta_k \|\nabla f_k\|^2 \to 0$ we find that

$$\lim_{k\to\infty} \|\nabla f_k\| = 0$$

So, globally convergent under the positive definitness assumptions on B_k, (which is needed to ensure that $\mathbf{d}_k$ is a descent direction), and if the step lengths satisfy the Wolfe conditions.

Rate of Convergence

Let $\{\mathbf{x}_k\}$ be a sequence in $\mathbb{R}^n$ that converges to $\mathbf{x}^*$.
The convergence is said to be **Q-linear** (quotient-linear) if there is a constant $r \in (0, 1)$ such that

$$\frac{\|\mathbf{x}_{k+1} - \mathbf{x}^*\|}{\|\mathbf{x}_k - \mathbf{x}^*\|} \leq r \qquad \text{for all } k \text{ sufficiently large}$$

ie, the distance to the solution $\mathbf{x}^*$ decreases at each iteration by at least a constant factor bounded away from 1 (ie, < 1).

Example:
sequence $\{1 + (0.5)^k\}$ converges Q-linearly to 1, with rate $r = 0.5$.

Rate of Convergence

The convergence is said to be **Q-superlinear** if

$$\lim_{k\to\infty} \frac{\|\mathbf{x}_{k+1} - \mathbf{x}^*\|}{\|\mathbf{x}_k - \mathbf{x}^*\|} = 0$$

Example: the sequence $\{1 + k^{-k}\}$ converges superlinearly to 1.

An even more rapid convergence rate: The convergence is said to be **Q-quadratic** if

$$\frac{\|\mathbf{x}_{k+1} - \mathbf{x}^*\|}{\|\mathbf{x}_k - \mathbf{x}^*\|^2} \leq M \qquad \text{for all } k \text{ sufficiently large}$$

where M is a positive constant, not necessarily less than 1. Example: the sequence $\{1 + (0.5)^{2^k}\}$. The values of r and M depend not only on the algorithm but also on the properties of the particular problem. Regardless of these values a quadratically convergent sequence will always eventually converge faster than a linearly convergent sequence.

Rate of Convergence

Superlinear convergence (quadratic, cubic, quartic, etc) is regarded as fast and desirable, while sublinear convergence is usually impractical.

- Steepest descent algorithms converge only at a Q-linear rate, and when the problem is ill-conditioned the convergence constant r is close to 1.
- Quasi-Newton methods for unconstrained optimization typically converge Q-superlinearly
- Newton's method converges Q-quadratically under appropriate assumptions.

Rate of Convergence

A slightly weaker form of convergence:
overall rate of decrease in the error, rather than the decrease over each individual step of the algorithm.
We say that convergence is **R-linear** (root-linear) if there is a sequence of nonnegative scalars $\{v_k\}$ such that

$$\|\mathbf{x}_k - \mathbf{x}^*\| \leq \{v_k\} \text{ for all } k, \text{ and } \{v_k\} \text{ converges Q-linearly to zero.}$$

Outline

7. Line Search Methods

8. Convergence Analysis

9. Trust Region Methods

Trust Region Methods

- Descent methods can place too much trust in their first and second order information
- A **trust region** is the local area of the design space where the local model is believed to be reliable.
- Trust region methods, or restricted step methods, limit the step size to ensure local approximation error is minimized
- If the improvement matches the predicted value, the trust region is expanded; otherwise it is contracted

Trust Region Methods

- $\mathbf{x}'$ is new design point
- $\hat{f}(\mathbf{x}')$ is local function approximation, eg, second-order Taylor approximation
- δ is trust region radius

$$\begin{aligned} &\text{minimize}_{\mathbf{x}'} \hat{f}(\mathbf{x}') \\ &\text{subject to} \quad \|\mathbf{x} - \mathbf{x}'\| \leq \delta \end{aligned}$$

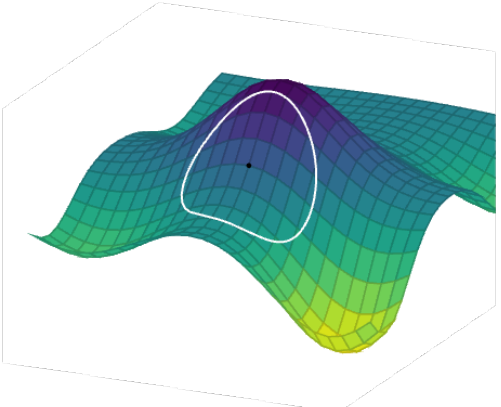

Constrained optimization problem.
It can be solved efficiently if $\hat{f}$ quadratic

Trust Region Methods

δ can be expanded or contracted based on performance

$$\eta = \frac{\text{actual improvement}}{\text{predicted improvement}} = \frac{f(\mathbf{x}) - f(\mathbf{x}')}{f(\mathbf{x}) - \hat{f}(\mathbf{x}')}$$

If $\eta < \eta_1$ contract by a factor $\gamma_k < 1$
if $\eta > \eta_2$ expand by a factor $\gamma_k > 1$

Trust Region Methods: Example

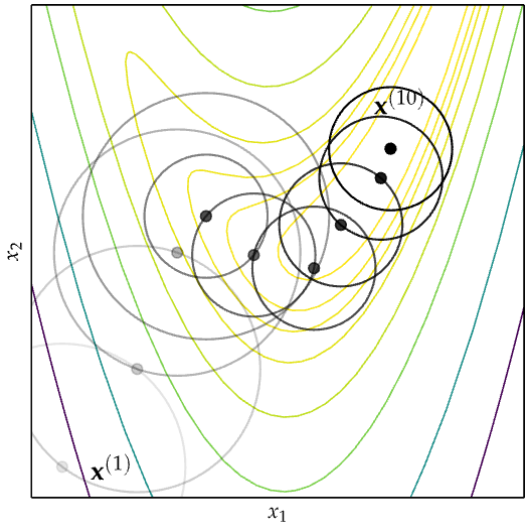

Trust regions can be also non circular.

Termination Conditions

For all iterative descent methods and commonly used together:

- Maximum Iterations: $k > k_{\max}$
- Absolute Improvement: $f(\mathbf{x}_k) - f(\mathbf{x}_{k+1}) < \epsilon_a$
- Relative Improvement: $f(\mathbf{x}_k) - f(\mathbf{x}_{k+1}) < \epsilon_r |f(\mathbf{x}_k)|$
- Gradient Magnitude: $\|\nabla f(\mathbf{x}_{k+1})\| < \epsilon_g$

Then random restart.

Summary

- Descent direction methods incrementally descend toward a local optimum.
- Univariate optimization can be applied during line search.
- Approximate line search can be used to identify appropriate descent step sizes.
- Trust region methods constrain the step to lie within a local region that expands or contracts based on predictive accuracy.
- Termination conditions for descent methods can be based on criteria such as the change in the objective function value or magnitude of the gradient.

5. First-Order Methods

Descent Direction Methods

How to select the descent direction?

- first-order methods that rely on gradient
- second-order methods that rely on Hessian information

Advantages of first order methods:

- cheap iterations: good for small and large scale optimization
- helpful because easy to warm restart

Limitations of first order methods:

- not hard to find challenging instances for them (instances with many saddle regions).
- can converge slowly.

Outline

10. Gradient Descent

11. Conjugate Descent

12. Accelerated Descents

Gradient Descent

The **steepest descent** direction at $\mathbf{x}_k$, at kth iteration of a **local descent iterative method**, is the one opposite to the gradient (**gradient descent**):

$$\mathbf{d}_k = -\frac{\nabla f(\mathbf{x}_k)}{\|\nabla f(\mathbf{x}_k)\|}$$

Guaranteed to lead to improvement if:

- f is smooth
- step size is sufficiently small
- $\mathbf{x}_k$ is not a stationary point (ie, $\nabla f(\mathbf{x}_k) = 0$)

Gradient Descent: Example

- Suppose we have

$$f(\mathbf{x}) = x_1 x_2^2$$

- The gradient is $\nabla f = [x_2^2, 2x_1 x_2]$
- $\mathbf{x}_k = [1, 2]$

$$\mathbf{d}_{k+1} = -\frac{\nabla f(\mathbf{x}_k)}{\|\nabla f(\mathbf{x}_k)\|} = \frac{[-4, -4]}{\sqrt{16+16}} = \left[-\frac{1}{\sqrt{2}}, -\frac{1}{\sqrt{2}}\right]$$

Implementation

```
class DescentMethod:
    alpha: float

class GradientDescent(DescentMethod):
    def __init__(self, f, grad, x, alpha):
        self.alpha = alpha

    def step(self, f, grad, x):
        alpha, g = self.alpha, grad(x)
        return x - alpha * g
```

Gradient Descent

Theorem: The next direction is orthogonal to the current direction.

Proof:

$$\alpha_k^* = \underset{\alpha}{\operatorname{argmin}}\, f(\mathbf{x}_k + \alpha \mathbf{d}_k)$$

$$\nabla f(\mathbf{x}_k + \alpha_k^* \mathbf{d}_k) = \nabla_{\mathbf{d}_k} f(\mathbf{x}_k + \alpha_k^* \mathbf{d}_k) = 0 \qquad \text{because } \alpha_k^* \text{ is minimum}$$

$$\nabla f(\mathbf{x}_k + \alpha_k^* \mathbf{d}_k)^T \mathbf{d}_k = 0 \qquad \text{because directional derivative: } \nabla_{\mathbf{s}} f(\mathbf{x}) = \nabla f(\mathbf{x})^T \mathbf{s}$$

$$\mathbf{d}_{k+1} = -\frac{\nabla f(\mathbf{x}_k + \alpha_k^* \mathbf{d}_k)}{\left\| \nabla f(\mathbf{x}_k + \alpha_k^* \mathbf{d}_k) \right\|} \qquad \text{gradient descent}$$

$$\mathbf{d}_{k+1} \cdot \mathbf{d}_k = -\frac{\nabla f(\mathbf{x}_k + \alpha_k^* \mathbf{d}_k)}{\left\| \nabla f(\mathbf{x}_k + \alpha_k^* \mathbf{d}_k) \right\|} \cdot \mathbf{d}_k = 0 \qquad \mathbf{d}_{k+1}^T \mathbf{d}_k = 0 \implies \mathbf{d}_{k+1} \perp \mathbf{d}_k$$

□

Gradient Descent: Example

2D Rosenbrock function

$$f(x, y) = (a - x)^2 + b(y - x^2)^2$$

Narrow valleys not aligned with gradient can be a problem

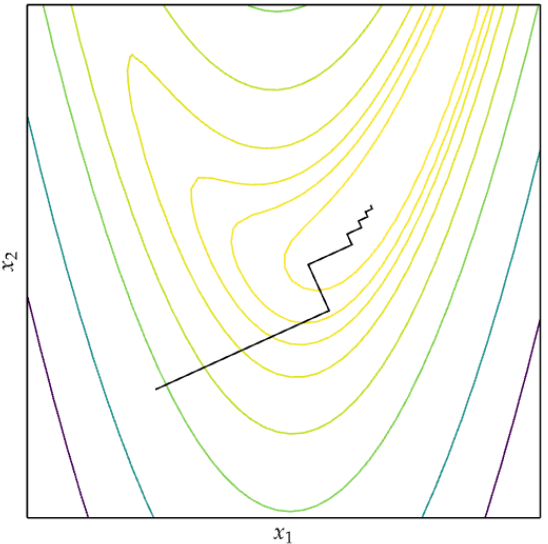

Outline

10. Gradient Descent

11. Conjugate Descent

12. Accelerated Descents

Conjugate Gradient

[Hestenes and Stiefel, 1950s]

For A symmetric positive definite:

$$A\mathbf{x} = \mathbf{b} \iff \underset{\mathbf{x}}{\text{minimize}}\, f(\mathbf{x}) \stackrel{def}{=} \frac{1}{2}\mathbf{x}^T A\mathbf{x} - \mathbf{b}^T\mathbf{x}$$

$$\nabla f(\mathbf{x}) = A\mathbf{x} - \mathbf{b} \stackrel{def}{=} \mathbf{r}(\mathbf{x})$$

Conjugate Direction

Def.: A set of nonzero vectors $\{\mathbf{d}_0, \mathbf{d}_1, \ldots, \mathbf{d}_\ell\}$ is said to be **conjugate** with respect to the symmetric positive definite matrix A if

$$\mathbf{d}_i^T A \mathbf{d}_j = 0, \qquad \text{for all } i \neq j$$

(the vectors are linearly independent. Generally, not orthogonal.)

Theorem: Given an arbitrary $\mathbf{x}_0 \in \mathbb{R}^n$ and a set of conjugate vectors $\{\mathbf{d}_0, \mathbf{d}_1, \ldots, \mathbf{d}_{n-1}\}$ the sequence $\{\mathbf{x}_k\}$ generated by

$$\mathbf{x}_{k+1} = \mathbf{x}_k + \alpha_k \mathbf{d}_k$$

where α_k is the analytical solution of $\min_\alpha f(\mathbf{x}_k + \alpha \mathbf{d}_k)$ given by:

$$\alpha_k = -\frac{\mathbf{r}_k^T \mathbf{d}_k}{\mathbf{d}_k^T A \mathbf{d}_k}$$

(aka, **conjugate direction algorithm**) converges to the solution $\mathbf{x}^*$ of the linear system and minimization problem in at most n steps.

Proof:

$$\min_{\alpha} f(\mathbf{x}_k + \alpha \mathbf{d}_k)$$

We can compute the derivative with respect to α:

$$\begin{aligned}
\frac{\partial}{\partial \alpha} f(\mathbf{x} + \alpha \mathbf{d}) &= \frac{\partial}{\partial \alpha} (\mathbf{x} + \alpha \mathbf{d})^T A (\mathbf{x} + \alpha \mathbf{d}) - \mathbf{b}^T (\mathbf{x} + \alpha \mathbf{d}) \\
&= \mathbf{d}^T A (\mathbf{x} + \alpha \mathbf{d}) - \mathbf{d}^T \mathbf{b} \\
&= \mathbf{d}^T (A\mathbf{x} - \mathbf{b}) + \alpha \mathbf{d}^T A \mathbf{d}
\end{aligned}$$

Setting $\frac{\partial f(\mathbf{x}+\alpha \mathbf{d})}{\partial \alpha} = 0$ results in:

$$\alpha_k = -\frac{\mathbf{d}_k^T (A\mathbf{x}_k - \mathbf{b})}{\mathbf{d}_k^T A \mathbf{d}_k} = -\frac{\mathbf{d}_k^T \mathbf{r}(\mathbf{x}_k)}{\mathbf{d}_k^T A \mathbf{d}_k} \tag{1}$$

- Since the directions $\{\mathbf{d}_k\}$ are linearly independent, they must span the whole space $\mathbb{R}^n$. Hence, there is a set of scalars σ_k such that:

$$\mathbf{x}^* - \mathbf{x}_0 = \sigma_0 \mathbf{d}_0 + \sigma_1 \mathbf{d}_1 + \ldots + \sigma_{n-1} \mathbf{d}_{n-1} \qquad \text{(the "in at most } n \text{ steps" part)}$$

- By premultiplying this expression by $\mathbf{d}_k^T A$ and using the conjugacy property, we obtain:

$$\sigma_k = \frac{\mathbf{d}_k^T A(\mathbf{x}^* - \mathbf{x}_0)}{\mathbf{d}_k^T A \mathbf{d}_k} \tag{2}$$

- If $\mathbf{x}_k$ is generated by conjugate direction algorithm, then we have

$$\mathbf{x}_k = \mathbf{x}_0 + \alpha_0 \mathbf{d}_0 + \alpha_1 \mathbf{d}_1 + \ldots + \alpha_k \mathbf{d}_{k-1}$$

- By premultiplying this expression by $\mathbf{d}_k^T A$ and using the conjugacy property, we have that

$$\mathbf{d}_k^T A(\mathbf{x}_k - \mathbf{x}_0) = 0$$

- and therefore

$$\mathbf{d}_k^T A(\mathbf{x}^* - \mathbf{x}_0) = \mathbf{d}_k^T A(\mathbf{x}^* - \mathbf{x}_k + \mathbf{x}_k - \mathbf{x}_0) = \mathbf{d}_k^T A(\mathbf{x}^* - \mathbf{x}_k) + \mathbf{d}_k^T A(\mathbf{x}_k - \mathbf{x}_0) =$$
$$= \mathbf{d}_k^T A(\mathbf{x}^* - \mathbf{x}_k) = \mathbf{d}_k^T (\mathbf{b} - A\mathbf{x}_k) = -\mathbf{d}_k^T \mathbf{r}_k.$$

- Using this result in (2) and comparing with (1) we conclude $\alpha_k = \sigma_k$. □

Interpretation of Conjugate Directions





If the matrix A is diagonal, the contours of the function $f(\cdot)$ are ellipses whose axes are aligned with the coordinate directions. In each iteration we compute one component of the optimal solution, this takes two steps in $\mathbb{R}^2$.

If A is not diagonal, its contours are elliptical, but they are usually not aligned with the coordinate directions. Finding the optimum may take more than n iterations. Transform the problem to make A diagonal and minimize along the coordinate directions.
Transformation matrix: $S = \left[\mathbf{d}_0, \mathbf{d}_1, \ldots, \mathbf{d}_{n-1}\right]$

Conjugate Gradient Method

- The **conjugate gradient method** is a **first order method** with the property: In generating its set of conjugate vectors, it can compute a new vector $\mathbf{d}_k$ by using only the previous vector $\mathbf{d}_{k-1}$. Hence, little storage and computation requirements.

$$\mathbf{d}_k = -\mathbf{r}_k + \beta_k \mathbf{d}_{k-1}$$

  where β_k is to be determined such that $\mathbf{d}_{k-1}$ and $\mathbf{d}_k$ are conjugate with respect to A. By premultiplying by $\mathbf{d}_{k-1}^T A$ and imposing that $\mathbf{d}_{k-1}^T A \mathbf{d}_k = 0$ we find that

$$\beta_k = \frac{\mathbf{r}_k^T A \mathbf{d}_{k-1}}{\mathbf{d}_{k-1}^T A \mathbf{d}_{k-1}}$$

- Larger values of β indicate that the previous descent direction contributes more strongly.
- $\mathbf{d}_0$ is commonly chosen to be the steepest descent direction at $\mathbf{x}_0$
- Advantage with respect to steepest descent: implicitly reuses previous information about the function and thus better convergence.

Algorithm CG

Basic version:

Input: $f, \mathbf{x}_0$
Output: x^*
Set $\mathbf{r}_0 \leftarrow A\mathbf{x}_0 - b, \mathbf{d}_0 \leftarrow \mathbf{r}_0, k \leftarrow 0$;
while $\mathbf{r}_k \neq \mathbf{0}$ **do**
$\alpha_k \leftarrow -\frac{\mathbf{d}_k^T \mathbf{r}(\mathbf{x}_k)}{\mathbf{d}_k^T A \mathbf{d}_k}$;
$\mathbf{x}_{k+1} \leftarrow \mathbf{x}_k + \alpha_k \mathbf{d}_k$;
$\mathbf{r}_{k+1} \leftarrow A\mathbf{x}_{k+1} - \mathbf{b}$;
$\beta_{k+1} \leftarrow \frac{\mathbf{r}_{k+1}^T A \mathbf{d}_k}{\mathbf{d}_k^T A \mathbf{d}_k}$;
$\mathbf{d}_{k+1} \leftarrow -\mathbf{r}_{k+1} + \beta_{k+1} \mathbf{d}_k$;
$k \leftarrow k + 1$;

Computationally improved version:

Input: $f, \mathbf{x}_0$
Output: x^*
Set $\mathbf{r}_0 \leftarrow A\mathbf{x}_0 - b, \mathbf{d}_0 \leftarrow \mathbf{r}_0, k \leftarrow 0$;
while $\mathbf{r}_k \neq \mathbf{0}$ **do**
$\alpha_k \leftarrow -\frac{\mathbf{r}(\mathbf{x}_k)^T \mathbf{r}(\mathbf{x}_k)}{\mathbf{d}_k^T A \mathbf{d}_k}$;
$\mathbf{x}_{k+1} \leftarrow \mathbf{x}_k + \alpha_k \mathbf{d}_k$;
$\mathbf{r}_{k+1} \leftarrow \mathbf{r}_k + \alpha_k A \mathbf{d}_k$;
$\beta_{k+1} \leftarrow \frac{\mathbf{r}_{k+1}^T \mathbf{r}_{k+1}}{\mathbf{r}_k^T \mathbf{r}_k}$;
$\mathbf{d}_{k+1} \leftarrow -\mathbf{r}_{k+1} + \beta_{k+1} \mathbf{d}_k$;
$k \leftarrow k + 1$;

- we never need to know the vectors $\mathbf{x}$, $\mathbf{r}$, and $\mathbf{d}$ for more than the last two iterations.
- major computational tasks: the matrix–vector product $A\mathbf{d}_k$, inner products $\mathbf{d}_k^T A \mathbf{d}_k$ and $\mathbf{r}_{k+1}^T \mathbf{r}_{k+1}$, and three vector sums

NonLinear Conjugate Gradient Methods

- The conjugate gradient method can be applied to nonquadratic functions as well.
- Smooth, continuous functions behave like quadratic functions close to a local minimum
- but! we do not know the value of A that best approximates f around $\mathbf{x}_k$. Instead, several choices for β_k tend to work well
- Two changes:
  - α_k is computed by solving an approximate line search
  - the residual $\mathbf{r}$, (it was simply the gradient of f), must be replaced by the gradient of the nonlinear objective f.

NonLinear Conjugate Gradient Methods

Fletcher-Reeves Method:

Input: $f, \mathbf{x}_0$
Output: x^*
Evaluate $f_0 = f(\mathbf{x}_0), \nabla f_0 = \nabla f(\mathbf{x}_0)$;
Set $\mathbf{d}_0 \leftarrow -\nabla f_0, k \leftarrow 0$;
while $\nabla f_k \neq 0$ **do**
  Compute α_k by line search and set
  $\mathbf{x}_{k+1} \leftarrow \mathbf{x}_k + \alpha_k \mathbf{d}_k$;
  Evaluate ∇f_{k+1};
  $\beta_{k+1}^{FR} \leftarrow \frac{\nabla f_{k+1}^T \nabla f_{k+1}}{\nabla f_k^T \nabla f_k}$;
  $\mathbf{d}_{k+1} \leftarrow -\nabla f_{k+1} + \beta_{k+1}^{FR} \mathbf{d}_k$;
  $k \leftarrow k + 1$;

Polak-Ribière:

Input: $f, \mathbf{x}_0$
Output: x^*
Evaluate $f_0 = f(\mathbf{x}_0), \nabla f_0 = \nabla f(\mathbf{x}_0)$;
Set $\mathbf{d}_0 \leftarrow -\nabla f_0, k \leftarrow 0$;
while $\nabla f_k \neq 0$ **do**
  Compute α_k by line search and set
  $\mathbf{x}_{k+1} \leftarrow \mathbf{x}_k + \alpha_k \mathbf{d}_k$;
  Evaluate ∇f_{k+1};
  $\beta_{k+1}^{PR} \leftarrow \frac{\nabla f_{k+1}^T (\nabla f_{k+1} - \nabla f_k)}{\nabla f_k^T \nabla f_k}$;
  $\mathbf{d}_{k+1} \leftarrow -\nabla f_{k+1} + \beta_{k+1}^{PR} \mathbf{d}_k$;
  $k \leftarrow k + 1$;

PR with:

$$\beta_{k+1}^{+} = \max\{\beta_{k+1}^{PR}, 0\}$$

becomes PR$^+$ and guaranteed to converge (satisfies first Wolfe conditions).

The conjugate gradient method with the Polak-Ribière update. Gradient descent is shown in gray.

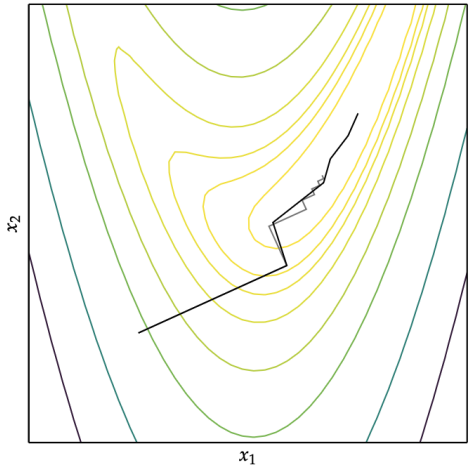

Outline

10. Gradient Descent

11. Conjugate Descent

12. Accelerated Descents

Accelerated Descents

- Addresses common convergence issues
- Some functions have regions with very small gradients (flat surface) where gradient descent gets stuck

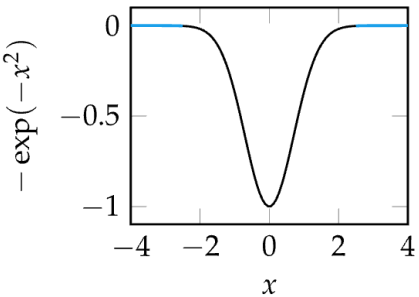

Momentum

Rosenbrock function with $b = 100$

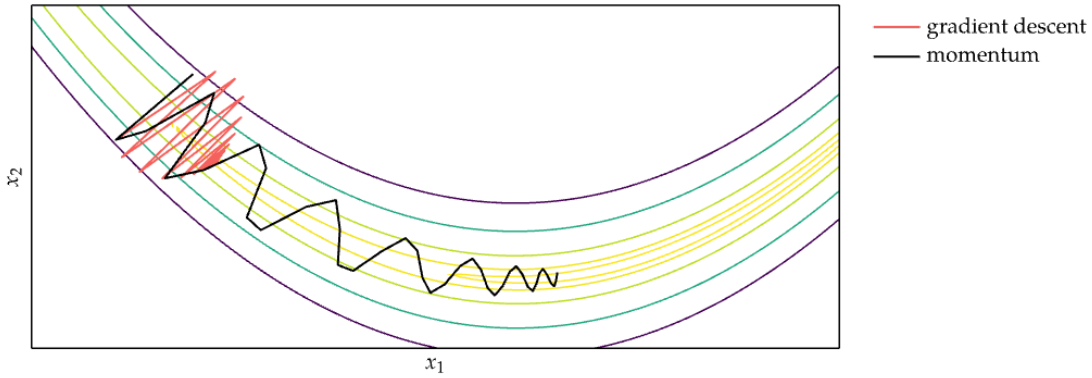

Momentum overcomes these issues by replicating the effect of physical momentum

Momentum

Momentum update equations:

$$\mathbf{v}_{k+1} = \beta \mathbf{v}_k - \alpha \nabla f(\mathbf{x}_k)$$
$$\mathbf{x}_{k+1} = \mathbf{x}_k + \mathbf{v}_{k+1}$$

```
import numpy as np

class Momentum(DescentMethod):
  alpha: float # learning rate
  beta: float # momentum decay
  v: np.array # momentum

  def __init__(self, alpha, beta, f, grad, x):
    self.alpha = alpha
    self.beta = beta
    self.v = np.zeros_like(x)

  def step(self, grad, x):
    self.v = self.beta * self.v - self.alpha * grad(x↪
        ↪)
    return x + self.v
```

Nesterov Momentum Gradient (NAG)

Issue of momentum: steps do not slow down enough at the bottom of a valley, overshoot.

Nesterov Momentum update equations:

$$\mathbf{v}_{k+1} = \beta \mathbf{v}_k - \alpha \nabla f(\mathbf{x}_k + \beta \mathbf{v}_k)$$
$$\mathbf{x}_{k+1} = \mathbf{x}_k + \mathbf{v}_{k+1}$$

it calculates the gradient at a "look-ahead" position

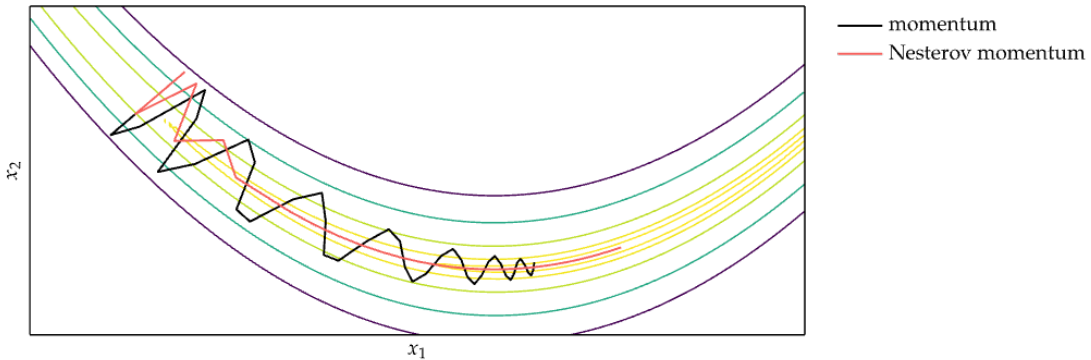

Adagrad

- Instead of using the same learning rate for all components of $\mathbf{x}$, **Adaptive Subgradient method** (Adagrad) adapts the learning rate for each component of $\mathbf{x}$. For each component of $\mathbf{x}$, the update equation is

$$x_{i,k+1} = x_{i,k} - \frac{\alpha}{\epsilon + \sqrt{s_{i,k}}} \nabla f_i(\mathbf{x}_k)$$

where

$$s_{i,k} = \sum_{j=1}^{k} (\nabla f_i(\mathbf{x}_j))^2$$

$$\epsilon \approx 1 \times 10^{-8}, \alpha = 0.01$$

- components of $\mathbf{s}$ are strictly nondecreasing, hence learning rate decreases over time

RMSProp

- Extends Adagrad to avoid monotonically decreasing learning rate by maintaining a decaying average of squared gradients

$$\hat{s}_{k+1} = \gamma \hat{s}_k + (1-\gamma)\left(\nabla f(\mathbf{x}_k) \odot \nabla f(\mathbf{x}_k)\right), \qquad \gamma \in [0,1], \qquad \odot \text{ element-wise product}$$

(accumulated squared gradients) and using it in the Update Equation

$$\begin{aligned} x_{i,k+1} &= x_{i,k} - \frac{\alpha}{\epsilon + \sqrt{\hat{s}_{i,k}}} \nabla f_i(\mathbf{x}_k) \\ &\approx x_{i,k} - \frac{\alpha}{\epsilon + RMS(\nabla f_i(\mathbf{x}_k))} \nabla f_i(\mathbf{x}_k) \end{aligned}$$

root mean square: For n values $\{x_1, x_2, \ldots, x_n\}$

$$x_{\text{RMS}} = \sqrt{\frac{1}{n}\left({x_1}^2 + {x_2}^2 + \cdots + {x_n}^2\right)}.$$

AdaDelta

Also extends Adagrad to avoid monotonically decreasing learning rate
Modifies RMSProp to eliminate learning rate parameter entirely

$$x_{i,k+1} = x_{i,k} - \frac{RMS(\Delta x_i)}{\epsilon + RMS(\nabla f_i(\mathbf{x}))} \nabla f_i(\mathbf{x}_k)$$

Δx_i sum of squared updates
$\nabla f_i(\mathbf{x})$ sum of squared gradients

Adam

- The **adaptive moment estimation method** (Adam), adapts the learning rate to each parameter.
- stores both an exponentially decaying gradient like momentum and an exponentially decaying squared gradient like RMSProp and Adadelta
- At each iteration, a sequence of values are computed

Biased decaying momentum	$\mathbf{v}_{k+1} = \beta \mathbf{v}_k - \alpha \nabla f(\mathbf{x}_k)$
Biased decaying squared gradient	$\mathbf{s}_{k+1} = \gamma \mathbf{s}_k + (1-\gamma)\left(\nabla f(\mathbf{x}_k) \odot \nabla f(\mathbf{x}_k)\right)$
Corrected decaying momentum	$\hat{\mathbf{v}}_{k+1} = \mathbf{v}_{k+1} / (1-\gamma_{v,k})$
Corrected decaying squared gradient	$\hat{\mathbf{s}}_{k+1} = \mathbf{s}_{k+1} / (1-\gamma_{s,k})$
Next iterate	$\mathbf{x}_{k+1} = \mathbf{x}_k + \dfrac{\alpha}{(\epsilon + \sqrt{\hat{\mathbf{s}}_{k+1}})} \hat{\mathbf{v}}_{k+1}$

- Defaults: $\alpha = 0.001, \gamma_v = 0.9, \gamma_s = 0.999, \epsilon = 1 \times 10^{-8}$

Adamax

Same as Adam, but based on the max-norm L_∞.

$$\begin{aligned}\mathbf{s}_{k+1} &= \gamma^\infty \mathbf{s}_k + (1-\gamma^\infty)\left(\|\nabla f(\mathbf{x}_k)\|_\infty\right) \\ &= \max\left(\gamma \mathbf{s}_k, \|\nabla f(\mathbf{x}_k)\|_\infty\right)\end{aligned}$$

Nadam

Nadam

- Nesterov-accelerated Adaptive Moment Estimation
- Adam is basically RMSProp with momentum
- We have seen that Nesterov is often more efficient
- Welcome to Nadam: Adam which uses the Nesterov momentum.

Hypergradient Descent

- Learning rate determines how sensitive the method is to the gradient signal.
- Many accelerated descent methods are highly sensitive to hyperparameters such as learning rate.
- Applying gradient descent to a hyperparameter of an underlying descent method is called hypergradient descent
- Requires computing the partial derivative of the objective function with respect to the hyperparameter

Hypergradient Descent

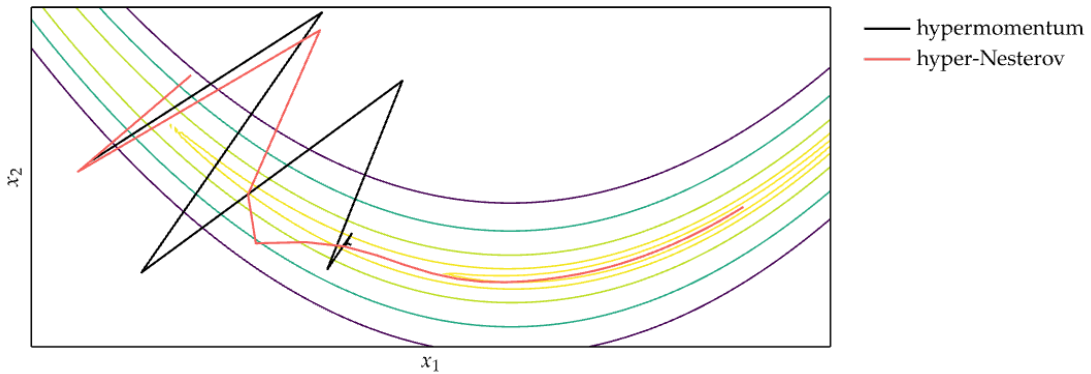

Summary

- Gradient descent follows the direction of steepest descent.
- The conjugate gradient method can automatically adjust to local valleys.
- Descent methods with momentum build up progress in favorable directions.
- A wide variety of accelerated descent methods use special techniques to speed up descent.
- Hypergradient descent applies gradient descent to the learning rate of an underlying descent method.

6. Second-Order Methods

Descent Direction Methods

How to select the descent direction?

- first-order methods that rely on gradient
- second-order methods that rely on Hessian information

Advantages of second order methods in descent algorithms:

- way of accelerating the iteration [Davidon mid 1950s]
- additional information that can help improve the local model for informing the selection of
  - directions and
  - step lengths

Second-Order Methods

- Locally approximate function as quadratic
- Comparison of first-order and second order approximations

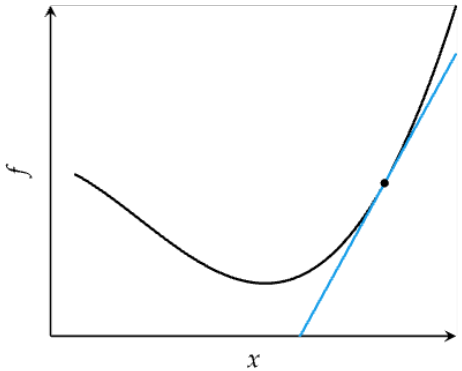

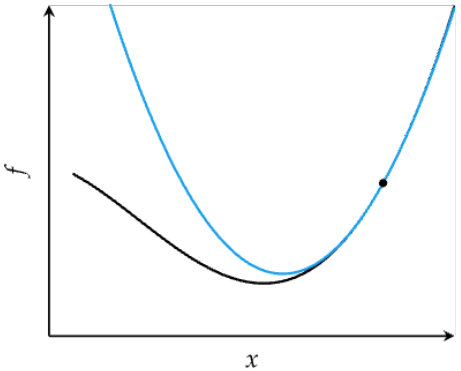

Outline

13. Newton Method

14. Secant Method

15. Quasi-Newton Method

Newton's Method – Univariate

- Approximate a function using second-order Taylor series expansion
- analytically obtain the location where a quadratic approximation has a zero gradient.
- use that location as the next iteration to approach a local minimum.
- Univariate function

$$q(x) = f(x_k) + (x - x_k)f'(x_k) + \frac{(x - x_k)^2}{2}f''(x_k)$$

$$\frac{\mathrm{d}q(x)}{\mathrm{d}x} = f'(x_k) + (x - x_k)f''(x_k) = 0$$

$$x_{k+1} = x_k - \frac{f'(x_k)}{f''(x_k)}$$

$\equiv$ finding roots of derivative function

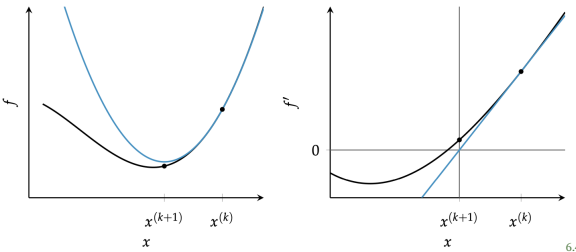

Newton's Method - Multivariate

- Multivariate function

$$f(\mathbf{x}) \approx q(\mathbf{x}) = f(\mathbf{x}_k) + \nabla f(\mathbf{x}_k)^T(\mathbf{x} - \mathbf{x}_k) + \frac{1}{2}(\mathbf{x} - \mathbf{x}_k)^T H_k(\mathbf{x} - \mathbf{x}_k)$$

- H is the Hessian matrix
- Evaluate the gradient and set it to zero:

$$\nabla \mathbf{q}(x) = \nabla f(\mathbf{x}_k) + H(\mathbf{x}_k)(\mathbf{x} - \mathbf{x}_k) = 0$$

- Multivariate update rule

$$\boxed{\mathbf{x}_{k+1} = \mathbf{x}_k - H_k^{-1} \nabla f(\mathbf{x}_k)}$$

- (If f is quadratic and its Hessian is positive definite, then the update converges to the global minimum in one step.)

Algorithm

Input: $\nabla f, H, \mathbf{x}_0, \epsilon, k_{max}$
Output: $\mathbf{x}^*$
Set $k = 0, \Delta = 1, \mathbf{x} = \mathbf{x}_0$;
while $\|\Delta\| > \epsilon$ and $k \leq k_{max}$ **do**
    $\Delta = H(\mathbf{x})^{-1}\nabla f(\mathbf{x})$;
    $\mathbf{x} = \mathbf{x} - \Delta$;
    $k = k + 1$;

It can be modified to only give a descent direction $\mathbf{d} = -H(\mathbf{x})^{-1}\nabla f(\mathbf{x})$ and leave the step size to be determined with line search.

Newton's method – Example

Minimize **Booth's function**:

$$f(x) = (x_1 + 2x_2 - 7)^2 + (2x_1 + x_2 - 5)^2$$

- $\mathbf{x}_0 = [9, 8]$
- The gradient of Booth's function is:

$$\nabla f(x) = [10x_1 + 8x_2 - 34, 8x_1 + 10x_2 - 38]$$

- The Hessian of Booth's function is:

$$H(x) = \begin{bmatrix} 10 & 8 \\ 8 & 10 \end{bmatrix}$$

- The first iteration of Newton's method yields:

$$\begin{aligned}\mathbf{x}_1 &= \mathbf{x}_0 - H(\mathbf{x}_0)^{-1}\nabla f(\mathbf{x}_0) \\ &= \begin{bmatrix}9\\8\end{bmatrix} - \begin{bmatrix}10 & 8\\8 & 10\end{bmatrix}^{-1} \cdot \begin{bmatrix}10\cdot 9 + 8\cdot 8 - 34\\8\cdot 9 + 10\cdot 8 - 38\end{bmatrix} = \begin{bmatrix}9\\8\end{bmatrix} - \begin{bmatrix}10 & 8\\8 & 10\end{bmatrix}^{-1} \cdot \begin{bmatrix}120\\114\end{bmatrix} = \begin{bmatrix}1\\3\end{bmatrix}\end{aligned}$$

- Second iteration: The gradient at $\mathbf{x}_1$ is zero, so we have converged after a single iteration. The Hessian is positive definite everywhere, so $\mathbf{x}_1$ is the global minimum.

Newton's Method

Common causes of error in Newton's method

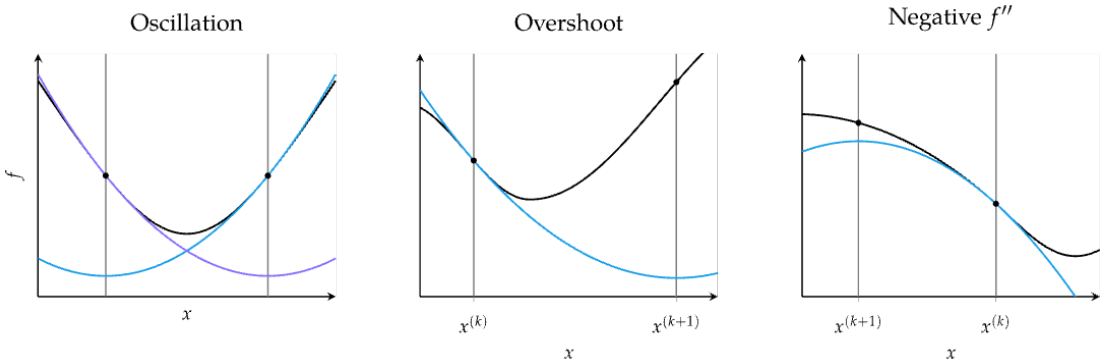

Strong Convexity

Recall that for a symmetric matrix A, $A \succeq 0$ means that A is positive semidefinite, i.e.

$$\mathbf{x}^\top A\mathbf{x} \geq 0 \quad \forall \mathbf{x} \in \mathbb{R}^n.$$

Hence, for a Q symmetric matrix, and I the identity matrix, the condition

$$Q \succeq cI \qquad \text{means:} \qquad Q - cI \succeq 0.$$

In scalar form:

$$\mathbf{x}^T(Q - cI)\mathbf{x} = \mathbf{x}^T Q\mathbf{x} - c\|\mathbf{x}\|^2 \geq 0.$$

$$\mathbf{x}^\top Q\mathbf{x} \geq c\|\mathbf{x}\|^2.$$

this was explained wrongly in class and it has been corrected here

Strong Convexity

- Intuition: the second order derivative is positive, ie, $f''(x) \geq c > 0$.
- For high dimension: the Hessian matrix is positive definite.

Definition (Strongly Convex Function (Lower Curvature Bound))

The function $f : \mathbb{R}^d \to \mathbb{R}$ twice-differentiable function (ie, $f \in C^2(\mathbb{R}^n)$) is **c-strongly convex** if there exists a constant $c > 0$ such that for all $\mathbf{x}$ and $\mathbf{y}$ in $\mathbb{R}^d$:

$$f(\mathbf{y}) \geq f(\mathbf{x}) + \nabla f(\mathbf{x})^\top (\mathbf{y} - \mathbf{x}) + \frac{c}{2}\|\mathbf{y} - \mathbf{x}\|^2.$$

or, equivalently, if there exists $c > 0$:

$$\nabla^2 f(\mathbf{x}) \succeq cI \qquad \text{for all } \mathbf{x} \in \mathbb{R}^d$$

When $c = 0$, we recover the basic inequality characterizing convexity; for $c > 0$ we obtain a better lower bound on $f(\mathbf{x})$ than follows from convexity alone.

Convex $\to$ no flat "bending downward"; Strongly convex $\to$ strictly curved upward everywhere

Strong Convexity

Implications:

- Uniqueness of Minimizer:
  f has **exactly one** minimizer, denoted as $\mathbf{x}^* \in \mathbb{R}^d$ with $f^* \stackrel{def}{=} f(\mathbf{x}^*)$.

- $f(x) - f^* \leq \frac{1}{2c}\|\nabla f(x)\|^2$ (strong inequality with $\mathbf{y} = \mathbf{x}^*$ and $\nabla f(\mathbf{y}) = 0$)
  quadratic growth: function grows at least like a quadratic bowl centered at $\mathbf{x}^*$

Strong Convexity

Interpretation

- Compared to ordinary convexity:

$$f(\mathbf{y}) \geq f(\mathbf{x}) + \nabla f(\mathbf{x})^\top (\mathbf{y} - \mathbf{x}),$$

  strong convexity adds a quadratic curvature term.
  It enforces that the function grows at least quadratically away from any point.
  Equivalently:

$$f(\mathbf{x}) - \frac{c}{2}\|\mathbf{x}\|^2 \text{ is convex.}$$

- Monotonicity of Gradient
  Strong convexity is equivalent to strong monotonicity of the gradient:

$$(\nabla f(\mathbf{x}) - \nabla f(\mathbf{y}))^\top (\mathbf{x} - \mathbf{y}) \geq c\|\mathbf{x} - \mathbf{y}\|^2 \quad \forall \mathbf{x}, \mathbf{y}.$$

  This is extremely important in convergence proofs.

Strong Convexity

Eigenvalue Interpretation:

Because Q is symmetric, it has an orthonormal eigenbasis.
Let its eigenvalues be $\lambda_1, \ldots, \lambda_n$.
Then:

$$Q \succeq cI \iff \lambda_i \geq c \quad \forall i.$$

In other words:

$$\lambda_{\min}(Q) \geq c.$$

So the smallest curvature direction of Q is at least c.

If

$$Q = \begin{bmatrix} 1 & 0 \\ 0 & 100 \end{bmatrix},$$

then eigenvalues are 1 and 100. So:
So:

- $Q \succeq I$
- $Q \not\succeq 2I$ (since $1 < 2$)

The smallest curvature direction determines the strong convexity constant.

Strong Convexity

Geometric Meaning:

Consider the quadratic function

$$f(\mathbf{x}) = \frac{1}{2}\mathbf{x}^\top Q\mathbf{x}.$$

Its curvature in direction $\mathbf{v}$ is $\mathbf{v}^\top Q\mathbf{v}$.
The condition $Q \succeq cI$ means:

$$\mathbf{v}^\top Q\mathbf{v} \geq c\|\mathbf{v}\|^2 \quad \forall \mathbf{v}.$$

So:
The function curves upward at least as much as a bowl with curvature c in every direction.

Smoothness Constant

- Definition in Optimization. It is NOT the smoothness in Mathematics (C^∞)
- Lipschitzness controls the changes in function value, while smoothness controls the changes in gradients.

Definition (Lipschitz Gradient (Upper Curvature Bound))

We say $f(\mathbf{x})$ is L-**smooth** when

$$f(\mathbf{y}) \leq f(\mathbf{x}) + \nabla f(\mathbf{x})^\top (\mathbf{y} - \mathbf{x}) + \frac{L}{2}\|\mathbf{y} - \mathbf{x}\|^2, \quad L > 0$$

Some alternative definitions

1. $L\|x - x_0\|_2^2/2 - f(x)$ is convex (upper bounded by a quadratic function)
2. $-LI \preceq \nabla^2 f(x) \preceq LI$ (f has Lipschitz Hessian)
3. $\langle \nabla f(\mathbf{y}) - \nabla f(\mathbf{x}), \mathbf{y} - \mathbf{x} \rangle \leq L\|\mathbf{y} - \mathbf{x}\|^2$ (weaker when not require convexity)

Lipschitz Gradient

Definition (Lipschitz Gradient (Upper Curvature Bound))

f has an L-Lipschitz gradient if

$$\|\nabla f(\mathbf{x}) - \nabla f(\mathbf{y})\| \leq L\|\mathbf{x} - \mathbf{y}\|.$$

Equivalent (if $f \in C^2(\mathbb{R}^n)$):

$$\nabla^2 f(\mathbf{x}) \preceq LI \qquad \text{for all } \mathbf{x} \in \mathbb{R}^n$$

This gives a uniform upper bound on curvature.

Illustration of Strong Convexity and Smoothness

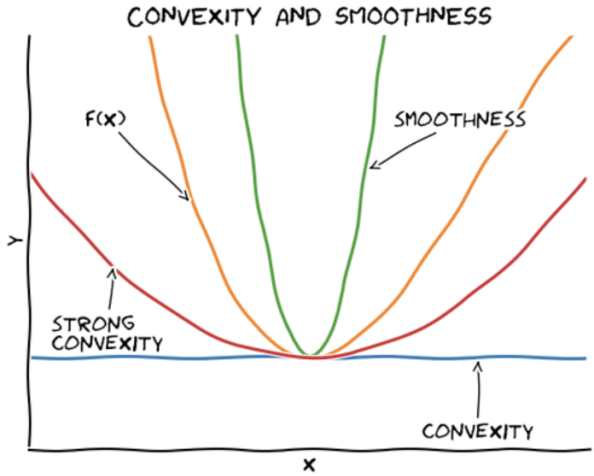

[illustration by Zhanyu Wang, 2021]

Combined Condition:
If both hold:

$$cI \preceq \nabla^2 f(\mathbf{x}) \preceq LI \qquad \text{for all } \mathbf{x} \in \mathbb{R}^n$$

then all eigenvalues of the Hessian satisfy:

$$c \leq \lambda_i(\nabla^2 f(\mathbf{x})) \leq L.$$

So:
Strong convexity $\rightarrow$ prevents flatness
Lipschitz gradient $\rightarrow$ prevents excessive curvature

Stable Step Size

We can derive the stable step size for gradient descent for quadratic problems.
Consider the quadratic problem

$$f(\mathbf{x}) = \frac{1}{2}\mathbf{x}^\top Q\mathbf{x} - \mathbf{b}^\top \mathbf{x}, \qquad \text{where } Q = Q^\top \succ 0.$$

The gradient is $\nabla f(x) = Qx - \mathbf{b}$ and gradient descent with step size α:

$$\mathbf{x}_{k+1} = \mathbf{x}_k - \alpha(Q\mathbf{x}_k - \mathbf{b}).$$

We can derive that the step size that stabilizes the iteration is

$$0 < \alpha < \frac{2}{\lambda_{\max}(Q)}$$

The largest eigenvalue corresponds to the direction with the largest curvature: $L = \lambda_{\max}(Q)$. Thus:

$$0 < \alpha < \frac{2}{L}.$$

If the step size is too large relative to that curvature, the method overshoots and oscillates.

Convergence rate of gradient descent for quadratic problems:

$$\|x_k - x_*\| \leq \left(\frac{\kappa - 1}{\kappa + 1}\right)^k \|x_0 - x_*\|$$

where

$$\kappa = \frac{\lambda_{\max}(Q)}{\lambda_{\min}(Q)} = \frac{L}{c}$$

is the optimization condition number of Q.

Stable Step Size - Line Search

- If relevant parameters describing the regularity and curvature of the objective function (Lipschitz constant, smoothness constant, strong convexity parameter) are known they can be used to tune the algorithm's own parameters.

- These parameters are often unknown and difficult to estimate, and Line search is a powerful technique heavily used in practice.

Newton's Method - Multivariate

Theorem

If f is a strongly convex function with Lipschitz Hessian (aka, has $\nabla^2 f(\mathbf{x})$ that is Lipschitz continuous), then provided that x_0 is close enough to $x_* = \arg\min f(x)$, the sequence $x_0, x_1, x_2, \ldots$ generated by Newton's method will converge to the (necessarily unique) minimizer x_* of f quadratically fast. That is,

$$\|x_{k+1} - x_*\| \leq \frac{1}{2}\|x_k - x_*\|^2, \qquad \forall k \geq 0.$$

Lipschitz Hessian is a third order information on the variation of curvature.
Strong convexity says: The bowl never flattens. Lipschitz Hessian says: The bowl shape cannot change too abruptly.

Convergence of Newton's Method

Theorem (Convergence of Netwons Method)

Suppose that f is twice differentiable and that the Hessian $\nabla^2 f(\mathbf{x})$ is Lipschitz continuous with constant L in a neighborhood of a strict local minimizer $\mathbf{x}^*$. Consider the iteration $\mathbf{x}_{k+1} = \mathbf{x}_k + \mathbf{p}_k$, where $\mathbf{p}_k = -\nabla^2(\mathbf{x}_k)^{-1}\nabla f(\mathbf{x}_k)$. Then:

1. *if the starting point $\mathbf{x}_0$ is sufficiently close to $\mathbf{x}^*$, the sequence of iterates converges to $\mathbf{x}^*$;*
2. *the rate of convergence of $\{\mathbf{x}_k\}$ is quadratic; and*
3. *the sequence of gradient norms $\{\|\nabla f_k\|\}$ converges quadratically to zero.*

Quadratic convergence means that, when the difference is small, the difference between the minimum and the iterate is approximately squared with every iteration.

Newton's Method

Equivalently, from the text book:

- A quadratic rate of convergence holds for Newton's method starting from x_0 within an interval $I = [x^* - \delta, x^* + \delta]$, for a root x^*, if

  1. $f''(x) \neq 0$ for all points in I,
  2. $f'''(x)$ is continuous on I, and
  3. $\frac{1}{2}\left|\frac{f'''(x_0)}{f''(x_0)}\right| < L\left|\frac{f'''(x^*)}{f''(x^*)}\right|$ for some $L < \infty$
     sufficient closeness condition, ensuring that the function is sufficiently approximated by the Taylor expansion and no overshoot.

- Note that the Hessian matrix $\nabla^2 f(\mathbf{x}_k)$ may not always be positive definite, and the Netwon step: $\mathbf{d}_k = -\nabla^2(\mathbf{x}_k)^{-1}\nabla f(\mathbf{x}_k)$ not always be a descent direction. (There are approaches for obtaining a globally convergent iteration based on the Newton step: a line search approach, in which the Hessian $\nabla^2 f(\mathbf{x}_k)$ is modified, if necessary, to make it positive definite)

Outline

13. Newton Method

14. Secant Method

15. Quasi-Newton Method

Secant Method – Univariate

- For univariate functions, if the second derivative is unknown, it can be approximated using the secant method

$$f''(x_k) \approx \frac{f'(x_k) - f'(x_{k-1})}{x_k - x_{k-1}}$$

- Update equation

$$x_{k+1} = x_k - \frac{x_k - x_{k-1}}{f'(x_k) - f'(x_{k-1})} f'(x_k)$$

- It requires an additional initial design point and suffers from the same problems as Newton's method and may take more iterations to converge due to approximating the second derivative.

Outline

13. Newton Method

14. Secant Method

15. Quasi-Newton Method

Quasi-Netwon Methods – Multivariate

- Automatic differentiation tools may not be applicable in many situations, and it may be much more costly to work with second derivatives in automatic differentiation software than with the gradient.
- Quasi-Newton methods, like steepest descent, require only the gradient of the objective function to be supplied at each iterate.
- By measuring the changes in gradients, they construct a model of the objective function that is good enough to produce superlinear convergence.
- The improvement over steepest descent is dramatic, especially on difficult problems.

Quasi-Netwon Methods – Multivariate

Use an approximation $Q_k \approx H^{-1}(\mathbf{x}_k)$

Input: $\mathbf{x}_0$, convergence tolerance $\epsilon > 0$, Q_0 (typically the $n \times n$ identity matrix)
Output: x^*
Set $k \leftarrow 0$;
while $\|\nabla f(\mathbf{x}_k)\| > \epsilon$ **do**
  Compute search direction $\mathbf{d}(x_k) = -Q_k \nabla f(\mathbf{x}_k)$;
  Set $\mathbf{x}_{k+1} = \mathbf{x}_k + \alpha_k \mathbf{d}(\mathbf{x}_k)$ where α_k is computed from a line search procedure to satisfy the Wolfe conditions;
  Define $\boldsymbol{\delta}_{k+1} \stackrel{def}{=} \mathbf{x}_{k+1} - \mathbf{x}_k$ and $\boldsymbol{\gamma}_{k+1} \stackrel{def}{=} \nabla f(\mathbf{x}_{k+1}) - \nabla f(\mathbf{x}_k)$;
  Compute Q_{k+1};
  $k \leftarrow k + 1$;

- Davidon-Fletcher-Powell (DFP) method
- Broyden-Fletcher-Goldfarb-Shanno (BFGS) method
- Limited-memory BFGS (L-BFGS) method

Davidon-Fletcher-Powell (DFP) method

$$Q_{k+1} = Q_k - \frac{Q_k \gamma_k \gamma_k^T Q_k}{\gamma_k^T Q_k \gamma_k} + \frac{\delta_k \delta_k^T}{\delta_k^T \gamma_k}$$

where all terms on the right hand side are evaluated at the same iteration k.

The update for Q in the DFP method has three properties:

- Q remains symmetric and positive definite.
- If $f(x) = \frac{1}{2}\mathbf{x}^T A\mathbf{x} + \mathbf{b}^T\mathbf{x} + c$, then $Q = A^{-1}$. Thus the DFP has the same convergence properties as the conjugate gradient method.
- For high-dimensional problems, storing and updating Q can be significant compared to other methods like the conjugate gradient method.

Broyden-Fletcher-Goldfarb-Shanno (BFGS) method

$$Q_{k+1} = Q_k - \left(\frac{\delta_k \gamma_k^T Q_k + Q_k \gamma_k \delta_k^T}{\delta_k^T \gamma_k} \right) + \left(1 + \frac{\gamma_k^T Q_k \gamma_k}{\delta_k^T \gamma_k} \right) \frac{\delta_k \delta_k^T}{\delta_k^T \gamma_k}$$

BFGS better than DFP with approximate line search but still uses an $n \times n$ dense matrix.

Theorem: Suppose that f is twice continuously differentiable and that the iterates generated by the BFGS algorithm converge to a minimizer $\mathbf{x}^*$ at which the Hessian matrix G is Lipschitz continuous Suppose also that the sequence $\|\mathbf{x}_k - \mathbf{x}^*\|$ converges to zero rapidly enough that $\sum_{k=1}^{\infty} \|\mathbf{x}_k - \mathbf{x}^*\| < \infty$. Then $\mathbf{x}_k$ converges to $\mathbf{x}^*$ at a superlinear rate (ie, faster than linear).

Limited-memory BFGS (L-BFGS) method

For **large-scale unconstrained optimization**
It stores the last m values for δ and γ rather than the full inverse Hessian ($i = 1$ oldest, $i = m$ last).
Compute $\mathbf{d}$ at $\mathbf{x}$ as $\mathbf{d} = -\mathbf{z}_m$ using:

$$\mathbf{q}_m = \nabla f(\mathbf{x}_k) \qquad \mathbf{q}_i = \mathbf{q}_{i+1} - \frac{\delta_{i+1}^T \mathbf{q}_{i+1}}{\gamma_{i+1}^T \delta_{i+1}} \gamma_{i+1}, \quad i = m-1, \ldots, 1$$

$$\mathbf{z}_0 = \frac{\delta_m \odot \delta_m \odot \mathbf{q}_m}{\gamma_m^T \gamma_m} \qquad \mathbf{z}_i = \mathbf{z}_{i-1} + \delta_{i-1} \left(\frac{\delta_{i-1}^T \mathbf{q}_{i-1}}{\gamma_{i-1}^T \delta_{i-1}} - \frac{\gamma_{i-1}^T \mathbf{z}_{i-1}}{\gamma_{i-1}^T \gamma_{i-1}} \right), \quad i = 1, \ldots, m$$

For minimization, the inverse Hessian Q must remain positive definite.
The initial Hessian is often set to the diagonal of

$$Q_0 = \frac{\gamma_0 \delta_0^T}{\gamma_0^T \gamma_0}$$

Computing the diagonal for the above expression and substituting the result into $\mathbf{z}_0 = Q_0 \mathbf{q}_0$ results in the equation for $\mathbf{z}_0$.

L-BFGS

(L-BFGS two-loop recursion)

Input:
Output: $Q_k \nabla f_k = \mathbf{z}$
Set $\mathbf{q} \leftarrow \nabla f_k$;
for $i = k-1, k-2, \ldots, k-m$ **do**
  $\alpha_i \leftarrow \frac{\delta_i^T \mathbf{q}}{\gamma_i \cdot \delta_i^T}$;
  $\mathbf{q} \leftarrow \mathbf{q} - \alpha_i \cdot \gamma_i$;
$\mathbf{z} \leftarrow Q_0 \mathbf{q}$;
for $i = k-m, k-m+1, \ldots, k-1$ **do**
  $\beta \leftarrow \frac{\gamma_i^T \cdot \mathbf{r}}{\gamma_i \cdot \delta_i^T}$;
  $\mathbf{z} \leftarrow \mathbf{z} + \delta_i(\mathbf{z}_i - \beta)$;

Input:
Output: x^*
Choose starting point $\mathbf{x}_0$, integer $m > 0$;
$k \leftarrow 0$;
while not convergence **do**
  Set Q_0;
  Compute $\mathbf{d}_k \leftarrow -Q_k \nabla f_k$ from Algorithm on the left;
  Compute $\mathbf{x}_{k+1} \leftarrow \mathbf{x}_k + \alpha_k \mathbf{d}_k$, where α_k is chosen to satisfy the Wolfe conditions;
  if $k > m$ **then**
    Discard the vector pair $\{\boldsymbol{\delta}_{k-m}, \gamma_{k-m}\}$ from storage;
  Compute and save $\boldsymbol{\delta}_k = \mathbf{x}_{k+1} - \mathbf{x}_k$, $\gamma_k = \nabla f_{k+1} - \nabla f_k$;
  $k \leftarrow k+1$;

BFGS Methods - Comparison

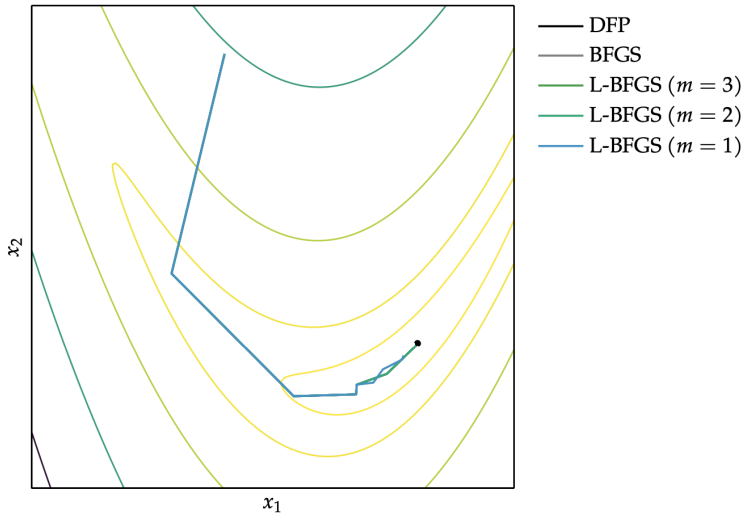

Summary

- Incorporating second-order information in descent methods often speeds convergence.
- Newton's method is a root-finding method that leverages second-order information to quickly descend to a local minimum.
- The secant method and quasi-Newton methods approximate Newton's method when the second-order information is not directly available.
- In Python, methods implemented in the module scipy
  `https://docs.scipy.org/doc/scipy/tutorial/optimize.html`

7. Direct Methods

Outline

16. Black-Box Optimization

17. Nelder-Mead Method

18. DIRECT

Black-Box Model

$$\begin{aligned} \min \quad & f(\mathbf{x}) \\ \text{subject to} \quad & \mathbf{x} \in \mathcal{X} \end{aligned}$$

In the black-box model we assume that we have unlimited computational resources, the set of constraint $\mathcal{X}$ is known, and the objective function $f : \mathcal{X} \to \mathbb{R}$ is unknown but can be accessed through queries to **oracles**:

- A zeroth order oracle takes as input a point $\mathbf{x} \in \mathcal{X}$ and outputs the value of f at x.
- A first order oracle takes as input a point $\mathbf{x} \in \mathcal{X}$ and outputs a subgradient of f at x.

In the situation where also the set of constraint $\mathcal{X}$ is unknown, it can only be accessed through a **separation oracle**: given $\mathbf{x} \in \mathbb{R}^n$, it outputs either that $\mathbf{x}$ is in $\mathcal{X}$, or if $\mathbf{x} \notin \mathcal{X}$. Then it may output a separating hyperplane between $\mathbf{x}$ and $\mathcal{X}$.

Subgradient and Generalized Gradient

The subgradient generalizes the notion of gradient to nondifferentiable continuous, functions.

Definition (Subgradient)

We say a vector $g \in \mathbb{R}^n$ is a subgradient of $f : \mathbb{R}^n \to \mathbb{R}$ at $\mathbf{x} \in \operatorname{dom} f$ if for all $z \in \operatorname{dom} f$,

$$f(\mathbf{z}) \geq f(\mathbf{x}) + \mathbf{g}^\top(\mathbf{z} - \mathbf{x}).$$

Equivalently, g is a subgradient of f at x if $f(x) + g^T(z - x)$ is an hyperplane that supports $\operatorname{epi} f$ at $(x, f(x))$.

- If f is convex and differentiable, then its gradient at $\mathbf{x}$ is a subgradient of f at $\mathbf{x}$.
- There can be more than one subgradient of a function f at a point $\mathbf{x}$.
- (We will not use subgradients in this course)

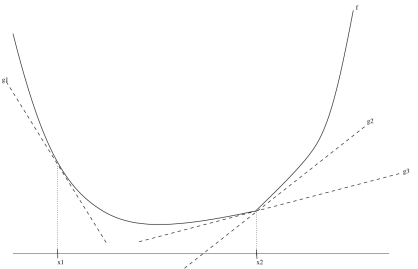

Derivative-Free Methods

- Also called **direct search methods**, zeroth order black box, or pattern search
- Direct method search using function evaluations only

Cyclic Coordinate Search

- Also known as coordinate descent, or taxicab search
- Performs line search in alternating coordinate directions

$$x_{1,1} = \operatorname{argmin}_{x_1} f(x_1, x_{2,0}, x_{3,0}, \ldots, x_{n,0})$$

$$x_{2,1} = \operatorname{argmin}_{x_2} f(x_{1,1}, x_2, x_{3,1}, \ldots, x_{n,1})$$

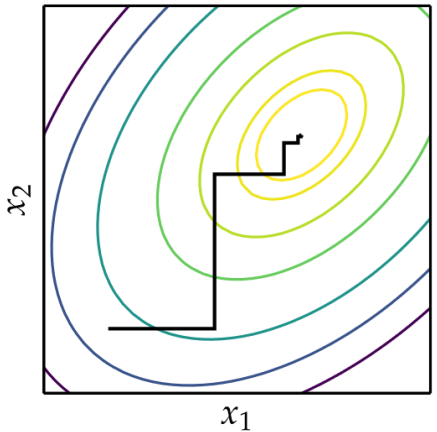

Cyclic Coordinate Search

- Can be augmented to accelerate convergence
- For every full cycle starting with optimizing $\mathbf{x}_1$ along $[1, 0, \ldots, 0]$ and ending with $\mathbf{x}_{n+1}$ after optimizing along $[0, 0, \ldots, 1]$, an additional line search is conducted along the direction $\mathbf{x}_{n+1} - \mathbf{x}_1$.

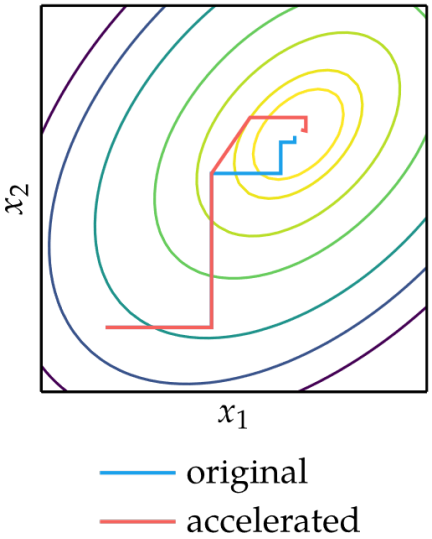

Powell's Method

- Similar to Cyclic Coordinate Search, but can search in non-orthogonal directions
- Drops the oldest search direction in favor of the overall direction of progress
- It can lead the search directions to become linearly dependent and the search directions can no longer cover the full design space, and the method may not be able to find the minimum

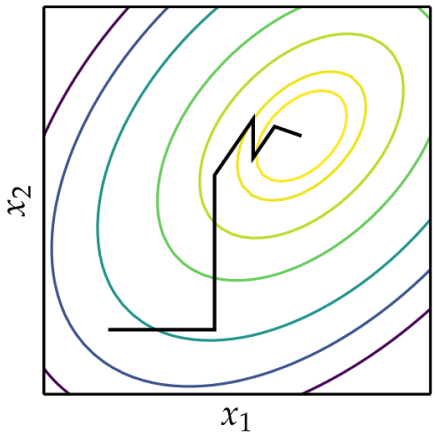

Powell's Method

Input: $f, \mathbf{x}_0$
Output: $\mathbf{x}^*$
search directions $\mathbf{u}_1 = \mathbf{e}_1, \ldots, \mathbf{u}_n = \mathbf{e}_i$;
while not converged **do**
  for i in $\{1, \ldots, n\}$ **do**
    $\mathbf{x}_{i+1} \leftarrow \texttt{line_search}(f, \mathbf{x}_i, \mathbf{u}_i)$;
  for i in $\{1, \ldots, n-1\}$ **do**
    $\mathbf{u}_i \leftarrow \mathbf{u}_{i+1}$;
  $\mathbf{u}_n \leftarrow \mathbf{x}_{n+1} - \mathbf{x}_1$;

- search directions can become linearly dependent and no longer cover the full design space.
- peridocally reset the diections to the canonical basis.

Hooke-Jeeves

- Evaluate $f(\mathbf{x})$ and $f(\mathbf{x} \pm \alpha \mathbf{e}_i)$ for a given step size α in every coordinate direction from an anchoring point $\mathbf{x}$.
- It accepts any improvement it may find.
- If no improvements are found, it decreases the step size.
- The process repeats until the step size is sufficiently small.
- $2n$ evaluations for an n-dimensional problem

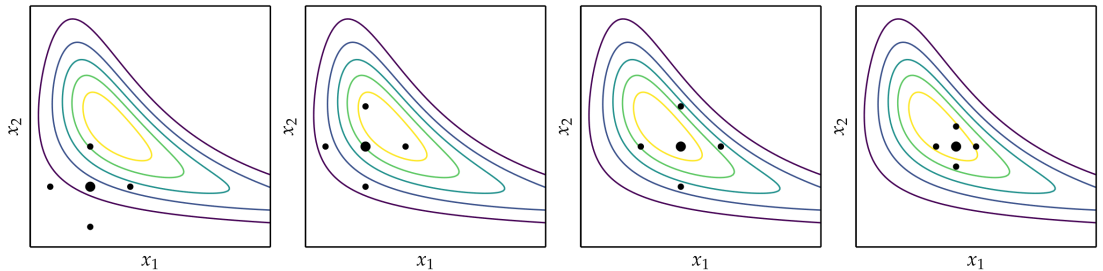

Generalized Pattern Search

- Generalization of Hooke-Jeeves method that can use as few as $n+1$ search directions instead of $2n$
- A pattern P can be constructed from a set of m directions $\mathcal{D}$ about an anchoring point $\mathbf{x}$ with a step size α according to: $P = \{\mathbf{x} + \alpha\mathbf{d} \text{ for each } \mathbf{d} \in \mathcal{D}\}$
- Searches in set of directions that **positively spans** (nonnegative linear combination) search space. (if D has full row rank and if $D\mathbf{x} = -D\mathbf{1}$ with $\mathbf{x} \geq 0$)



only positively spans the cone



only positively spans 1d space



positively spans $\mathbb{R}^2$

Generalized Pattern Search

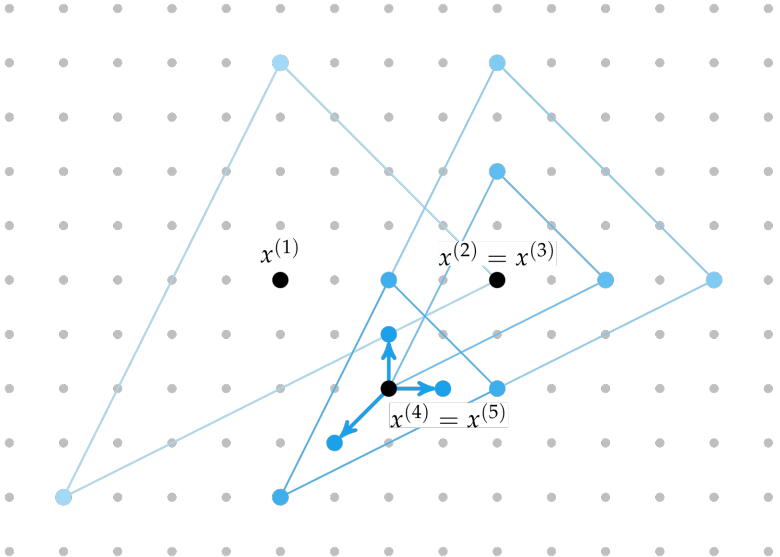

Outline

16. Black-Box Optimization

17. Nelder-Mead Method

18. DIRECT

Nelder-Mead Simplex Method

Uses simple algorithm to traverse search space using set of points defining a simplex [Nelder and Mead, 1965]:

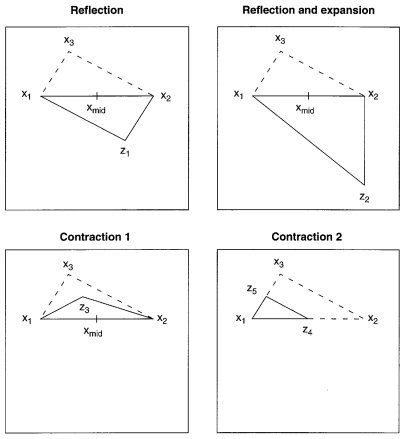

In each iteration:

- we seek to replace the vertex with the worst function value with another point with a better value.
- The new point is obtained by **reflecting, expanding**, or **contracting** the simplex along the line joining the worst vertex with the centroid of the remaining vertices.
- If we cannot find a better point in this manner, we retain only the vertex with the best function value, and we **shrink** the simplex by moving all other vertices toward this value.

Nelder-Mead (cont.)



reflection



expansion



contraction



shrinkage

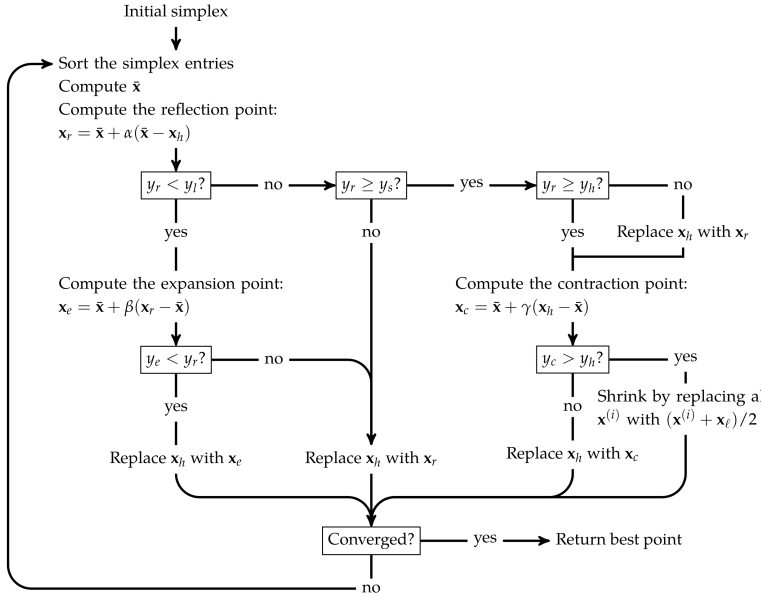
Initial simplex
Sort the simplex entries
Compute $\bar{\mathbf{x}}$
Compute the reflection point:
$\mathbf{x}_r = \bar{\mathbf{x}} + \alpha(\bar{\mathbf{x}} - \mathbf{x}_h)$
$y_r < y_l$?
no
$y_r \geq y_s$?
yes
$y_r \geq y_h$?
no
yes
no
yes
Replace $\mathbf{x}_h$ with $\mathbf{x}_r$
Compute the expansion point:
$\mathbf{x}_e = \bar{\mathbf{x}} + \beta(\mathbf{x}_r - \bar{\mathbf{x}})$
Compute the contraction point:
$\mathbf{x}_c = \bar{\mathbf{x}} + \gamma(\mathbf{x}_h - \bar{\mathbf{x}})$
$y_e < y_r$?
no
$y_c > y_h$?
yes
yes
no
Shrink by replacing all
$\mathbf{x}^{(i)}$ with $(\mathbf{x}^{(i)} + \mathbf{x}_\ell)/2$
Replace $\mathbf{x}_h$ with $\mathbf{x}_e$
Replace $\mathbf{x}_h$ with $\mathbf{x}_r$
Replace $\mathbf{x}_h$ with $\mathbf{x}_c$
Converged?
yes
Return best point
no

Nelder-Mead

Simplex based method [Spendley et al. (1962)]

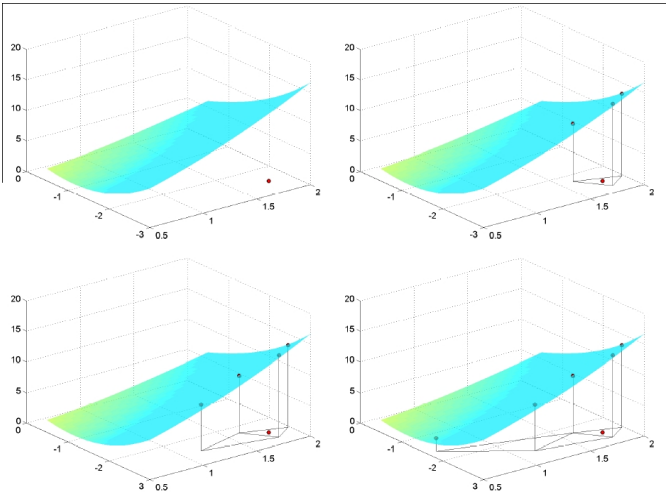

Nelder-Mead (cont.)

Example:

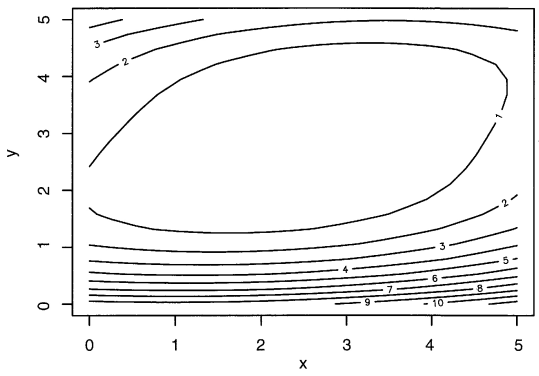

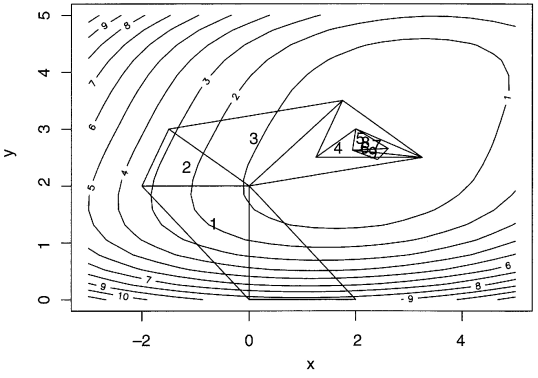

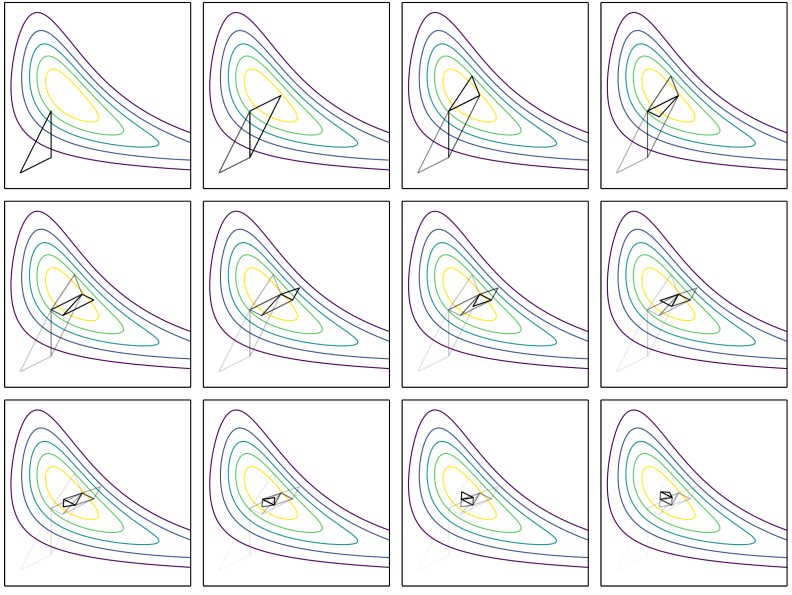

Nelder-Mead (cont.)

Modelling the operations: [Nocedal and Wright, 2006]

- $\mathbf{x}_1, \ldots, \mathbf{x}_{n+1}$ vertices of a simplex ordered such that $f(\mathbf{x}_1) \leq f(\mathbf{x}_2) \leq \ldots \leq f(\mathbf{x}_{n+1})$
- $\bar{\mathbf{x}} = \frac{1}{n} \sum_{i=1}^{n} \mathbf{x}_i$ centroid of the points excluding the worst $\mathbf{x}_{n+1}$
- $\bar{\mathbf{x}}(t) = \bar{\mathbf{x}} + t(\mathbf{x}_{n+1} - \bar{\mathbf{x}})$ points along the line joining $\mathbf{x}_{n+1}$ and $\bar{\mathbf{x}}$

Reflection: evaluating $\bar{\mathbf{x}}(t)$ at $t = -\alpha$, typically $\alpha = 1$
Expansion: evaluating $\bar{\mathbf{x}}(t)$ at $t = -\beta$, typically $\beta = 2$
Contraction: evaluating $\bar{\mathbf{x}}(t)$ at $t = \pm\gamma$, typically $\gamma = 0.5$

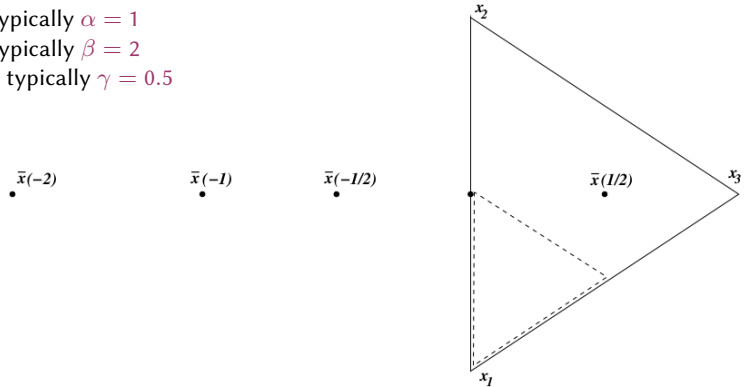

Input: f, $\mathbf{x}_1, \ldots, \mathbf{x}_{n+1}$ vertices of a simplex ordered such that $f(\mathbf{x}_1) \leq f(\mathbf{x}_2) \leq \ldots \leq f(\mathbf{x}_{n+1})$
Output: $\mathbf{x}^*$
Let $\bar{\mathbf{x}} = \frac{1}{n}\sum_{i=1}^{n} \mathbf{x}_i$ be the centroid of the points excluding $\mathbf{x}_{n+1}$;
Let $\bar{\mathbf{x}}(t) = \bar{\mathbf{x}} + t(\mathbf{x}_{n+1} - \bar{\mathbf{x}})$ points along the line joining $\mathbf{x}_{n+1}$ and $\bar{\mathbf{x}}$;
Compute the **reflection point** $\mathbf{x}_R = \bar{\mathbf{x}}(-1)$ and evaluate $f_R = f(\mathbf{x}(R))$;
while termination condition not met **do**
    if $f(\mathbf{x}_1) \leq f_R < f(\mathbf{x}_n)$ **then**
        $\mathbf{x}_{n+1} \leftarrow \mathbf{x}_R$ and continue;
    else if $f_R < f(\mathbf{x}_1)$ **then**
        Compute the **expansion point** $\mathbf{x}_E = \bar{\mathbf{x}}(-2)$ and evaluate $f_E = f(\mathbf{x}_E)$;
        if $f_E < f_R$ **then**
            $\mathbf{x}_{n+1} \leftarrow \mathbf{x}_E$ and continue;
        else
            $\mathbf{x}_{n+1} \leftarrow \mathbf{x}_R$ and continue;
    else if $f_R \geq f(\mathbf{x}_n)$ **then**
        if $f(\mathbf{x}_n) \leq f_R < f(\mathbf{x}_{n+1})$ **then**
            Compute **outside contraction point** $\mathbf{x}_C = \bar{\mathbf{x}}(-1/2)$ and evaluate $f_C = f(\mathbf{x}_C)$;
            if $f_C < f_R$ **then** $\mathbf{x}_{n+1} \leftarrow \mathbf{x}_C$ and continue ;
        else
            Compute **inside contraction point** $\mathbf{x}_C = \bar{\mathbf{x}}(1/2)$ and evaluate $f_C = f(\mathbf{x}_C)$;
            if $f_C < f(\mathbf{x}_{n+1})$ **then** $\mathbf{x}_{n+1} \leftarrow \mathbf{x}_C$ and continue ;
    shrink: $\mathbf{x}_i \leftarrow (1/2)(\mathbf{x}_1 + \mathbf{x}_i)$ for $i = 2, 3, \ldots, n+1$;

Outline

16. Black-Box Optimization

17. Nelder-Mead Method

18. DIRECT

DIRECT – Divided Rectangles

- Also called DIRECT for Divided RECTangles
- Recall from Shubert-Piyavskii, a Lipshitz constant is used to provide a lower bound on the function, and a function evaluation is made where this bound is lowest

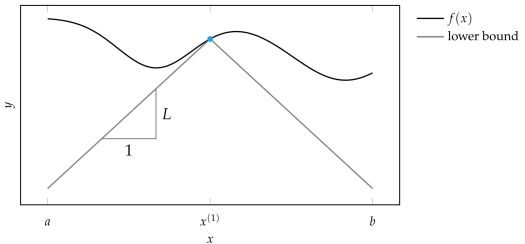

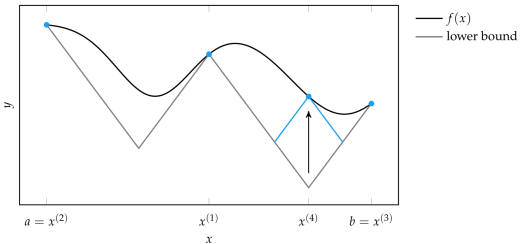

DIRECT – Divided Rectangles

- The notion of Lipschitz continuity can be extended to multiple dimensions.
  If f is Lipschitz continuous over a domain X with Lipschitz constant $\ell > 0$, then for a given design $\mathbf{x}_0$ and $y = f(\mathbf{x}_0)$, the circular cone

  $$f(\mathbf{x}_0) - \ell \left\| \mathbf{x} - \mathbf{x}_0 \right\|_2$$

  forms a lower bound of f

- Given m function evaluations with design points $\{\mathbf{x}_1, \mathbf{x}_2, \ldots, \mathbf{x}_m\}$, we can construct a superposition of these lower bounds by taking their maximum:

  $$\max_i f(\mathbf{x}_i) - \ell \left\| \mathbf{x} - \mathbf{x}_i \right\|_2$$

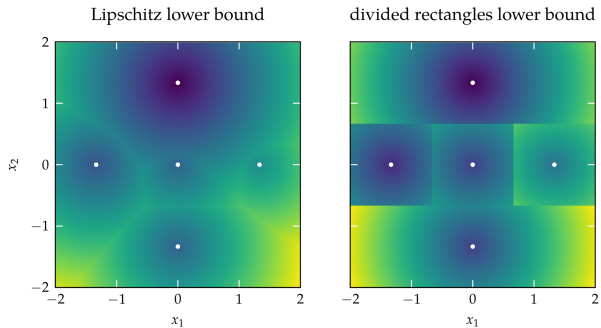

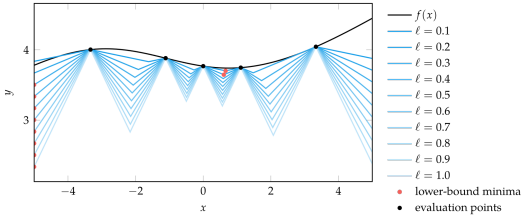
$f(x)$
$\ell = 0.1$
$\ell = 0.2$
$\ell = 0.3$
$\ell = 0.4$
$\ell = 0.5$
$\ell = 0.6$
$\ell = 0.7$
$\ell = 0.8$
$\ell = 0.9$
$\ell = 1.0$
lower-bound minima
evaluation points
x
y
4
3
−4
−2
0
2
4

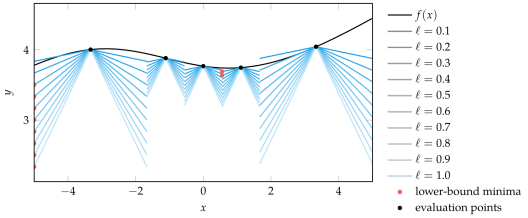
$f(x)$
$\ell = 0.1$
$\ell = 0.2$
$\ell = 0.3$
$\ell = 0.4$
$\ell = 0.5$
$\ell = 0.6$
$\ell = 0.7$
$\ell = 0.8$
$\ell = 0.9$
$\ell = 1.0$
lower-bound minima
evaluation points
x
y
4
3
−4
−2
0
2
4

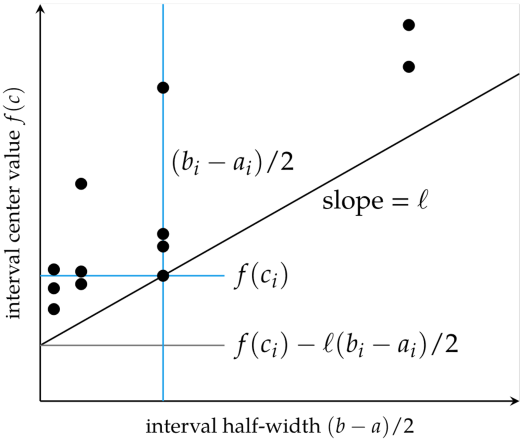
interval center value $f(c)$
$(b_i - a_i)/2$
slope $= \ell$
$f(c_i)$
$f(c_i) - \ell(b_i - a_i)/2$
interval half-width $(b-a)/2$

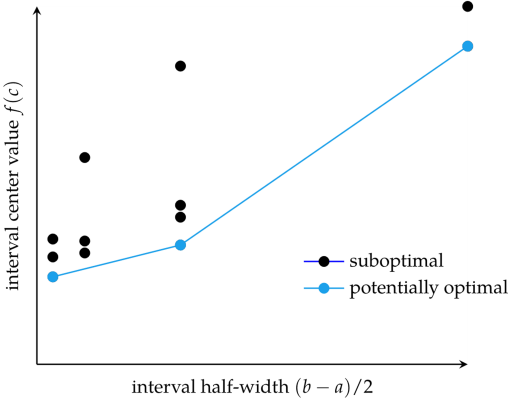
interval center value $f(c)$
suboptimal
potentially optimal
interval half-width $(b-a)/2$

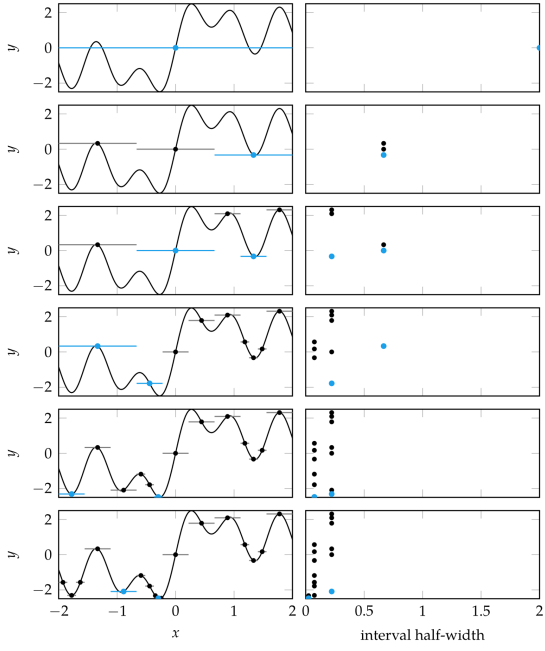
y
2
0
−2
−2
−1
0
1
2
x
0
0.5
1
1.5
2
interval half-width

Multivariate DIRECT

- intervals $\rightarrow$ hyper-rectangles
- normalizes the search space to be the unit hypercube
- divide the rectangles into thirds along the axis directions
- larger rectangles for the points with lower function evaluations
- larger rectangles are prioritized for additional splitting
- when splitting a region without equal side lengths, only the longest dimensions are split

Multivariate DIRECT

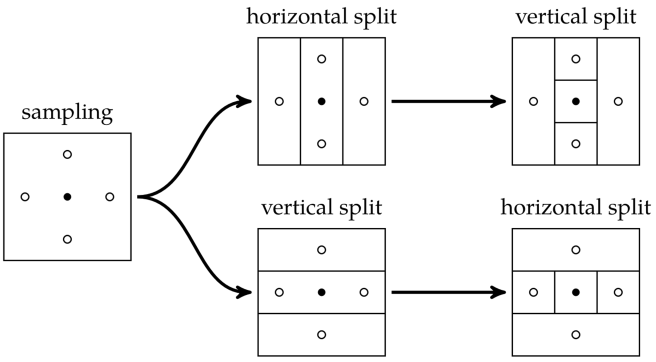

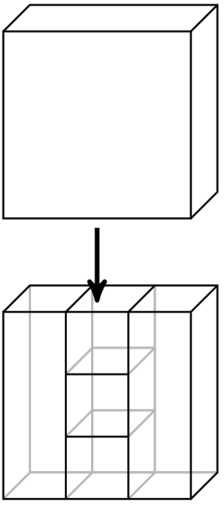

Multivariate DIRECT

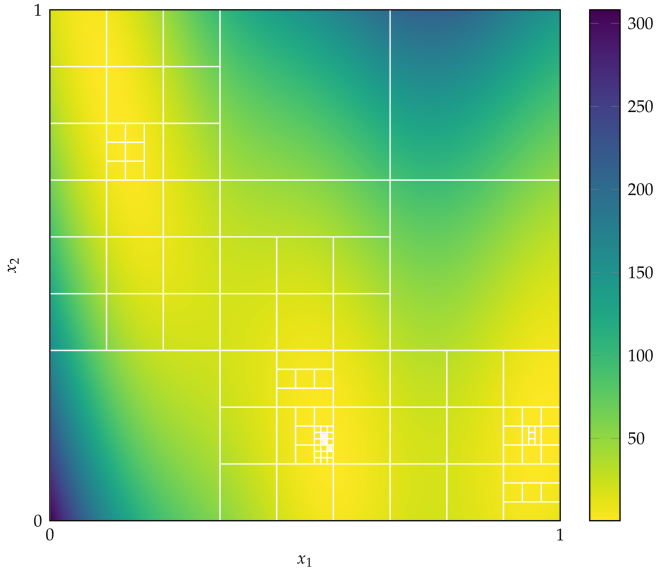

Consider using DIRECT to optimize the flower function (appendix B.4) over $x_1 \in [-1, 3]$, $x_2 \in [-2, 1]$. The function is first normalized to the unit hypercube such that we optimize $x'_1, x'_2 \in [0, 1]$:

$$f(x'_1, x'_2) = \text{flower}(4x'_1 - 1, 3x'_2 - 2)$$

The objective function is sampled at $[0.5, 0.5]$ to obtain 0.158. We have a single interval with center $[0.5, 0.5]$ and side lengths $[1, 1]$. The interval is divided twice, first into thirds in x'_1 and then the center interval is divided into thirds in x'_2.



the interval width can only take on powers of one-third, hence the interval half-width is $\left\| \frac{a-b}{2} \right\|_2 = \left\| \frac{3^{-h}}{2} \right\|_2$ where h is the depth of the rectangle

We now have five intervals:

interval	center	side lengths	vertex distance	center value
1	$[1/6, 3/6]$	$[1/3, 1]$	0.527	0.500
2	$[5/6, 3/6]$	$[1/3, 1]$	0.527	1.231
3	$[3/6, 3/6]$	$[1/3, 1/3]$	0.236	0.158
4	$[3/6, 1/6]$	$[1/3, 1/3]$	0.236	2.029
5	$[3/6, 5/6]$	$[1/3, 1/3]$	0.236	1.861

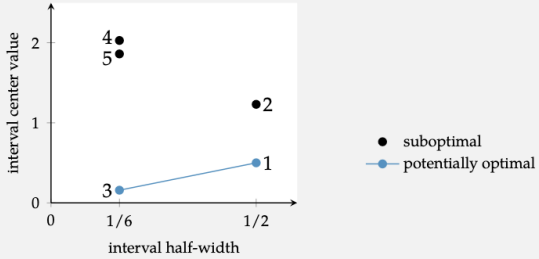

We next split on the two intervals centered at $[1/6, 3/6]$ and $[3/6, 3/6]$.

Summary

- Direct methods rely solely on the objective function and do not use derivative information.
- Cyclic coordinate search optimizes one coordinate direction at a time.
- Powell's method adapts the set of search directions based on the direction of progress.
- Hooke-Jeeves searches in each coordinate direction from the current point using a step size that is adapted over time.
- Generalized pattern search is similar to Hooke-Jeeves, but it uses fewer search directions that positively span the design space.
- The Nelder-Mead simplex method uses a simplex to search the design space, adaptively expanding and contracting the size of the simplex in response to evaluations of the objective function.
- The divided rectangles algorithm extends the Shubert-Piyavskii approach to multiple dimensions and does not require specifying a valid Lipschitz constant.

8. Stochastic Methods

Outline

19. Stochastic Methods

20. Benchmarking

- Employ randomness strategically to help explore design space
- Randomness can help escape local minima
- Increases chance of searching near the global minimum
- Typically rely on pseudo-random number generators to ensure repeatability
- Control over randomness and the exploration vs exploitation trade off.

Noisy Descent

- Saddle points, where the gradient is very close to zero, can cause descent methods to select step sizes that are too small to be useful
- add Gaussian noise at each descent step

$$\mathbf{x}_{k+1} \leftarrow \mathbf{x}_k + \alpha \nabla f(\mathbf{x}_k) + \boldsymbol{\epsilon}_k \qquad \boldsymbol{\epsilon}_k \sim \mathcal{N}(\mathbf{0}, \boldsymbol{\Sigma})$$

- $\mathcal{N}(\mathbf{0}, \boldsymbol{\Sigma})$ multivariate normal distribution (see next slide) with covariance matrix $\boldsymbol{\Sigma} = \sigma_k^2 I$.
- $\sigma_k = 1/k$, so that the noise decreases over time and the method converges to a local minimum

Multivariate normal distribution

Probability density function

- 1-dimensional:

$$f(x) = \frac{1}{\sqrt{2\pi\sigma^2}} \exp\left(-\frac{(x-\mu)^2}{2\sigma^2}\right).$$

- 2-dimensional:

$$f(x,y) = \frac{1}{2\pi\sigma_X\sigma_Y\sqrt{1-\rho^2}} \exp\left(-\frac{1}{2\left[1-\rho^2\right]}\left[\left(\frac{x-\mu_X}{\sigma_X}\right)^2 - 2\rho\left(\frac{x-\mu_X}{\sigma_X}\right)\left(\frac{y-\mu_Y}{\sigma_Y}\right) + \left(\frac{y-\mu_Y}{\sigma_Y}\right)^2\right]\right)$$

where ρ is the correlation between X and Y and where $\sigma_X > 0$ and $\sigma_Y > 0$. In this case,

$$\boldsymbol{\mu} = \begin{pmatrix}\mu_X \\ \mu_Y\end{pmatrix}, \quad \boldsymbol{\Sigma} = \begin{pmatrix}\sigma_X^2 & \rho\sigma_X\sigma_Y \\ \rho\sigma_X\sigma_Y & \sigma_Y^2\end{pmatrix}.$$

- d dimensional:

$$f_{\mathbf{X}}(x_1,\ldots,x_d) = \frac{\exp\left(-\frac{1}{2}(\mathbf{x}-\boldsymbol{\mu})^{\mathrm{T}}\boldsymbol{\Sigma}^{-1}(\mathbf{x}-\boldsymbol{\mu})\right)}{\sqrt{(2\pi)^k|\boldsymbol{\Sigma}|}}$$

with symmetric covariance matrix $\boldsymbol{\Sigma}$ positive definite.

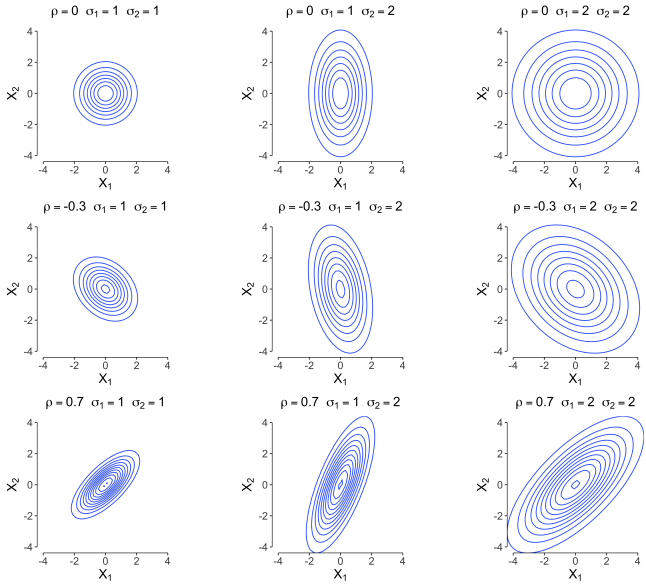
ρ = 0 σ1 = 1 σ2 = 1
ρ = 0 σ1 = 1 σ2 = 2
ρ = 0 σ1 = 2 σ2 = 2
ρ = -0.3 σ1 = 1 σ2 = 1
ρ = -0.3 σ1 = 1 σ2 = 2
ρ = -0.3 σ1 = 2 σ2 = 2
ρ = 0.7 σ1 = 1 σ2 = 1
ρ = 0.7 σ1 = 1 σ2 = 2
ρ = 0.7 σ1 = 2 σ2 = 2
X1
X2
-4
-2
0
2
4

Stochastic Gradient Descent

- evaluates gradients using randomly chosen subsets of the training data (**batches**)
- significantly less expensive computationally than calculating the true gradient at every iteration and yields same effect as noisy gradient approximation
- helping traverse past saddle points Convergence guarantees for stochastic gradient descent require that the positive step sizes be chosen such that:

$$\sum_{k=1}^{\infty} \alpha_k = \infty \qquad \sum_{k=1}^{\infty} \alpha_k^2 < \infty$$

- ensure that the step sizes decrease and allow the method to converge, but not too quickly so as to become stuck away from a local minimum


x_2
x_1
stochastic gradient descent
steepest descent

Mesh Adaptive Direct Search

- Similar to generalized pattern search but uses random positive spanning directions
- Example: set of positive spanning sets constructed from nonzero directions $d_1, d_2 \in \{-1, 0, 1\}$.

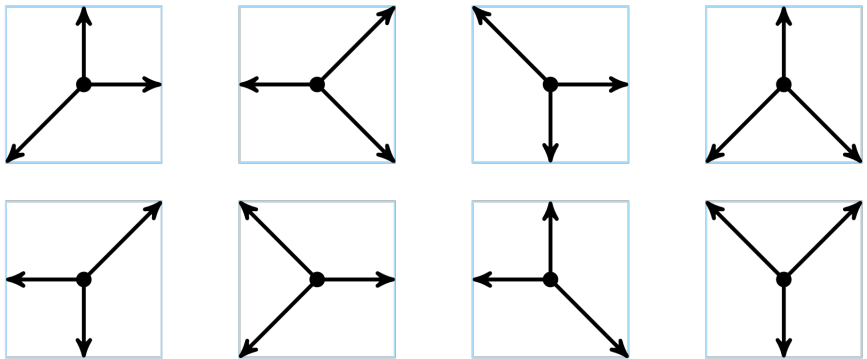

- Construct lower triangular matrix L sampling from:

$$\{-1/\sqrt{\alpha_k}+1, -1/\sqrt{\alpha_k}+2, \ldots, 1/\sqrt{\alpha_k}-1\}$$

- permute rows and columns of L randomly to obtain a matrix D whose columns correspond to n directions that linearly span $\mathbb{R}^n$. The maximum magnitude among these directions is $1/\sqrt{\alpha_k}$
- add one additional direction $\mathbf{d}_{n+1} = -\sum_{i=1}^{n} \mathbf{d}_i$ or add n additional directions $\mathbf{d}_{n+j} = -\mathbf{d}_j$
-

$$\alpha_{k+1} \leftarrow \begin{cases} \alpha_k/4 & \text{if no improvement was found in this iteration} \\ \min(1, 4\alpha_k) & \text{otherwise} \end{cases}$$

- If $f(\mathbf{x}_k = \mathbf{x}_{k-1} + \alpha\mathbf{d}) < f(\mathbf{x}_{k-1})$, then the queried point is $\mathbf{x}_{k-1} + 4\alpha\mathbf{d} = \mathbf{x}_k + 3\alpha\mathbf{d}$

Simulated Annealing

- often used on functions with many local minima due to its ability to escape local minima.
- a candidate transition from $\mathbf{x}$ to $\mathbf{x}'$ is sampled from a transition distribution T, eg, multivariate Gaussian

$$\mathbf{x}' = \mathbf{x} + \epsilon \qquad \epsilon \sim T$$

- **Metropolis acceptance criterion:**

$$p(\mathbf{x}, \mathbf{x}') = \begin{cases} 1 & \text{if } \Delta \leq 0 \\ e^{-\frac{\Delta}{t_k}} & \text{if } \Delta > 0 \end{cases}$$

where $\Delta = f(\mathbf{x}') - f(\mathbf{x})$ is the change in the objective function value and t_k is the **temperature** at iteration k.

Annealing Plan

- a logarithmic annealing schedule

$$t_k = t_0 \frac{\ln(2)}{\ln(k+1)}$$

  guaranteed to asymptotically reach the global optimum under certain conditions, but it can be slow in practice.
- exponential annealing schedule, more common, uses a simple decay factor:

$$t_{k+1} = \gamma t_k$$

- fast annealing

$$t_k = \frac{t_0}{k}$$



Simulated Annealing

- Corana et al 1987 introduced variable step-size $\mathbf{v}$ (separate directional components)
- cycle of random moves, one in each direction

$$\mathbf{x}' = \mathbf{x} + rv_i\mathbf{e}_i$$

where r is randomly sampled from $\{-1, 1\}$

- after n_s cycles, step size is adjusted according to

$$v_i = \begin{cases} v_i \left(1 + c_i \frac{a_i/n_s - 0.6}{0.4}\right) & \text{if } a_i > 0.6n_s \\ v_i \left(1 + c_i \frac{0.4 - a_i/n_s}{0.4}\right)^{-1} & \text{if } a_i < 0.4n_s \\ v_i & \text{otherwise} \end{cases}$$

$\mathbf{a}$: accepted steps in each direction; c_i: typically 2.



regulates the ratio of accepted-to-rejected points to about 50%.

Simulated Annealing

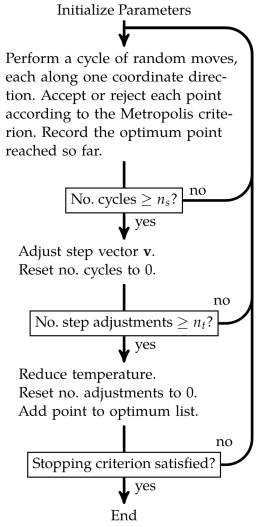

- Temperature reduction occurs every n_t step adjustments, which is every $n_s \cdot n_t$ cycles
- termination when the temperature sinked low and no improvement expected or when no movement more than ϵ in last n_ϵ iterations

Cross-Entropy Method

- Maintains explicit probability distribution over design space often called a **proposal distribution**
- Requires choosing a family of parameterized distributions
- At each iteration, a set of design points are **conditionally independently** sampled from the proposal distribution; these are evaluated and ranked
- The best-performing subset of samples, called **elite samples**, are retained
- The proposal distribution parameters are then **updated** based on the elite samples, and the next iteration begins

Cross-Entropy Method

- Cross-entropy is a measure of divergence between two probability distributions p and q (related to Kullback-Leibler divergence)
- Here we measure cross-entropy in a case where one distribution (the one of optimal solutions) is unknown.
- A model is created and then its cross-entropy is measured on the elite set to assess how accurate the model is in predicting this set.
- Let q be the true distribution of the optimal solutions, and p the distribution of solutions as predicted by the model. Since the true distribution is unknown, cross-entropy cannot be directly calculated. Instead, an estimate of cross-entropy is:

$$H(T, p) = -\sum_{i=1}^{N} \frac{1}{N} \log_2 p(\mathbf{x}_i)$$

where N is the size of the elite set, and $p(\mathbf{x})$ is the probability of solution $\mathbf{x}$ estimated from the training set T.

Cross-Entropy Method

cross-entropy $\equiv$ Maximum likelihood estimation

- A widely used frequentist estimator is maximum likelihood, in which $\boldsymbol{\theta}$ is set to the value that maximizes the **likelihood function** $p(\mathbf{x} \mid \boldsymbol{\theta})$.
- This corresponds to choosing the value of $\boldsymbol{\theta}$ for which the probability of the observed data set is maximized.
- In the machine learning literature, the **negative log of the likelihood function** is called an error function. Because the negative logarithm is a monotonically decreasing function, maximizing the likelihood is equivalent to minimizing the error.
- Suppose our data set consists of N data points $\mathbf{x} = \{x_1, \ldots, x_N\}$:

$$\mathcal{L}(\mathbf{x} \mid \boldsymbol{\theta}) = p(\mathbf{x} \mid \boldsymbol{\theta}) = \prod_{i=1}^{N} p(x_i \mid \boldsymbol{\theta}) \qquad \text{likelihood}$$

$$\mathcal{E}(\mathbf{x} \mid \boldsymbol{\theta}) = -\log \mathcal{L}(\mathbf{x}) \qquad \text{error function}$$

Cross-Entropy Method

- $$\min_{\boldsymbol{\theta}} \mathcal{E}(\mathbf{x} \mid \boldsymbol{\theta}) = \min_{\boldsymbol{\theta}} \left(-\log \mathcal{L}(\mathbf{x})\right) = -\max_{\boldsymbol{\theta}} \log \mathcal{L}(\mathbf{x})$$ maximum log-likelihood

  $$\min \left(-\sum_{i=1}^{N} \log p(x_i \mid \boldsymbol{\theta}) \right)$$

- hence minimizing the negative of the log-likelhoood is equivalent to minimizing the entropy

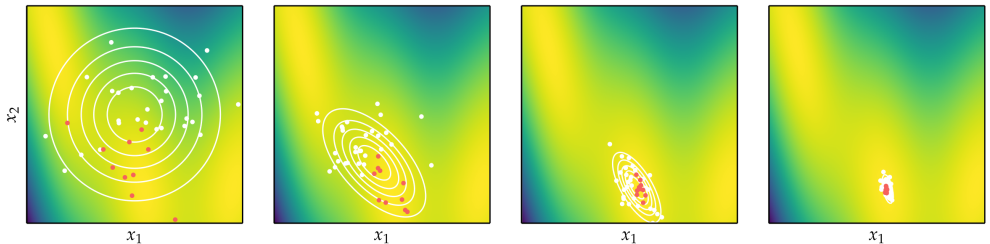

Solution of Max Likelihood

Multivariate Gaussian distribution with mean $\boldsymbol{\mu}$ and covariance Σ has a closed solution for the maximum likelihood estimation of the parameters:

$$\boldsymbol{\mu}_{k+1} = \frac{1}{m_e} \sum_{i=1}^{m_e} \mathbf{x}_i$$

$$\Sigma_{k+1} = \frac{1}{m_e} \sum_{i=1}^{m_e} (\mathbf{x}_i - \boldsymbol{\mu}_{k+1})(\mathbf{x}_i - \boldsymbol{\mu}_{k+1})^T$$

m_e is the number of elite samples, and $\mathbf{x}_i$ are the elite samples. The mean is updated to be the average of the elite samples, and the covariance is updated to be the average of the outer products of the centered elite samples.

Disadvantage of the Gaussian distribution: it is unimodal

Natural Evolution Strategies

- Similar to cross-entropy method, except instead of parameterizing distribution based on elite samples, it is optimized using **gradient descent**

- The aim is to minimize the expectation

$$E_{\mathbf{x}\sim p(\cdot|\boldsymbol{\theta})}[f(\mathbf{x})] = \int_{\mathbb{R}} f(\mathbf{x}) p(\mathbf{x} \mid \boldsymbol{\theta}) d\mathbf{x}$$

$$\begin{aligned}
\nabla_{\theta}\, \mathbb{E}_{\mathbf{x}\sim p(\cdot|\theta)}[f(\mathbf{x})] &= \int \nabla_{\theta}\, p(\mathbf{x} \mid \theta) f(\mathbf{x})\, d\mathbf{x} \\
&= \int \frac{p(\mathbf{x} \mid \theta)}{p(\mathbf{x} \mid \theta)} \nabla_{\theta}\, p(\mathbf{x} \mid \theta) f(\mathbf{x})\, d\mathbf{x} \\
&= \int p(\mathbf{x} \mid \theta) \nabla_{\theta} \log p(\mathbf{x} \mid \theta) f(\mathbf{x})\, d\mathbf{x} \\
&= \mathbb{E}_{\mathbf{x}\sim p(\cdot|\theta)}[f(\mathbf{x}) \nabla_{\theta} \log p(\mathbf{x} \mid \theta)] \\
&\approx \frac{1}{m} \sum_{i=1}^{m} f(\mathbf{x}^{(i)}) \nabla_{\theta} \log p(\mathbf{x}^{(i)} \mid \theta)
\end{aligned}$$

Natural Evolution Strategies

The distribution parameter gradient is estimated from the set of function evaluations

Input: $f, \boldsymbol{\theta}, k_{MAX}, N = 100, \alpha = 0.01$
Output: $\boldsymbol{\theta}$
for k in $1, \ldots, k_{MAX}$ **do**
  Let $X = \{\mathbf{x}_1, \ldots, \mathbf{x}_N\}$ be a conditionally independent sample of size N from $p(\boldsymbol{\theta})$;
  $\boldsymbol{\theta}_{k+1} = \boldsymbol{\theta}_k - \alpha \frac{1}{N} \sum_{i=1}^{N} f(\mathbf{x}_i) \nabla_{\boldsymbol{\theta}} \log p(\mathbf{x}_i, \boldsymbol{\theta}_k)$;

Natural Evolution Strategies

The multivariate normal distribution $\mathcal{N}(\boldsymbol{\mu}, \boldsymbol{\Sigma})$ with mean $\boldsymbol{\mu}$ and covariance $\boldsymbol{\Sigma}$ is a popular distribution family due to having analytic solutions. The likelihood in d dimensions has the form

$$p(\mathbf{x} \mid \boldsymbol{\mu}, \boldsymbol{\Sigma}) = (2\pi)^{-\frac{d}{2}} |\boldsymbol{\Sigma}|^{-\frac{1}{2}} \exp\left(-\frac{1}{2} (\mathbf{x} - \boldsymbol{\mu})^\top \boldsymbol{\Sigma}^{-1} (\mathbf{x} - \boldsymbol{\mu}) \right)$$

where $|\boldsymbol{\Sigma}|$ is the determinant of $\boldsymbol{\Sigma}$. The log likelihood is

$$\log p(\mathbf{x} \mid \boldsymbol{\mu}, \boldsymbol{\Sigma}) = -\frac{d}{2} \log(2\pi) - \frac{1}{2} \log |\boldsymbol{\Sigma}| - \frac{1}{2} (\mathbf{x} - \boldsymbol{\mu})^\top \boldsymbol{\Sigma}^{-1} (\mathbf{x} - \boldsymbol{\mu})$$

The parameters can be updated using their log likelihood gradients:

$$\nabla_{(\boldsymbol{\mu})} \log p(\mathbf{x} \mid \boldsymbol{\mu}, \boldsymbol{\Sigma}) = \boldsymbol{\Sigma}^{-1} (\mathbf{x} - \boldsymbol{\mu})$$

$$\nabla_{(\boldsymbol{\Sigma})} \log p(\mathbf{x} \mid \boldsymbol{\mu}, \boldsymbol{\Sigma}) = \frac{1}{2} \boldsymbol{\Sigma}^{-1} (\mathbf{x} - \boldsymbol{\mu}) (\mathbf{x} - \boldsymbol{\mu})^\top \boldsymbol{\Sigma}^{-1} - \frac{1}{2} \boldsymbol{\Sigma}^{-1}$$

The term $\nabla_{(\boldsymbol{\Sigma})}$ contains the partial derivative of each entry of $\boldsymbol{\Sigma}$ with respect to the log likelihood.

Natural Evolution Strategies

Directly updating $\boldsymbol{\Sigma}$ may not result in a positive definite matrix, as is required for covariance matrices. One solution is to represent $\boldsymbol{\Sigma}$ as a product $\mathbf{A}^\top \mathbf{A}$, which guarantees that $\boldsymbol{\Sigma}$ remains positive semidefinite, and then update $\mathbf{A}$ instead. Replacing $\boldsymbol{\Sigma}$ by $\mathbf{A}^\top \mathbf{A}$ and taking the gradient with respect to $\mathbf{A}$ yields:

$$\nabla_{(\mathbf{A})} \log p(\mathbf{x} \mid \boldsymbol{\mu}, \mathbf{A}) = \mathbf{A}\left[\nabla_{(\boldsymbol{\Sigma})} \log p(\mathbf{x} \mid \boldsymbol{\mu}, \boldsymbol{\Sigma}) + \nabla_{(\boldsymbol{\Sigma})} \log p(\mathbf{x} \mid \boldsymbol{\mu}, \boldsymbol{\Sigma})^\top\right]$$

Natural Evolution Strategies

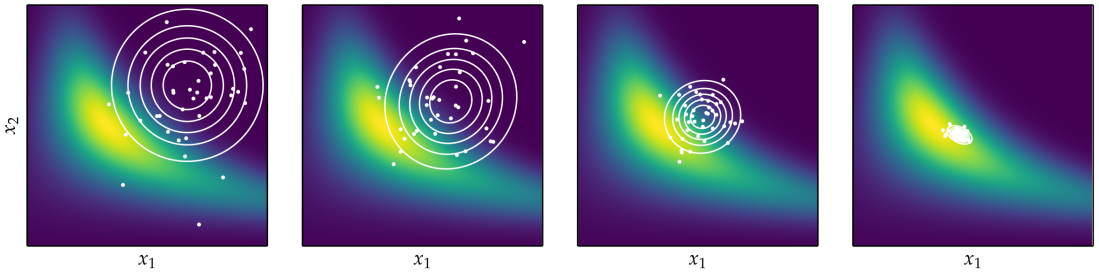

Covariance Matrix Adaptation Evolutionary Strategy (CMA-ES)

- Same approach as natural evolution strategy and cross entropy method, but the proposal distribution is a multivariate Gaussian parameterized by a covariance matrix.
- At every iteration, m designs are sampled from the multivariate Gaussian:

  $$\mathbf{x} \sim \mathcal{N}(\boldsymbol{\mu}, \sigma^2 \Sigma)$$

  parameters: mean vector $\boldsymbol{\mu}$, a covariance matrix Σ, and an additional step-size scalar σ.
- The covariance matrix only increases or decreases in a single direction with every iteration, whereas σ is adapted to control the overall spread of the distribution.
- Design points are sorted $f(x^{(1)}) \leq f(x^{(2)}) \leq \ldots \leq f(x^{(m)})$.
- A new mean vector $\boldsymbol{\mu}_{k+1}$ is formed using a weighted average of the first m_e-elite sampled designs:

  $$\boldsymbol{\mu}(k+1) \leftarrow \sum_{i=1}^{m_e} w_i x^{(i)}$$

CMA-ES

- the first m_e elite weights sum to 1, and all the weights approximately sum to 0 and are ordered largest to smallest
- positive and negative weigths, more aggressive shift
- The step size σ is updated using a cumulative vector $\mathbf{p}_1$ that tracks steps over time:
  Comparing the length of $\mathbf{p}_1$ to its expected length under random selection provides the mechanism by which σ is increased or decreased.
- covariance matrix is updated using a cumulative vector $\mathbf{p}_2$ and adjusted weights;
  the update consists of three components: the previous covariance matrix Σ_k, a rank-one update, and a rank-μ update
  Rank-one updates using the cumulation vector allow for correlations between consecutive steps to be exploited
- covariance estimated around original mean $\boldsymbol{\mu}_k$ (cross-entropy did it around new mean $\boldsymbol{\mu}_{k+1}$)

Summary

- Stochastic methods employ random numbers during the optimization process
- Simulated annealing uses a temperature that controls random exploration and which is reduced over time to converge on a local minimum
- The cross-entropy method and evolution strategies maintain proposal distributions from which they sample in order to inform updates
- Natural evolution strategies uses gradient descent with respect to the log likelihood to update its proposal distribution
- Covariance matrix adaptation is a robust and sample-efficient optimizer that maintains a multivariate Gaussian proposal distribution with a full covariance matrix

Outline

19. Stochastic Methods

20. Benchmarking

Terminology in COCO Benchmarking

- **function** a parametrized mapping $f : \mathbb{R}^n \to \mathbb{R}$, Functions are parametrized such that different instances of the "same" function are available, e.g. translated or shifted versions.

- **quality indicator measure** The indicator assigns to any solution a real value. Our simplest quality indicator measure is the minimum of all so-far-observed f-values. Hence, by convention and abuse of naming, the 'quality' indicator is minimized.

- **problem** a specific function instance on which a solver is run. In the context of performance assessment, a target value is added to define a problem. A problem is considered as solved when the quality indicator value reaches this target, which is always given as a deviation from a (supposedly) optimal value.

- **runtime** the number of function evaluations on a problem until a prescribed target value is hit.

- **suite** a collection of problems in different dimensions. It typically consists of 1000 to 5000 problems (number of dimensions $\times$ number of functions $\times$ number of instances)

Benchmarking in the COCO Platform

- Functions divided in suites.
- Functions, f_i, within suites are distinguished by their identifier $i = 1, 2, \ldots$.
- parametrized by the (input) dimension, n, and
- instance number, j. (j as an index to a continuous parameter vector setting, eg, search space translations and rotations).

$$f_i^j \equiv f[n, i, j] : \mathbb{R}^n \to \mathbb{R} \qquad \mathbf{x} \mapsto f_i^j(\mathbf{x}) = f[n, i, j](\mathbf{x}).$$

- Varying n or j leads to a variation of the same function i of a given suite.
- Fixing n and j of function f_i defines an **optimization problem instance** $(n, i, j) \equiv (f_i, n, j)$ that can be presented to the solver.

Why?

Varying the instance parameter j represents a natural randomization for experiments in order to:

- generate repetitions on a single function for deterministic solvers, making deterministic and non-deterministic solvers directly comparable (both are benchmarked with the same experimental setup)
- average away irrelevant aspects of the function definition
- alleviate the problem of overfitting, and
- prevent exploitation of artificial function properties

BBOB Functions

Real-Parameter Black-Box Optimization Benchmarking

- All benchmark functions are scalable with the dimension.
- Most functions have no specific value of their optimal solution (they are randomly shifted in $\mathbf{x}$-space).
- All functions have an artificially chosen optimal function value (they are randomly shifted in f-space).

Target Values and Runtime

- Runtime of a solver on a problem is the hitting time condition.
- define a non-increasing quality indicator measure and prescribe a set of **target values**, t.
- target values are compared with the best so-far-seen f-value.
- For a single run, the solver run is **successful** on the problem instance (f_i, n, j) when the best-so-far f-value reaches the target value t.
- COCO collects hundreds of different target values from each single run.
- targets $t(i, j)$ depend on the problem instance in a way to make problems comparable
- typically, target values are set to known or estimated optimal solution plus an added **precision**
- **runtime** is the number of f-evaluations needed to solve the problem $(f_i, n, j, t(i, j))$.
- only runtimes to comparable target values can be aggregated among problem instances.

Simulated Restarts

- If a solver does not hit the target t in a given single run, the run is considered to be unsuccessful.
- The runtime of this single run remains undefined but is bounded from below by the number of evaluations conducted during the run $\tau \in [T, \infty]$
- T depends on the termination condition encountered. It can be the budget of evaluations.
- For hard problem instances COCO uses **budget-based target values**:
  For any given budget, COCO selects from the finite set of recorded target values the easiest (i.e., largest) target for which the expected runtime of all solvers (ERT) exceeds the budget.
- With unsuccessful runs: draw further runs from the set of tried problem instances, uniformly at random with replacement, until find an instance, j, for which $(f_i, n, j, t(i, j))$ is solved.
  the runtime is then the sum of the overall time spend and associated to the initially unsolved problem instance.

```
print: '|'if problem.final_target_hit, ':'if restarted and '.'otherwise
```

Aggregation

- Aggregation is to compute a statistical summary over a set or subset of problem instances over which we assume a uniform distribution
- If we can distinguish between problems easily, for example, according to their input dimension, we can use the information to select the solver, hence not worth aggregating data
- Empirical cumulative distribution functions of runtimes (**runtime ECDFs**)
  - Absolute distributions vs Performance profiles (ECDFs of runtimes relative to the respective best solver)
  - aggregate runtimes from several targets per function (!?)
- arithmetic average, as an estimator of the expected runtime. The estimated expected runtime of the restarted solver, ERT, is often plotted against dimension to indicate scaling with dimension. alternatives: average of log-runtimes $\equiv$ geometric average or shifted geometric mean

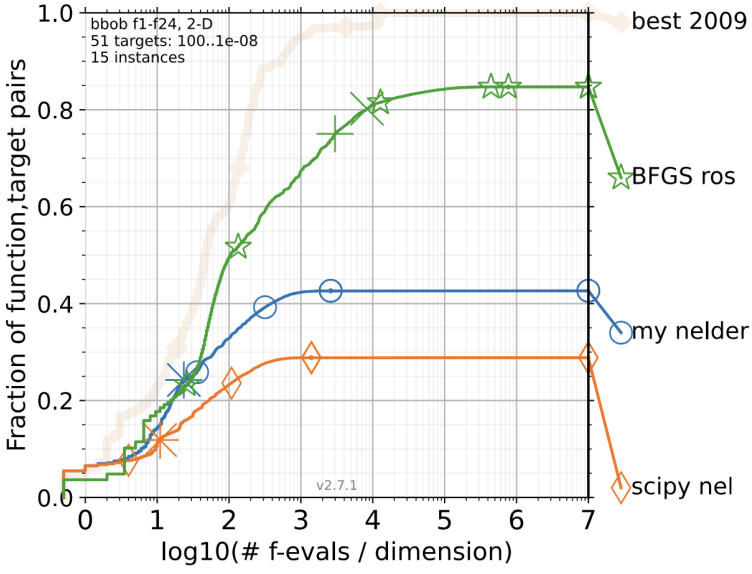
bbob f1-f24, 2-D
51 targets: 100..1e-08
15 instances
best 2009
BFGS ros
my nelder
scipy nel
v2.7.1
Fraction of function,target pairs
log10(# f-evals / dimension)
0.0
0.2
0.4
0.6
0.8
1.0
0
1
2
3
4
5
6
7

Reference

Nikolaus Hansen, Anne Auger, Raymond Ros, Olaf Mersmann, Tea Tušar & Dimo Brockhoff (2021) COCO: a platform for comparing continuous optimizers in a black-box setting, Optimization Methods and Software, 36:1, 114-144, DOI: 10.1080/10556788.2020.1808977

9. Population-based Methods

Population Methods

- Instead of optimizing a single design point, population methods optimize a collection of **individuals**
- A large number of individuals prevents algorithm from being stuck in a local minimum
- Useful information can be shared between individuals
- Stochastic in nature
- Easy to parallelize

Initialization

- Population methods begin with an initial population
- Common initializations are uniform, normal distribution, and Cauchy distribution
- But also space filling designs (later)

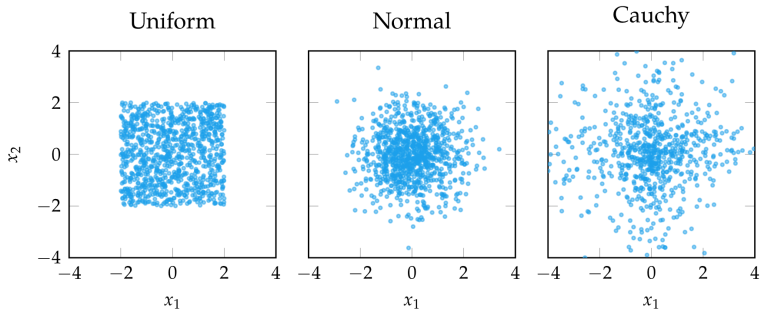

Genetic Algorithms

- Inspired by biological evolution where the fittest individuals pass their genetic information to the next generation
- Individuals are interpreted as **chromosomes**
- The fittest individuals are determined by **selection**
- The next generation is formed by selecting the fittest individuals and performing **crossover** and **mutation**

Genetic Algorithm Template

Input: f
Output: a "good" solution**x**
determine initial population `sp`;
while termination criterion is not satisfied **do**
    generate set `spr` of new candidate solutions by **recombination**;
    generate set `spm` of new candidate solutions from `spr` and `sp` by **mutation**;
    select new population `sp` from candidate solutions in `sp`, `spr`, and `spm`;

Genetic Algorithms: Chromosomes

- Simplest representation is the binary string chromosome

  but the process of decoding a binary string and producing a design point is not always straightforward.

- Chromosomes are more commonly represented as real-valued chromosomes which are simply real-valued vectors

- Typically initialized randomly

Genetic Algorithms: Selection

- Determining which individuals pass their genetic information on to the next generation choosing chromosomes to use as parents for the next generation
- **Truncation selection**: truncate the lowest performers
- **Tournament selection**: selects fittest out of k randomly chosen individuals
- **Roulette Wheel selection**: individuals are chosen with probability proportional to their fitness

Genetic Algorithms: Selection

Truncation Selection
Tournament Selection
Roulette Wheel Selection

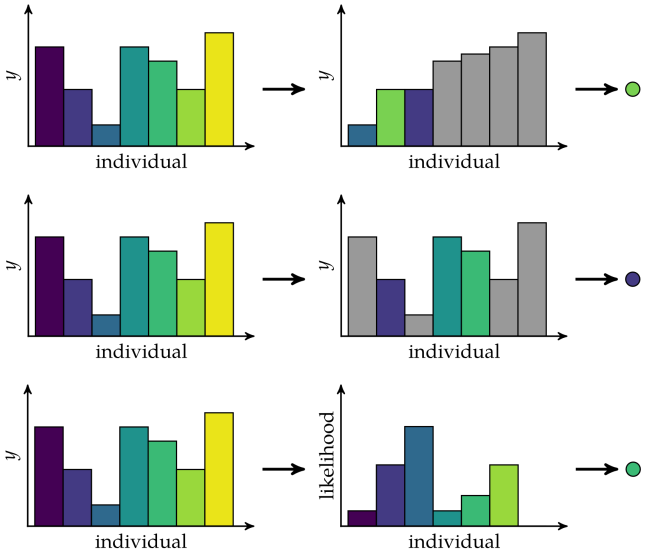

Genetic Algorithms: Crossover

- Combines the chromosomes of the parents to form children
- Single-point crossover: swap occurs after single crossover point



- Two-point crossover: two crossover points



- Uniform crossover: each bit has 50% chance of crossover



- real values are linearly interpolated between the parents' values $\mathbf{x}_a$ and $\mathbf{x}_b$: $\mathbf{x} \leftarrow (1-\lambda)\mathbf{x}_a + \lambda\mathbf{x}_b$

Genetic Algorithms: Mutation

- Mutation supports exploration of new areas of design space
- Each bit or real-valued element has a probability of being flipped or modified by noise
- The probability of an element mutating is called **mutation rate**

Selection of the New Population

Determines population for next cycle (**generation**) of the algorithm by selecting individual candidate solutions from

- current population +
- new candidate solutions from recombination and mutation

Goal: Obtain population of high-quality solutions while maintaining population diversity.
Survival of the fittest and maintenance of diversity (duplicates avoided)

Typical strategies:

- Generational Replacement (λ, μ): $\lambda \leftarrow \mu$
- Elitist strategy $(\lambda + \mu)$ the best candidates are always selected
- Steady state (most common) only a small number of least fit individuals is replaced

Genetic Algorithms

Genetic algorithm with truncation selection, single point crossover, and Gaussian mutation applied to Michalewicz function

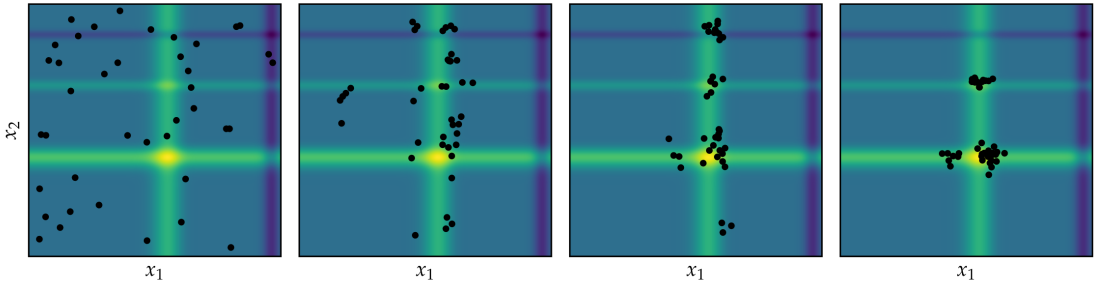

Differential Evolution

Improves each individual $\mathbf{x}$ by recombining other individuals according to a simple formula

1. Choose three random, distinct individuals $\mathbf{a}$, $\mathbf{b}$, and $\mathbf{c}$
2. Construct interim design $\mathbf{z} = \mathbf{a} + w(\mathbf{b} - \mathbf{c})$
3. Choose a random dimension to optimize in
4. Construct candidate $\mathbf{x}'$ via binary crossover of $\mathbf{x}'$ and $\mathbf{z}$

$$x_i' = \begin{cases} z_i & \text{if } i = j \text{ or with probability } p \\ x_i & \text{otherwise} \end{cases}$$

5. Insert better design between $\mathbf{x}$ and $\mathbf{x}'$ into next generation



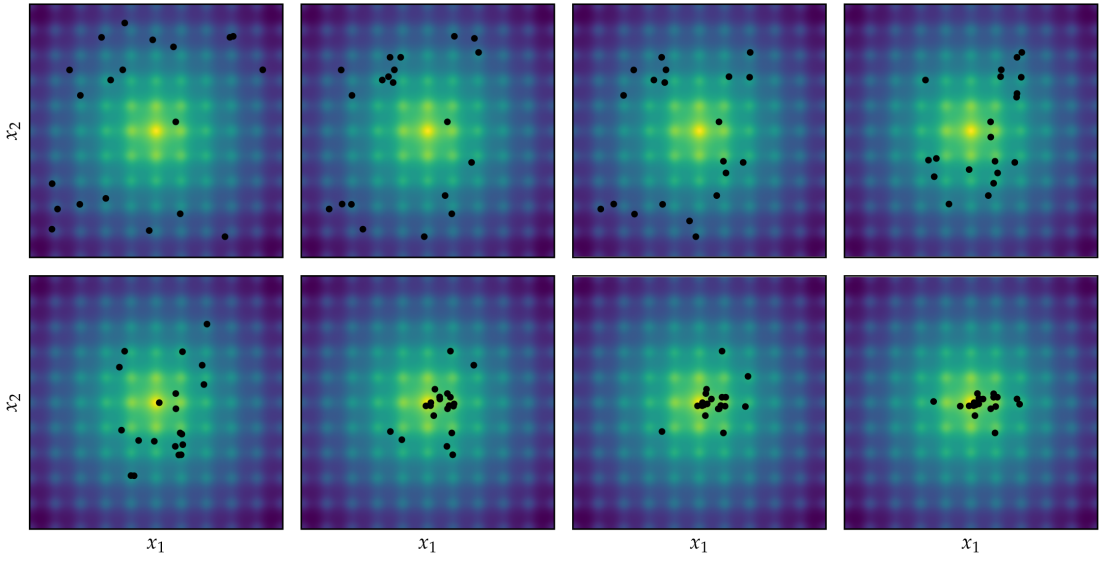
x_2
x_2
x_1
x_1
x_1
x_1

Particle Swarm Optimization

- Each individual, or particle, tracks the following
  - Current position
  - Current velocity
  - Best position seen so far by the particle
  - Best position seen so far by any particle

- At each iteration, these factors produce force and momentum effects to determine the movement of a particle p from the population:

$$x_i^p \leftarrow x_i^p + v_i^p$$
$$v_i^p \leftarrow w v_i^p + c_1 r_1 \left(x_i^{p,best} - x_i^p \right) + c_2 r_2 \left(x_i^{best} - x_i^p \right)$$

$\mathbf{x}_{p,best}$ is the best location among those seen by the particle; $\mathbf{x}_{best}$ is the best location found so far over all particles; w, c_1, and c_2 are parameters; and r_1 and r_2 are random numbers drawn from $U(0,1)$

Particle Swarm Optimization

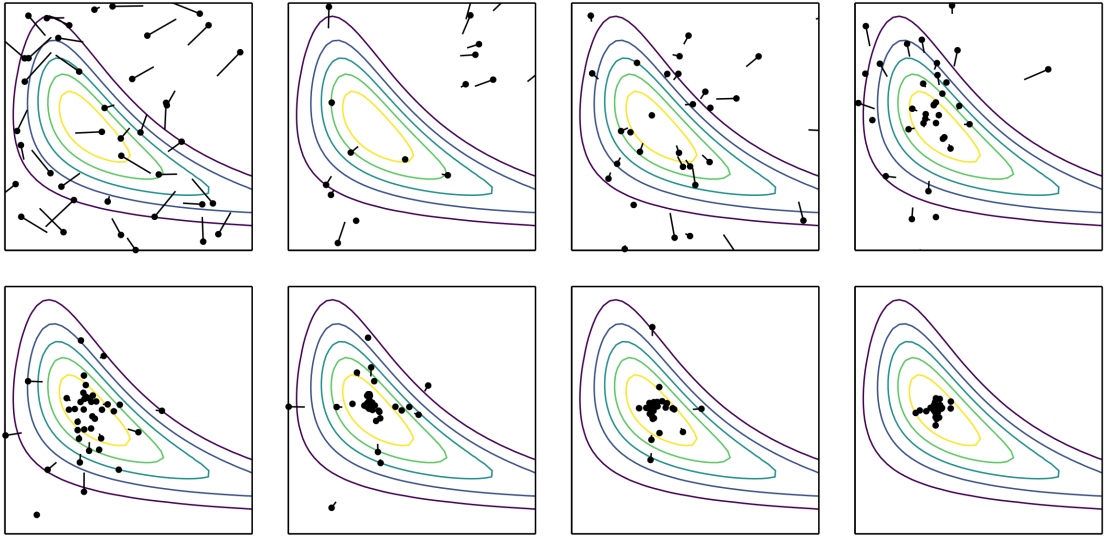

The Evolutionary Computation Bestiary
https://fcampelo.github.io/EC-Bestiary/

Hybrid Methods

- So far, we have discussed Darwinian Evolution: random variation + natural selection
  Some giraffes are born with longer necks. They access more food. They reproduce more. Long-neck genes spread.
- Generally, these methods are good at finding the best regions in design space, but do not perform as well as descent methods near the minimizer
- Hybrid methods try to leverage the strength of both methods
- Two hybrid approaches
  - Lamarckian evolution: traits that an organism acquires during its lifetime are directly inherited by offspring.
    Giraffes stretch their necks to reach higher leaves. Their necks become longer during life. Their offspring inherit the longer neck.
  - Baldwinian evolution: Learning does not directly change genes, but learning influences which genes are selected. Learning guides evolution indirectly.
    Giraffes stretch their necks to reach higher leaves. Their necks become longer during life. They are more likely to survive and reproduce. Their offspring inherit the genes that make it easier to stretch their necks.

Hybrid Methods

- Lamarckian evolution
  Performs regular descent method update on each individual

- Baldwinian evolution
  Uses value of descent method update to augment the objective value of each design point

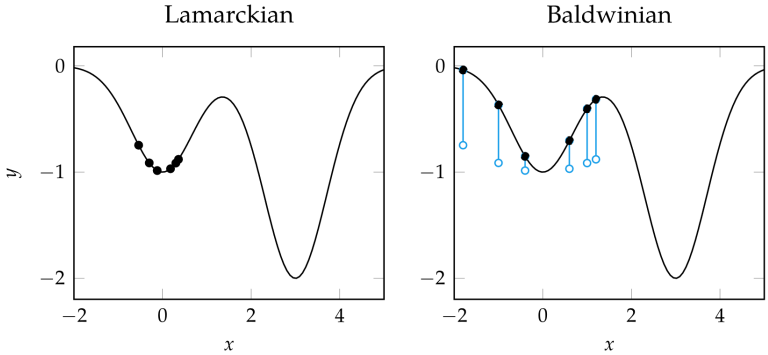

Hybird Genetic Algorithm Template

Input: f
Output: a "good" solution**x**
determine initial population `sp`;
perform local search on `sp`
while termination criterion is not satisfied **do**
    generate set `spr` of new candidate solutions by **recombination**;
    perform local search on `spr`
    generate set `spm` of new candidate solutions from `spr` and `sp` by **mutation**;
    perform local search on `spm`
    select new population `sp` from candidate solutions in `sp`, `spr`, and `spm`;

Summary

- Population methods use a collection of individuals in the design space to guide progression toward an optimum
- Genetic algorithms leverage selection, crossover, and mutations to produce better subsequent generations
- Differential evolution, particle swarm optimization, (the firefly algorithm, and cuckoo search) include rules and mechanisms for attracting design points to the best individuals in the population while maintaining suitable state space exploration
- Population methods can be extended with local search approaches to improve convergence

10. Sampling Plans

Sampling Plans

- In all nonlinear non convex optimization, to generate good initial design points
- With computationally costly functions, to create an initial set of design points from where to build a **surrogate models** to optimize in place of the original function
- In hyperparameter tuning

Full Factorial Design

- Factors and levels, terms from the field of Experimental Design in Statistics
- Uniform and evenly spaced samples across domain
- Simple, easy to implement, and covers domain
- Optimization over the points known as **grid search**
- Sample count grows exponentially with dimension: n^m
- Can be coarse and miss local features

$a_i \leq x_i \leq b_i$ for each component i.
grid with m_i samples in the ith dimension

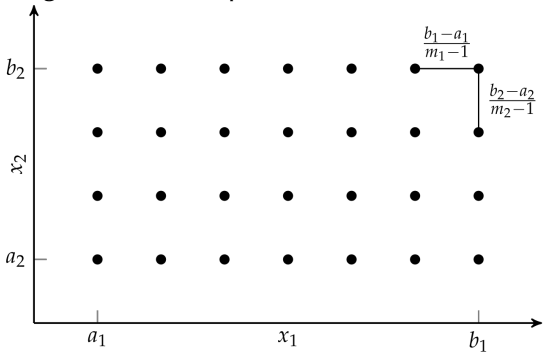

Random Sampling

- Uses pseudorandom number generator to define samples according to our desired distribution
- If variable bounds are known, a common choice is independent **uniform distributions** across domains of possible variable values
  $[a_1, b_1] \times \ldots \times [a_n, b_n]$
- Ideally, if enough points are sampled and the right distribution is chosen, the design space will be covered

Uniform Projection Plans

- A **uniform projection plan** is a sampling plan over a discrete grid where the distribution over each dimension is uniform.

Example

In 2D, $m \times m$ sampling grid (as in full factorial), but, instead of taking all m^2 samples, we want to sample only m positions.

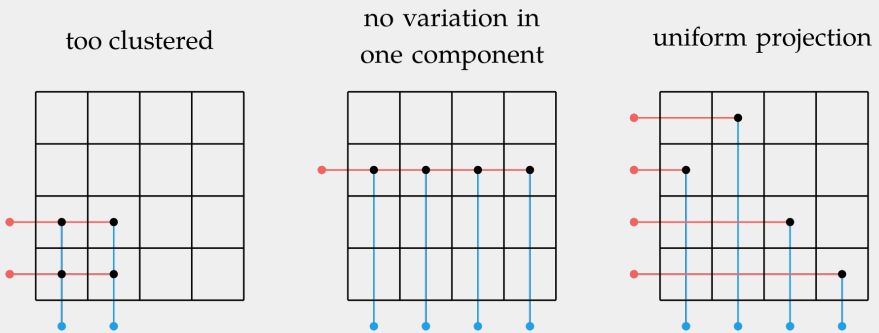

Uniform Projection Plans

Example (Random m-permutations)



$p = 4\,2\,1\,3\,5$

Example (Latin square)

Latin squares are $m \times m$ grids where each row contains each integer 1 through m and each column contains each integer 1 through m. N rooks on a chess board without threatening each other

4	1	3	2
1	4	2	3
3	2	1	4
2	3	4	1

Latin-hypercubes are a generalization to any number of dimensions (note that the points

Stratified Sampling

- Each point is sampled uniformly at random within each grid cell instead of the center
- Cells decided by Full Factorial or Uniform Projection Plans
- Can capture details that regularly-spaced samples might miss

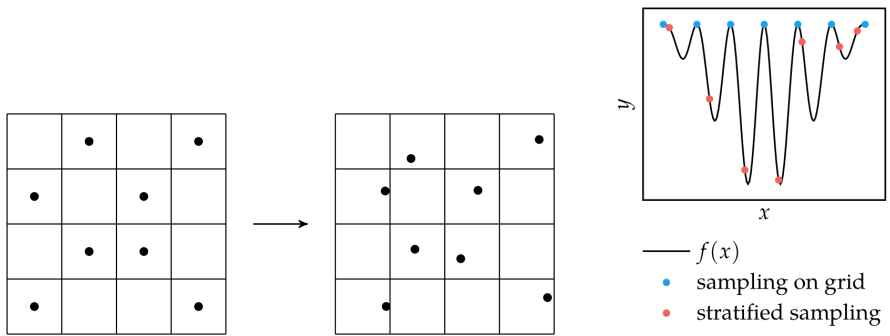

Space Filling Metrics

- A sampling plan may cover a search space fully, but still leave large areas unexplored

Example (Uniform Projection Plan)



- **space-filling metrics** quantify this aspect measuring the degree to which a sampling plan $X \subseteq \mathcal{X}$ fills the design space

Space-Filling Metrics: Discrepancy

- **Discrepancy**: measure of ability of the sampling plan X to fill a hyper-rectangular design space
- It is given by hyper-rectangular subset $\mathcal{H}$ with the maximum difference between the fraction of samples in $\mathcal{H}$ and the volume of $\mathcal{H}$'s.

$$d(X) = \underset{\mathcal{H}}{\text{supremum}} \left| \frac{\#(X \cap \mathcal{H})}{\#X} - \lambda(\mathcal{H}) \right|$$

$\lambda(\mathcal{H})$ is the n-dimensional volume of $\mathcal{H}$, ie, the product of the side lengths of $\mathcal{H}$

We wish to have a plan X with low discrepancy

Often very difficult to compute directly



d for the purple rectangle is $>$ than d for the blue rectangle

Space-Filling Metrics: Pairwise Distances

- Method of measuring relative space-filling performance of two m-point sampling plans
- Better spread-out plans will have larger pairwise distances:
  1. compute all pairwise distances between all points within each sampling plan
  2. sort the pairwise distances of each set in ascending order
  3. the plan with the first pairwise distance exceeding the other is considered more space-filling
- Suggests simple algorithm:
  1. produce a set of randomly distributed sampling plans,
  2. pick the one with greatest pairwise distances
- Possible also for uniform projection plans, by mutating them with swaps and simulated annealing.

Space-Filling Metrics: Morris-Mitchell Criterion

- Alternative to previously suggested algorithm that simplifies the optimization problem

$$\underset{X}{\text{minimize}} \; \underset{q \in \{1,2,3,10,20,50,100\}}{\text{maximize}} \; \Phi_q(X)$$

$$\Phi_q(X) = \left(\sum_i d_i^{-q} \right)^{\frac{1}{q}}$$

where d_i is the ith pairwise distance between points in X and $q > 0$ is a tunable parameter. Larger values of q give higher penalties to large distances.

Space-Filling Metrics: Morris-Mitchell Criterion

Uniform projection plans sorted from best to worst according to Φ_1

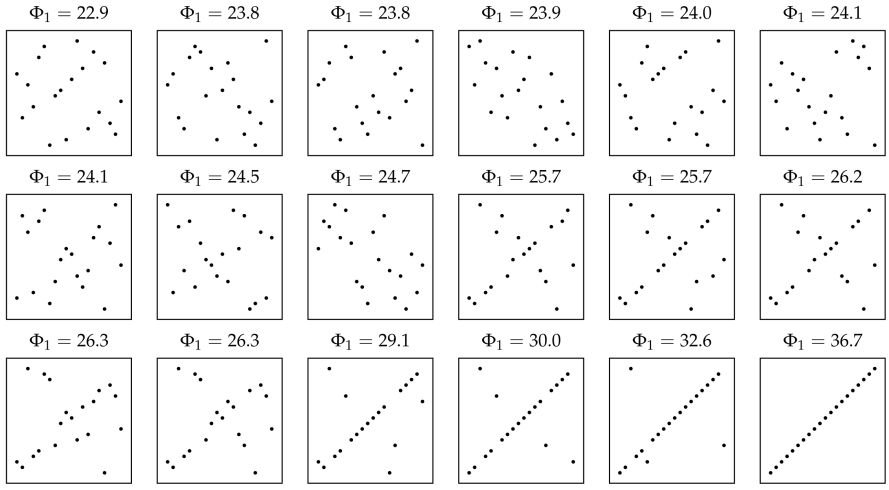

Space-Filling Subsets

- Often, the set of possible sample points is constrained to be a subset of available choices
- A space-filling metric for a subset S within a finite set X is the maximum distance between a point in X and the closest point in S, using a norm to measure distance

$$d_{\max}(X, S) = \underset{\mathbf{x} \in X}{\text{maximize}} \; \underset{\mathbf{s} \in S}{\text{minimize}} \; \|\mathbf{s} - \mathbf{x}\|_q$$

- A space-filling subset minimizes this metric
- Often computationally intractable, but heuristics like (repeated) greedy construction and exchange-search often produce acceptable results

Space-Filling Subsets

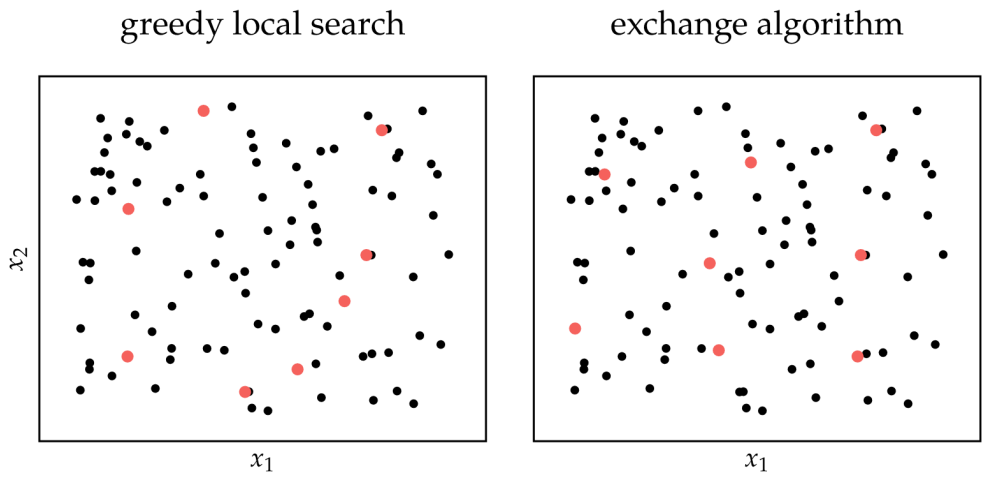

Quasi-Random Sequences

- Also called **low-discrepancy sequences**, **quasi-random sequences** are deterministic sequences that systematically fill a space such that their integral over the space converges as fast as possible

- Used for fast convergence in Monte Carlo integration, which approximates an integral by sampling points in a domain
  Monte Carlo integration: error convergence of $O(1/\sqrt{m})$; quasi-Monte Carlo: $O(1/m)$

- Quasi-random sequences are typically constructed for the unit n-dimensional hypercube, $[0,1]^n$. Any multidimensional function with bounds on each variable can be transformed into such a hypercube.

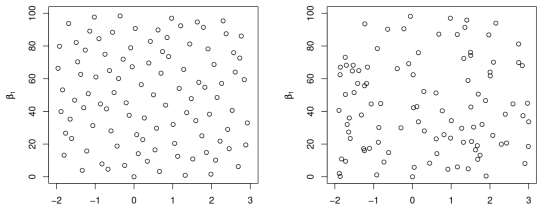

Quasi-Random Sequences

- Additive Recurrence: Recursively adds irrational numbers
- Halton Sequence: sequence of fractions generated with coprime numbers
- Sobol Sequence: recursive XOR operation with carefully chosen numbers

Quasi-Random Sequences: Additive Recurrence

- Recursively adds irrational numbers

  $$x_{k+1} = x_k + c \pmod 1$$

  c irrational

  $$c = 1 - \varphi = \frac{\sqrt{5} - 1}{2} \approx 0.618034$$

  φ is golden ratio

- We can construct a space-filling set over n dimensions using an additive recurrence sequence for each coordinate, each with its own value of c.

- square roots of the primes are known to be irrational, and can thus be used to obtain different sequences for each coordinate:

  $$c_1 = \sqrt{2}, c_2 = \sqrt{3}, c_3 = \sqrt{5}, c_4 = \sqrt{7}, c_5 = \sqrt{11}, \ldots$$

Quasi-Random Sequences: Halton Sequence

- single-dimensional version, called van der Corput sequences, generates sequences where the unit interval is divided into powers of base b. For example, $b = 2$

$$X = \left\{ \frac{1}{2}, \frac{1}{4}, \frac{3}{4}, \frac{1}{8}, \frac{5}{8}, \frac{3}{8}, \frac{7}{8}, \frac{1}{16}, \ldots \right\}$$

  whereas $b = 5$

$$X = \left\{ \frac{1}{5}, \frac{2}{5}, \frac{3}{5}, \frac{4}{5}, \frac{1}{25}, \frac{6}{25}, \frac{11}{25}, \ldots \right\}$$

- Multi-dimensional space-filling sequences use one van der Corput sequence for each dimension, each with its own base b. The bases, however, must be **coprime** in order to be uncorrelated.

- Two integers are **coprime** if the only positive integer that divides them both is 1, eg, 8 and 9.

- Correlation can be avoided by the leaped Halton method, which takes every pth point, where p is a prime different from all coordinate bases.

Quasi-Random Sequences: Sobol Sequence

- Recursive XOR operation with carefully chosen numbers.
- XOR ($\oplus$) returns true if and only if both inputs are different
- For n-dimensional hypercube $I^n = [0,1]^n$, the ith point of the sequence $\mathbf{x}_i$ for dimension j is calculated as:

  $$x_{i,j} = x_{i-1,j} \oplus v_{k,j}$$

  $v_{k,j}$ is the jth dimension of the kth direction number.
- **direction numbers** $v_{k,j} = (0.v_{k,j,1}v_{k,j,2}\ldots)_2$ where $v_{k,j,m}$ denotes the mth digit after the binary point.
- Tables of direction numbers with different properties have been proposed.
- Initialization: unit initialisation: ℓth left most bit set to one $v_{k,j,\ell} = 1$ for all k and j and all others to be zero

Quasi-Random Sequences

space-filling sampling plans in two dimensions. Samples are colored according to the order in which they are sampled. The uniform projection plan was generated randomly and is not optimized.

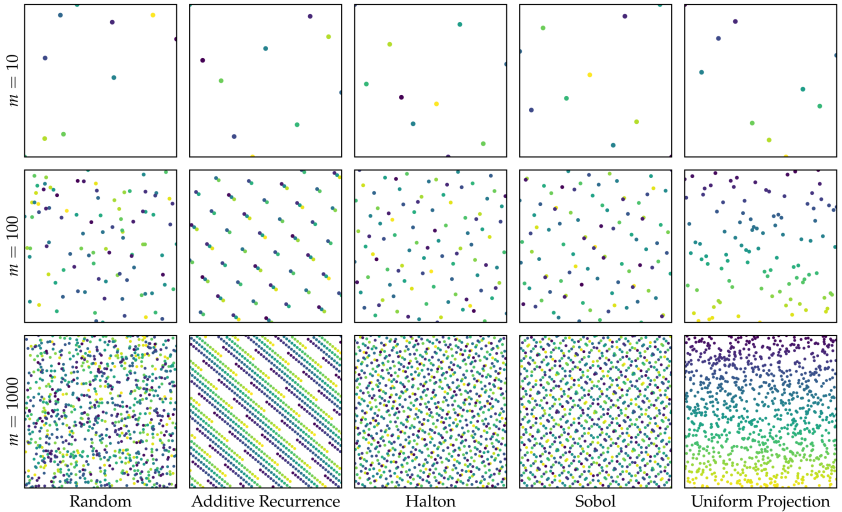

Summary

- Sampling plans are used to cover search spaces with a limited number of points
- Full factorial sampling, which involves sampling at the vertices of a uniformly discretized grid, requires a number of points exponential in the number of dimensions
- Uniform projection plans, which project uniformly over each dimension, can be efficiently generated and can be optimized to be space-filling
- Greedy construction and the exchange local search algorithm can be used to find a subset of points that maximally fill a space
- Quasi-random sequences are deterministic procedures by which space-filling sampling plans can be generated

11. Machine Learning Applications

Introduction

Large-scale machine learning represents an important application area of optimization.

It is also a setting where traditional optimization techniques typically falter, due to the large number of parameters to be optimized, the large number of training examples, and the highly nonlinear functions often used.

Two case studies:

- Logistic regression or support vector machines
  convex optimization problems

- deep neural networks
  highly nonlinear and nonconvex problems

Text Classification via Convex Optimization

Task: determining whether a text document is one that discusses politics.

- set of examples $\{(\mathbf{x}_1, y_1), \ldots, (\mathbf{x}_n, y_n)\}$, where for each $i \in \{1, \ldots, n\}$
  $\mathbf{x}_i$ represents the features of a text document (e.g., the words it includes)
  y_i is a label indicating whether the document belongs ($y_i = 1$) or not ($y_i = -1$) to a particular class.

- h prediction function

- performance measure: count how often the program prediction $h(\mathbf{x}_i)$ differs from the correct prediction y_i.

- minimize the so-called **empirical risk** of misclassification

$$R_n(h) = \frac{1}{n} \sum_{i=1}^{n} \mathbb{I}[h(\mathbf{x}_i) \neq y_i], \qquad \text{where } \mathbb{I}[A] = \begin{cases} 1 & \text{if } A \text{ is true,} \\ 0 & \text{otherwise} \end{cases}$$

Text Classification via Convex Optimization

Choosing between prediction functions belonging to a given class by comparing them using cross-validation procedures that involve splitting the examples into three disjoint subsets:

- a training set, optimizing the choice of a small subset of viable candidates h by minimizing R_n
- a validation set, generalized performance of each of these remaining candidates is then estimated using the validation set, the best performing of which is chosen as the selected function.
- a testing set, only used to estimate the generalized performance of this selected function

Formalization

- feature vector $\mathbf{x} \in \mathbb{R}^d$ whose components are associated with a prescribed set of vocabulary words (bag of words approach); $\|\mathbf{x}\| = 1$
- $h(\mathbf{x}; \mathbf{w}, \tau) = \mathbf{w}^T\mathbf{x} - \tau$, $\mathbf{w} \in \mathbb{R}^d$ and $\tau \in \mathbb{R}$ linear discriminator
- performance measure: count how many times $\operatorname{sign}(h(\mathbf{x}; \mathbf{w}, \tau))$ mispredicts. Discontinuous problem.
- alternatively, define a continuous **loss function** ℓ that measures a cost for predicting h when the true label is y;
  e.g., one may choose a **log-loss function** of the form $\ell(h, y) = \log(1 + \exp(-hy))$.
- minimize the empirical risk

$$\min_{(\mathbf{w},\tau)\in\mathbb{R}^d\times\mathbb{R}} \frac{1}{n}\sum_{i=1}^{n} \ell(h(\mathbf{x}_i; \mathbf{w}, \tau), y_i) + \frac{\lambda}{2}\|\mathbf{w}\|_2^2 \tag{3}$$

  solve for various λ and choose on the validation set

Deep Neural Networks

- Deep Neural Networks: represent hypotheses as computation graphs with tunable weights and compute the gradient of the loss function with respect to those weights in order to fit the training data.
- Forward accumulation: compute prediction
- Backward accumulation: compute gradient
- https://playground.tensorflow.org/

Perceptual Tasks via Deep Neural Networks

- Prediction function h whose value is computed by applying successive transformations to a given input vector $\mathbf{x}_i \in \mathbb{R}^{d_0}$.
- These transformations are made in layers. A canonical fully connected layer performs the computation

$$\mathbf{x}_i^{(j)} = s(W_j \mathbf{x}_i^{(j-1)} + b_j) \in \mathbb{R}^{d_j}$$

- where $\mathbf{x}_i^{(0)} = \mathbf{x}_i$, the matrix $W_j \in \mathbb{R}^{d_j \times d_{j-1}}$ and vector $b_j \in \mathbb{R}^{d_j}$ contain the jth layer parameters, and s is a component-wise nonlinear activation function
- $s(x) = 1/(1 + \exp(-x))$ and the hinge function $s(x) = \max(0, x)$ (often called a rectified linear unit (ReLU) in this context)
- $\mathbf{x}_i^{(J)}$ leads to the prediction function value $h(\mathbf{x}_i; \mathbf{w})$, $\mathbf{w} = \{(W_1, b_1), \ldots, (W_J, b_J)\}$.
- leads to a highliy non-linear and non-convex problem of the form:

$$\min_{\mathbf{w} \in \mathbb{R}^d} \frac{1}{n} \sum_{i=1}^{n} \ell(h(\mathbf{x}_i; \mathbf{w}), y_i)$$

- The gradient with respect to **w** is made of simple expressions that can be computed by passing information back through the network from the output units.
- the gradient computations for any feedforward computation graph have the same structure as the underlying computation graph.
- gradients can be computed by the chain rule and the algorithmic method of automatic differentiation
- back-propagation in deep learning is simply an application of **reverse mode differentiation**, which applies the chain rule “from the outside in”

Speech recognition

- A contemporary fully connected neural network for speech recognition typically has five to seven layers. This amounts to tens of millions of parameters to be optimized,
- the training may require up to thousands of hours of speech data (representing hundreds of millions of training examples) and weeks of computation on a supercomputer
- Accuracy of 2010-2012 models (GMM: Gaussian Mixture Models)

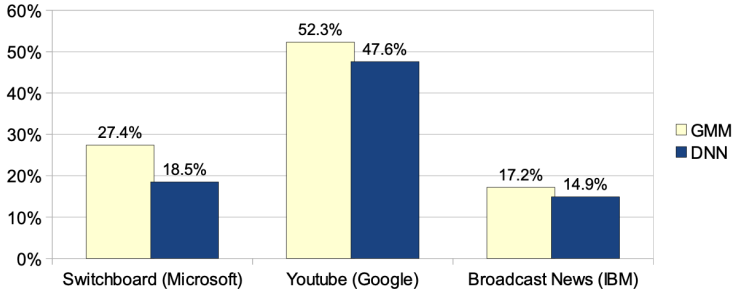

Convolutional neural networks

Convolutional neural networks (CNNs) have proved to be very effective for computer vision and signal processing tasks

ImageNet Large Scale Visual Recognition Competition (ILSVRC) with five convolutional layers and three fully connected layers

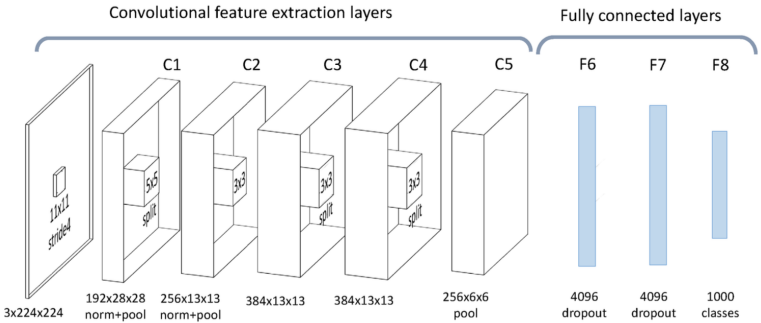

Image Recognition

- input $\mathbf{x}_i^{(j-1)}$ is intepreted as a multichannel image of 224×224 pixels.
- convolutional layers, wherein the parameter matrix W_j is a circulant matrix
- product $W_j \mathbf{x}_i^{(j-1)}$ computes the convolution of the image by a trainable filter
- activation functions are piecewise linear functions and can perform more complex operations that may be interpreted as image rectification, contrast normalization, or subsampling.
- output scores represent the odds that the image belongs to each of 1,000 categories.
- 60 million parameters
- training on a few million labelled images takes a few days on a dual GPU workstation.

Fundamentals

- Joint probability distribution function $P(x, y)$ that simultaneously represents the distribution $P(x)$ of inputs as well as the conditional probability $P(y \mid x)$ of the label y being appropriate for an input x.

- One should seek to find h that yields a small expected risk of misclassification over all possible inputs, i.e., an h that minimizes

$$R(h) = P[h(\mathbf{x}) \neq y] = E[\mathbb{I}[h(\mathbf{x}) \neq y]],$$

  which is **variational** since we are optimizing over a set of functions (the h), and is **stochastic** since the objective function involves an expectation.

- without explicit knowledge of P the only tractable option is to construct a **surrogate** problem that relies solely on the examples $(\mathbf{x}_i, y_i)_{i=1}^n$: minimize the empirical risk

Tasks:

- how to choose the parameterized family of prediction functions $\mathcal{H}$ and

- how to determine (and find) the particular prediction function $h \in \mathcal{H}$ that is optimal.

Choice of Prediction Function

1. $\mathcal{H}$ should contain prediction functions that are able to achieve a low empirical risk over the training set, so as to avoid bias or underfitting the data. (rich family of functions or by using a priori knowledge to select a well-targeted family)

2. the gap between expected risk and empirical risk, namely, $R(h) - R_n(h)$, should be small over all $h \in \mathcal{H}$. (increases with rich family of functions)

3. $\mathcal{H}$ should be effciently solvable in the corresponding optimization problem (the richer the family of functions and/or the larger training set the more complex the problem becomes)

Choice of Prediction Function

Uniform laws of large numbers and the Hoeffding inequality gurantee that with probability at least $1 - \eta$

$$\sup_{h \in \mathcal{H}} |R(h) - R_n(h)| \leq \mathcal{O}\left(\sqrt{\frac{1}{2n} \log\left(\frac{2}{\eta}\right) + \frac{d_{\mathcal{H}}}{n} \log\left(\frac{n}{d_{\mathcal{H}}}\right)}\right)$$

- $d_{\mathcal{H}}$ Vapnik-Chervonenkis (VC) dimension (measure of capacity of separating points)
- not the same as numer of parameters

- for a fixed $d_{\mathcal{H}}$, uniform convergence is obtained by increasing the number of training points n.
- for a fixed n, the gap can widen for larger $d_{\mathcal{H}}$.

In practice it is typically easier to estimate with cross-validation experiments.

Structural Risk Minimization

- Rather than choosing a generic family of prediction functions one chooses a structure, i.e., a collection of nested function families.
- structure can be formed as a collection of subsets of a given family $\mathcal{H}$: given a preference function Ω, choose various values of a hyperparameter C, according to each of which one obtains the subset $\mathcal{H}_C \stackrel{def}{=} \{h \in \mathcal{H} : \omega(h) \leq C\}$. ($C$ is, eg, degree of a polynomial model function, dimension of an inner layer of a DNN)

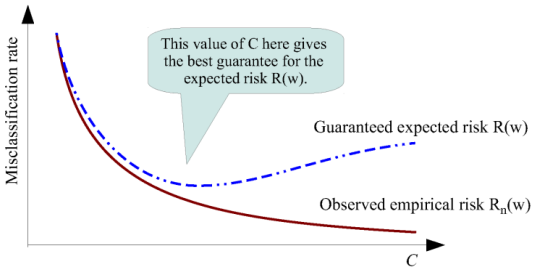

$$\min R_n(h)$$
$$\text{subject to} \quad \Omega(h) \leq C$$

Regularized empirical risk

$$R_n(h) + \lambda\Omega(h)$$

Structural Risk Minimization

Another approach:

- employ an algorithm for minimizing R_n, but terminate the algorithm early, i.e., before an actual minimizer of R_n is found.
  The hyperparameter is played by the training time allowed

- often essential due to computational budget limitations.

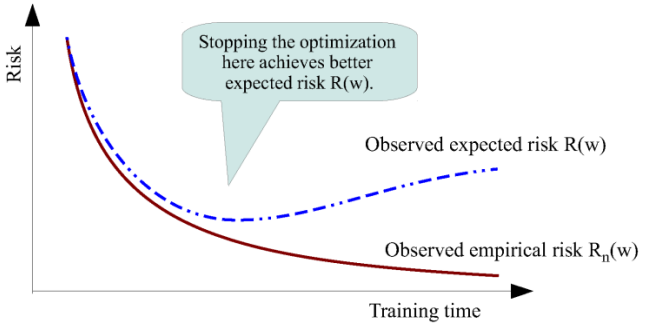

Formal Optimization Problem Statements

- We do not consider a variational optimization problem over $\mathcal{H}$,
- instead we assume that the prediction function h has a fixed form and is parameterized by a real vector $\mathbf{w} \in \mathbb{R}^d$
- for some given $h(\cdot;\cdot) : \mathbb{R}^{d_x} \times \mathbb{R}^d \to \mathbb{R}^{d_y}$, we consider the family of prediction functions $\mathcal{H} \stackrel{def}{=} \{h(\cdot;\mathbf{w}) : \mathbf{w} \in \mathbb{R}^d\}$
- aim to find $h \in \mathcal{H}$ that minimizes a given **loss function** $\ell : \mathbb{R}^{d_x} \times \mathbb{R}^d \to \mathbb{R}^{d_y}$, $\ell(h(x;\mathbf{w}), y)$
- Ideally, the expected loss is defined over **any** input-output pair. Assuming probability distribution $P(\mathbf{x}, y)$ represents the true input-output relationship:

$$R(w) = \int_{\mathbb{R}^{d_x} \times \mathbb{R}^{d_y}} \ell(h(\mathbf{x};\mathbf{w}), y) dP(\mathbf{x}, y) = E[\ell(h(\mathbf{x};\mathbf{w}), y)] \qquad \text{Expected Risk}$$

Formal Optimization Problem Statements

- In practice, one seeks the solution of a problem that involves an estimate of the expected risk R.
- In supervised learning, we have access (either all-at-once or incrementally) to a set of $n \in \mathbb{N}$ independently drawn input-output samples $\{(\mathbf{x}_i, y_i)\}_{i=1}^n \subseteq \mathbb{R}^{d_x} \times \mathbb{R}^{d_y}$, with which we define the **empirical risk function** $R_n : \mathbb{R}^d \to \mathbb{R}$ by

$$R_n(\mathbf{w}) \stackrel{def}{=} \frac{1}{n} \sum_{i=1}^{n} \ell(h(\mathbf{x}_i; \mathbf{w}), y_i) \qquad \text{Empirical Risk}$$

(note that before we used misclassification error while now ℓ.)

Simplified Notation

Let ξ be a random seed or the realization of a single (or a set of) sample $(\mathbf{x}, y)$.
For a given $(\mathbf{w}, \xi)$ let $f(\mathbf{w}; \xi)$ be the composition of the loss function ℓ and the prediction function h
Then:

$$R(\mathbf{w}) = \mathbb{E}_{\xi}[f(\mathbf{w}; \xi)] \qquad \text{Expected Risk}$$

Let $\{\xi_{[i]}\}_{i=1}^{n}$ be realizations of ξ corresponding to $\{(\mathbf{x}_i, y_i)\}_{i=1}^{n}$ and $f_i(\mathbf{w}) \stackrel{def}{=} f(\mathbf{w}; \xi_{[i]})$
Then:

$$R_n(\mathbf{w}) \stackrel{def}{=} \frac{1}{n} \sum_{i=1}^{n} f_i(\mathbf{w}) \qquad \text{Empirical Risk}$$

Convex Functions

The class of convex functions satisfies the following stability properties:

Proposition

If $\{f_j\}_{j\in\{1,\dots,m\}}$ are convex and $\{\alpha_j\}_{j\in\{1,\dots,m\}}$ are nonnegative, then $\sum_{j=1}^{m}\alpha_j f_j$ and $\max_{j\in\{1,\dots,m\}} f_j$ are convex.

Proposition

If $f:\mathbb{R}^d\to\mathbb{R}$ is convex and $A:\mathbb{R}^d\to\mathbb{R}^d$ is affine then $f\circ A:\mathbb{R}^d\to\mathbb{R}$ is convex.

Proposition

If $f:\mathbb{R}^{d_1+d_2}\to\mathbb{R}$ is convex, so is the function $x_1\mapsto\inf_{x_2\in\mathbb{R}^{d_2}} f(x_1,x_2)$ on $\mathbb{R}^{d_1}$.

- Functions of the form of $R_n(\mathbf{w})$ in the previous slide and equation (3) are convex if the loss ℓ is convex in the first variable, $h(\mathbf{x};\theta,\tau)$ is linear in $\mathbf{w},\tau$, and their domain is convex. Eg, Linear models (in their parameters).
- Neural networks are nonlinear models (in their parameters) and thus lead to non-convex problems.

Stochastic vs Batch Optimization Methods

Reduction to minimizing R_n, with $\mathbf{w}_0 \in \mathbb{R}^d$ given. Deterministic problem.
Stochastic Approach: Stochastic Gradient (Robbins and Monro, 1951)

$$\mathbf{w}_{k+1} \leftarrow \mathbf{w}_k - \alpha_k \nabla f_{i_k}(\mathbf{w}_k)$$

i_k is chosen randomly from $\{1, \ldots, n\}$, $\alpha_k > 0$.

- very cheap iteration only on one sample.
- $\{\mathbf{w}_k\}$ is a stochastic process determined by the random sequence $\{i_k\}$.
- the direction might not always be a descent but if it is a descent direction in **expectation**, then the sequence $\{\mathbf{w}_k\}$ can be guided toward a minimizer of R_n.

Batch Approach: batch gradient, steepest descent, full gradient method:

$$\mathbf{w}_{k+1} \leftarrow \mathbf{w}_k - \alpha_k \nabla R_n(\mathbf{w}_k) = \mathbf{w}_k - \frac{\alpha_k}{n} \sum_{i=1}^{n} \nabla f_i(\mathbf{w}_k)$$

- more expensive
- can use all deterministic gradient-based optimization methods
- the sum structure opens up to parallelization

Stochastic Gradient

- In case of redundancy using all the sample data in every iteration is inefficient
- Comparison of the performance of a batch L-BFGS method on number of evaluations of a sample gradient $\nabla f_{i_k}(\mathbf{w}_k)$.
- Each set of n consecutive accesses is called an **epoch**.
- The batch method performs only one step per epoch while SG performs n steps per epoch.

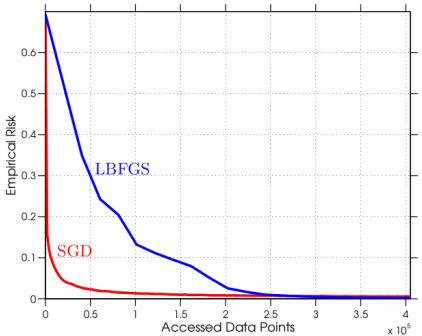

the fast initial improvement achieved by SG, followed by a drastic slowdown after 1 or 2 epochs, is common in practice

SG more sensitive to α_k and starting point

if more epochs, batch may become better

Theoretical Motivations

- A batch approach can minimize R_n at a fast rate;
  if R_n is strongly convex and we apply a batch gradient method, then there exists a constant $\rho \in (0, 1)$ such that, for all $k \in \mathbb{N}$, the training error follows **(R-)linear convergence** ($\equiv$ geometric convergence in ML)

$$R_n(\mathbf{w}_k) - R_n^* \leq \mathcal{O}(\rho^k),$$

- in the worst case, the total number of iterations in which the training error can be above a given $\epsilon > 0$ is proportional to $\log(1/\epsilon)$.

- with a per-iteration cost proportional to n (due to the need to compute $\nabla R_n(\mathbf{w}_k)$ for all $k \in \mathbb{N}$), the total work required to obtain ϵ-optimality for a batch gradient method is proportional to $n \log(1/\epsilon)$.

Theoretical Motivations

- The rate of convergence of a basic stochastic method is slower than for a batch gradient; if R_n is strictly convex and each i_k is drawn uniformly from $\{1, \ldots, n\}$, then for all $k \in \mathbb{N}$, SG satisfies the **sublinear convergence property**

$$\mathbb{E}[R_n(\mathbf{w}_k) - R_n^*] = \mathcal{O}(1/k).$$

- However, neither the per-iteration cost nor the right-hand side $\mathcal{O}(1/k)$ depends on the sample set size n

- the total work required to obtain ϵ-optimality for SG is proportional to $1/\epsilon$, which is larger than $n \log(1/\epsilon)$ for moderate values of n and ϵ, but SG can be more efficient than batch gradient for large n.

Theoretical Motivations

- In a **stochastic optimization setting**, in the analysis of SG we substitute $\nabla f_{i_k}(\mathbf{w}_k)$ by $\nabla f(\mathbf{w}_k; \xi_k)$ with each ξ_k drawn independently according to the distribution P
- then SG yields for the **expected risk** the same sublinear convergence rate but on the expected risk:

  $$\mathbb{E}[R(\mathbf{w}_k) - R^*] = \mathcal{O}(1/k).$$

  (a batch approach is not even viable without the ability to compute ∇R.)
- Interpretation: If $n \gg k$ up to iteration k minimizing R_n same as minimizing R

Theoretical Motivations: Summary

- Theoretical arguments in favor of stochastic over batch approaches in optimization methods for large-scale ML.
- However, if a larger number of epochs is considered, then one would see the batch approach eventually overtake the stochastic method and yield a lower training error.
- Moreover, the SG iteration is difficult to parallelize and requires excessive communication between nodes in a distributed computing setting
- Research on combining the best properties of batch and stochastic algorithms.

Beyond SG: Noise Reduction and Second-Order Methods

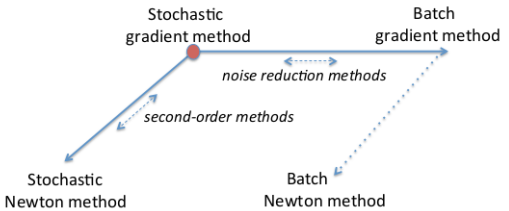

- on horizontal axis methods that try to improve rate of convergence
- on vertical axis, methods that try to overcome non-linearity and ill-conditioning

Mini-batch Approach small subset of samples, call it $\mathcal{S}_k \subseteq \{1, \ldots, n\}$, chosen randomly in each iteration:

$$\mathbf{w}_{k+1} \leftarrow \mathbf{w}_k - \frac{\alpha_k}{|\mathcal{S}_k|} \sum_{i \in \mathcal{S}} \nabla f_i(\mathbf{w}_k)$$

- due to the reduced variance of the stochastic gradient estimates, the method is easier to tune in terms of choosing the stepsizes $\{\alpha_k\}$.
- dynamic sample size and gradient aggregation methods, both of which aim to improve the rate of convergence from sublinear to linear

Formalization

$$F(\mathbf{w}) = \begin{cases} R_n(\mathbf{w}) = \frac{1}{n}\sum_{i=1}^{n} f_i(\mathbf{w}) & \text{Empirical Risk} \\ R(\mathbf{w}) = \mathbb{E}_{\xi}[f(\mathbf{w};\xi)] & \text{Expected Risk} \end{cases}$$

sampling uniformly with replacement from training set $\rightsquigarrow R_n$
sampling with $P(\xi)$ with replacement from training set $\rightsquigarrow R$.

Procedure SG(...);
Choose an initial iterate $\mathbf{w}_0$;
for $k = 0, 1, \ldots$ **do**
    Generate a realization of the random variable ξ_k;
    Compute a stochastic vector $g(\mathbf{w}_k, \xi_k)$;
    Choose a stepsize $\alpha_k > 0$;
    Set the new iterate as $\mathbf{w}_{k+1} \leftarrow \mathbf{w}_k - \alpha_k g(\mathbf{w}_k, \xi_k)$;

Formalization

ξ_k may represent a single sample or a mini-batch
g may represent a stochastic gradient (biased estimator of $\nabla F(\mathbf{w}_k)$ or a stochastic Netwon or quasi-Newton direction).

$$g(\mathbf{w}_k, \xi_k) = \begin{cases} \nabla f(\mathbf{w}_k; \xi_k) \\ \frac{1}{n_k} \sum_{i=1}^{n_k} \nabla f(\mathbf{w}_k; \xi_{k,i}) \\ H_k \frac{1}{n_k} \sum_{i=1}^{n_k} \nabla f(\mathbf{w}_k; \xi_{k,i}) \end{cases}$$

H_k a symmetric positive definite scaling matrix (we called it B_k^{-1} earlier in this course)
α_k fixed stepsize or diminishing stepsizes
$\mathbf{w}_k$ can have influence on the sample selection (active learning)

Noise Reduction Methods

- SG as the ideal optimization approach for large-scale applications.
- SG suffers from the adverse effect of **noisy gradient estimates**.
  - when fixed stepsizes are used it prevents SG from converging to the solution
  - when a diminishing stepsize sequence $\{\alpha_k\}$ is employed it leads to a slow, sublinear rate of convergence.
- Remedies:

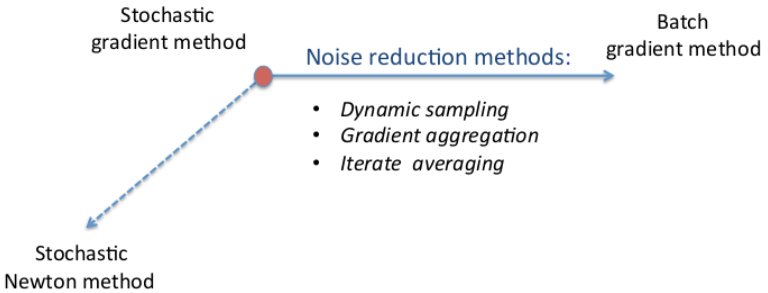

Overview

Achieve linear rate of convergence to the optimal value using a fixed stepsize by constructing a more reliable step with smaller variance than an SG step:

- **Dynamic sampling methods** achieve noise reduction by gradually increasing the mini-batch size used in the gradient computation, thus employing increasingly more accurate gradient estimates as the optimization process proceeds.

- **Gradient aggregation methods** improve the quality of the search directions by storing gradient estimates corresponding to samples employed in previous iterations, updating one (or some) of these estimates in each iteration, and defining the search direction as a weighted average of these estimates.

Rate of convergence remains sublinear but reduces variance of iterates wrt SG:

- **iterate averaging methods** maintain an average of iterates computed during the optimization process and employes a more aggressive stepsize sequence–of order $O(1/\sqrt{k})$ rather than $O(1/k)$.

Reducing Noise at a Geometric (Linear) Rate

rate of decrease in noise that allows a stochastic-gradient-type method to converge at a linear rate.

Lemma (4.2)

Under the assumption of Lipschitz-continuous objective gradients ∇F with Lipschitz constant $L > 0$, ie, $\|\nabla F(\mathbf{w}) - \nabla F(\bar{\mathbf{w}})\|_2 \leq L\|\mathbf{w} - \bar{\mathbf{w}}\|_2$ for all $\{\mathbf{w}, \bar{\mathbf{w}}\} \subseteq \mathbb{R}^d$, the iterates of SG satisfy the following inequality for all $k \in \mathbb{N}$:

$$\mathbb{E}_{\xi_k}[F(\mathbf{w}_{k+1})] - F(\mathbf{w}_k) \leq -\alpha_k \nabla F(\mathbf{w}_k)^T \mathbb{E}_{\xi_k}[g(\mathbf{w}_k, \xi_k)] + \frac{1}{2}\alpha_k^2 L \, \mathbb{E}_{\xi_k}[\|g(\mathbf{w}_k, \xi_k)\|_2^2]$$

We want to make the left hand side small (sequence of expected optimality gaps).

Reducing Noise at a Geometric (Linear) Rate

Theorem (5.1, Strongly Convex Objective, Noise Reduction)

Under assumptions of F strongly convex with Lipschitz-continuous gradients the SG method with an appropriately chosen fixed step size $\alpha_k = \bar{\alpha}$ and a variance of the stochastic vectors that decreases geometrically

$$Var_{\xi_k}[g(\mathbf{w}_k, \xi_k)] \leq M\zeta^{k-1}$$

has a sequence of expected optimality gaps that vanishes at a linear rate:

$$\mathbb{E}[F(\mathbf{w}_k) - F^*] \leq \omega\rho^{k-1}$$

Dynamic Sample Size Methods

Can we design efficient optimization methods attaining the critical bound on the variance?

Mini-batch stochastic gradient:

$$\mathbf{w}_{k+1} \leftarrow \mathbf{w}_k - \bar{\alpha} g(\mathbf{w}_k, \xi_k)$$

where the stochastic directions are computed for some $\tau > 1$ as

$$g(\mathbf{w}_k, \xi_k) \overset{def}{=} \frac{1}{n_k} \sum_{i \in \mathcal{S}_k} \nabla f(\mathbf{w}_k; \xi_{k,i}) \qquad \text{with } n_k \overset{def}{=} |\mathcal{S}_k| = \lceil \tau^{k-1} \rceil.$$

the mini-batch size increases geometrically as a function of the iteration counter k

Corollary 5.2. Let $\{\mathbf{w}_k\}$ be the iterates generated with unbiased gradient estimates, i.e., $\mathbb{E}_{\xi_{k,i}}[\nabla f(\mathbf{w}_k; \xi_{k,i})] = \nabla F(\mathbf{w}_k)$ for all $k \in \mathbb{N}$ and $i \in \mathcal{S}_k$ (expectation of each stochastic gradient is equal to the true gradient $\nabla F(\mathbf{w}_k)$). Then, the variance condition is satisfied, and if all other assumptions of Theorem 5.1 hold, then the expected optimality gap vanishes linearly.

Dynamic Sample Size Methods

Note: we described a method as linearly convergent but the per-iteration cost increases without bound.

Theorem 5.3 Suppose that the dynamic sampling SG method is run with a stepsize $\bar{\alpha}$ satisfying "some" bounds and some τ. In addition, suppose that other Assumptions hold. Then, the total number of evaluations of a stochastic gradient of the form $\nabla f(\mathbf{w}_k; \xi_{k,i})$ required to obtain $\mathbb{E}[F(\mathbf{w}_k) - F^*] \leq \epsilon$ is $O(\epsilon^{-1})$.

Dynamic Sample Size Guidelines

Given the rate of convergence of a batch optimization algorithm on strongly convex functions (i.e., linear, superlinear, etc.), what should be the sampling rate so that the overall algorithm is **efficient** in the sense that it results in the lowest computational complexity?

- if the optimization method has a sublinear rate of convergence, then there is no sampling rate that makes the algorithm "efficient";
- if the optimization algorithm is linearly convergent, then the sampling rate must be geometric (with restrictions on the constant in the rate) for the algorithm to be "efficient";
- for superlinearly convergent methods, increasing the sample size at a rate that is slightly faster than geometric will yield an "efficient" method.

Design in Practice

- presetting the sampling rate, ie, $\tau > 1$ before running the optimization algorithm, requires some experimentation. Care must be put in preventing the full sample set from being employed too soon

- adaptive mechanisms to produce descent directions sufficiently often
  - any direction $g(\mathbf{w}_k, \xi_k)$ is a descent direction for F at $\mathbf{w}_k$ if, for some $\chi \in [0, 1)$, one has

    $$\delta(\mathbf{w}_k, \xi_k) \stackrel{def}{=} \|g(\mathbf{w}_k, \xi_k) - \nabla F(\mathbf{w}_k)\|_2 \leq \chi \|g(\mathbf{w}_k, \xi_k)\|_2$$

    verifying the inequality may be costly because involves the evaluation of $\nabla F(\mathbf{w}_k)$, one can estimate the left-hand side $\delta(\mathbf{w}_k, \xi_k)$, and then choose n_k so it holds sufficiently often.
  - The sample variance obtained by sampling without replacements is bounded above by $\chi^2 \|g(\mathbf{w}_k, \xi_\epsilon)\|_2^2$
  - If this condition is not satisfied, then increase the sample size to a size that one might predict would satisfy such a condition.
  - no guarantee that the size n_k increases at a geometric rate. Remedy: if the adaptive increases the sampling rate more slowly than a preset geometric sequence, then a growth in the sample size is imposed.

Gradient Aggregation

- Rather than compute increasingly more **new** stochastic gradient information in each iteration, achieve a lower variance by **reusing and/or revising** previously computed information
- achieve a linear rate of convergence on strongly convex problems.
- improved rate is achieved primarily by either an increase in computation or an increase in storage.
- works on finite sums like R_n

stochastic variance reduced gradient (SVRG)

Procedure SVRG ; # Methods for Minimizing an Empirical Risk R_n
Choose an initial iterate $\mathbf{w}_1 \in \mathbb{R}^d$, stepsize $\alpha > 0$ and a positive integer m;
for $k = 1, 2, \ldots$ **do**
  Compute the batch gradient $\nabla R_n(\mathbf{w}_k)$;
  Initialize $\tilde{\mathbf{w}}_1 \leftarrow \mathbf{w}_k$;
  for $j = 1, \ldots, m$ **do**
    $\tilde{\mathbf{g}}_j \leftarrow \nabla f_{i_j}(\tilde{\mathbf{w}}_j) - (\nabla f_{i_j}(\mathbf{w}_k) - \nabla R_n(\mathbf{w}_k))$; # $\nabla R_n(\mathbf{w}_k)$ from batch gradient
    $\tilde{\mathbf{w}}_{j+1} \leftarrow \tilde{\mathbf{w}}_j - \alpha \tilde{\mathbf{g}}_j$;
  Option (a): Set $\mathbf{w}_{k+1} = \tilde{\mathbf{w}}_{m+1}$;
  Option (b): Set $\mathbf{w}_{k+1} = \frac{1}{m} \sum_{j=1}^{m} \tilde{w}_{j+1}$;
  Option (c): Choose j uniformly from $\{1, \ldots, m\}$ and set $\mathbf{w}_{k+1} = \tilde{\mathbf{w}}_{j+1}$;

- since $E_{i_j}[\nabla f_{i_j}(\mathbf{w}_k)] = \nabla R_n(\mathbf{w}_k)$, one can view $\nabla f_{i_j}(\mathbf{w}_k) - \nabla R_n(\mathbf{w}_k)$ as the bias in the gradient estimate $\nabla f_{i_j}(\mathbf{w}_k)$.
- sampled gradient $\nabla f_{i_j}(\tilde{\mathbf{w}}_j)$ is corrected based on a perceived bias. Overall, $\tilde{\mathbf{g}}_j$ represents an unbiased estimator of $\nabla R_n(\tilde{\mathbf{w}}_j)$, but with a variance that one can expect to be smaller than as in simple SG
- Without explicit knowledge of L and c, the length of the inner cycle m and the stepsize α are typically both chosen by experimentation.

Stochastic average gradient algorithm (SAGA)

in each iteration, it computes a stochastic vector $\mathbf{g}_k$ as the average of stochastic gradients evaluated at previous iterates.

Procedure SAGA ; # Method for Minimizing an Empirical Risk R_n

Choose an initial iterate $\mathbf{w}_1 \in \mathbb{R}^d$ and stepsize $\alpha > 0$;

for $i = 1, \ldots, n$ **do**

  Compute $\nabla f_i(\mathbf{w}_1)$;

  Store $\nabla f_i(\mathbf{w}_{[i]}) \leftarrow \nabla f_i(\mathbf{w}_1)$; # $\mathbf{w}_{[i]}$ represents the latest iterate when ∇f_i was evaluated

for $k = 1, 2, \ldots$ **do**

  Choose j uniformly in $\{1, \ldots, n\}$;

  Compute $\nabla f_j(\mathbf{w}_k)$;

  Set $\mathbf{g}_k \leftarrow \nabla f_j(\mathbf{w}_k) - \nabla f_j(\mathbf{w}_{[j]}) + \frac{1}{n}\sum_{i=1}^{n} \nabla f_i(\mathbf{w}_{[i]})$; # $\mathbb{E}[g_k] = \nabla R_n(\mathbf{w}_k)$

  Store $\nabla f_j(\mathbf{w}_{[j]}) \leftarrow \nabla f_j(\mathbf{w}_k)$;

  Set $\mathbf{w}_{k+1} \leftarrow \mathbf{w}_k - \alpha \mathbf{g}_k$;

As in SVRG, the method employs unbiased gradient estimates, with variances that are expected to be less than the stochastic gradients that would be employed in a basic SG routine

SAGA

- Same per-iteration costs as basic SG
- on strongly convex R_n can achieve a linear rate of convergence but needs knowledge of at least L.
- More effective initialization instead of evaluating all the gradients $\{\nabla f_i\}_{i=1}^n$ at the initial point. For example, one could perform one epoch of simple SG, or one can assimilate iterates one-by-one and compute $\mathbf{g}_k$ only using the gradients available up to that point.
- SAGA needs to store n stochastic gradient vectors
- for very large n, gradient aggregation methods are comparable to batch algorithms and therefore cannot beat SG in this regime

Iterated Averaging Methods

- for minimizing a continuously differentiable F with unbiased gradient estimates, the idea is to employ the iteration:

$$\mathbf{w}_{k+1} \leftarrow \mathbf{w}_k - \alpha_k g(\mathbf{w}_k, \xi_k)$$
$$\tilde{\mathbf{w}}_{k+1} \leftarrow \frac{1}{k+1} \sum_{j=1}^{k+1} \mathbf{w}_j$$

  where $\{\tilde{\mathbf{w}}_k\}$ has no effect on the computation of the SG iterate sequence $\{\mathbf{w}_k\}$

- with stepsizes diminishing at a slow rate of $\mathcal{O}(1/(k^a))$ for some $a \in (\frac{1}{2}, 1)$ on strongly convex objectives, yields that $\mathbb{E}[\|\mathbf{w}_k - \mathbf{w}^*\|_2^2] = \mathcal{O}(1/(k^a))$ while $\mathbb{E}[\|\tilde{\mathbf{w}}_k - \mathbf{w}^*\|_2^2] = \mathcal{O}(1/k)$.

- in certain cases this combination of long steps and averaging prevent the adverse effects caused by ill-conditioning.

Second Order Methods

- Address the adverse effects of high nonlinearity and ill-conditioning of the objective function through the use of second-order information.
- improve convergence rates of batch methods or the constants involved in the sublinear convergence rate of stochastic methods
- First-order methods are **not scale invariant**. Consider:
  F continuously differentiable function $F : \mathbb{R}^d \to \mathbb{R}$

  $$\mathbf{w}_{k+1} \leftarrow \mathbf{w}_k - \alpha_k \nabla F(\mathbf{w}_k)$$

  linear transformation of the variables $\{\mathbf{w}_k\} = \{B\tilde{\mathbf{w}}_k\}$. $\min_{\tilde{\mathbf{w}}} F(B\tilde{\mathbf{w}}_k)$. B SPD matrix.

  $$\tilde{\mathbf{w}}_{k+1} \leftarrow \tilde{\mathbf{w}}_k - \alpha_k B \nabla F(B\tilde{\mathbf{w}}_k) \qquad \Longrightarrow \qquad \mathbf{w}_{k+1} \leftarrow \mathbf{w}_k - \alpha_k B^2 \nabla F(\mathbf{w}_k)$$

  They will perform differently. With $\alpha = 1$ and $B = \left(\nabla^2 F(\mathbf{w}_1)\right)^{-1/2}$ we get Newton's method. If F is strongly convex quadratic it gets to w^* in one step.

- Deterministic (batch) methods like Newton's method can achieve a quadratic rate of convergence if $\mathbf{w}_1$ is sufficiently close to a strong minimizer.

- Stochastic methods like the SG method cannot achieve a convergence rate that is faster than sublinear, regardless of the choice of B.

- careful use of successive re-scalings based on (approximate) second-order derivatives can be beneficial between the stochastic and batch regimes.

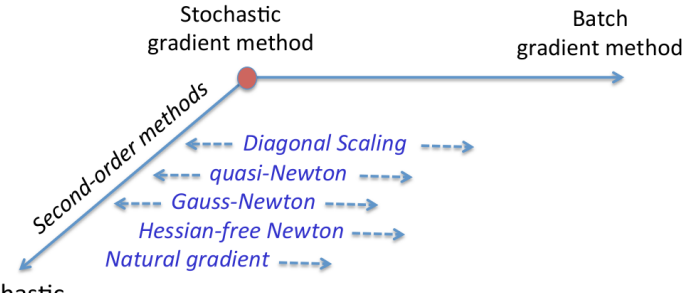

Hessian-Free Inexact Newton Methods

- Newton's method:

  $\mathbf{w}_{k+1} \leftarrow \mathbf{w}_k + \alpha_k \mathbf{s}_k$
  where $\mathbf{s}_k$ satisfies $\nabla^2 F(\mathbf{w}_k)\mathbf{s}_k = -\nabla F(\mathbf{w}_k)$.

- one can solve the linear system inexactly through an iterative approach such as the conjugate gradient (CG) method.

- By ensuring that the linear solves are accurate enough, such an inexact Newton-CG method can enjoy a superlinear rate of convergence

- For a smooth objective function F, one can compute $\nabla^2 F(\mathbf{w})\mathbf{d}$ at a cost that is a small multiple of the cost of evaluating ∇F, and without forming the Hessian, which would require $\mathcal{O}(d^2)$ storage

- exploit structure of risk measures

- iterations are more tolerant to noise in the hessian estimate than it is to noise in the gradient estimate
- employs a smaller, conditionally (given $\mathbf{w}_k$) uncorrelated, sample for defining the Hessian than for the stochastic gradient estimate
- can be combined with a backtracking (Armijo) line search or trust region
- (subsampled) Hessian-vector products can be computed efficiently in ML tasks

Example 6.2. *Consider a binary classification problem where the training function is given by the logistic loss with an ℓ_2-norm regularization parameterized by $\lambda > 0$:*

$$R_n(w) = \frac{1}{n}\sum_{i=1}^{n} \log(1 + \exp(-y_i w^T x_i)) + \frac{\lambda}{2}\|w\|^2. \tag{6.8}$$

A (subsampled) Hessian-vector product can be computed efficiently by observing that

$$\nabla^2 f_{\mathcal{S}_k^H}(w_k; \xi_k^H)d = \frac{1}{|\mathcal{S}_k^H|}\sum_{i\in\mathcal{S}_k^H} \frac{\exp(-y_i w^T x_i)}{(1+\exp(-y_i w^T x_i))^2}(x_i^T d)x_i + \lambda d.$$

- Stochastic Quasi-Newton Methods:
  construct approximations to the Hessian using only gradient information. Eg, L-BFGS (limited memory BFGS)

- Gauss-Newton Methods
  works for problems in which the objective function is a sum of squares.
  constructs an approximation to the Hessian using only first-order information, and this approximation is guaranteed to be positive semidefinite, even when the full Hessian itself may be indefinite.
  The price to pay for this convenient representation is that it ignores second-order interactions between elements of the parameter vector $\mathbf{w}$, which might mean a loss of curvature information that could be useful for the optimization process.

- Natural Gradient Methods
  aim to be invariant with respect to all differentiable and invertible transformations
  formulate the gradient descent algorithm in the space of prediction functions rather than specific parameters.

Summary

- Ways to cope with the problems in machine learning
- SG might not be the best choice for parallelization
- How about other methods like CMA-ES? Why not used?

Other Methods

- gradient methods with momentum,
- accelerated gradient methods, and
- coordinate descent methods

12. Convergence Analysis of Stochastic Gradient

Outline

21. Analysis of SG

Theoretical Analysis — Preliminaries

convergence properties and worst-case iteration complexity bounds.

$$F(\mathbf{w}) = \begin{cases} R_n(\mathbf{w}) = \frac{1}{n}\sum_{i=1}^{n} f_i(\mathbf{w}) & \text{Empirical Risk} \\ R(\mathbf{w}) = \mathbb{E}_{\xi}[f(\mathbf{w};\xi)] & \text{Expected Risk} \end{cases}$$

sampling uniformly with replacement from training set $\rightsquigarrow R_n$
sampling with $P(\xi)$ with replacement from training set $\rightsquigarrow R$.

Procedure SG(...);
Choose an initial iterate $\mathbf{w}_0$;
for $k = 0, 1, \ldots$ **do**
  Generate a realization of the random variable ξ_k;
  Compute a stochastic vector $g(\mathbf{w}_k, \xi_k)$;
  Choose a stepsize $\alpha_k > 0$;
  Set the new iterate as $\mathbf{w}_{k+1} \leftarrow \mathbf{w}_k - \alpha_k g(\mathbf{w}_k, \xi_k)$;

Theoretical Analysis — Preliminaries

ξ_k may represent a single sample or a mini-batch
g may represent a stochastic gradient (biased estimator of $\nabla F(\mathbf{w}_k)$ or a stochastic Netwon or quasi-Newton direction).

$$g(\mathbf{w}_k, \xi_k) = \begin{cases} \nabla f(\mathbf{w}_k; \xi_k) \\ \frac{1}{n_k} \sum_{i=1}^{n_k} \nabla f(\mathbf{w}_k; \xi_{k,i}) \\ H_k \frac{1}{n_k} \sum_{i=1}^{n_k} \nabla f(\mathbf{w}_k; \xi_{k,i}) \end{cases}$$

H_k a symmetric positive definite scaling matrix (we called it B_k^{-1} earlier in this course)
α_k fixed stepsize or diminishing stepsizes
$\mathbf{w}_k$ can have influence on the sample selection (active learning)

Convergence Analysis – Assumptions

- Assumption 4.1 Lipschitz-continuous objective gradients:
  $\|\nabla F(\mathbf{w}) - \nabla F(\bar{\mathbf{w}})\|_2 \leq L\|\mathbf{w} - \bar{\mathbf{w}}\|_2$ for all $\{\mathbf{w}, \bar{\mathbf{w}}\} \subseteq \mathbb{R}^d$
- Assumption 4.3 First and second moment limits. The objective function and Procedure SG satisfy the following:
  - objective function is bounded from below by a scalar F_{inf} over the region explored by the algorithm.
  - in expectation, the vector $-g(\mathbf{w}_k, \xi_k)$ is a direction of sufficient descent for F from $\mathbf{w}_k$ with a norm comparable to the norm of the gradient
  - the variance of $g(\mathbf{w}_k, \xi_k)$ is restricted, but in a relatively minor manner.

$$\mathrm{Var}_{\xi_k}[g(\mathbf{w}_k, \xi_k)] \leq M + M_V \|\nabla F(\mathbf{w}_k)\|_2^2, \ M > 0, M_V > 0 \text{ for all } k \in \mathbb{N}$$

- Lemma: SG is a Markovian process in the sense that $\mathbf{w}_{k+1}$ is a random variable that depends only on the iterate $\mathbf{w}_k$, the seed ξ_k, and the stepsize α_k and not on any past iterates.

Convergence Analysis – Assumptions

- Assumption 4.5 Strong convexity.
  The objective function $F : \mathbb{R}^d \to \mathbb{R}$ is **strongly convex** in that there exists a constant $c > 0$ such that

$$F(\bar{\mathbf{w}}) \geq F(\mathbf{w}) + \nabla F(\mathbf{w})^T(\bar{\mathbf{w}} - \mathbf{w}) + \frac{1}{2}c\,\|\bar{\mathbf{w}} - \mathbf{w}\|_2^2 \qquad \text{for all } (\bar{\mathbf{w}}, \mathbf{w}) \in \mathbb{R}^d \times \mathbb{R}^d$$

  or equivalently if there exists $c > 0$:

$$\nabla^2 F(\mathbf{w}) \succeq c$$

  (for univariate case: $f''(w) \geq c$), ie, grows at least quadratically.

  Hence, F has a unique minimizer, denoted as $\mathbf{w}^* \in \mathbb{R}^d$ with $F^* \stackrel{def}{=} F(w^*)$.

Convergence Analysis – Results

- Theorem 4.6 (Strongly Convex Objective, Fixed Stepsize).
  - optimality gap has an asymptotic bound in expectation depending on $\bar{\alpha}$.
  - sublinear convergence rate of the suboptimality gap
- Theorem 4.7 (Strongly Convex Objective, Diminishing Stepsizes)
  SG with diminishing step size converges in expectation.
  - role of strong convexity
  - role of initial point
  - trade-offs of mini batches
- Theorem 4.8 (Nonconvex Objective, Fixed Stepsize)
  - While one cannot bound the expected optimality gap as in the convex case, inequality (4.28b) bounds the average norm of the gradient of the objective function observed on $\{\mathbf{w}_k\}$ visited during the first K iterations.
  - classical result for the full gradient method applied to nonconvex functions, namely, that the sum of squared gradients remains finite, implying that

    $$\{\|\nabla F(\mathbf{w}_k)\|_2\} \to 0.$$

- Theorem 4.9 (Nonconvex Objective, Diminishing Stepsizes)
  - for the SG method with diminishing stepsizes, the expected gradient norms cannot stay bounded away from zero
  - the weighted average norm of the squared gradients converges to zero even if the gradients are noisy, (i.e., if $M > 0$ in the Variance upper bounding assumption) one can still conclude that the expected gradient norms cannot asymptotically stay far from zero.

Computational Complexity Analysis

- consider a big data scenario with an infinite supply of training examples, but a **limited computational time budget**. what type of algorithm — e.g., a simple SG or batch gradient method — would provide the best guarantees in terms of achieving a low expected risk?

- $\mathbf{w}^* \in \operatorname{argmin} R(\mathbf{w})$; $\mathbf{w}_n \in \operatorname{argmin} R_n(\mathbf{w})$, $\tilde{\mathbf{w}}_n$ approximate empirical risk minimizer returned by a given optimization algorithm at $\mathcal{T}_{max}$

- The tradeoffs associated with this scenario can be formalized as choosing the family of prediction functions $\mathcal{H}$, the number of examples n, and the optimization accuracy $\epsilon \stackrel{def}{=} E[R_n(\tilde{\mathbf{w}}_n) - R_n(\mathbf{w}_n)]$ in order to minimize the total error:

$$\underset{\mathcal{H}, n \in \mathbb{N}, \epsilon}{\text{minimize}} \; E[R(\tilde{\mathbf{w}}_n)] = \overbrace{R(\mathbf{w}^*)}^{\mathcal{E}_{app}(\mathcal{H})} + \overbrace{E[R(\mathbf{w}_n) - R(\mathbf{w}^*)]}^{\mathcal{E}_{est}(\mathcal{H}, n)} + \overbrace{E[R(\tilde{\mathbf{w}}_n) - R(\mathbf{w}_n)]}^{\mathcal{E}_{opt}(\mathcal{H}, n, \epsilon)}$$

$$\text{subject to } \mathcal{T}(n, \epsilon) \leq \mathcal{T}_{max}$$

Computational Complexity Analysis

- SG, with its sublinear rate of convergence, is more efficient for large-scale learning than (full, batch) gradient-based methods that have a linear rate of convergence.

- reducing the optimization error $\mathcal{E}_{opt}(\mathcal{H}, n, \epsilon)$ (evaluated with respect to R rather than R_n) one might need to make up for the additional computing time by: (i) reducing the sample size n, potentially increasing the estimation error $\mathcal{E}_{est}(\mathcal{H}, n)$; or (ii) simplifying the function family $\mathcal{H}$, potentially increasing the approximation error $\mathcal{E}_{app}(\mathcal{H})$.

Computational Complexity Analysis

Instead, keep fixed $\mathcal{H}$ carrying out a worst-case analysis on the influence of the sample size n and optimization tolerance ϵ, which together only influence the estimation and optimization errors.

- this leads to an upper bound:

$$\mathcal{E}(n, \epsilon) = \mathcal{O}\left(\frac{\sqrt{\log n}}{n} + \epsilon\right)$$

- when the loss function is strongly convex

$$\mathcal{E}(n, \epsilon) = \mathcal{O}\left(\frac{\log n}{n} + \epsilon\right) \qquad \text{and when } n \text{ large to } \quad \mathcal{E}(n, \epsilon) \sim \frac{1}{n} + \epsilon$$

Computational Complexity Analysis

Recall:

- the total work required to obtain ϵ-optimality for SG is $\mathcal{T}_{stoch} \sim 1/\epsilon$,
- the total work required to obtain ϵ-optimality for a batch gradient method is $\mathcal{T}_{batch} \sim n \log(1/\epsilon)$.

	Batch	Stochastic
$\mathcal{T}(n, \epsilon)$	$\sim n \log\left(\frac{1}{\epsilon}\right)$	$\frac{1}{\epsilon}$
$\mathcal{E}^*$	$\sim \frac{\log(\mathcal{T}_{\max})}{\mathcal{T}_{\max}} + \frac{1}{\mathcal{T}_{\max}}$	$\frac{1}{\mathcal{T}_{\max}}$

A stochastic optimization algorithm performs better that batch stochastic in terms of expected error

Large gap between asymptotical behavior and practical realities.

Remarks

- Fragility of the Asymptotic Performance of SG
  ok if objective function includes a squared L_2-norm regularizer (related to constant c) but regularization parameter should be lowered when the number of samples increases.

- SG good for GPUs but ill-conditioning erodes efficiency of SG

- Distributed computing not working with basic SG because of too frequent updates of $\mathbf{w}$, more promising with mini-batch.

- Alternatives with Faster Convergence: minimizing empirical risk R_n there is information from previous gradients.
  - gradient aggregation methods
  - dynamic sampling approach

Thery vs Practice

- A lot of work and results on convex functions (strongly and Lipschitz smooth) but not much on non-convex functions, which are more common in ML applications.
- Note however that locally, local optima are in convex parts of the landscape. Hence, theoretical analysis and results are important. Ideally we would ike to have algorithms that work well for non-convex functions, but also that they can switch to a more efficient behavior when the landscape is locally convex.
- we want that our algorithms work well at least in convex regions.
- problem because of noisy and local information of the gradients.

13. Constrained Optimization

Constrained Optimization

- Minimizing an objective subject to design point restrictions called **constraints**
- A variety of techniques transform constrained optimization problems into unconstrained problems
- New optimization problem statement

$$\begin{aligned} &\underset{\mathbf{x}}{\text{minimize}} && f(\mathbf{x}) \\ &\text{subject to} && \mathbf{x} \in \mathcal{X} \end{aligned}$$

- The set $\mathcal{X} \subset \mathbb{R}$ is called the **feasible set**

Constrained Optimization

Constraints that bound feasible set can change the optimizer



$$\underset{x}{\text{minimize}}\ f(x)$$

$$\text{subject to } x \in [a, b]$$

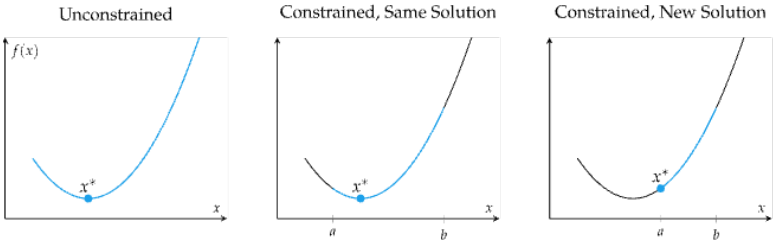

Constraint Types

- Generally, constraints are formulated using two types:
  1. **Equality constraints**: $h(\mathbf{x}) = 0$
  2. **Inequality constraints**: $g(\mathbf{x}) \leq 0$
- Any optimization problem can be written as

$$\begin{aligned} \underset{\mathbf{x}}{\text{minimize}}\ & f(\mathbf{x}) \\ \text{subject to}\ & g_i(\mathbf{x}) \leq 0 \text{ for all } i \text{ in } \{1, \ldots, m\} \\ & h_j(\mathbf{x}) = 0 \text{ for all } j \text{ in } \{1, \ldots, \ell\} \end{aligned}$$

$$\begin{aligned} \underset{\mathbf{x}}{\text{minimize}}\ & f(\mathbf{x}) \\ \text{subject to}\ & \mathbf{g}(\mathbf{x}) \leq \mathbf{0} \\ & \mathbf{h}(\mathbf{x}) = \mathbf{0} \end{aligned}$$

f and the functions h and g are all smooth, real-valued functions on a subset of $\mathbb{R}^n$

Transformations to Remove Constraints

- If necessary, some problems can be reformulated to incorporate constraints into the objective function
- If x is constrained between a and b

$$x = t_{a,b}(\hat{x}) = \frac{b+a}{2} + \frac{b-a}{2}\left(\frac{2\hat{x}}{1+\hat{x}^2}\right)$$

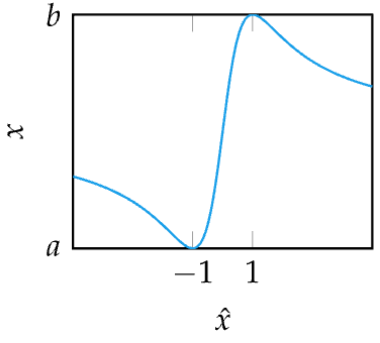

Transformations to Remove Constraints

Example

$$\underset{x}{\text{minimize}} \; x \sin(x)$$
$$\text{subject to} \; 2 \leq x \leq 6$$

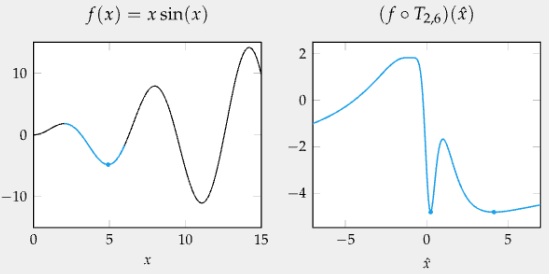

$$\underset{\hat{x}}{\text{minimize}} \; t_{2,6}(\hat{x}) \sin(t_{2,6}(\hat{x}))$$

$$\underset{\hat{x}}{\text{minimize}} \; \left(4 + 2\left(\frac{2\hat{x}}{1+\hat{x}^2}\right)\right) \sin\left(4 + 2\left(\frac{2\hat{x}}{1+\hat{x}^2}\right)\right)$$

Transformations to Remove Constraints

Example

$$\underset{x}{\text{minimize}}\ f(\mathbf{x})$$
$$\text{subject to}\ h(\mathbf{x}) = x_1^2 + x_2^2 + \ldots + x_n^2 - 1 = 0$$

- Solve for one of the variables to eliminate constraint:

$$x_n = \pm\sqrt{1 - x_1^2 - x_2^2 - \ldots - x_{n-1}^2}$$

- Transformed, unconstrained optimization problem:

$$\underset{x}{\text{minimize}}\ \left(\left[x_1, x_2, \ldots, x_{n-1}, \pm\sqrt{1 - x_1^2 - x_2^2 - \ldots - x_{n-1}^2}\right]\right)$$

Lagrangian Multiplier Method

- With only equality constraints, critical points (local minima, global minima, or saddle points optimal) where gradient of f and the gradient of h are aligned
- The method of Lagrangian Multipliers is used to optimize a function subject to (equality) constraints
- Lagrangian multipliers refer to the variables introduced by the method denoted by λ

$$\begin{aligned} &\underset{\mathbf{x}}{\text{minimize}} \; f(\mathbf{x}) \\ &\text{subject to} \; h(\mathbf{x}) = 0 \end{aligned}$$

1. Form **Lagrangian function**

$$\mathcal{L}(\mathbf{x}, \lambda) = f(\mathbf{x}) - \lambda h(\mathbf{x})$$

2. Set $\nabla_{\mathbf{x}} \mathcal{L}(\mathbf{x}, \lambda) = 0$ and $\nabla_{\lambda} \mathcal{L}(\mathbf{x}, \lambda) = 0$ to get

$$\nabla f(\mathbf{x}) = \lambda \nabla h(\mathbf{x}) \qquad h(\mathbf{x}) = 0$$

3. solve for $\mathbf{x}$ and λ

Lagrangian Multiplier Method

Intuitively, the method of Lagrange multipliers finds the point x^* where the constraint function is orthogonal to the gradient

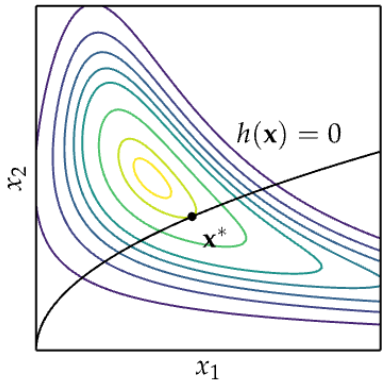

Lagrangian Multiplier Method with Inequality Constraints

$$\begin{aligned} &\underset{\mathbf{x}}{\text{minimize}} \; f(\mathbf{x}) \\ &\text{subject to} \; g(\mathbf{x}) \leq 0 \end{aligned}$$

- If solution lies at the constraint boundary, the constraint is called **active**, and the Lagrangian condition holds for a non-negative constant μ:

$$\nabla f(\mathbf{x}) + \mu \nabla g(\mathbf{x}) = 0$$

- If the solution lies within the boundary, the constraint is called **inactive**, and the optimal solution simply lies where

$$\nabla f(\mathbf{x}) = 0$$

that is, the Lagrangian condition holds with $\mu = 0$

Lagrangian Multiplier Method with Inequality Constraints

$$\begin{aligned} &\underset{\mathbf{x}}{\text{minimize}} \; f(\mathbf{x}) \\ &\text{subject to} \; g(\mathbf{x}) \leq 0 \end{aligned}$$

- We create the Lagrangian function such that it goes to ∞ outside the feasibility set ($g(\mathbf{x}) \not\leq 0$)):

$$\mathcal{L}_\infty(\mathbf{x}) = f(\mathbf{x}) + \infty(g(\mathbf{x}) > 0)$$

impractical: discontinuous and nondifferentiable.

- Instead, for $\mu \geq 0$:

$$\mathcal{L}(\mathbf{x}, \mu \geq 0) = f(\mathbf{x}) + \mu g(\mathbf{x})$$

$$\mathcal{L}_\infty(\mathbf{x}) = \underset{\mu \geq 0}{\text{maximize}} \; \mathcal{L}(\mathbf{x}, \mu)$$

for $\mathbf{x}$ infeasible, $\mathcal{L}_\infty(\mathbf{x}) = \infty$; for $\mathbf{x}$ feasible, $\mathcal{L}_\infty(\mathbf{x}) = f(\mathbf{x})$

- The new optimization problem becomes

$$\underset{\mathbf{x}}{\text{minimize}} \; \underset{\mu \geq 0}{\text{maximize}} \; \mathcal{L}(\mathbf{x}, \mu)$$

This is called the **primal problem**

Lagrangian Multiplier Method – General Case

$$\begin{aligned} \underset{\mathbf{x}}{\text{minimize}} \quad & f(\mathbf{x}) \\ \text{subject to} \quad & \mathbf{g}(\mathbf{x}) \leq \mathbf{0} \\ & \mathbf{h}(\mathbf{x}) = \mathbf{0} \end{aligned}$$

- Generalized **Lagrangian Function** (with both equality and inequality constraints):

$$\mathcal{L}(\mathbf{x}, \boldsymbol{\mu}, \boldsymbol{\lambda}) = f(\mathbf{x}) + \sum_i \mu_i g_i(\mathbf{x}) + \sum_j \lambda_j h_j(\mathbf{x})$$

  (note we changed the sign of the λ term since λ is anyway free to be positive or negative)

- the **primal form** of the optimization problem

$$\underset{\mathbf{x}}{\text{minimize}} \; \underset{\boldsymbol{\mu} \geq 0, \boldsymbol{\lambda}}{\text{maximize}} \; \mathcal{L}(\mathbf{x}, \boldsymbol{\mu}, \boldsymbol{\lambda})$$

Necessary Conditions – KKT Conditions

$$\begin{aligned} \underset{\mathbf{x}}{\text{minimize}}\ & f(\mathbf{x}) \\ \text{subject to}\ & \mathbf{g}(\mathbf{x}) \leq \mathbf{0} \\ & \mathbf{h}(\mathbf{x}) = \mathbf{0} \end{aligned}$$

Any critical point $\mathbf{x}^*$ must satisfy the **Karush-Kuhn-Tucker conditions**

1. primal feasibility: $\mathbf{g}(\mathbf{x}^*) \leq 0$ and $\mathbf{h}(\mathbf{x}^*) = 0$
2. dual feasibility: penalization is towards feasibility $\boldsymbol{\mu} \geq 0$
3. complementary slackness: either μ_i or $g_i(\mathbf{x}^*)$ is zero.

$$\boldsymbol{\mu} \cdot \mathbf{g}(\mathbf{x}) = 0 \implies \mu_i g_i(\mathbf{x}^*) = 0, \text{ for } i = 1, \ldots, m.$$

4. stationarity: objective function tangent to each active constr.

$$\nabla f(\mathbf{x}^*) + \sum_i \mu_i \nabla g_i(\mathbf{x}^*) + \sum_j \lambda_j \nabla h_j(\mathbf{x}^*) = 0$$

These are the First Order Necessary Conditions (FONC) for Constrained Optimization

Necessary Conditions – KKT Conditions

In vector form:

$$\begin{cases} \nabla f(\mathbf{x}^*) + \boldsymbol{\mu} \cdot \nabla \mathbf{g}(\mathbf{x}^*) + \boldsymbol{\lambda} \cdot \nabla \mathbf{h}(\mathbf{x}^*) = \mathbf{0} \\ \boldsymbol{\mu} \cdot \mathbf{g}(\mathbf{x}^*) = 0 \\ \mathbf{g}(\mathbf{x}^*) \leq \mathbf{0}, \ \mathbf{h}(\mathbf{x}^*) = \mathbf{0} \\ \boldsymbol{\mu} \geq \mathbf{0} \end{cases}$$

Particular cases:

- f concave, $\mathbf{g}$ convex: then KKT are also sufficient
- $\mathbf{x}^*$ interior point
- Patological cases where they do not hold (formal expressions of the conditions include assumptions to avoid these cases).

Duality

- Generalized Lagrangian Function:

$$\mathcal{L}(\mathbf{x}, \boldsymbol{\mu}, \boldsymbol{\lambda}) = f(\mathbf{x}) + \sum_i \mu_i g_i(\mathbf{x}) + \sum_j \lambda_j h_j(\mathbf{x})$$

- the **primal form** of the optimization problem

$$\underset{\mathbf{x}}{\text{minimize}}\ \underset{\boldsymbol{\mu} \geq 0, \boldsymbol{\lambda}}{\text{maximize}}\ \mathcal{L}(\mathbf{x}, \boldsymbol{\mu}, \boldsymbol{\lambda})$$

- Reversing the order of operations leads to the **dual form**

$$\underset{\boldsymbol{\mu} \geq 0, \boldsymbol{\lambda}}{\text{maximize}}\ \underset{\mathbf{x}}{\text{minimize}}\ \mathcal{L}(\mathbf{x}, \boldsymbol{\mu}, \boldsymbol{\lambda})$$

- What is the relationship between the two? (See next slide)
- In some cases, the dual problem is easier to solve computationally than the original problem. In other cases, the dual can be used to obtain easily to gain information on the optimal value of the objective for the primal problem.
  The dual has also been used to design algorithms for solving the primal problem.

Min-Max Inequality

Theorem (Max-min inequality)

For any function $f : Z \times W \to \mathbb{R}$,

$$\sup_{z \in Z} \inf_{w \in W} f(z, w) \leq \inf_{w \in W} \sup_{z \in Z} f(z, w) .$$

Proof

For all $z \in Z$, $\inf_{w \in W} f(z, w) \leq f(z, w)$ for all $w \in W$ by definition of infimum being a lower bound.

For all $w \in W$, $f(z, w) \leq \sup_{z \in Z} f(z, w)$ for all $z \in Z$ by definition of supremum being an upper bound.

Let $g(z) \triangleq \inf_{w \in W} f(z, w)$. Let $h(w) \triangleq \sup_{z \in Z} f(z, w)$. Then, for all $z \in Z$ and $w \in W$, $g(z) \leq h(w)$

$\sup_{z \in Z} g(z) \leq h(w)$ holds for all $w \in W$ because the supremum is the least upper bound.

$\sup_{z \in Z} g(z) \leq \inf_{w \in W} h(w)$ because the infimum is the greatest lower bound

□

Min-Max Inequality and Duality

- When f, W, and Z are convex the inequality becomes equality and we have a **strong max-min property** (or a **saddle-point property**).
- For us:

$$\underset{\boldsymbol{\mu}\geq 0,\boldsymbol{\lambda}}{\text{maximize}}\ \underset{\mathbf{x}}{\text{minimize}}\ \mathcal{L}(\mathbf{x},\boldsymbol{\mu},\boldsymbol{\lambda}) \leq \underset{\mathbf{x}}{\text{minimize}}\ \underset{\boldsymbol{\mu}\geq 0,\boldsymbol{\lambda}}{\text{maximize}}\ \mathcal{L}(\mathbf{x},\boldsymbol{\mu}.\boldsymbol{\lambda})$$

- Therefore, the solution to the dual problem d^* is a **lower bound** to the primal solution p^*
- The inner part of the dual problem can be used to define the **dual function** or **dual objective**

$$\mathcal{D}(\boldsymbol{\mu}\geq 0,\boldsymbol{\lambda}) = \underset{\mathbf{x}}{\text{minimize}}\ \mathcal{L}(\mathbf{x},\boldsymbol{\mu},\boldsymbol{\lambda})$$

Duality

- The dual function is concave. Gradient ascent on a concave function always converges to the global maximum.
- **Dual Problem**: $\max \mathcal{D}(\boldsymbol{\mu} \geq 0, \boldsymbol{\lambda})$
- Optimizing the dual problem is easy whenever minimizing the Lagrangian with respect to $\mathbf{x}$ is easy.
- For any $\boldsymbol{\mu} \geq \mathbf{0}$ and any $\boldsymbol{\lambda}$, we have

$$\mathcal{D}(\boldsymbol{\mu} \geq \mathbf{0}, \boldsymbol{\lambda}) \leq p^*$$

- The difference between dual and primal solutions d^* and p^* is called the **duality gap**
- Showing zero-duality gap is a "certificate" of optimality

Penalty methods

- A way to optimize the Lagrangiann function is to alternate between optimizing with respect to $\mathbf{x}$ and $\boldsymbol{\mu}$ and $\boldsymbol{\lambda}$ (called **primal-dual methods**)
- Penalty methods are a **heuristic** way of reformulating a constrained optimization problem as an unconstrained problem by penalizing the objective function value when constraints are violated

Example

$$\begin{aligned} \underset{\mathbf{x}}{\text{minimize}} \; & f(\mathbf{x}) \\ \text{subject to} \; & \mathbf{g}(\mathbf{x}) \leq \mathbf{0} \\ & \mathbf{h}(\mathbf{x}) = \mathbf{0} \end{aligned}$$

$$\begin{aligned} \min_{\mathbf{x}} \; & f(\mathbf{x}) + \rho \cdot p_{count}(\mathbf{x}) \\ \text{s.t.} \; & p_{count}(\mathbf{x}) = \sum_i (g_i(\mathbf{x}) > 0) + \sum_j (h_j(\mathbf{x}) \neq 0) \end{aligned}$$

Penalty Methods

Penalty methods optimize on the $\mathbf{x}$ space only, but the penalty term is designed (heuristically) to push the solution towards the feasible set.

Procedure penalty_method;
Input: $f, p, \mathbf{x}, k_{max}; \rho = 1, \gamma = 2$
Output: $\mathbf{x}$ solution
for k in $1, ..., k_{max}$ **do**
    $\mathbf{x} \leftarrow \text{minimize}_{\mathbf{x}}\{f(\mathbf{x}) + \rho \cdot p(\mathbf{x})\}$;
    $\rho \leftarrow \rho \cdot \gamma$;
    if $p(\mathbf{x}) = 0$ **then**
        return $\mathbf{x}$;
return $\mathbf{x}$;

Penalty methods

- Count penalty:

$$p_{count}(\mathbf{x}) = \sum_i (g_i(\mathbf{x}) > 0) + \sum_j (h_j(\mathbf{x}) \neq 0)$$



- Quadratic penalty:

$$p_{quadratic}(\mathbf{x}) = \sum_i \max(g_i(\mathbf{x}), 0)^2 + \sum_j h_j(\mathbf{x})^2$$



- Mixed Penalty:

$$p_{mixed}(\mathbf{x}) = \rho_1 p_{count}(\mathbf{x}) + \rho_2 p_{quadratic}(\mathbf{x})$$



Augmented Lagrange Method

- Adaptation of penalty method for equality constraints

$$p_{Lagrangian}(\mathbf{x}) \stackrel{def}{=} \frac{1}{2}\rho \sum_i (h_i(\mathbf{x}))^2 - \sum_i \lambda_i h_i(\mathbf{x})$$

Procedure augmented_lagrange_method;
Input: $f, h, \mathbf{x}, k_{max}; \rho = 1, \gamma = 2)$
$\boldsymbol{\lambda} \leftarrow \mathbf{0}$;
for k in $1, \ldots, k_{max}$ **do**
  $p \leftarrow (x \mapsto \rho/2 \cdot \sum_i (h_i(\mathbf{x})^2) - \boldsymbol{\lambda} \cdot h(\mathbf{x}))$;
  $\mathbf{x} \leftarrow \text{minimize}_{\mathbf{x}}\{f(\mathbf{x}) + p(\mathbf{x})\}$;
  $\boldsymbol{\lambda} \leftarrow \boldsymbol{\lambda} - \rho \cdot \mathbf{h}(\mathbf{x})$;
  $\rho \leftarrow \rho \cdot \gamma$;
return $\mathbf{x}$;

- $\boldsymbol{\lambda}$ converges towards the Lagrangian multiplier

Interior Point Methods

$$\begin{aligned} &\underset{\mathbf{x}}{\text{minimize}} \; f(\mathbf{x}) \\ &\text{subject to } \mathbf{g}(\mathbf{x}) \leq \mathbf{0} \end{aligned}$$

- Also called **barrier methods**, interior point methods ensure that each step is feasible
- This allows premature termination to return a nearly optimal, feasible point
- Barrier functions are implemented similar to penalties but must meet the following conditions:
  1. Continuous
  2. Non-negative in the feasible region, i.e., $p_{barrier}(\mathbf{x}) \geq 0$ for all $\mathbf{x}$ such that $g_i(\mathbf{x}) \leq 0$ for all i
  3. Approach infinity as $\mathbf{x}$ approaches boundary

Interior Point Methods – Barrier Functions

- Inverse Barrier:

$$p_{barrier}(\mathbf{x}) = -\sum_i \frac{1}{g_i(\mathbf{x})}$$

- Standard Log Barrier:

$$p_{barrier}(\mathbf{x}) = -\sum_i \log(-g_i(\mathbf{x}))$$

- Truncated Log Barrier:

$$p_{barrier}(\mathbf{x}) = -\sum_i \begin{cases} \log(-g_i(\mathbf{x})) & \text{if } g_i(\mathbf{x}) \geq -1 \\ 0 & \text{otherwise} \end{cases}$$

  - Feasible Region: The function is primarily defined for $g_i(\mathbf{x}) < 0$. As $g_i(\mathbf{x}) \to 0$ (approaching the boundary of the constraint), the value $-\log(-g_i(\mathbf{x}))$ approaches $+\infty$, creating a penalty "wall"
  - Truncation at -1: The barrier only exerts influence when the variable is relatively close to the boundary (specifically within a distance where $g_i(\mathbf{x})$ is between -1 and 0).
  - Continuity: At $g_i(\mathbf{x}) = -1$, the function is continuous because $\log(-(-1)) = \log(1) = 0$.

Interior Point Methods – Truncated Log Barrier

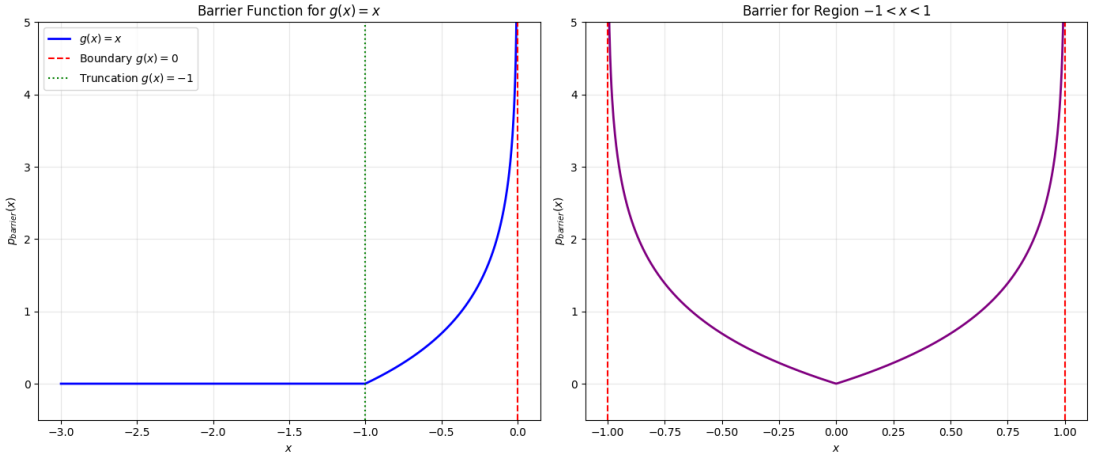

Left: a single constraint $g(x) = x$. Right: the summation of two constraints $g_1(x) = x - 1$ and $g_2(x) = -x - 1$

Interior Point Methods – Optimization Problem

New optimization problem:

$$\underset{\mathbf{x}}{\text{minimize}}\; f(\mathbf{x}) + \frac{1}{\rho} p_{barrier}(\mathbf{x})$$

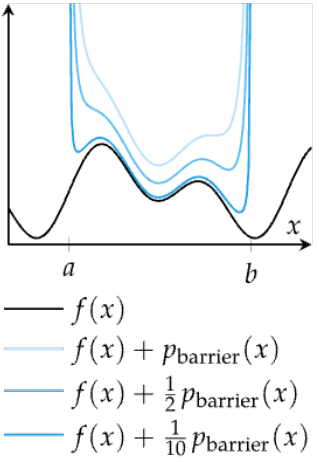

Interior Point Methods

Procedure interior_point_method;
Input: $f, p, \mathbf{x}; \rho = 1, \gamma = 2, \epsilon = 0.001$
$\Delta \leftarrow \infty$;
while $\Delta > \epsilon$ **do**
  $\mathbf{x}' \leftarrow \text{minimize}_{\mathbf{x}}\{f(\mathbf{x}) + p(\mathbf{x})/\rho\}$;
  $\Delta \leftarrow \|\mathbf{x}' - \mathbf{x}\|$;
  $\mathbf{x} \leftarrow \mathbf{x}'$;
  $\rho \leftarrow \rho \cdot \gamma$;
return $\mathbf{x}$;

- Line searches $f(\mathbf{x} + \alpha\mathbf{d})$ are constrained to the interval $\alpha = [0, \alpha_u]$, where α_u is the step to the nearest boundary.
  In practice, α_u is chosen such that $\mathbf{x} + \alpha\mathbf{d}$ is just inside the boundary to avoid the boundary singularity.
- Needs an initial **feasible** solutions. Typically, found by solving:

$$\underset{\mathbf{x}}{\text{minimize}}\ p_{quadratic}(\mathbf{x})$$

Summary

- Constraints are requirements on the design points that a solution must satisfy
- Some constraints can be transformed or substituted into the problem to result in an unconstrained optimization problem
- Analytical methods using Lagrange multipliers yield the generalized Lagrangian and the necessary conditions for optimality under constraints
- A constrained optimization problem has a dual problem formulation that is easier to solve and whose solution is a lower bound of the solution to the original problem
- Penalty methods penalize infeasible solutions and often provide gradient information to the optimizer to guide infeasible points toward feasibility
- Interior point methods maintain feasibility but use barrier functions to avoid leaving the feasible set

14. Linear Constrained Optimization

Outline

22. Linear Programming

23. Simplex Algorithm

24. Duality

25. Primal-Dual Hybrid Gradient (PDHG) Method for LP

Problem Formulation

- If an optimization problem has a linear objective and constraints, it is called a **linear programming problem (linear program, LP)**

- The general form of a linear program is:

$$
\begin{aligned}
\underset{\mathbf{x}}{\text{minimize}} \quad & \mathbf{c}^T\mathbf{x} \\
\text{subject to} \quad & A\mathbf{x} \leq \mathbf{b} \\
& D\mathbf{x} \geq \mathbf{e} \\
& F\mathbf{x} = \mathbf{g} \\
& \\
& \mathbf{x}, \mathbf{c} \in \mathbb{R}^n, \\
& A \in \mathbb{R}^{m \times n}, \mathbf{b} \in \mathbb{R}^m \\
& D \in \mathbb{R}^{p \times n}, \mathbf{e} \in \mathbb{R}^p \\
& F \in \mathbb{R}^{q \times n}, \mathbf{g} \in \mathbb{R}^q
\end{aligned}
$$

Numerical Example

$$
\begin{aligned}
\underset{x_1,x_2,x_3}{\text{minimize}} \quad & 2x_1 - 3x_2 + 7x_3 \\
\text{subject to} \quad & 2x_1 + 3x_2 - 8x_3 \leq 5 \\
& 4x_1 + x_2 + 3x_3 \leq 9 \\
& x_1 - 5x_2 - 3x_3 \geq -4 \\
& x_1 + x_2 + 2x_3 = 1
\end{aligned}
$$

Modelling in Linear Programming

Example

Given a set of assets/items I, each item with a price p_i per unit of measure and a value v_i for i in I, select the subset of items/assets that maximizes the total (expected return)value collected subject to a total expense that does not exceed a given budget B.

$$\begin{aligned} \max \quad & \sum_{i \in I} v_i x_i \\ \text{s.t.} \quad & \sum_{i \in I} p_i x_i \leq B \\ & x_i \geq 0, \quad \text{for all } i \text{ in } I \end{aligned}$$

This problem admits an efficient solution anyway.

Note: if indivisible items rather than assets are considered then the variables must be integer-valued and the problem becomes an **integer linear program** and is weakly NP-hard.

Modelling in Linear Programming

Many problems can be converted into linear programs that have the same solution.

Example

$$\text{minimize } L_1 = \|A\mathbf{x} - \mathbf{b}\|_1$$

$$\begin{aligned} &\min \mathbf{1}^T\mathbf{s} \\ &\text{s.t. } A\mathbf{x} - \mathbf{b} \leq \mathbf{s} \\ &\qquad -(A\mathbf{x} - \mathbf{b}) \leq \mathbf{s} \end{aligned}$$

Sum of absolute errors
Robust regression: Ignores outliers; focuses on the "median" fit.

Example

$$\text{minimize } L_\infty = \|A\mathbf{x} - \mathbf{b}\|_\infty$$

$$\begin{aligned} &\min t \\ &\text{s.t. } A\mathbf{x} - \mathbf{b} \leq t\mathbf{1} \\ &\qquad -(A\mathbf{x} - \mathbf{b}) \leq t\mathbf{1} \end{aligned}$$

Minimax Approximation or Chebyshev Approximation problem

Outline

22. Linear Programming

23. Simplex Algorithm

24. Duality

25. Primal-Dual Hybrid Gradient (PDHG) Method for LP

Problem Formulation

Every, general form, linear program can be rewritten more compactly in **standard form**

$$\begin{aligned} \underset{\mathbf{x}}{\text{minimize}} \quad & \mathbf{c}^T\mathbf{x} \\ \text{subject to} \quad & A\mathbf{x} \leq \mathbf{b} \\ & \mathbf{x} \geq \mathbf{0} \end{aligned}$$

$$\mathbf{x}, \mathbf{c} \in \mathbb{R}^n,$$
$$A \in \mathbb{R}^{m \times n}, \mathbf{b} \in \mathbb{R}^m$$

Example

$$\begin{aligned} \text{minimize } & 5x_1 + 4x_2 \\ \text{s.t. } & 2x_1 + 3x_2 \leq 5 \\ & 4x_1 + x_2 \leq 11 \end{aligned}$$

Problem Formulation

- Each inequality constraint defines a planar boundary of the feasible set called a **half-space**
- The set of inequality constraints define the intersection of multiple half-spaces forming a **convex set**
- Convexity of the feasible set, along with convexity of the objective function, implies that if we find a local feasible minimum, it is also a global feasible minimum.

$$\begin{aligned} \underset{\mathbf{x}}{\text{minimize}} \quad & \mathbf{c}^T\mathbf{x} \\ \text{subject to} \quad & A\mathbf{x} \leq \mathbf{b} \\ & \mathbf{x} \geq \mathbf{0} \end{aligned}$$



Half-Spaces and Supporting Hyperplanes

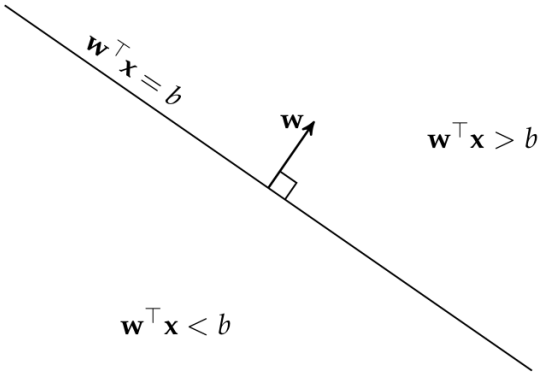

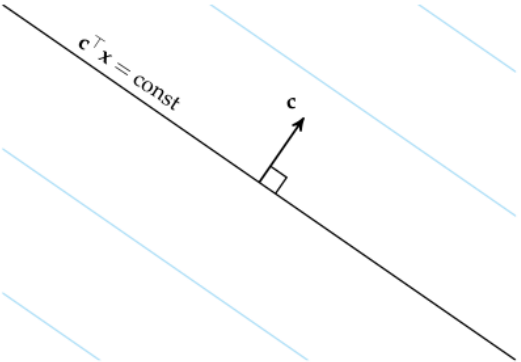

Problem Formulation

- How many solutions are there?

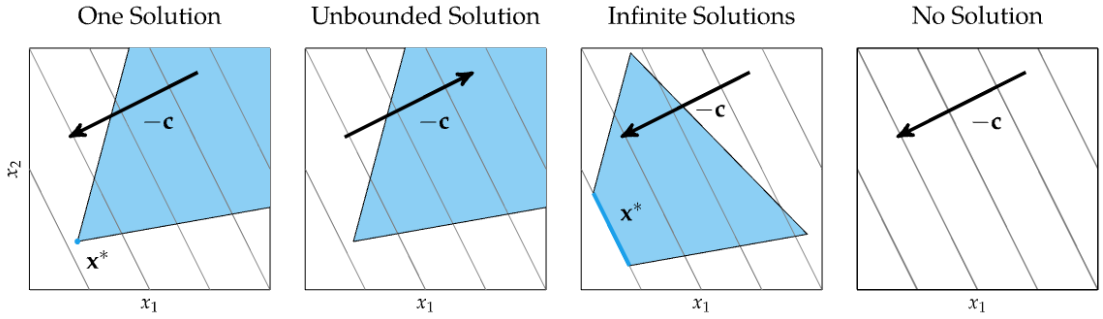

Problem Formulation

Linear programs are often solved in **equality form**

$$\begin{aligned} \underset{\mathbf{x}}{\text{minimize}} \quad & \mathbf{c}^T\mathbf{x} \\ \text{subject to} \quad & A\mathbf{x} = \mathbf{b} \\ & \mathbf{x} \geq \mathbf{0} \end{aligned}$$

$$\mathbf{x}, \mathbf{c} \in \mathbb{R}^{2n+m},$$
$$A \in \mathbb{R}^{m \times 2n+m},$$
$$\mathbf{b} \in \mathbb{R}^m$$

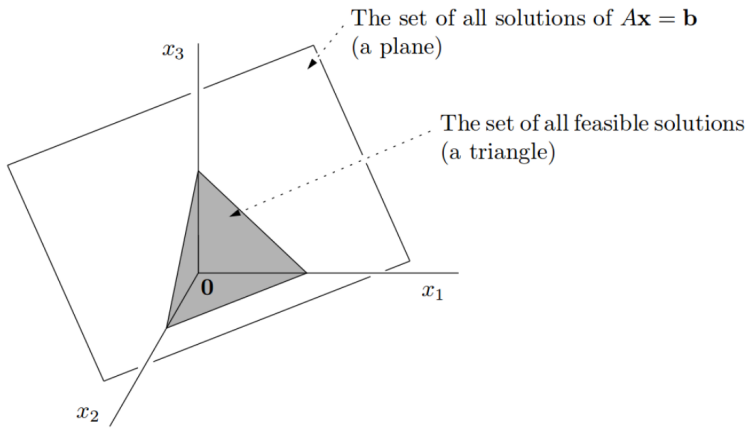

Simplex Algorithm

- Guaranteed to solve any feasible and bounded linear program
- Works on the equality form
- Assumes that rows of A are linearly independent and $m \leq n'$ ($n' \leq 2n + m$)
- The feasible set of a linear program forms a **polytope** (polyhedron bounded by faces of $n - 1$ dimension)
- The simplex algorithm moves between **vertices** of the polytope until it finds an optimal **vertex**
- Points on faces not perpendicular to $\mathbf{c}$ can be improved by sliding along the face in the direction of the projection of $-\mathbf{c}$ onto the face.

Fundamental Theorem of LP

Theorem (Fundamental Theorem of Linear Programming)

Given:

$$\min\{\mathbf{c}^T\mathbf{x} \mid \mathbf{x} \in P\} \text{ where } P = \{\mathbf{x} \in \mathbb{R}^n \mid A\mathbf{x} \leq \mathbf{b}\}$$

If P is a bounded polyhedron and not empty and x^* is an optimal solution to the problem, then:

- $\mathbf{x}^*$ *is an extreme point (vertex) of P, or*
- $\mathbf{x}^*$ *lies on a face $F \subset P$ of optimal solution*

Proof:

- assume $\mathbf{x}^*$ not a vertex of P then $\exists$ a ball around it still in P. Show that a point in the ball has better cost
- if $\mathbf{x}^*$ is not a vertex then it is a convex combination of vertices. Show that all points are also optimal.

Simplex Algorithm

- Every vertex for a linear program in equality form can be uniquely defined by $n - m$ components of $\mathbf{x}$ that equal zero.
- choosing m design variables and setting the remaining variables to zero effectively removes $n - m$ columns of A, yielding an $m \times m$ constraint matrix
- the m selected columns of the matrix A are called **basis** and denoted by B: $x_i \geq 0$ for $i \in B$
- the $n - m$ columns not in B are called **not in basis** and are denoted by N: $x_i = 0$ for $i \in N$.

$$A\mathbf{x} = A_B \mathbf{x}_B = \mathbf{b} \quad \Longrightarrow \quad \mathbf{x}_B = A_B^{-1} \mathbf{b}$$

Simplex Algorithm

- every vertex has an associated partition (B, N),
- not every partition corresponds to a vertex.
  A_B might be not invertible or the point $\mathbf{x}_B$ might not be ≥ 0.
- identifying partitions that correspond to vertices corresponds to solving an LP problem as well!

Two phases of the algorithm

1. **Initialization Phase**: finding a feasible starting vertex
2. **Optimization Phase**: finding the optimal vertex

Simplex Algorithm: FONCs

Lagrangian function:

$$\mathcal{L}(\mathbf{x}, \boldsymbol{\mu} \geq \mathbf{0}, \boldsymbol{\lambda}) = \mathbf{c}^T\mathbf{x} - \boldsymbol{\mu}^T\mathbf{x} - \boldsymbol{\lambda}^T(A\mathbf{x} - \mathbf{b})$$

The necessary conditions for optimality (KKT) are also sufficient for linear programs

- feasibility: $A\mathbf{x} = \mathbf{b}, \mathbf{x} \geq \mathbf{0}$
- dual feasibility: $\boldsymbol{\mu} \geq \mathbf{0}$
- complementary slackness: $\boldsymbol{\mu} \cdot \mathbf{x} = \mathbf{0}$
- stationarity: $A^T\boldsymbol{\lambda} + \boldsymbol{\mu} = \mathbf{c}$

$$A^T\boldsymbol{\lambda} + \boldsymbol{\mu} = \mathbf{c} \quad \Longrightarrow \quad \begin{cases} A_B^T\boldsymbol{\lambda} + \boldsymbol{\mu}_B = \mathbf{c}_B \\ A_N^T\boldsymbol{\lambda} + \boldsymbol{\mu}_N = \mathbf{c}_N \end{cases}$$

- We can choose $\boldsymbol{\mu}_B = \mathbf{0}$ to satisfy complementary slackness (because $\mathbf{x}_B \geq 0$)

$$\boldsymbol{\mu}_N = \mathbf{c}_N - \left(A_B^{-1}A_N\right)^T \mathbf{c}_B$$

- Knowing $\boldsymbol{\mu}_N$ allows us to assess the optimality of the vertices. If $\boldsymbol{\mu}_B$ contains negative components, then dual feasibility is not satisfied and the vertex is sub-optimal.
- maintain a partition (B, N), which corresponds to a vertex of the feasible set polytope.
- The partition can be updated by swapping indices between B and N. Such a swap equates to moving from one vertex along an edge of the feasible set polytope to another vertex.

Simplex Algorithm: Optimization Phase

Pivoting

- $q \in V$ to enter in B

$$A\mathbf{x}' = A_B\mathbf{x}'_B + A_{\{q\}}x'_q = A_B\mathbf{x}_B = A\mathbf{x} = \mathbf{b}$$

- $p \in B$ to leave B becomes zero during the transition.

$$\mathbf{x}'_B = \mathbf{x}_B - A_B^{-1}A_{\{q\}}x'_q \quad \Longrightarrow \quad (\mathbf{x}'_B)_p = 0 = (\mathbf{x}_B)_p - \left(A_B^{-1}A_{\{q\}}\right)_p x'_q$$

- leaving index is obtained using the **minimum ratio test**: compute x'_q for each potential leaving index p and select the leaving index p that yields the smallest x'_q.

- Choosing an entering index q decreases the objective function value by

$$\mathbf{c}^T\mathbf{x}' = \mathbf{c}_B^T\mathbf{x}'_B + c_q x'_q = \mathbf{c}^T\mathbf{x} + \mu_q x'_q$$

- The objective function decreases only if μ_q is negative.

Simplex Algorithm: Optimization Phase

- In order to progress toward optimality, we must choose an index q in N such that μ_q is negative. If all components of μ_N are non-negative, we have found a global optimum.

- Since there can be multiple negative entries in μ_N, several possible heuristics to search for optimal vertex (choose next q)
  - **Dantzig's rule**: choose most negative entry in μ_N; easy to calculate
  - **Greedy heuristic (largest decrease)**: maximally reduces objective at each step
  - **Bland's rule**: chooses first vertex found with negative μ_N; useful for preventing or breaking out of cycles

Simplex Algorithm: Initialization Phase

- The starting vertex of the optimization phase is found by solving an additional **auxiliary linear program** that has a known feasible starting vertex

$$\begin{aligned} \underset{\mathbf{x},\mathbf{z}}{\text{minimize}} \quad & \begin{bmatrix} \mathbf{0}^T & \mathbf{1}^T \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{z} \end{bmatrix} \\ & \begin{bmatrix} A & Z \end{bmatrix} \begin{bmatrix} \mathbf{x} \\ \mathbf{z} \end{bmatrix} = \mathbf{b} \\ & \begin{bmatrix} \mathbf{x} \\ \mathbf{z} \end{bmatrix} \geq \mathbf{0} \end{aligned}$$

- The solution is a feasible vertex in the original linear program

Outline

22. Linear Programming

23. Simplex Algorithm

24. Duality

25. Primal-Dual Hybrid Gradient (PDHG) Method for LP

Dual Certificates

- Verification that the solution returned by the algorithm is actually the correct solution
- Recall that the solution to the dual problem, d^* provides a lower bound to the solution of the primal problem, p^*
- If $d^* = p^*$ then p^* is guaranteed to be the unique optimal value because the duality gap is zero
- What happens if one of the two is unbounded or infeasible?

Dual Certificates

Linear programs have a simple dual form:

Primal form (equality)

$$\begin{aligned} \underset{\mathbf{x}}{\text{minimize}} \quad & \mathbf{c}^T\mathbf{x} \\ \text{subject to} \quad & A\mathbf{x} = \mathbf{b} \\ & \mathbf{x} \geq \mathbf{0} \end{aligned}$$

Dual form

$$\begin{aligned} \underset{\boldsymbol{\lambda}}{\text{maximize}} \quad & \mathbf{b}^T\boldsymbol{\lambda} \\ \text{subject to} \quad & A^T\boldsymbol{\lambda} \leq \mathbf{c} \end{aligned}$$

Strong Duality Theorem

Due to Von Neumann and Dantzig 1947 and Gale, Kuhn and Tucker 1951.

Theorem (Strong Duality Theorem)

Given:

$$\begin{array}{ll} (P) & \min\{\mathbf{c}^T\mathbf{x} \mid A\mathbf{x} = \mathbf{b}, \mathbf{x} \geq \mathbf{0}\} \\ (D) & \max\{\mathbf{b}^T\boldsymbol{\lambda} \mid A^T\boldsymbol{\lambda} \geq \mathbf{c}\} \end{array}$$

exactly one of the following occurs:

1. *(P) and (D) are both infeasible*
2. *(P) is unbounded and (D) is infeasible*
3. *(P) is infeasible and (D) is unbounded*
4. *(P) has feasible solution, then let an optimal be:* $\mathbf{x}^* = [x_1^*, \ldots, x_n^*]$
   (D) has feasible solution, then let an optimal be: $\boldsymbol{\lambda}^* = [\lambda_1^*, \ldots, \lambda_m^*]$*, then:*

$$p^* = \mathbf{c}^T\mathbf{x}^* = \mathbf{b}^T\boldsymbol{\lambda}^* = d^*$$

Outline

22. Linear Programming

23. Simplex Algorithm

24. Duality

25. Primal-Dual Hybrid Gradient (PDHG) Method for LP

First Order Methods

FOM requires only matrix-vector multiplication:

1. Matrix-vector multiplication is very suitable for utilizing modern hardware and distributed computation
2. Matrix factorization free. The memory usage is relatively low.

FOM is particularly good at solving large instances

With help of GPU, recent research shows PDHG is fast when the problem becomes large, see:
["cuPDLP. jl: A GPU implementation of restarted primal-dual hybrid gradient for linear programming in Julia", Lu/Yang, arXiv:2311.12180, 2023.]
["cuPDLP-C: A Strengthened Implementation of cuPDLP for Linear Programming by C language," Lu et al. arXiv:2312.14832, 2023.]

Problem Formulation

For the standard LP:

$$\begin{aligned} \underset{\mathbf{x}}{\text{minimize}} \ & \mathbf{c}^T\mathbf{x} \\ \text{subject to} \ & A\mathbf{x} = \mathbf{b} \\ & \mathbf{x} \geq \mathbf{0} \end{aligned}$$

Via Lagrangian function:

$$\min_{\mathbf{x}\geq\mathbf{0}} \max_{\mathbf{y}} \mathcal{L}(\mathbf{x},\mathbf{y}) \stackrel{def}{=} \mathbf{c}^T\mathbf{x} - \mathbf{y}^T(A\mathbf{x} - \mathbf{b})$$

Saddle point: The $(\mathbf{x}^*, \mathbf{y}^*)$ with $\mathbf{x}^* \geq \mathbf{0}$ is a saddle point of $\mathcal{L}(\mathbf{x},\mathbf{y})$ if for any $\mathbf{x} \geq \mathbf{0}$ and $\mathbf{y}$:

$$\mathcal{L}(\mathbf{x}^*,\mathbf{y}) \leq \mathcal{L}(\mathbf{x}^*,\mathbf{y}^*) \leq \mathcal{L}(\mathbf{x},\mathbf{y}^*)$$

Gradient Descent Ascent

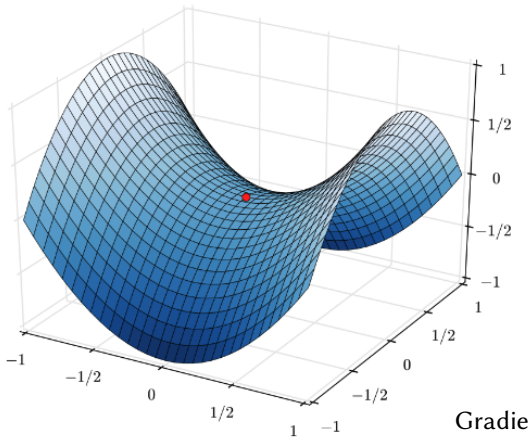

Gradient Descent Ascent:

$$\mathbf{x}^{k+1} = \text{Projection}_{\mathbf{x}\geq\mathbf{0}}\left(\mathbf{x}^k - \alpha(\mathbf{c} - A^T\mathbf{y}^k)\right) = \left(\mathbf{x}^k - \alpha(\mathbf{c} - A^T\mathbf{y}^k)\right)^+$$

$$\mathbf{y}^{k+1} = \mathbf{y}^k + \alpha(\mathbf{b} - A\mathbf{x}^{k+1})$$

Gradient Descent Ascent may not converge to the saddle point
Example:

$$\max_{\mathbf{x}} \min_{\mathbf{y}} \mathbf{x}\mathbf{y}$$

we have closed form of each iteration:

$$\begin{bmatrix} \mathbf{x}^k \\ \mathbf{y}^k \end{bmatrix} = \begin{bmatrix} 1 & \alpha \\ -\alpha & 1 \end{bmatrix}^k \begin{bmatrix} \mathbf{x}^0 \\ \mathbf{y}^0 \end{bmatrix}$$

The determinant of $\left[\begin{smallmatrix} 1 & \alpha \\ -\alpha & 1 \end{smallmatrix}\right]$ is $1 + \alpha^2 > 1$, no matter how small α is, which means this approach never converges.

Primal-Dual Hybrid Gradient (PDHG) Method

PDHG: To update $\mathbf{y}^{k+1}$ uses the idea of momentum ["A Primal-Dual Hybrid Gradient Method for Convex Problems with Applications to Imaging," Chambolle and Pock, Journal of Mathematical Imaging and Vision, 2011.]:

$$\mathbf{x}^{k+1} = \text{Projection}_{\mathbf{x}\geq\mathbf{0}}\left(\mathbf{x}^k - \alpha(\mathbf{c} - A^T\mathbf{y}^k)\right) = \left(\mathbf{x}^k - \alpha(\mathbf{c} - A^T\mathbf{y}^k)\right)^+$$
$$\mathbf{y}^{k+1} = \mathbf{y}^k + \alpha\left(\mathbf{b} - A(2\mathbf{x}^{k+1} - \mathbf{x}^k)\right)$$

Example:

$$\max_{\mathbf{x}} \min_{\mathbf{y}} \mathbf{xy}$$

we still have closed form of each iteration:

$$\begin{bmatrix}\mathbf{x}^k \\ \mathbf{y}^k\end{bmatrix} = \begin{bmatrix}1 & \alpha \\ -\alpha & 1-2\alpha^2\end{bmatrix}^k \begin{bmatrix}\mathbf{x}^0 \\ \mathbf{y}^0\end{bmatrix}$$

The modulus of eigenvalues of $\begin{bmatrix}1 & \alpha \\ -\alpha & 1-2\alpha^2\end{bmatrix}$ are smaller than 1 if $\alpha < 1$ so PDHG converges.

Termination Metrics

For the original LP problem, usually we use the following metrics for termination:

1. Primal feasibility $\|A\mathbf{x} - b\|_2 \leq \epsilon$
2. Dual feasibility $\|(c - A^T\mathbf{y})\|_2 \leq \epsilon$
3. Primal-dual gap $|\mathbf{c}^T\mathbf{x} - \mathbf{b}^T\mathbf{y}| \leq \epsilon$

Summary

- Linear programs are problems consisting of a linear objective function and linear constraints
- The simplex algorithm can optimize linear programs globally in an efficient manner
- Dual certificates allow us to verify that a candidate primal-dual solution pair is optimal
- Linear programs can be solved to optimality for problems with millions of variables.
- PDHG is a first-order method for solving linear programs that is particularly well-suited for modern hardware.

15. Discrete Optimization: Integer Linear Programming

Discrete Optimization

- Discrete optimization is a branch of optimization that deals with problems where the solution space is discrete, meaning that the **variables** can only take on **specific, distinct values**.
- This is in contrast to continuous optimization, where the variables can take on any value within a given range.
- Discrete optimization problems are often NP-hard, meaning that they are computationally challenging to solve.
- It is important to develop efficient algorithms and heuristics to solve these problems, as they often arise in real-world applications.
- Discrete optimization is widely used in various fields, including operations research, computer science, engineering, and economics.

Discrete Optimization

- What is discrete optimization (previous slide)? And Combinatorial Optimization?
- Integer (linear) programming
- Exact solution techniques
  - Dedicated algorithms
  - Dynamic programming
  - Constraint programming
  - SAT solvers
- Approximate solution techniques
  - Approximation algorithms
  - Greedy algorithms and Local Search
  - Metaheuristics, Randomized Optimization Algorithms
  - Matheuristics
  - ...

Discrete vs Combinatorial Optimization

In Combinatorial Optimization, variables have some combinatorial structure, ie, sets, permutations, paths, etc.

Definition (Combinatorial Optimization Problem (COP))

Input: Given a finite set $N = \{1, \dots, n\}$ of objects,
weights c_j for all $j \in N$,
a collection $\mathcal{F}$ of feasible subsets of N
Task: Find a minimum weight feasible subset, ie,

$$\underset{S \subseteq N}{\text{minimize}} \left\{ \sum_{j \in S} c_j \mid S \in \mathcal{F} \right\}$$

COP can also be modelled as discrete optimization problems.

Typically: **incidence vector** of S, $\mathbf{x}^S \in \mathbb{B}^n$: $x_j^S = \begin{cases} 1 & \text{if } j \in S \\ 0 & \text{otherwise} \end{cases}$

Discrete (or Combinatorial) Optimization

Solving problems with variables that are discrete instead of continuous

Example

- Set covering and set partitioning
- Knapsack problem
- Traveling salesman problem
- Vehicle routing problem
- Job scheduling problem
- Facility location problem
- Bin packing problem
- Graph coloring problem
- Maximum flow problem
- Minimum spanning tree problem
- Shortest path problem
- Steiner tree problem
- Hamiltonian path problem

The set of possible discrete values can be finite or infinite

Solution Methods

Exact Methods:

- Integer programming
- Combinatorial optimization algorithms
- Graph theory algorithms
- Scheduling algorithms
- SAT
- Dedicated Branch and bound
- Dynamic programming
- Constraint programming
- Integer linear programming
- Mixed-integer programming
- Network flow algorithms

Heuristic Methods:

- Approximation algorithms
- Greedy algorithms
- Local Search algorithms
- Metaheuristics
  - Genetic algorithms
  - Simulated annealing
  - Ant colony optimization
  - Tabu search
  - ...

Outline

26. Integer Linear Programming

Notation: Set of Integer Numbers

- $\mathbb{Z}$ set of integer numbers $\{\ldots, -3, -2, -1, 0, 1, 2, 3, \ldots\}$
- $\mathbb{Z}^+$ set of positive integers
- $\mathbb{Z}_0^+$ set of nonnegative integers ($\{0\} \cup \mathbb{Z}^+$)
- $\mathbb{N}_0$ set of natural numbers, ie, nonnegative integers $\{0, 1, 2, 3, 4, \ldots\}$
- $\mathbb{B}$ set of binary numbers

Mixed Integer Linear Programming (ILP)

Linear Objective • Linear Constraints • but! integer variables

$$\begin{aligned} \max\ & \mathbf{c}^T\mathbf{x} \\ & A\mathbf{x} \leq \mathbf{b} \\ & \mathbf{x} \geq \mathbf{0} \end{aligned}$$

Linear Programming (LP)

$$\begin{aligned} \max\ & \mathbf{c}^T\mathbf{x} \\ & A\mathbf{x} \leq \mathbf{b} \\ & \mathbf{x} \geq \mathbf{0} \\ & \mathbf{x}\ \text{integer} \end{aligned}$$

Integer Linear Programming (ILP)

$$\begin{aligned} \max\ & \mathbf{c}^T\mathbf{x} \\ & A\mathbf{x} \leq \mathbf{b} \\ & \mathbf{x} \in \{0,1\}^n \end{aligned}$$

Binary Integer Program (BIP)
0/1 Integer Programming

$$\begin{aligned} \max\ & \mathbf{c}^T\mathbf{x} + \mathbf{h}^T\mathbf{y} \\ & A\mathbf{x} + G\mathbf{y} \leq \mathbf{b} \\ & \mathbf{x} \geq \mathbf{0} \\ & \mathbf{y} \geq \mathbf{0} \\ & \mathbf{y}\ \text{integer} \end{aligned}$$

Mixed Integer Linear Programming (MILP)

$$\begin{aligned} \max\ & f(\mathbf{x}) \\ & g(\mathbf{x}) \leq \mathbf{b} \\ & \mathbf{x} \geq \mathbf{0} \\ & \mathbf{x}\ \text{integer} \end{aligned}$$

Integer Non-linear Programming (MINLP)

Mathematical Programming: Modeling

- Find out exactly what the decision maker needs to know:
  - which investment?
  - which product mix?
  - which job j should a person i do?
- Define **Decision Variables** of suitable type (continuous, integer valued, binary) corresponding to the needs and **Known Parameters** corresponding to given data.
- Formulate **Objective Function** computing the benefit/cost
- Formulate mathematical **Constraints** indicating the interplay between the different variables.

Rounding

$$\begin{aligned} \max\ & 100x_1 + 64x_2 \\ & 50x_1 + 31x_2 \leq 250 \\ & 3x_1 - 2x_2 \geq -4 \\ & x_1, x_2 \in \mathbb{Z}_0^+ \end{aligned}$$

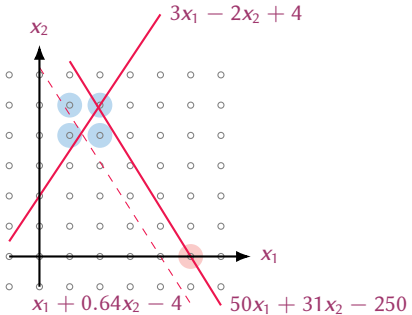

Note: rounding does not help in the example above!

LP optimum $(376/193, 950/193)$
IP optimum $(5, 0)$

$\rightsquigarrow$ feasible region convex but not continuous: Now the optimum can be on the border (vertices) but also **internal**.

Possible way: solve the **relaxed** problem.

- If solution is **integer**, done.
- If solution is **rational** (never irrational) try rounding to the nearest integers (but may exit feasibility region)
  if in $\mathbb{R}^2$ then 2^2 possible roundings (up or down)
  if in $\mathbb{R}^n$ then 2^n possible roundings (up or down)

Rounding

Rounding to infeasible point

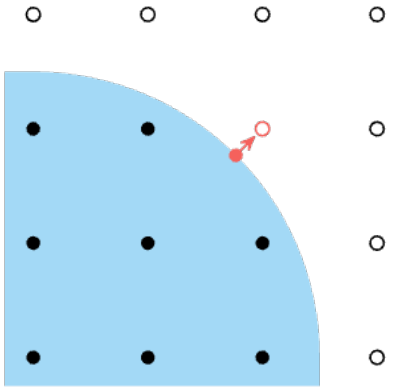

Rounding to suboptmal point

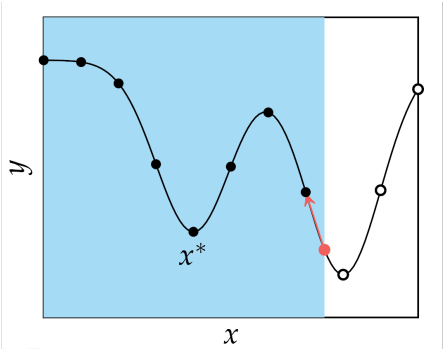

If A is integral, the error of a rounded solution can be bounded

Cutting Planes

$$
\begin{array}{rrcl}
\max & x_1 + 4x_2 & & \\
& x_1 + 6x_2 & \leq & 18 \\
& x_1 & \leq & 3 \\
& x_1, x_2 & \geq & 0 \\
& x_1, x_2 \text{ integers} & &
\end{array}
$$

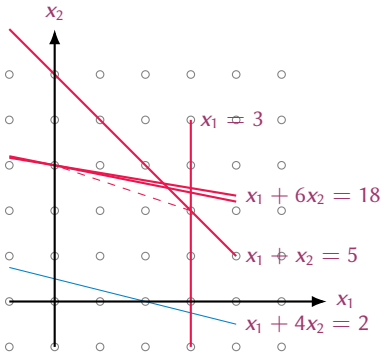

Cuts: Useful valid inequalities: they are satisfied by all integer solutions but not by all relaxed solutions

Cutting Plane Method

- The cutting plane method solves the relaxed LP, adds linear constraints, then repeats until the solution is exact
- Solves mixed integer programs exactly
- The linear constraints are chosen such that all discrete points are still feasible, but the relaxed solution is not

Chvatal-Gomory's Cutting Plane Algorithm

- Recall that we can partition a vertex (and also an optimal one $\mathbf{x}^*$) as

$$A_B\mathbf{x}_B^* + A_N\mathbf{x}_N^* = \mathbf{b} \quad \Longrightarrow \quad \mathbf{x}_B^* = A_B^{-1}\mathbf{b} - A_B^{-1}A_N\mathbf{x}_N^*$$
$$\mathbf{x}_B^* + \lfloor A_B^{-1}A_N \rfloor \mathbf{x}_N^* \leq A_B^{-1}\mathbf{b}$$
$$\mathbf{x}_B^* + \lfloor A_B^{-1}A_N \rfloor \mathbf{x}_N^* \leq \lfloor A_B^{-1}\mathbf{b} \rfloor$$
$$A_B^{-1}\mathbf{b} - \lfloor A_B^{-1}\mathbf{b} \rfloor - (A_B^{-1}A_N - \lfloor A_B^{-1}A_N \rfloor)\mathbf{x}_N^* \leq 0$$

- Using this derivation, we can add an inequality constraint for every variable $u \in B$ that has a fractional value in the relaxed solution $\mathbf{x}^*$ (u is the index of the variable and of the row in A_B)

$$x_u^* - \lfloor x_u^* \rfloor - \sum_{j \in N} \left(\bar{A}_{uj} - \lfloor \bar{A}_{uj} \rfloor\right) x_j \leq 0 \qquad \bar{A} = A_B^{-1}A_N$$

- This "cuts out" the relaxed solution $\mathbf{x}^*$

$$\underbrace{x_u^* - \lfloor x_u^* \rfloor}_{>0} - \underbrace{\sum_{j \in N} \left(\bar{A}_{uj} - \lfloor \bar{A}_{uj} \rfloor\right) x_j^*}_{=0} > 0$$

Branch and Bound

- General Branch and Bound: dedicated algorithms for specific problems (e.g., TSP, Knapsack, etc.)
- LP Based Branch and Bound for ILP: general method for solving integer linear programs
- (Spacial Branch and Bound for MINLP: general method for solving mixed integer nonlinear programs)

General Branch and Bound

- Consider the problem $z = \min\{\mathbf{c}^T\mathbf{x} : \mathbf{x} \in S\}$
- Divide and conquer: let $S = S_1 \cup \ldots \cup S_k$ be a decomposition of S into smaller sets, and let $z^k = \min\{\mathbf{c}^T\mathbf{x} : \mathbf{x} \in S_k\}$ for $k = 1, \ldots, K$. Then $z = \min_k z^k$

For instance if $S \subseteq \{0,1\}^3$ the enumeration tree is:

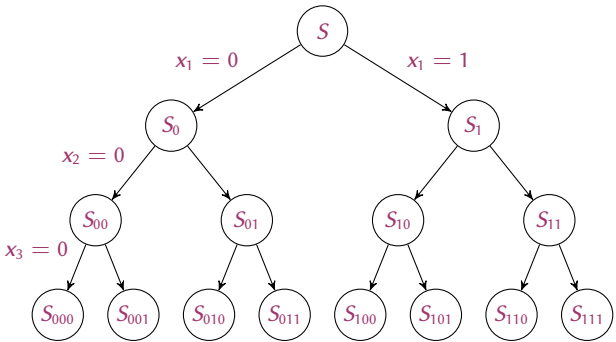

Bounding

Let's consider a minimization problem

- Let $\underline{z}^k$ be a **lower bound** on z^k (dual bound)
- Let $\overline{z}^k$ be an **upper bound** on z^k (primal bound)
- $(\underline{z}^k \leq z^k \leq \overline{z}^k)$
- $\underline{z} = \min_k \underline{z}^k$ is a **lower bound** on z
- $\overline{z} = \min_k \overline{z}^k$ is an **upper bound** on z

Pruning (Fathoming)



$\overline{z} = 80$
$\underline{z} = 75$
pruned by optimality



$\overline{z} = 79$
$\underline{z} = 74$
pruned by bounding



$\overline{z} = 86$
$\underline{z} = 74$
pruned by infeasibility

Pruning



$\overline{z} = 76$

$\underline{z} = 63$

nothing to prune

LP Based Branch and Bound

- Algorithm for efficiently searching the very large set of solution possibilities
  (first proposed by Ailsa Land and Alison Doig, “An automatic method of solving discrete programming problems”, 1960)
- **Branching** is dividing the domain into sections
- **Bounding** is keeping track of the best solution so far and rejecting regions that cannot improve upon it
- In the worst case, the algorithm has to search all possibilities but in practice it works very well. Combined with cutting planes, this approach forms the basis of many commercial MIP solvers.

LP Based Branch and Bound

LP based branch and bound uses the optimal value of the LP relaxation problem as dual bound

Example

$$
\begin{aligned}
\min \quad & -x_1 - 2x_2 \\
& x_1 + 4x_2 \leq 8 \\
& 4x_1 + x_2 \leq 8 \\
& x_1, x_2 \geq 0, \text{integer}
\end{aligned}
$$

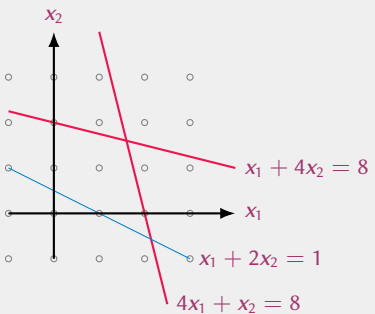


−4.8
$x_1 \leq 1$
$x_1 \geq 2$

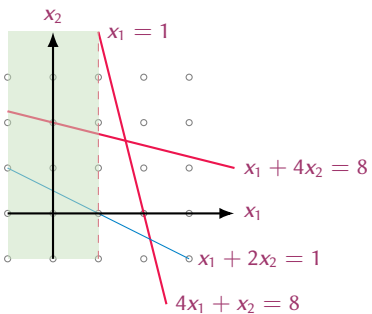
x_2
$x_1 = 1$
$x_1 + 4x_2 = 8$
x_1
$x_1 + 2x_2 = 1$
$4x_1 + x_2 = 8$

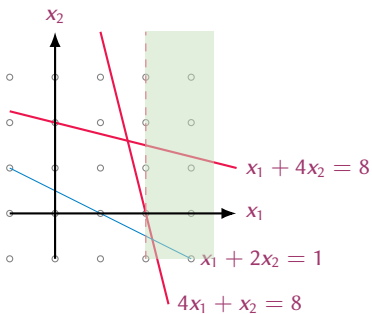
x_2
$x_1 + 4x_2 = 8$
x_1
$x_1 + 2x_2 = 1$
$4x_1 + x_2 = 8$

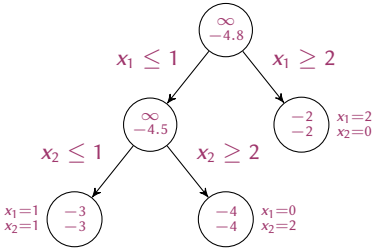
∞
-4.8
$x_1 \leq 1$
$x_1 \geq 2$
∞
-4.5
-2
-2
x_1=2
x_2=0
$x_2 \leq 1$
$x_2 \geq 2$
x_1=1
x_2=1
-3
-3
-4
-4
x_1=0
x_2=2

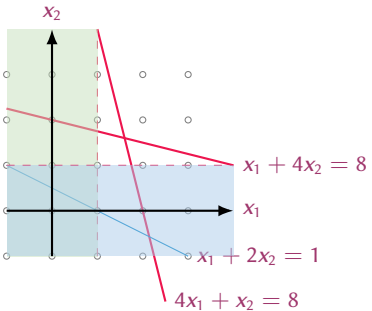
x_2
$x_1 + 4x_2 = 8$
x_1
$x_1 + 2x_2 = 1$
$4x_1 + x_2 = 8$

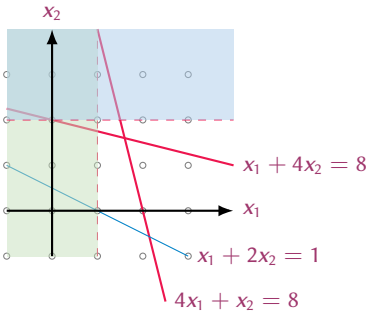
x_2
$x_1 + 4x_2 = 8$
x_1
$x_1 + 2x_2 = 1$
$4x_1 + x_2 = 8$

Branch and Bound: Pruning

$$\underset{x,y}{\text{minimize}} \; -1.3x - y$$

$$1.8x + y \leq 7.4$$

$$y \leq 5$$

$$x, y \in \mathbb{Z}$$

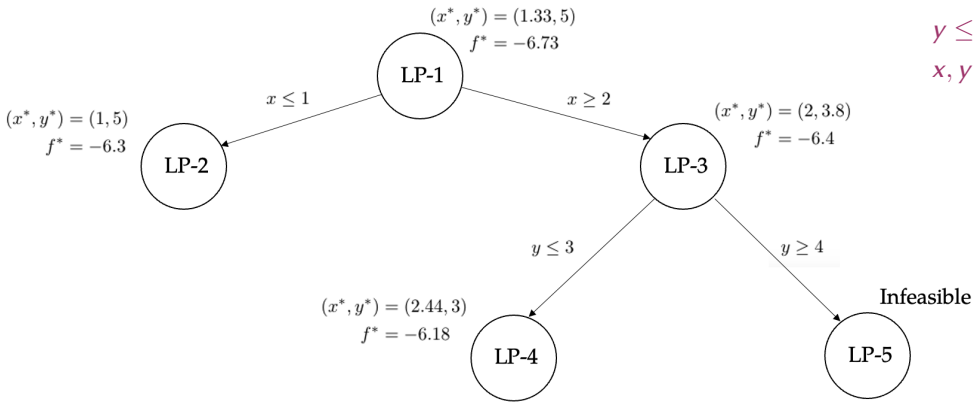

Pruning by: integrality, bounding, infeasibiliy.

Summary

- Discrete optimization problems require that the design variables be chosen from discrete sets.
- Many combinatorial optimization problems can be framed as an integer program, which is a linear program with integer constraints.
- In ILP, LP Relaxation, in which the continuous version of the discrete problem is solved, is by itself an unreliable technique for finding an optimal discrete solution but is central to more sophisticated algorithms.
- Both the cutting plane and branch and bound methods can be used to solve integer programs efficiently and exactly. The branch and bound method is quite general and can be applied to a wide variety of discrete optimization problems.

16. Discrete Optimization: Dynamic Programming & Constraint Programming

Outline

27. Dynamic Programming

28. Constraint Programming

Dynamic Programming

- Applied to problems with **optimal substructure** and **overlapping subproblems**
- **Optimal substructure** means an optimal solution can be constructed from optimal solutions to its subproblems
- **Overlapping subproblems** means solving each subproblem separately requires repeating certain operations
- **Dynamic programming** begins with desired problem and recurses down to smaller and smaller subproblems, retrieving the value of previously solved problems as necessary

Overlapping Subproblems

Example of Overlapping Subproblems: Padovan Sequence

$P_n = P_{n-2} + P_{n-3}$ $P_0 = P_1 = P_2 = 1$

```
def padovan_naive(n, P=None):
    if n < 3:
        return 1
    else:
        return padovan_naive(n - 2, P) +↪
            ↪ padovan_naive(n - 3, P)
```

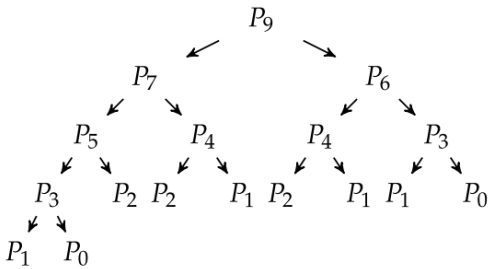

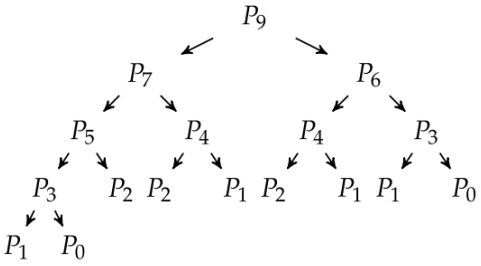
P_9
P_7
P_6
P_5
P_4
P_4
P_3
P_3
P_2
P_2
P_1
P_2
P_1
P_1
P_0
P_1
P_0

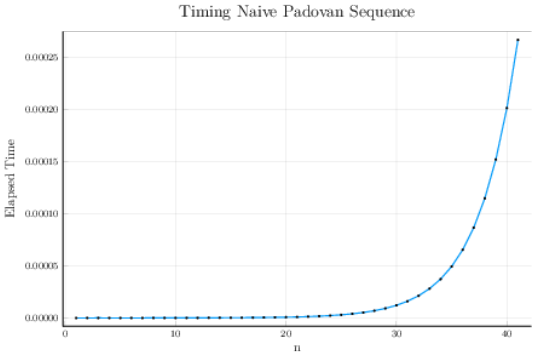
Timing Naive Padovan Sequence
Elapsed Time
0.00025
0.00020
0.00015
0.00010
0.00005
0.00000
0
10
20
30
40
n

```python
def padovan_topdown(n, P=None):
    if P is None:
        P = {}
    if n not in P:
        if n < 3:
            P[n] = 1
        else:
            P[n] = padovan_topdown(n - 2, P) + ↪
                ↪padovan_topdown(n - 3, P)
    return P[n]

def padovan_bottomup(n):
    P = {0: 1, 1: 1, 2: 1}
    for i in range(3, n + 1):
        P[i] = P[i - 2] + P[i - 3]
    return P[n]
```

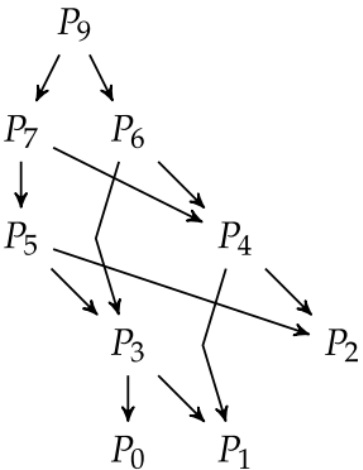

```python
from functools import lru_cache

@lru_cache(maxsize=None)
def padovan_topdown(n):
    if n < 3:
        return 1
    return padovan_topdown(n - 2) + padovan_topdown(n - 3)

def padovan_bottomup_const(n):
    if n < 3:
        return 1
    p0, p1, p2 = 1, 1, 1  # Corresponds to P[0], P[1], P[2]
    for _ in range(3, n + 1):
        p_next = p0 + p1
        p0, p1, p2 = p1, p2, p_next
    return p2
```

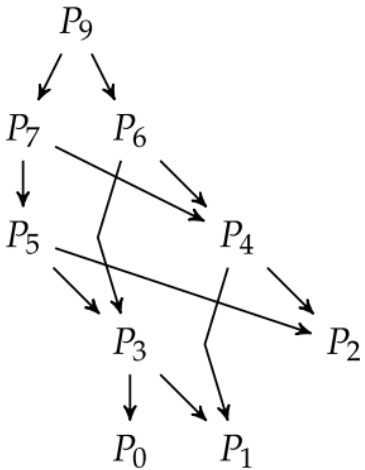

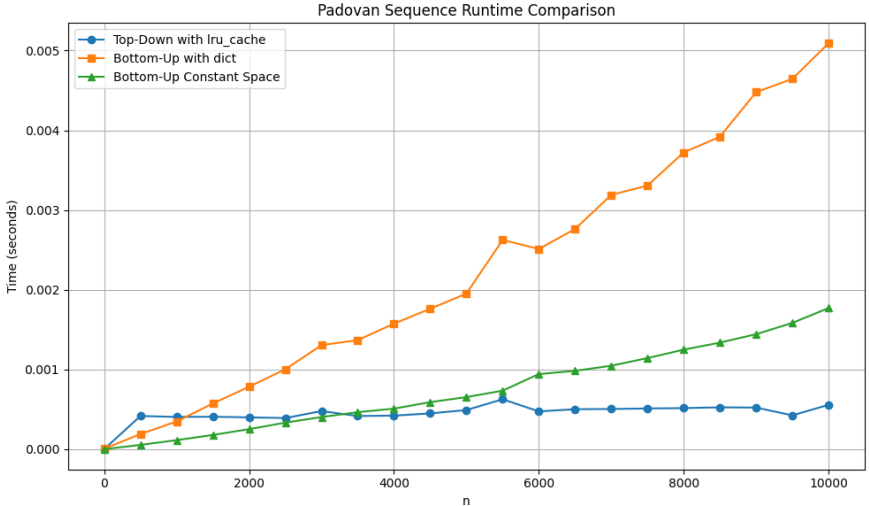
Padovan Sequence Runtime Comparison
Top-Down with lru_cache
Bottom-Up with dict
Bottom-Up Constant Space
Time (seconds)
n
0.000
0.001
0.002
0.003
0.004
0.005
0
2000
4000
6000
8000
10000

Dynamic Programming: Optimal Substructure

Optimal substructure

- **Principle of Optimality** (known as Bellman Optimality Conditions): Suppose that the solution of a problem is the result of a sequence of n decisions $D_1, D_2, \ldots, D_n$; if a given sequence is optimal, then the first k decisions must be optimal, but also the last $n - k$ decisions must be optimal
- DP breaks down the problem into stages, at which decisions take place, and find a recurrence relation that relates each stage with the previous one

Example: Knapsack Problem

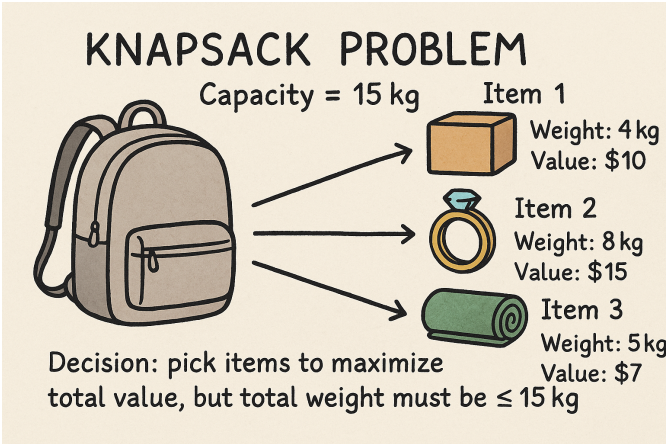

- Trying to pack some number of items into a backpack
- Limited space in the backpack
- Each item has a specified value and size
- What is the best subset of items to include?

Recall: A MILP Formulation

$$\begin{aligned}
\underset{x}{\text{minimize}} \quad & -\sum_{i=1}^{n} v_i x_i \\
\text{subject to} \quad & \sum_{i=1}^{n} w_i x_i \leq W \\
& x_i \in \{0, 1\} \quad \text{for } i = 1, 2, \ldots, n
\end{aligned}$$

Dynamic Programming Solution

- Let the $V(i, w)$ (the so-called **value function**) be the maximum value achievable using the first i items and a knapsack capacity w.
- Consider the ith item. You can either use it or not.
  - If you don't use it, then the value of your knapsack will be

    $$V(i-1, w)$$

  - If you use it, then the value of your knapsack will be

    $$V(i-1, w-w_i) + v_i$$

The Recursion

- For each item i and weight w:

$$V(i,w) = \begin{cases} 0 & \text{if } i = 0 \\ \max \begin{cases} V(i-1,w) & \text{(discard new item)} \\ V(i-1,w-w_i)+v_i & \text{(include new item)} \end{cases} & \text{if } w_i \leq w \\ V(i-1,w) & \text{if } w_i > w \end{cases}$$

- Optimal solution:

$$z^* = V(n,W)$$

  and trace back to find the items collected.

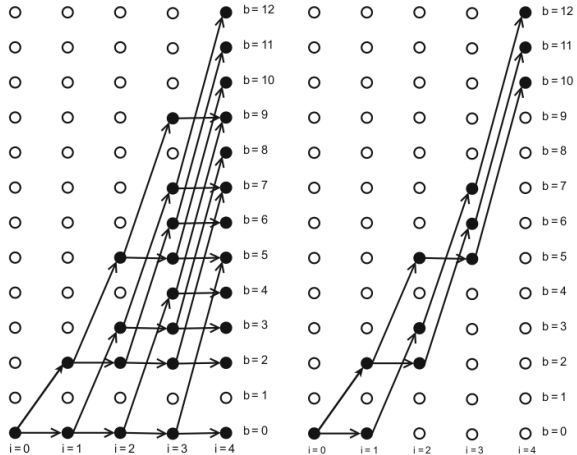
b = 12
b = 11
b = 10
b = 9
b = 8
b = 7
b = 6
b = 5
b = 4
b = 3
b = 2
b = 1
b = 0
i = 0
i = 1
i = 2
i = 3
i = 4
b = 12
b = 11
b = 10
b = 9
b = 8
b = 7
b = 6
b = 5
b = 4
b = 3
b = 2
b = 1
b = 0
i = 0
i = 1
i = 2
i = 3
i = 4

Example

Capacity = 5 kg

Item	Weight	Value
1	1 kg	$1
2	3 kg	$4
3	4 kg	$5

Step 1: Initialize
Create a table with (number of items + 1) rows and (capacity + 1) columns, filled with zeros.

```
  w = 0 1 2 3 4 5
i=0 | 0 0 0 0 0 0
i=1 | 0
i=2 | 0
i=3 | 0
```

Step 2: Fill it step by step

```
Item 1 (w_1=1, v_1=1):
  w = 0 1 2 3 4 5
i=0 | 0 0 0 0 0 0
i=1 | 0 1 1 1 1 1
i=2 | 0
i=3 | 0
```

```
Item 2 (w_2=3, v_2=4):
  w = 0 1 2 3 4 5
i=0 | 0 0 0 0 0 0
i=1 | 0 1 1 1 1 1
i=2 | 0 1 1 4 5 5
i=3 | 0

Item 3 (w_3=4, v_3=5):
  w = 0 1 2 3 4 5
i=0 | 0 0 0 0 0 0
i=1 | 0 1 1 1 1 1
i=2 | 0 1 1 4 5 5
i=3 | 0 1 1 4 5 6
```

Example: Traveling Salesman Problem

https://www.math.uwaterloo.ca/tsp/

Principle of Optimality

The TSP asks for the shortest tour that starts from 0, visits all cities of the set $C = \{1, 2, ..., n\}$ exactly once, and returns to 0, where the cost to travel from i to j is c_{ij} (with $(i, j) \in A$)
If the optimal solution of a TSP with six cities is $(0, 1, 3, 2, 4, 6, 5, 0)$, then...

- the optimal solution to visit $\{1, 2, 3, 4, 5, 6\}$ starting from 0 and ending at 5 is $(0, 1, 3, 2, 4, 6, 5)$
- the optimal solution to visit $\{1, 2, 3, 4, 6\}$ starting from 0 and ending at 6 is $(0, 1, 3, 2, 4, 6)$
- the optimal solution to visit $\{1, 2, 3, 4\}$ starting from 0 and ending at 4 is $(0, 1, 3, 2, 4)$
- the optimal solution to visit $\{1, 2, 3\}$ starting from 0 and ending at 2 is $(0, 1, 3, 2)$
- the optimal solution to visit $\{1, 3\}$ starting from 0 and ending at 3 is $(0, 1, 3)$
- the optimal solution to visit 1 starting from 0 is $(0, 1)$

$\rightsquigarrow$ The optimal solution is made up of a number of optimal solutions of smaller subproblems

Enumerate All Solutions of the TSP

- A solution of a TSP with n cities derives from a sequence of n decisions, where the kth decision consists of choosing the kth city to visit in the tour

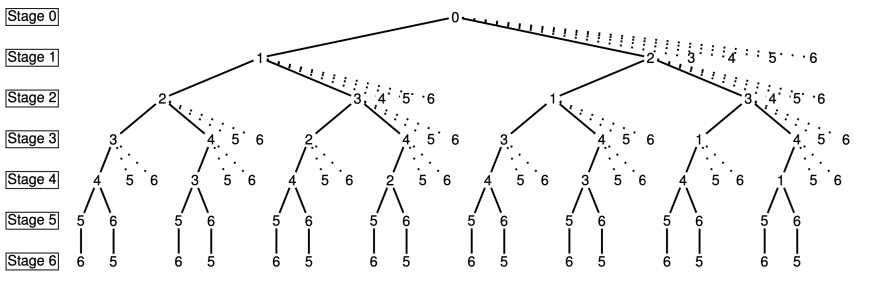

- The number of nodes (or states) grows exponentially with n
- At stage k, the number of states is $\binom{n}{k} k!$
- With $n = 6$, at stage $k = 6$, 720 states are necessary

$\rightsquigarrow$ DP finds the optimal solution by implicitly enumerating all states but actually generating only some of them

Are All States Necessary?

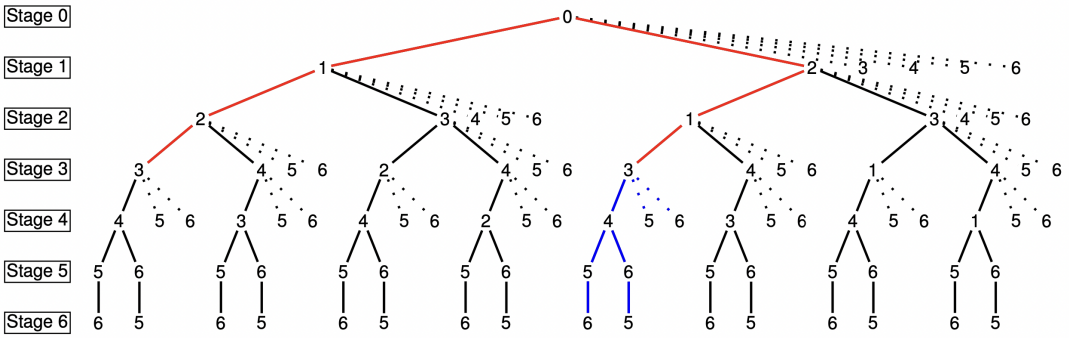

If path $(0, 1, 2, 3)$ costs less than $(0, 2, 1, 3)$, the optimal solution cannot be found in the blue part of the tree

Are All States Necessary?

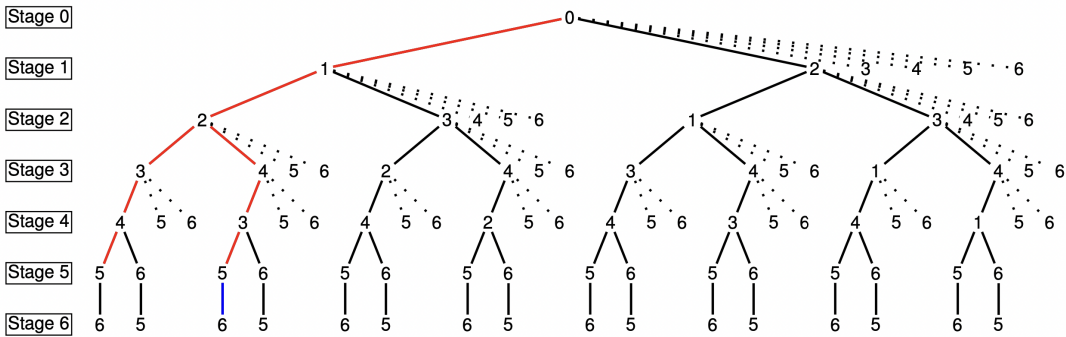

If path $(0, 1, 2, 3, 4, 5)$ costs less than $(0, 1, 2, 4, 3, 5)$, the optimal solution cannot be found in the blue part of the tree

Are All States Necessary?

- At stage k ($1 \leq k \leq n$), for each subset of cities $S \subseteq C$ of cardinality k, it is necessary to have only k states (one for each of the cities of the set S)
- At state $k = 3$, given the subset of cities $S = \{1, 2, 3\}$, three states are needed:
  - the shortest-path to visit S by starting from 0 and ending at 1
  - the shortest-path to visit S by starting from 0 and ending at 2
  - the shortest-path to visit S by starting from 0 and ending at 3
- At stage k, $\binom{n}{k} k$ states are required to compute the optimal solution (not $\binom{n}{k} k!$)

#States n = 6

Stage	$\binom{n}{k} k!$	$\binom{n}{k} k$
1	6	6
2	30	30
3	120	60
4	360	60
5	720	30
6	720	6

Complete Trees with n=4

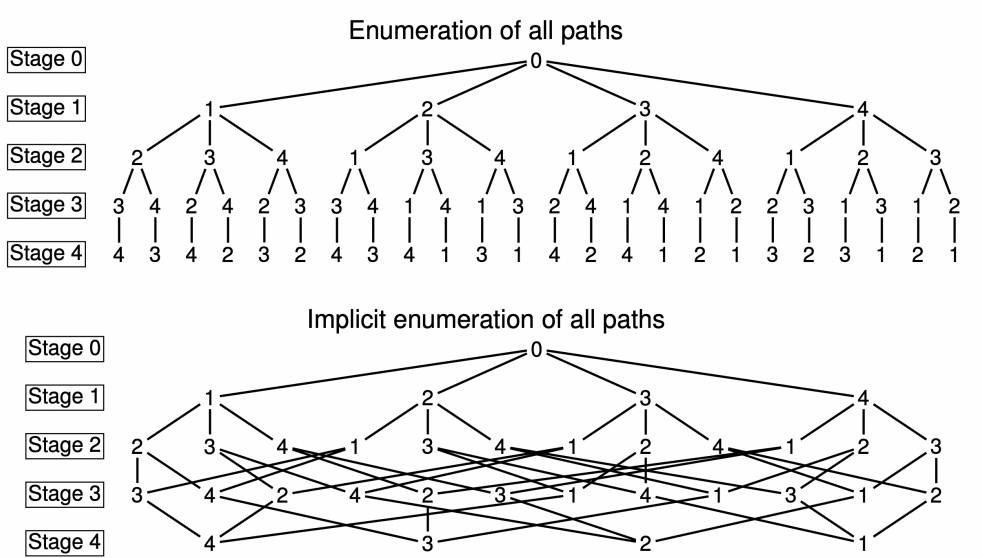

Dynamic Programming Recursion for the TSP I

- Given a subset $S \subseteq C$ of cities and $k \in S$, let $f(S, k)$ be the optimal cost of starting from 0, visiting all cities in S, and ending at k
- Begin by finding $f(S, k)$ for $|S| = 1$, which is $f(\{k\}, k) = c_{0k}, \forall k \in C$
- To compute $f(S, k)$ for $|S| > 1$, the best way to visit all cities of S by starting from 0 and ending at k is to consider all $j \in S \setminus \{k\}$ immediately before k, and look up $f(S \setminus \{k\}, j)$, namely

$$f(S, k) = \min_{j \in S \setminus \{k\}} \{f(S \setminus \{k\}, j) + c_{jk}\}$$

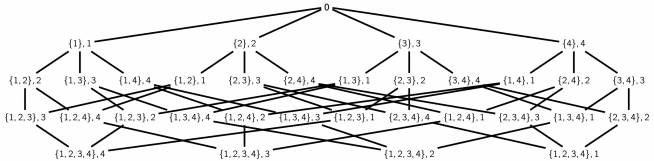

- The optimal solution cost z^* of the TSP is $z^* = \min_{k \in C}\{f(C, k) + c_{k0}\}$

Dynamic Programming Recursion for the TSP II

DP Recursion from [Held and Karp (1962)]

1. **Initialization**. Set $f(\{k\}, k) = c_{0k}$ for each $k \in C$

2. **RecursiveStep**. For each stage $r = 2, 3, ..., n$, compute

$$f(S, k) = \min_{j \in S \setminus \{k\}} \{f(S \setminus \{k\}, j) + c_{jk}\} \forall S \subseteq C : |S| = r \text{ and } \forall k \in S$$

3. **Optimal Solution**. Find the optimal solution cost z^* as

$$z^* = \min_{k \in C} \{f(C, k) + c_{k0}\}$$

- With the DP recursion, TSP instances with up to 25 - 30 customers can be solved to optimality; other solution techniques (i.e., branch-and-cut) are able to solve TSP instances with up to... 85900 customers
- Nonetheless, DP recursions represents the state-of-the-art solution techniques to solve a wide variety of PDPs

TSP

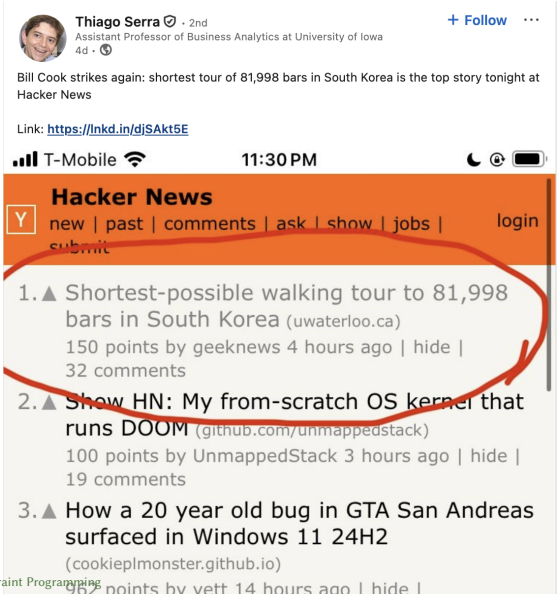
Thiago Serra · 2nd
Assistant Professor of Business Analytics at University of Iowa
4d ·
+ Follow
Bill Cook strikes again: shortest tour of 81,998 bars in South Korea is the top story tonight at Hacker News
Link: https://lnkd.in/djSAkt5E
T-Mobile
11:30 PM
Hacker News
new | past | comments | ask | show | jobs | submit
login
1. Shortest-possible walking tour to 81,998 bars in South Korea (uwaterloo.ca)
150 points by geeknews 4 hours ago | hide | 32 comments
2. Show HN: My from-scratch OS kernel that runs DOOM (github.com/unmappedstack)
100 points by UnmappedStack 3 hours ago | hide | 19 comments
3. How a 20 year old bug in GTA San Andreas surfaced in Windows 11 24H2
(cookieplmonster.github.io)

Summary

- Dynamic programming is a powerful technique that exploits optimal overlapping substructure in some problems.

Outline

27. Dynamic Programming

28. Constraint Programming

Number Circle Puzzle

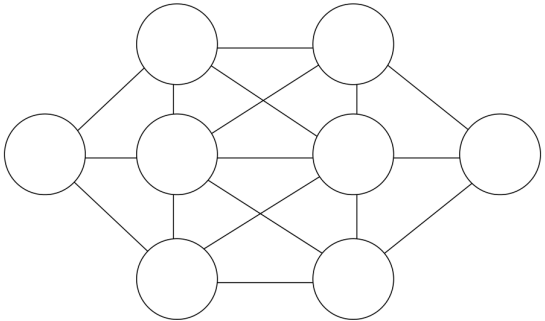

You have 8 minutes

Put a different number (1 to 8) in each circle such that adjacent circles do not have consecutive numbers.

Example by Patrick Prosser with the help of Toby Walsh, Chris Beck, Barbara Smith, Peter van Beek, Edward Tsang, ...

Heuristic Search

Which nodes are hardest to number?

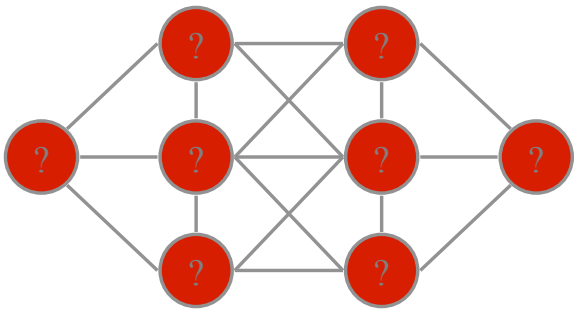

Heuristic Search

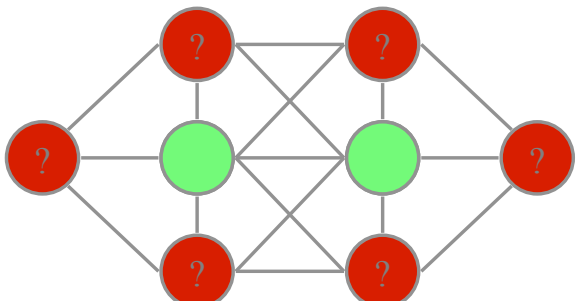

Heuristic Search

Which are the least constraining values to use?

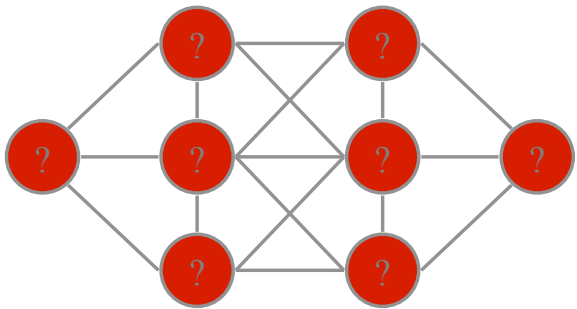

Heuristic Search

Values 1 and 8

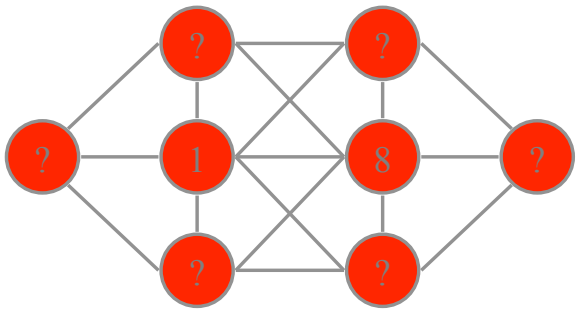

Heuristic Search

Values 1 and 8

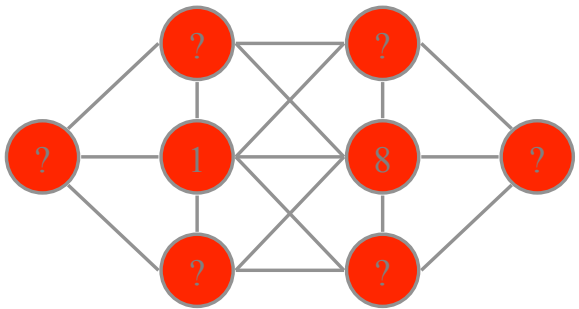

Symmetry means we don’t need to consider: 8 1

Inference/propagation

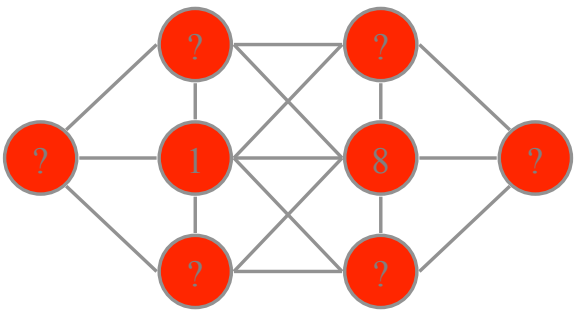

We can now eliminate many values for other nodes

Inference/propagation

{1,2,3,4,5,6,7,8}

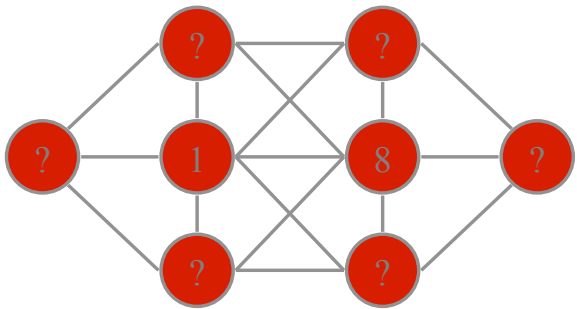

Inference/propagation

{2,3,4,5,6,7}

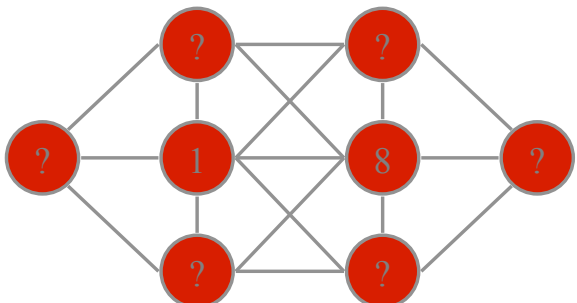

Inference/propagation

{3,4,5,6}

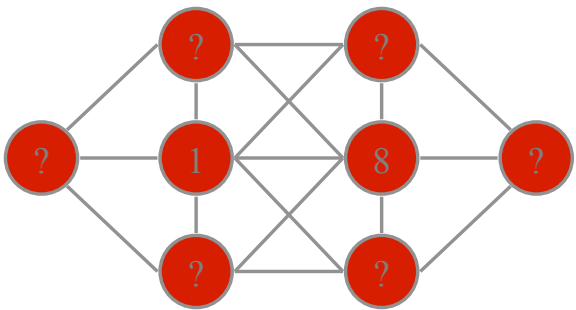

Inference/propagation

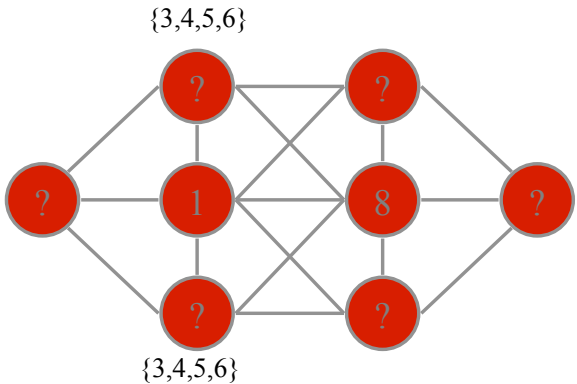

By symmetry

Inference/propagation

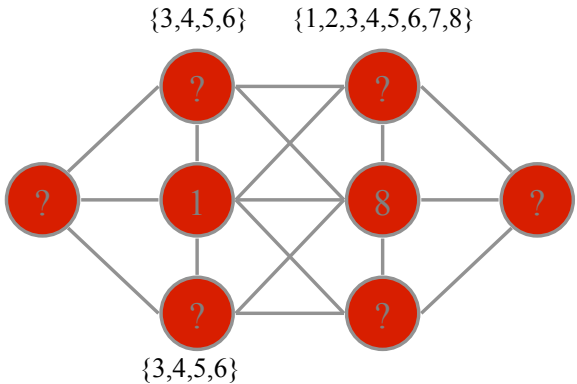

Inference/propagation

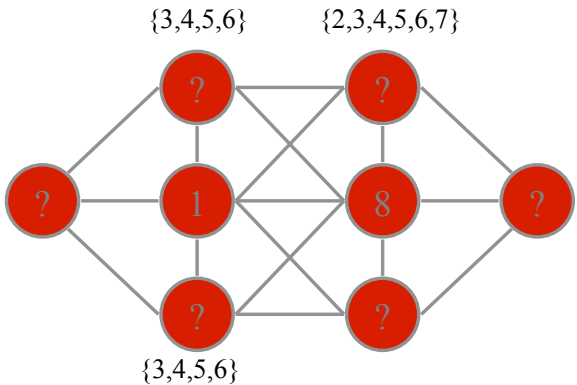

Inference/propagation

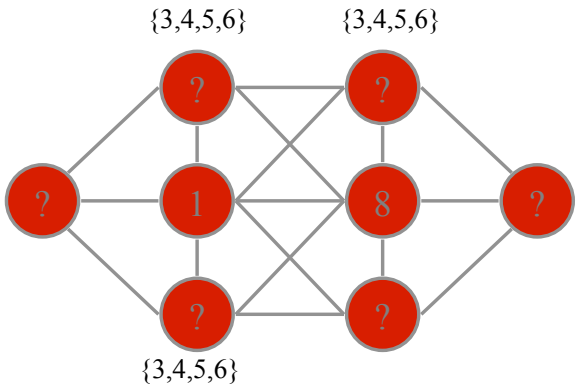

Inference/propagation

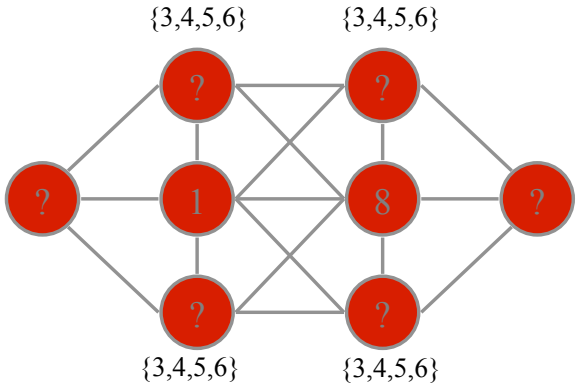

By symmetry

Inference/propagation

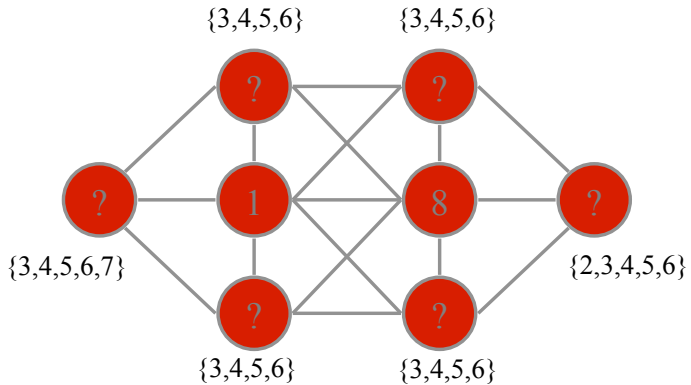

Inference/propagation

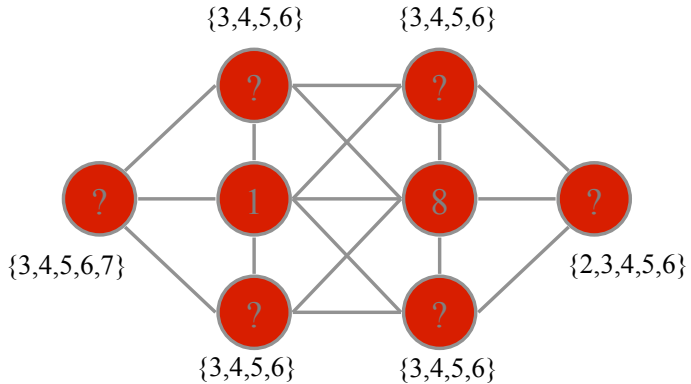

Value 2 and 7 are left in just one variable domain each

Inference/propagation

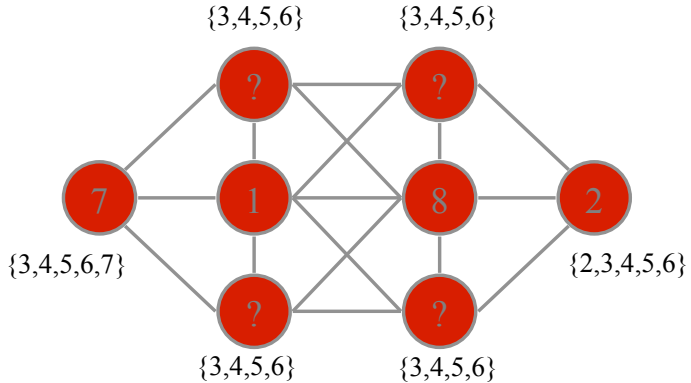

And propagate …

Inference/propagation

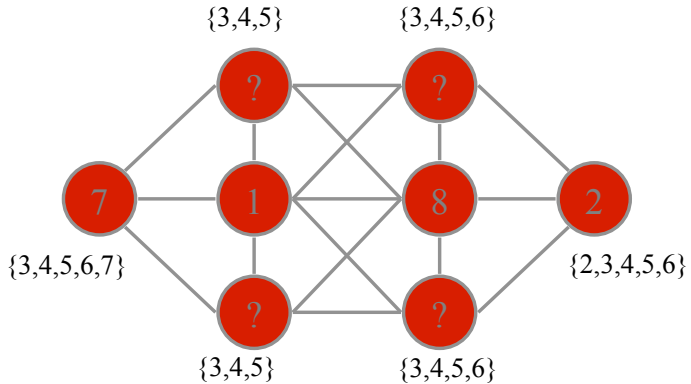

And propagate …

Inference/propagation

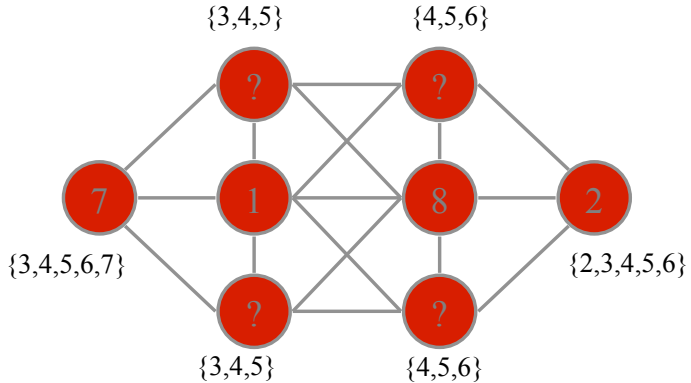

And propagate …

Inference/propagation

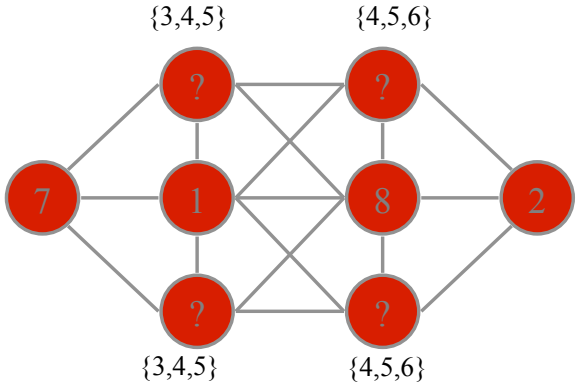

Guess a value, but be prepared to backtrack …

Inference/propagation

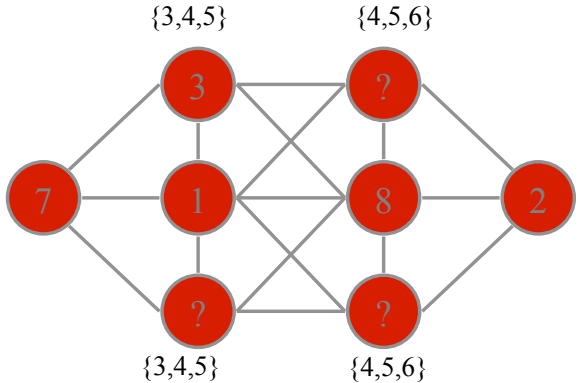

Guess a value, but be prepared to backtrack …

Inference/propagation

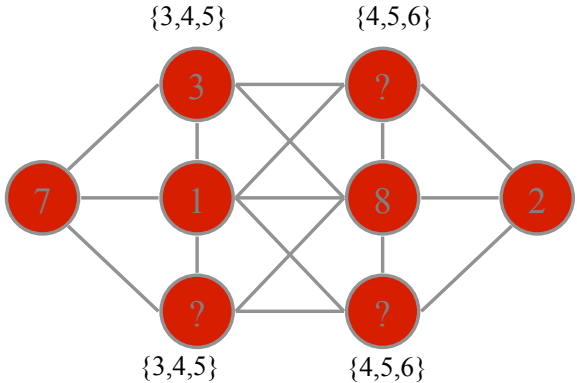

And propagate …

Inference/propagation

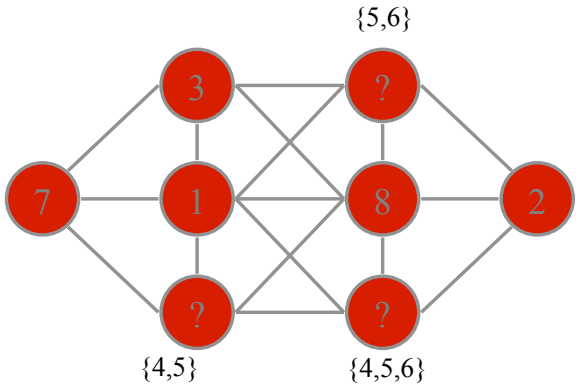

And propagate …

Inference/propagation

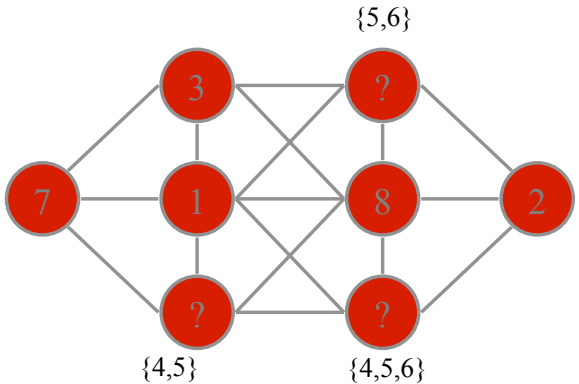

Guess another value …

Inference/propagation

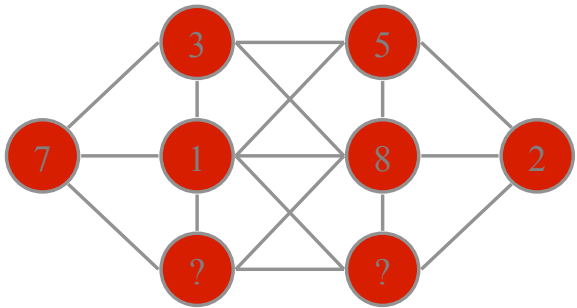

Guess another value …

Inference/propagation

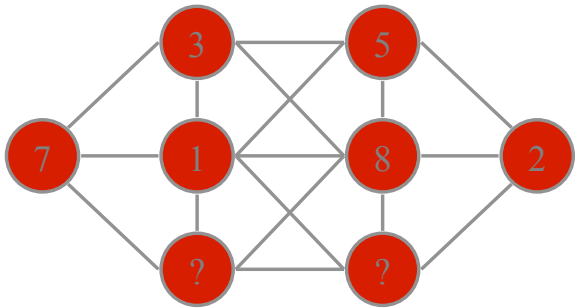

And propagate …

Inference/propagation

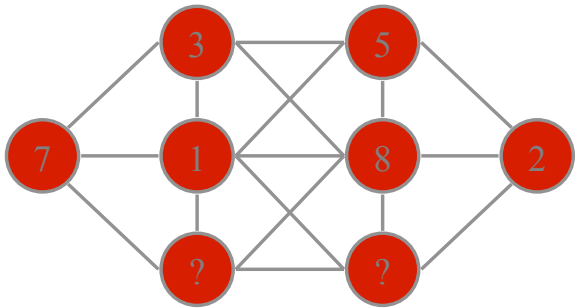

And propagate …

Inference/propagation

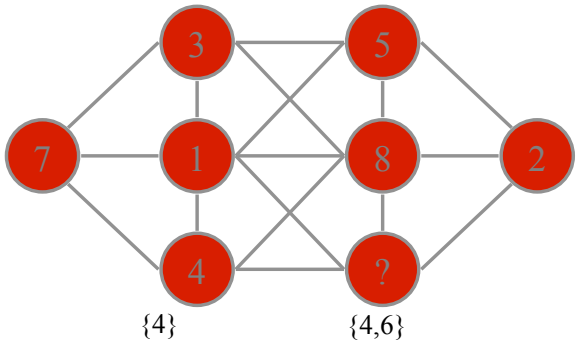

One node has only a single value left …

Inference/propagation

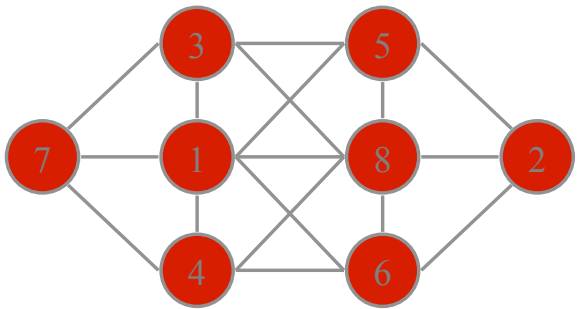

Solution

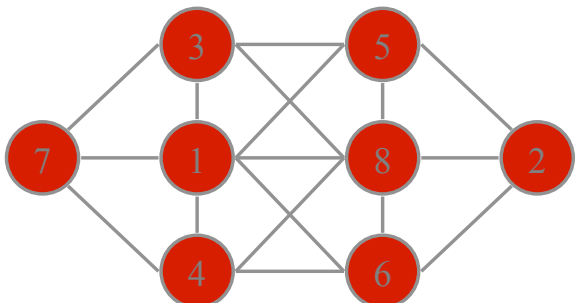

Hardness

- The puzzle is actually a hard problem
  - NP-complete



The Core of Constraint Computation

- Modelling
  Deciding on variables/domains/constraints
- Inference/Propagation
- Heuristic Search
- Symmetry
- Backtracking

Problem-Solver Separation in Solution Paradigms

1. Dedicated algorithms
   (eg.: enumeration, branch and bound, dynamic programming)
2. Integer Linear Programming
3. Constraint Programming
4. SAT Solving and others
5. Randomized Search/Optimization Heuristics

Common to 2-5: **Representation (modeling) + reasoning (search + inference)**

Constraint programming

- **Model** problem by specifying constraints on acceptable solutions:
  - define variables and domains
  - post constraints on these variables
- Solve model
  - choose algorithm
    - incremental assignments / backtracking search
    - complete assignments / (stochastic) local search
  - design heuristics

Constraint Satisfaction Problem

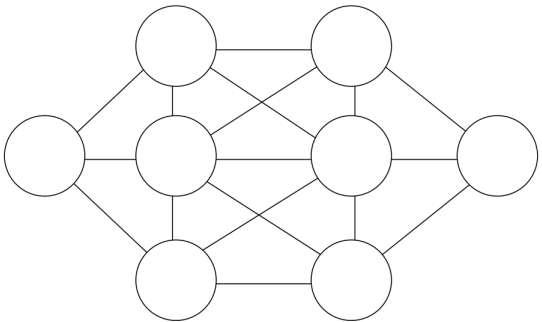

- Variable x_i for each node $i = 1, \ldots, 8$
- Domain $\{1, \ldots, 8\}$ for each variable x_i
- Constraints:

$$\texttt{allDifferent}([x_1, x_2, x_3, x_4, x_5, x_6, x_7, x_8])$$
$$|x_1 - x_2| > 1$$
$$|x_2 - x_3| > 1$$
$$|x_3 - x_4| > 1$$
$$\vdots$$
$$|x_7 - x_8| > 1$$

Modeling in Constraint Programming

Definition (Variables, Domains, Constraints)

The **domain** of a variable x, denoted $D(x)$, is a finite set of elements that can be assigned to x.

A **constraint** C on X is a subset of the Cartesian product of the domains of the variables in X, i.e., $C \subseteq D(x_1) \times \cdots \times D(x_k)$. A tuple $(d_1, \ldots, d_k) \in C$ is called a **solution** to C.

Equivalently, we say that a solution $(d_1, ..., d_k) \in C$ is an assignment of the value d_i to the variable x_i for all $1 \leq i \leq k$, and that this assignment satisfies C.

If $C = \emptyset$, we say that it is **inconsistent**.

Extensional: specifies the good (or bad) tuples (values)
Intensional: specifies the characteristic function

Modeling in Constraint Programming

Constraint Satisfaction Problem (CSP)

A CSP is a finite set of variables X with **domain extension** $\mathcal{D} = D(x_1) \times \cdots \times D(x_n)$, together with a finite set of constraints $\mathcal{C}$, each on a subset of X. A **solution** to a CSP is an assignment of a value $d \in D(x)$ to each $x \in X$, such that all constraints are satisfied simultaneously.

Constraint Optimization Problem (COP)

A COP is a CSP $\mathcal{P}$ defined on the variables $x_1, \ldots, x_n$, together with an objective function $f : D(x_1) \times \cdots \times D(x_n) \to Q$ that assigns a value to each assignment of values to the variables. An **optimal solution** to a minimization (maximization) COP is a solution d to $\mathcal{P}$ that minimizes (maximizes) the value of $f(d)$.

Partial vs **Complete** assignments

Modeling in Constraint Programming

Variables can be combinatorial structures:

- integer variables (arrays)
- permutations/sequences
- sets with set domains
- ordered lists
- graphs

and constraints defined on them

Another Example: Social Golfers

Example (Social Golfer Problem (Combinatorial Design))

- 9 golfers: 1, 2, 3, 4, 5, 6, 7, 8, 9
- wish to play in groups of 3 players in 4 days
- such that no golfer plays in the same group with any other golfer more than just once.

Is it possible?

	Group 1	**Group 2**	**Group 3**
Day 0	? ? ?	? ? ?	? ? ?
Day 1	? ? ?	? ? ?	? ? ?
Day 2	? ? ?	? ? ?	? ? ?
Day 3	? ? ?	? ? ?	? ? ?

This is an instance of a **constrained satisfaction problem**. Adding an optimizing criterion we get a **constrained optimization problem**.

Constraint Programming: Representation

Golfers

	Group 1	Group 2	Group 3
Day 0	? ? ?	? ? ?	? ? ?
Day 1	? ? ?	? ? ?	? ? ?
Day 2	? ? ?	? ? ?	? ? ?
Day 3	? ? ?	? ? ?	? ? ?

Groups

	Day 0	Day 1	Day 2	Day 3
Golfer 0	1	{1,2,3}	{1,2,3}	{1,2,3}
Golfer 1	1	{1,2,3}	{1,2,3}	{1,2,3}
Golfer 2	1	{1,2,3}	{1,2,3}	{1,2,3}
Golfer 3	{2,3}	{1,2,3}	{1,2,3}	{1,2,3}
Golfer 4	{2,3}	{1,2,3}	{1,2,3}	{1,2,3}
Golfer 5	{2,3}	{1,2,3}	{1,2,3}	{1,2,3}
Golfer 6	{2,3}	{1,2,3}	{1,2,3}	{1,2,3}
Golfer 7	{2,3}	{1,2,3}	{1,2,3}	{1,2,3}
Golfer 8	{2,3}	{1,2,3}	{1,2,3}	{1,2,3}

Integer variables:

`assign[i,j]` variables whose value is from domain $\{1, 2, 3\}$

Constraints:

C1: each group has exactly groupSize players

C2: each pair of players only meets once

Constraint Programming: Representation

In MiniZinc

```
int: golfers = 9;
int: groupSize = 3;
int: days = 4;
int: groups = golfers/groupSize;
set of int: Golfer = 1..golfers;
set of int: Day = 1..days;
set of int: Group = 1..groups;

array[Golfer, Day] of var Group: assign; % Variables

constraint
  % C1: Each group has exactly groupSize players
  forall (gr in Group, d in Day)( % c1
   sum (g in Golfer)  (bool2int(assign[g,d] = gr)) = groupSize
  ) /\
  % C2: Each pair of players only meets at most once
  forall (g1, g2 in Golfer, d1, d2 in Day  where g1 != g2 /\ d1 != d2) (
   (bool2int(assign[g1,d1] = assign[g2,d1]) + bool2int(assign[g1,d2] = assign[g2,d2])) <=1);

solve :: int_search([assign[i,j] | i in Golfer, j in Day ],
                    first_fail, indomain_min, complete)  satisfy;
```

Constraint Programming: Reasoning

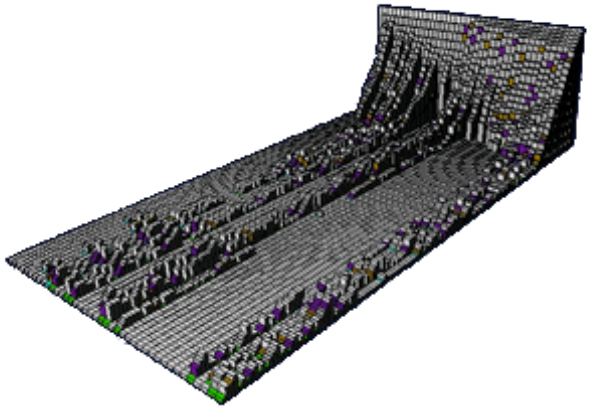

The solution process proceeds by propagating the constraints on the domanins of the variables (ie, removing values) and tentatively assigning variables until only feasible values are left or backtracking.

Summary

- Two different approaches to solve combinatorial optimization problems: Dynamic programming and Constraint programming
- Dynamic programming is a dedicated approach that exploits optimal overlapping substructure in some problems
- Constraint programming is a general purpose approach that exploits the structure of (standard) constraints to reduce the search space

17. Discrete Optimization: Constructive Heuristics

Outline

29. Randomized Optimization Heuristics

30. Search Methods

31. Constructive Search
    - Incomplete Search Ideas
    - Construction-Based Metaheuristics

Heuristics

- Get inspired by approach to problem solving in human mind
  [A. Newell and H.A. Simon. “Computer science as empirical inquiry: symbols and search.” Communications of the ACM, ACM, 1976, 19(3)]
  - effective rules without theoretical support
  - trial and error
- Applications:
  - Optimization
  - But also in Psychology, Economics, Management [Tversky, A.; Kahneman, D. (1974). "Judgment under uncertainty: Heuristics and biases". Science 185]
- Basis on empirical evidence rather than mathematical logic. Getting things done in the given time.

Randomized Optimization Heuristics (ROHs)

Two main search paradigms:

- Constructive search (works on partial solutions)
- Local search (works on complete solutions)

plus high level guiding heuristics (ie, metaheuristics), eg, evolutionary algorithms.

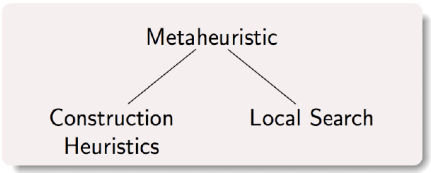

Toy Examples

We will use the following examples to illustrate concepts:

- Knapsack Problem
- Traveling Salesman Problem
- Single Machine Total Weighted Tardiness
- Graph Vertex-Coloring

Knapsack Problem

Given: A ground set of items with weights and values. A knapsack with a weight capacity.

Task: Find the subset that maximizes the total value

Example (Instance)

Capacity = 15

Item	Weight	Value
1	4	10
2	8	15
3	5	7
4	5	8
5	9	10
6	7	7
7	3	4
8	1	3

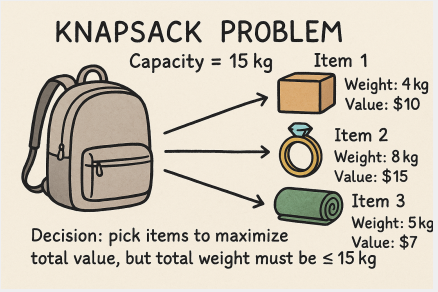

Sol. representation: Set: $\{1, 2, 7\}$ or Incidence vector: $[1, 1, 0, 0, 0, 0, 1, 0]$
Total weight: 15; Total value: 26

Traveling Salesman Problem

Given: A graph $G = (V, E)$ and a weight function $\omega : E \to \mathbb{R}$.

Task: Find the shortest Hamiltonian tour.



sol. representation:
permutation of vertices or
assignment of successors



sol. representation:
set of adjacent edges



sol. representation:
set of edges or
incidence binary vector

Single Machine Total Weighted Tardiness

Given: a set of n jobs $\{1, \ldots, n\}$ to be processed on a single machine and for each job j a processing time p_j, a weight w_j and a due date d_j.

Task: Find a schedule that minimizes the total weighted tardiness $\sum_{j=1}^{n} w_j \cdot T_j$, where $T_j = \max\{C_j - d_j, 0\}$ (C_j completion time of job j)

Example (Instance)

Job	1	2	3	4	5	6
Processing Time	3	2	2	3	4	3
Due date	6	13	4	9	7	17
Weight	2	3	1	5	1	2

Sol. representation:
Linear permutation

$\phi = [3, 1, 5, 4, 1, 6]$

Job	3	1	5	4	2	6
C_j	2	5	9	12	14	17
T_j	0	0	2	3	1	0
$w_j \cdot T_j$	0	0	2	15	3	0

Graph Vertex-Coloring

Given: A graph G and a set of colors Γ.

A **proper coloring**: each vertex receives a color and no two adjacent vertices receive the same color.

Task:
Find a proper coloring of G that uses the minimal number of colors (chromatic number).



Assignment representation



Partitioning representation

Outline

29. Randomized Optimization Heuristics

30. Search Methods

31. Constructive Search
    Incomplete Search Ideas
    Construction-Based Metaheuristics

A Search Problem

Problem statement

Constrained Optimization Problem: $\min\{f(s) \mid s \in \mathcal{F}\}$

- $\mathcal{F} \subseteq \mathcal{S}$ set of **feasible solutions**
- $\mathcal{S}$ set of **candidate solutions** (**combinatorial structures**)

The concept of **feasibility** is flexible and a design choice.
Most typically, it implies satisfying the constraints of the problem.

Guiding rule: if it has an **objective function value**, then it is a **feasible solution**

Guiding rule: **constructive search algorithms** work with **partial, infeasible solutions**

Example: a partial tour does not have an objective function value (but knapsack partial solutions do have an objective function value)

Partial vs Complete and Infeasible vs Feasible

The previous guiding rules are often broken:

- Constructive search on partial sols and local search on complete sols not always true
- Partial **vs** Complete $\neq$ Infeasible **vs** Feasible

For example in the Graph Vertex-Coloring different choices for **candidate solutions** are used in local search algorithms (last column indicates the frequency in the literature):



k-fixed	complete	proper	+
k-fixed	partial	proper	+
k-fixed	complete	unproper	+++
k-fixed	partial	unproper	
k-variable	complete	proper	++
k-variable	partial	proper	+
k-variable	complete	unproper	++
k-variable	partial	unproper	

So don't take me too rigidly in this organization!

Constraint Handling

Constraints in heuristic methods are handled:

- **implicitly** in the definition of the **combinatorial structures** that constitute the search states: assignments, permutations, (sub)sets, partitions, (sub)graphs, sequences, set of sequences, ...
- as **one-way** constraints between variables
- as **soft constraints**
  ie, relaxed in the evaluation function as penalty components with large weights or as lexicographically more important componenents

A Classification

- White box optimization:
  models can be expressed mathematically

- Grey box optimization:
  internal information about objective function computation is often available
  models that have a mathematical expression but may need data to determine them (eg, neural networks)

- Black box optimization:
  no mathematical expression is available
  We assume a zeroth order oracle that takes as input a point $s \in \mathcal{S}$ and outputs a dual bound if infeasible or the value of f at s.

Approaches to ROHs

- White/Grey box: representation (modelling) + reasoning (search)
  constraint based local search, comet, local solver (Hexaly)

- Black Box: a different approach, framework separating problem from solvers and defining the interface specification

$\Longrightarrow$ COST Action: ROAR-NET

https://roar-net.eu

A Search Problem

Definition (Search or Optimization Algorithm)

Goal formulation: we want to find the minimum with respect to some criterion from a set of candidate elements.

Problem formulation: Given a description of the states, an initial state and actions necessary to reach the goal, find a sequence of actions to reach the goal.

Search: the algorithm simulates sequences of actions in the model of the goal, searching until it finds a sequence of actions that reaches the goal.
The algorithm might have to simulate multiple tentative answers that do not meet the goal, but eventually it reaches a solution, or it will find that no solution is possible.

Components of a Search Algorithm (1)

(valid for complete or heuristic and constructive or perturbative algorithms)

- **State or (Candidate) solution**: a definition of the states of the search
- **Search Space**: A set of possible **states** that the search can be in.
- **Initial State**: State the search starts in.
- **Goal**: A set of one or more goal states. Sometimes there is one goal state sometimes there is a small set of alternative goal states
- **Evaluation function** $f(s)$: assesses the distance from a potential goal.
  (note: different from "objective", it can also include penalties due to constraint violations).

Components of a Search Algorithm (2)

- **Action Type** t: available to the algorithm. Neighborhood
- A finite set of **actions** of type t that can be executed in s, $\text{Actions}(t, s)$. Move
- A **transition model** that describes what each action does. $\text{Result}(s, a)$ returns the state that results from doing action $a \in \text{Actions}(t, s)$ in state s. Apply Move
- An **action-cost function**, $\text{Action-Cost}(s, a, s')$, that gives the numeric cost of applying action a in state s to reach state s'. Increment

ROAR-NET Application Programming Interface (API)

(Note: Here not meant as Web API, network-based API, or REST API.)

The ROAR-NET API Specification is the definition of an interface or protocol between optimization problems seen as black box and their solvers in order to facilitate understanding, reusing and scaling of solution approaches.

We look for a model that

- ... allows one to use off the shelf components to solve it.
- ... assumes a separation between **problem specifics** and **solver**.
- .. is designed as a **software interface** offering a service to other pieces of software and is implemented by the user.
- ... promotes **reusability** of software components and minimizes the user's effort to deploy a solution for the specific optimization problem at hand.
- ... maximizes code extensability, reusability, and simplicity.

The ROAR-NET API

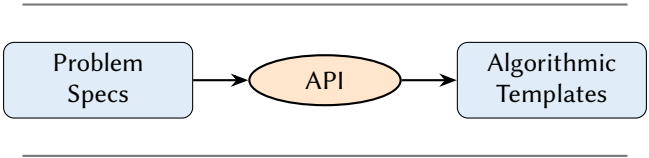

- Standardized interface for **randomised optimisation algorithms**.
- Provides a set of types and methods to be **implemented by the user**, then used by the algorithms.

The ROAR-NET API

```
# User Types
Problem
Solution
Neighborhood
Move
Value
Increment
SubNeighborhood
```

```
# Methods of Problem
construction_neighbourhood
destruction_neighbourhood
local_neighbourhood
perturbation_neighbourhood
empty_solution
random_solution
heuristic_solution

# Methods of Solution
lower_bound
objective_value
copy_solution
```

```
# Methods of Neighborhood
moves
random_move
random_moves_without_replacement

# Methods of Move
lower_bound_increment
objective_value_increment
apply_move
revert_move
```

https://github.com/roar-net/roar-net-api-spec

Minimal API Functions Implemented

Problem

```
local_neighbourhood(Problem) : Neighbourhood
perturbation_neighbourhood(Problem) : Neighbourhood
random_solution(Problem) : Solution
```

Solution

```
objective_value(Solution) : Value[0..1]
copy(Solution) : Solution
```

SubNeighbourhood, Neighborhood, PerturbationNeighborhood

```
moves(Neighbourhood, Solution) : Move[0..*]
random_move(Neighbourhood, Solution) : Move[0..1]
```

Move

```
apply_move(Move, Solution) : Solution
revert_move(Move, Solution) : Solution
objective_value_increment(Move, Solution) : Increment[0..1]
```

Types

- **`Problem`** the problem instance
- **`Solution`** implements the representation of a **tentative** solution
- **`Value`** represents points in objective space
- **`Neighborhood`** a function that given a solution, gives another solution $neighbor : S \rightarrow S$, based on a neighborhood, compute a `Move`
- **`Move`** applied to a solution to get the novel solution
- **`Increment`** represents difference of `Value`

Simplification in single objective cases: **`Value`** and **`Increment`** are Reals (ie, **`Double`** or **`Integer`**)

Operations: Problem Representation

... on Problem (P):

- `empty_solution(P): Solution`
- `random_solution(P): Solution`
- `heuristic_solution(P): Solution[0..1]`

... on Solution S:

- `copy_solution(S): Solution`
- `lower_bound(S): Value[0..1]`
- `objective_value(S): Value[0..1]`

Operations: Search

... on Neighborhood (N):

- `construction_neighbourhood(Problem): Neighbourhood`
- `destruction_neighbourhood(Problem): Neighbourhood`
- `local_neighbourhood(Problem): Neighbourhood`
- `moves(N, Solution): Move[0..*]`
- `random_move(N, Solution): Move[0..1]`
- `random_move_without_replacement(N, Solution): Move[0..*]`

Operations: Search

... on Move:

- `lower_bound_increment(Move, Solution): double[0..1]`
- `objective_value_increment(Move, Solution): double[0..1]`
- `apply_move(M, Solution): Solution` applies the move to a solution, to get a novel solution
- `revert_move(M): Move` computes the inverse of a move to revert it

Outline

29. Randomized Optimization Heuristics

30. Search Methods

31. Constructive Search
    - Incomplete Search Ideas
    - Construction-Based Metaheuristics

Overview: Another Classification

- Solving Problems by Complete Search
  - Enumeration and Tree Search
  - Dynamic Programming
  - Backtracking (satisfaction problems)
  - Branch and Bound (optimization problems)
- Solving Problems by Incomplete Search
  - Incomplete Search Ideas (greedy algorithms)
  - Construction-Based Metaheuristics

Recall: Complete Graph Search Methods

Tree (or graph) search in

Uninformed settings

- Breadth-first search
- Uniform-cost search
- Depth-first search

Informed settings

- Greedy best-first search
- A* search

Complete Tree Search

- For CSPs with n variables and d values, we can use a complete tree search
- Search Space: Tree with branching factor at the top level nd
  at the next level the branching factor is $(n-1)d$.
  The tree has $n! \cdot d^n$ leaves even if only d^n possible complete assignments.
- In this setting the same partial assignments are examined multiple times even though both yield the same complete assignment. Eg, X=a, Y=b and Y=b, X=a.
- A CSP is **commutative** if the order in which we apply assignments does not affect the resulting state. Assigning $X_i = v_i$ and then $X_j = v_j$ leads to the same state as doing it in the opposite order because:
  - Variables are distinct
  - Assignments don't interfere (no side effects)
  - The state is just a set of variable-value pairs
- So instead do: At each step, pick any unassigned variable and assign it any value.
- The tree has now d^n leaves
- Order can be fixed or dynamic (e.g., most constrained variable first, least constraining value first, etc.)
- Use information: look-ahead, best first, etc.

Exploiting Information

In an unconstrained setting:

Assessment of partial, infeasible solutions

The priority assigned to a node x is determined by the function

$$f(x) = g(x) + h(x)$$

$g(x)$: cost of the path so far
$h(x)$: heuristic estimate of the minimal cost to reach the goal from x.

- **greedy best-first search** uses h to decide
- **A* best-first search** uses f and is cost-optimal when reaches the goal, if $h(x)$ is an
  - admissible heuristic: never overestimates the cost to reach the goal
  - consistent: $h(n) \leq c(n, a, n') + h(n')$
    (consistent $\implies$ admissible, only necessary in graph search)

Best-First Search

```
Procedure TreeSearch(start, target)
add start to visited
add start to queue
while queue is not empty do
    current_node ← vertex of queue with min distance to target[a]
    remove current_node from queue
    for each neighbor n of current_node do
        if n not in visited then
            if n is target then
                return n
            else
                mark n as visited
                add n to queue
return failure
```

[a] Greedy best-first: min distance to target $= h(n)$;
A* best-first: min sum of distance so far and distance to target $= f(n)$

Heuristic Functions

Possible choices for admissible heuristic functions in $A^\star$ search:

- optimal solution to an easily solvable **relaxed problem**
- optimal solution to an easily solvable **subproblem**
- learning from experience by gathering statistics on state features
- preferred heuristic functions with higher values (provided they do not overestimate)
- if several heuristics available $h_1, h_2, \ldots, h_m$ and not clear which is the best then:

$$h(x) = \max\{h_1(x), \ldots, h_m(x)\}$$

A Star Search

Drawbacks:

- Time complexity: In the worst case, the number of nodes expanded is exponential,
  (but it is polynomial when the heuristic function h meets the following condition:

$$|h(x) - h^*(x)| \leq O(\log h^*(x))$$

  h^* is the optimal heuristic, the exact cost of getting from x to the goal.)

- Memory usage: In the worst case, it must remember an exponential number of nodes.
  Several variants: including iterative deepening A* (IDA*), memory-bounded A* (MA*) and simplified memory bounded A* (SMA*) and recursive best-first search (RBFS)

Outline

29. Randomized Optimization Heuristics

30. Search Methods

31. Constructive Search
    - Incomplete Search Ideas
    - Construction-Based Metaheuristics

Greedy Algorithms

- Algorithms based on incomplete versions of greedy best-first search perform a single descent in the search tree.
- They always expand the current state and do not maintain an open set (frontier)
- Strategy: always make the choice that is best at the moment
- Sometimes, they guarantee the optimal solution: Minimum Spanning Tree, Single Source Shortest Path, etc.)

Greedy Algorithms in the ROAR-NET API

```
def greedy_construction(problem, solution):
    neigh = problem.construction_neighbourhood()
    if solution is None:
        solution = problem.empty_solution()
    move_iter = iter(_valid_moves_and_increments(neigh, solution))
    move_and_incr = next(move_iter, None)
    while move_and_incr is not None:
        best_move, best_incr = move_and_incr
        for move, incr in move_iter:
            if incr < best_incr:
                best_move, best_incr = move, incr
                if incr == 0:
                    break
        solution = best_move.apply_move(solution)
        move_iter = iter(_valid_moves_and_increments(neigh, solution))
        move_and_incr = next(move_iter, None)
    return solution

def _valid_moves_and_increments(neigh, solution):
    for move in neigh.moves(solution):
        incr = move.objective_value_increment(solution)
        yield (move, incr) if incr < 0 else continue
```

Incomplete Search

On the backtracking framework
(beyond depth-first search)

- Bounded backtrack
- Credit-based search
- Limited Discrepancy Search
- Barrier Search
- Randomization in Tree Search
- Random Restart

Outside the exact framework
(beyond greedy search)

- Random Restart
- Rollout/Pilot Method
- Beam Search
- Iterated Greedy
- GRASP
- (Adaptive Iterated Construction Search)
- (Multilevel Refinement)

Bounded Backtrack

Bounded-backtrack search:



bbs(10)

Depth-bounded, then bounded-backtrack search:



dbs(2, bbs(0))

Visualizations by Helmut Simonis

Credit-Based Search

- Key idea: important decisions are at the top of the tree
- **Credit** = backtracking steps
- Credit distribution: one half at the best child the other divided among the other children.
- When credits run out follow deterministic best-search
- In addition: allow limited backtracking steps (eg, 5) at the bottom
- **Control parameters**: initial credit, distribution of credit among the children, amount of local backtracking at bottom.

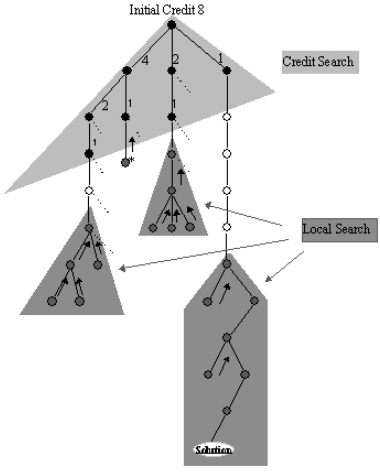

Limited Discrepancy Search

- Key observation that often the heuristic used in the search is nearly always correct with just a few exceptions.
- Explore the tree in increasing number of **discrepancies**, modifications from the heuristic choice.
- Eg: count one discrepancy if second best is chosen
  count two discrepancies either if third best is chosen or twice the second best is chosen
- **Control parameter**: the number of discrepancies

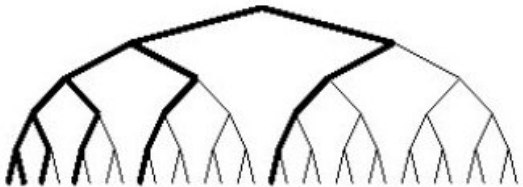

Randomization in Tree Search

Idea: important decisions are made up in the search tree (backdoors - set of variables such that once they are instantiated the remaining problem simplifies to a tractable form)
$\rightsquigarrow$ random selections + restart strategy

Random selections

- randomization in variable ordering:
  - breaking ties at random
  - use heuristic to rank and randomly pick from small factor from the best
  - random pick among heuristics
  - random pick variable with probability depending on heuristic value
- randomization in value ordering:
  - just select random from the domain

Restart strategy with different budget in backtracking (if kept running it becomes complete)

- Example: $B = (1, 1, 2, 1, 1, 2, 4, 1, 1, 2, 1, 1, 4, 8, 1, \ldots)$

Outline

29. Randomized Optimization Heuristics

30. Search Methods

31. Constructive Search
    - Incomplete Search Ideas
    - Construction-Based Metaheuristics

Rollout/Pilot Method

Derived from A*

- Master process adds components sequentially to a partial solution $S_k = (s_1, s_2, \ldots s_k)$
- At the kth iteration the master process evaluates feasible components to add based on a **heuristic look-ahead strategy**.
- The evaluation function $H(S_{k+1})$ is determined by sub-heuristics that complete the solution starting from S_k
- Sub-heuristics are combined in $H(S_{k+1})$ by
  - weighted sum
  - minimal value

Note: this evaluation does not need to be a lower bound!

Rollout/Pilot Method

Speed-ups:

- halt whenever cost of current partial solution exceeds current upper bound
- evaluate only a fraction of possible components

Beam Search

Based on the tree search framework:

- maintain a set B of bw (beam width) partial candidate solutions
- at each iteration extend each solution from B in fw (filter width) possible ways
- rank each $bw \times fw$ candidate solutions and take the best bw partial solutions
- complete candidate solutions obtained by B are maintained in B_f
- stop when no partial solution in B is to be extended

Three phases of Beam Search illustrated with beam width $bw = 3$ and expansion factor $bf = 2$.
[Choo, Jinho et al. 2022]

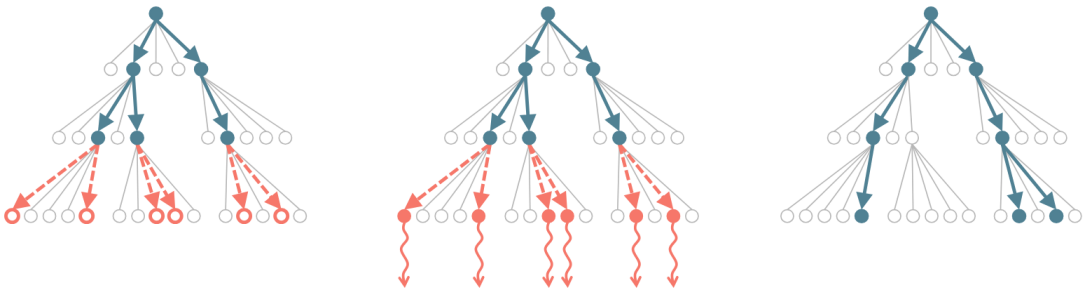

Greedy Randomized Adaptive Search Procedure

Greedy Randomized "Adaptive" Search Procedure, aka, GRASP

Key Idea: Combine randomized constructive search with subsequent local search.

Motivation:

- Candidate solutions obtained from construction heuristics can often be substantially improved by local search.
- Local search methods often require substantially fewer steps to reach high-quality solutions when initialized using greedy constructive search rather than random picking.
- By iterating cycles of constructive + local search, further performance improvements can be achieved.

GRASP

Procedure GRASP();
while termination criterion is not satisfied **do**
  generate candidate solution s using **subsidiary greedy randomized constructive search**;
  perform **subsidiary local search** on s ;

- Randomization in constructive search ensures that a large number of good starting points for subsidiary local search is obtained.
- Constructive search in GRASP is 'adaptive' (or dynamic):
  Heuristic value of solution component to be added to a given partial candidate solution may depend on solution components present in it.
- Variants of GRASP without local search phase (aka semi-greedy heuristics) typically do not reach the performance of GRASP with local search.

GRASP

- Each step of constructive search adds a solution component selected uniformly at random from a **restricted candidate list (RCL)**.
- RCLs are constructed in each step using a heuristic function h.
  - RCLs based on **cardinality restriction** comprises the k best-ranked solution components.
    (k is a parameter of the algorithm.)
  - RCLs based on **value restriction** comprise all solution components ℓ for which
    $h(\ell) \leq h_{min} + \alpha \cdot (h_{max} - h_{min})$,
    where h_{min} = minimal value of h and h_{max} = maximal value of h for any ℓ.
    (α is a parameter of the algorithm)
  - Possible extension: **reactive GRASP** (dynamic adaptation of α during search)

A GRASP Example: Squeaky Wheel

Key idea: solutions can reveal problem structure which maybe worth to exploit.

Use a greedy heuristic repeatedly by prioritizing the elements that create troubles.

Squeaky Wheel

- **Constructor**: greedy algorithm on a sequence of problem elements.
- **Analyzer**: assign a penalty to problem elements that contribute to flaws in the current solution.
- **Prioritizer**: uses the penalties to modify the previous sequence of problem elements. Elements with high penalty are moved toward the front.

Possible to include a local search phase between one iteration and the other

Iterated Greedy

Key idea: use greedy construction

- alternation of **construction** and **deconstruction** phases
- an acceptance criterion decides whether the search continues from the new or from the old solution.

Procedure Iterated Greedy;
determine initial candidate solution s;
while termination criterion is not satisfied **do**
  $r \leftarrow s$;
  (randomly or heuristically) **destruct** part of s;
  greedily **reconstruct** the missing part of s;
  based on **acceptance criterion**, keep s or revert to $s \leftarrow r$

[Hoos, Stützle, SLS FA, 2004]

Very Large Scale Neighborhood Algorithms

- Local search algorithms typically explore small neighborhoods of a solution. Very large scale neighborhood (VLSN) algorithms are a generalization to large neighborhoods that can be searched efficently.
- Algorithms that proceed by iteratively destroying and repairing a solution can be seen as performing a neighborhood search in a large neighborhood as well.
- Examples of this kind are:
  - Iterated greedy
  - Large Neighborhood Search (LNS) proposed by [Shaw, 1998] use constraint programming to reconstruct a solution after destroying part of it.
  - Adaptive Large Neighborhood Search (ALNS) [Røpke and Pisinger, 2006]

Large Neighborhood Search (LNS)

input: a feasible solution x
$x^b = x$;
repeat
  $x^t = r(d(x))$;
  if accept(x^t, x) **then**
    $x = x^t$;
  end if
  if $c(x^t) < c(x^b)$ **then**
    $x^b = x^t$;
  end if
until stopping criterion is met
return x^b

$d()$ destruction (destroy) method
$r()$ reconstruction (repair) method

The LNS metaheuristic does not search the entire neighborhood of a solution, but merely samples this neighborhood.

Large Neighborhood Search (LNS)

Acceptance criterion:

- always
- only if better
- record-to-record travel
  (accept if $f(s') \leq (1+\epsilon)f(s_b)$)
- threshold accepting (Metropolis criterion)
- simulated annealing criterion

Degree of destruction

- gradually increase
- randomly chosen from a specific range dependent on the instance size

To guarantee connectivity, it must be possible to destroy every part of the solution.

Repair method:

- problem-specific heuristic
- exact method
- general purpose mixed integer programming (MIP) (aka, fix and optimize)
- constraint programming solver (aka, fix and optimize)

It should allow diversification

Adaptive Large Neighborhood Search (ALNS)

Key Idea: allow multiple destroy and repair methods controlling with an adaptive weighting system how often a particular method is attempted during the search [Røpke, Pisinger, 2006]

input: a feasible solution x
$x^b = x$; $\rho^- = (1, \ldots, 1)$; $\rho^+ = (1, \ldots, 1)$;
repeat
  select destroy and repair methods $d \in \Omega^-$ and $r \in \Omega^+$ using ρ^- and ρ^+;
  $x^t = r(d(x))$;
  if accept(x^t, x) **then**
    $x = x^t$;
  end if
  if $c(x^t) < c(x^b)$ **then**
    $x^b = x^t$;
  end if
  update ρ^- and ρ^+;
until stopping criterion is met
return x^b

Adaptive Large Neighborhood Search (ALNS)

Selection mechanism: roulette wheel principle:

$$p(j) = \frac{\rho_j^-}{\sum_{k \in \Omega^-} \rho_k^-}$$

Update mechanism:

$$\Psi = \max \begin{cases} \omega_1 & \text{if the new solution is a new global best} \\ \omega_2 & \text{if the new solution is better than the current one} \\ \omega_3 & \text{if the new solution is accepted} \\ \omega_4 & \text{if the new solution is rejected} \end{cases}$$

with normally $\omega_1 \geq \omega_2 \geq \omega_3 \geq \omega_4 \geq 0$. Only accepted a and b are updated:

$$\rho_a^- = \lambda \rho_a^- + (1 - \lambda)\Psi, \qquad \rho_b^+ = \lambda \rho_b^+ + (1 - \lambda)\Psi$$

$\lambda \in [0, 1]$ is a decay parameter

ALNS: Design Choices

Destroy methods:

- diversification: random destroy method.
- intensification: remove q "critical" variables, i.e. variables having a large cost or variables that spoil the current structure of the solution (e.g. edges crossing each other in an Euclidean TSP). This is known as **worst destroy** or **critical destroy**.
- **related destroy**: select a set of customers that have a high mutual relatedness measure. Eg on the CVRP, relatedness measure between each pair of customers is distance between the customers (and it could include customer demand)
- **history based destroy**: q variables are chosen according to some historical information,

Repair methods:

- greedy heuristics, problem specific
- include local search
- exact algorithms
- mixed integer programming (aka, matheuristic)
- constraint programming

ALNS: Design Choices

Large multiple-neighborhood search (LMNS) heuristics: It may be sufficient to have a number of destroy and repair heuristics that are selected randomly with equal probability, that is, without the adaptive layer.

Same robustness as ALNS heuristics, while fewer parameters to calibrate.

ALNS: Other Relations

- Variable Neighborhood Search
- Portfolio Algorithms
- Hyperheuristics
- Reinforcement learning

Adaptive Iterated Construction Search (AICS)

Key Idea: Alternate construction and local search phases as in GRASP, exploiting experience gained during the search process.

Realisation:

- Associate weights with possible decisions made during constructive search.
- Initialize all weights to some small value τ_0 at beginning of search process.
- After every cycle (= constructive + local search phase), update weights based on solution quality and solution components of current candidate solution.

Adaptive Iterated Construction Search (AICS)

Procedure AICS();
initialise weights;
while termination criterion is not satisfied **do**
    generate candidate solution s using subsidiary randomized constructive search;
    perform subsidiary local search on s;
    adapt weights based on s;

AICS: Components

Subsidiary constructive search:

- The solution component to be added in each step of constructive search is based on:
  i) weights and
  ii) heuristic function h.
- h can be standard heuristic function as, e.g., used by greedy heuristics
- It is often useful to design solution component selection in constructive search such that any solution component may be chosen (at least with some small probability) irrespective of its weight and heuristic value.

AICS: Components

Subsidiary local search:

- As in GRASP, local search phase is typically important for achieving good performance.
- Can be based on Iterative Improvement or more advanced LS method (the latter often results in better performance).
- Tradeoff between computation time used in construction phase **vs** local search phase (typically optimized empirically, depends on problem domain).

AICS: Components

Weight updating mechanism:

- Typical mechanism: increase weights of all solution components contained in candidate solution obtained from local search.
- Can also use aspects of search history;
  e.g., current candidate solution can be used as basis for
  weight update for additional intensification.

Example: A simple AICS algorithm for the TSP (1/2)

[Based on Ant System for the TSP, Dorigo et al. 1991]

- Search space and solution set as usual (all Hamiltonian cycles in given graph G). However represented in a construction tree T.
- Associate weight τ_{ij} with each edge (i, j) in G and T
- Use heuristic values $\eta_{ij} := 1/w_{ij}$.
- Initialize all weights to a small value τ_0 (parameter).
- Constructive search start with randomly chosen vertex and iteratively extend partial round trip π by selecting vertex not contained in π with probability

$$\Pr(\pi_j) = \frac{[\tau_{ij}]^\alpha \cdot [\eta_{ij}]^\beta}{\sum_{l \in N'(i)} [\tau_{il}]^\alpha \cdot [\eta_{ij}]^\beta}$$

Example: A simple AICS algorithm for the TSP (2/2)

- Subsidiary local search = typical iterative improvement
- Weight update according to

  $$\tau_{ij} := (1 - \rho) \cdot \tau_{ij} + \Delta(ij, s')$$

  where $\Delta(i, j, s') := 1/f(s')$, if edge ij is contained in the cycle represented by s', and 0 otherwise.
- Criterion for weight increase is based on intuition that edges contained in short round trips should be preferably used in subsequent constructions.
- Decay mechanism (controlled by parameter ρ) helps to avoid unlimited growth of weights and lets algorithm forget past experience reflected in weights.
- (Just add a population of cand. solutions and you have an Ant Colony Optimization Algorithm!)

18. Local Search Methods

Outline

32. Local Search

ROHs: Reasoning, Local Search

Example on Traveling Salesman Problem:

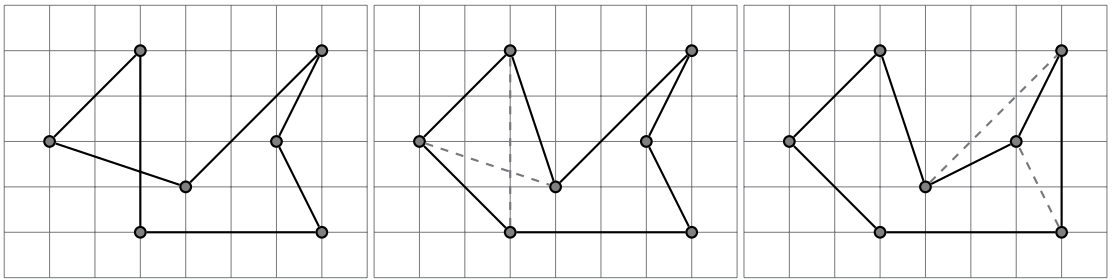

ROHs: Reasoning, Metaheuristics

Accepting worsening changes







Trying different changes







Local Search

- Model (Problem dependent)
  - Variables $\rightsquigarrow$ solution representation, search space
  - Constraints:
    – implicit
    – one-way defining invariants
    – soft
  - Evaluation function
- Reasoning, Search (Problem independent)
  - Construction heuristics
  - Neighborhoods, Iterative Improvement, (Stochastic) local search
  - Metaheuristics: Tabu Search, Simulated Annealing, Iterated Local Search
  - Population based metaheuristics

Local Search Algorithms

Given a (combinatorial) optimization problem Π and one of its instances π:

1. **search space** $S(\pi)$
   - specified by the definition of (finite domain) **states** and their handling **implicit constraints**
   - all together they determine the **representation of candidate solutions**
   - common solution representations are discrete structures such as: sequences, permutations, partitions, graphs

     Note: **solution set** $S'(\pi) \subseteq S(\pi)$

Local Search Algorithms (cntd)

2. **evaluation function** $f_\pi : S(\pi) \to \mathbf{R}$
   - it handles the **soft constraints** and the objective function

3. **initialization function** $\texttt{init} : \emptyset \to S(\pi)$
   (can be seen as a probability distribution $\Pr(S(\pi) \times M(\pi))$ over initial search positions and memory states)

Local Search Algorithms (cntd)

Further components [according to [HS]]

4. **neighborhood function,** $N_\pi : S \to 2^{S(\pi)}$
   - defines for each solution $s \in S(\pi)$ a set of solutions $N(s) \subseteq S(\pi)$ that are in some sense close to s.

5. **transition model** $\texttt{step} : S(\pi) \times M(\pi) \to S(\pi) \times M(\pi)$
   (can be seen as a probability distribution $\Pr(S(\pi) \times M(\pi))$ over subsequent, neighboring search positions and memory states)

6. **termination predicate** $\texttt{terminate} : S(\pi) \times M(\pi) \to \{\top, \bot\}$
   (determines the termination state for each search position and memory state)

Local search — global view

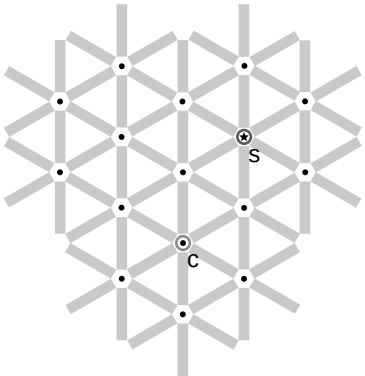

Neighborhood graph

- vertices: candidate solutions (search positions)
- vertex labels: evaluation function
- edges: connect “neighboring” positions
- s: (optimal) solution
- c: current search position

Neighborhood

Definition (Neighborhood)

Neighborhood structure/type defined as a function $N : S_\pi \to 2^S$ also defined as: $\mathcal{N} : S \times S \to \{T, F\}$ or $\mathcal{N} \subseteq S \times S$

- **neighborhood (set)** of candidate solution s: $N(s) := \{s' \in S \mid \mathcal{N}(s, s')\}$
- **neighborhood size** is $|N(s)|$
- neighborhood is **symmetric** if: $s' \in N(s) \Rightarrow s \in N(s')$
- **neighborhood graph** of (S, N, π) is a directed graph: $G_N := (V, A)$ with $V = S$ and $(uv) \in A \Leftrightarrow v \in N(u)$
  (if symmetric neighborhood $\rightsquigarrow$ undirected graph)

Local Search Algorithms

Note:

- Local search implements a **walk** through the neighborhood graph
- Procedural versions of `init`, `step` and `terminate` implement sampling from respective probability distributions.
- Local search algorithms can be described as **Markov processes**:
  behavior in any **search state** $\{s, m\}$ depends only
  on current position s
  higher order MP if (limited) memory m.

Search Landscape

Given:

- Problem instance π
- Search space S_π
- Neighborhood function $N : S \subseteq 2^S$
- Evaluation function $f_\pi : S \to \mathbf{R}$



Definition (Search Landscape)

The **search landscape** L is the **vertex-labeled neighborhood graph** given by the triplet $\mathcal{L} = \langle S, N, f \rangle$.

Iterative Improvement

Iterative Improvement (II):
determine initial candidate solution s
while s has better neighbors **do**
  choose a neighbor s' of s such that $f(s') < f(s)$
  $s := s'$

- If more than one neighbor has better cost then need to choose one (step, aka **heuristic pivot rule**):
  - first encountered
  - random among best ones
- The procedure ends in a **local optimum** $\hat{s}$:
  Def.: **Local optimum** $\hat{s}$ w.r.t. N if $f(\hat{s}) \leq f(s)\ \forall s \in N(\hat{s})$

Definitions

Definition:

- **Local minimum:** search position without improving neighbors wrt given evaluation function f and neighborhood function N,
  i.e., position $s \in S$ such that $f(s) \leq f(s')$ for all $s' \in N(s)$.
- **Strict local minimum:** search position $s \in S$ such that $f(s) < f(s')$ for all $s' \in N(s)$.
- **Local maxima** and **strict local maxima**: defined analogously.

Transition Graph

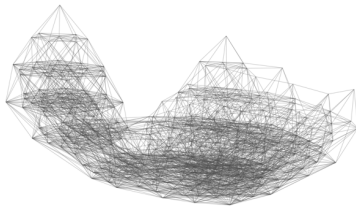





Definition (Transition Graph of Iterative Improvement)

Given $\mathcal{L} = \langle S, N, f \rangle$, the transition graph of iterative improvement is a directed acyclic subgraph obtained from $\mathcal{L}$ by deleting all arcs (i, j) for which it holds that the cost of solution j is worse than or equal to the cost of solution i.

It can be defined for other algorithms as well and it plays a central role in the theoretical analysis of proofs of convergence.

Metaheuristics

How to avoid getting trapped in bad local optima?

- "Restart" + parallel search
  Avoid local optima
  Improve search space coverage

- use more complex neighborhood functions:
  - Variable Neighborhood Search and Large Scale Neighborhood Search
    diversified neighborhoods + incremental algorithmics
    ("diversified" $\equiv$ multiple, variable-size, and rich).

- allow non-improving moves
  - Tabu Search: Online learning of moves
    Discard undoing moves,
    Discard inefficient moves
    Improve efficient moves selection
  - Simulated annealing

Idealized visualization of landscapes principles

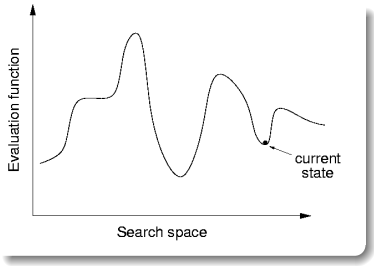

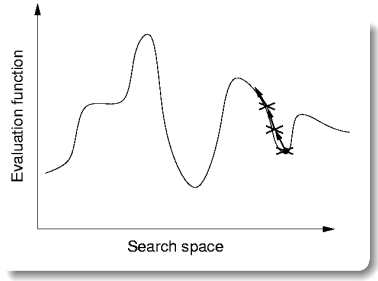

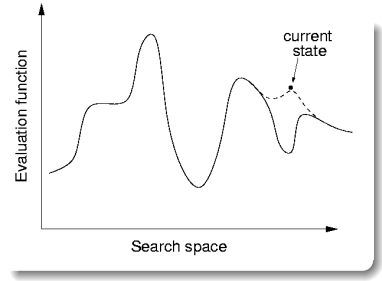

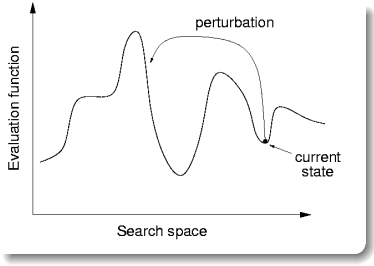

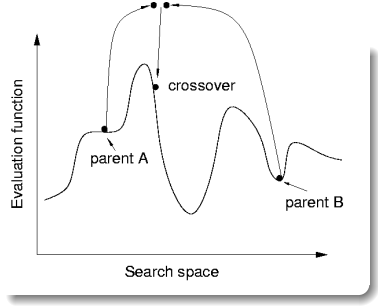

Evaluation function

Evaluation (or cost) function:

- function $f_\pi : S_\pi \to \mathbf{Q}$ that maps candidate solutions of a given problem instance π onto rational numbers (most often integer), such that global optima correspond to solutions of π;
- used for assessing or ranking neighbors of current search position to provide guidance to search process.

Evaluation vs objective functions:

- **Evaluation function**: part of LS algorithm.
- **Objective function**: integral part of optimization problem.
- Some LS methods use evaluation functions different from given objective function (*e.g.*, guided local search).

Constraint-based local search
From Van Hentenryck and Michel

If infeasible solutions are allowed, we count violations of constraints.

What is a violation?
Constraint specific:

- decomposition-based violations
  number of violated constraints, eg: alldiff
- variable-based violations
  min number of variables that must be changed to satisfy the constraint.
- value-based violations
  for constraints on number of occurences of values
- arithmetic violations
- combinations of these

Constraint-based local search

From Van Hentenryck and Michel

Combinatorial constraints:

- $\texttt{alldiff}(x_1, \ldots, x_n)$:
  Let a be an assignment with values $V = \{a(x_1), \ldots, a(x_n)\}$ and $c_v = \#_a(v, x)$ be the number of occurrences of v in a.
  Possible definitions for violations are:
  - $\text{viol} = \sum_{v \in V} \mathrm{I}(\max\{c_v - 1, 0\} > 0)$ value-based; I indicator function.
  - $\text{viol} = \max_{v \in V} \max\{c_v - 1, 0\}$ value-based
  - $\text{viol} = \sum_{v \in V} \max\{c_v - 1, 0\}$ value-based
  - # variables with same value, variable-based, here leads to same definitions as previous three

Arithmetic constraints

- $l \leq r \rightsquigarrow \text{viol} = \max\{l - r, 0\}$
- $l = r \rightsquigarrow \text{viol} = |l - r|$
- $l \neq r \rightsquigarrow \text{viol} = 1$ if $l = r$, 0 otherwise

Search space – Alternatives

Search Space

Solution representations defined by the decision variables and the implicit constraints:

- permutations (implicit: alldiffrerent)
  - linear (scheduling problems)
  - circular (traveling salesman problem)
- arrays (implicit: assign exactly one; assignment problems: GCP)
- sets (implicit: disjoint sets, partition problems: graph partitioning, max indep. set)

⇝ Multiple **viewpoints** can be useful in local search!

Search Space and Neighborhoods: A Formalization

A neighborhood (action type) is also defined by means of an operator Δ.

An operator Δ is a collection of operator functions $\delta : S \to S$ (aka **move**) such that

$$s' \in N(s) \quad \Longrightarrow \quad \exists\, \delta \in \Delta, \delta(s) = s'$$

Definition

k-exchange neighborhood: candidate solutions s, s' are neighbors iff s differs from s' in at most k solution components

Examples:

- 2-exchange neighborhood for TSP
  (solution components = edges in given graph)

Neighborhood Operator

Goal: providing a formal description of neighborhood functions for the three main solution representations:

- **Permutation**
  - **linear permutation**: Single Machine Total Weighted Tardiness Problem
  - **circular permutation**: Traveling Salesman Problem
- **Assignment**: SAT, CSP
- **Set, Partition**: Max Independent Set

A neighborhood function $N : S \to 2^S$ is also defined through an operator.
An **operator** Δ is a collection of operator functions $\delta : S \to S$ such that

$$s' \in N(s) \quad \Longleftrightarrow \quad \exists \delta \in \Delta \mid \delta(s) = s'$$

Digression: Permutations

S_n indicates the set all permutations of the numbers $\{1, 2, \ldots, n\}$

$(1, 2 \ldots, n)$ is the identity permutation ι.

If $\pi \in \Pi(n)$ and $1 \leq i \leq n$ then:

- π_i is the element at position i
- $pos_\pi(i) = \pi_i^{-1}$ is the position of element i

Alternatively, a permutation is a bijective function $\pi(i) = \pi_i$

The permutation product $\pi \cdot \pi'$ is the composition $(\pi \cdot \pi')_i = \pi'(\pi(i))$

For each π there exists a permutation such that $\pi^{-1} \cdot \pi = \iota$
$\pi^{-1}(i) = pos_\pi(i)$

$$\Delta_N \subset S_n$$

Linear Permutations

Swap operator

$$\Delta_S = \{\delta_S^i \mid 1 \leq i \leq n\}$$

$$\delta_S^i(\pi_1 \dots \pi_i \pi_{i+1} \dots \pi_n) = (\pi_1 \dots \pi_{i+1} \pi_i \dots \pi_n)$$

Interchange operator

$$\Delta_X = \{\delta_X^{ij} \mid 1 \leq i < j \leq n\}$$

$$\delta_X^{ij}(\pi) = (\pi_1 \dots \pi_{i-1} \pi_j \pi_{i+1} \dots \pi_{j-1} \pi_i \pi_{j+1} \dots \pi_n)$$

($\equiv$ set of all transpositions)

Insert operator

$$\Delta_I = \{\delta_I^{ij} \mid 1 \leq i \leq n, 1 \leq j \leq n, j \neq i\}$$

$$\delta_I^{ij}(\pi) = \begin{cases} (\pi_1 \dots \pi_{i-1} \pi_{i+1} \dots \pi_j \pi_i \pi_{j+1} \dots \pi_n) & i < j \\ (\pi_1 \dots \pi_j \pi_i \pi_{j+1} \dots \pi_{i-1} \pi_{i+1} \dots \pi_n) & i > j \end{cases}$$

Circular Permutations

Reversal (**2-edge-exchange**)

$$\Delta_R = \{\delta_R^{ij} \mid 1 \leq i < j \leq n\}$$

$$\delta_R^{ij}(\pi) = (\pi_1 \dots \pi_{i-1}\pi_j \dots \pi_i\pi_{j+1} \dots \pi_n)$$

Block moves (**3-edge-exchange**)

$$\Delta_B = \{\delta_B^{ijk} \mid 1 \leq i < j < k \leq n\}$$

$$\delta_B^{ij}(\pi) = (\pi_1 \dots \pi_{i-1}\pi_j \dots \pi_k\pi_i \dots \pi_{j-1}\pi_{k+1} \dots \pi_n)$$

Short block move (**Or-edge-exchange**)

$$\Delta_{SB} = \{\delta_{SB}^{ij} \mid 1 \leq i < j \leq n\}$$

$$\delta_{SB}^{ij}(\pi) = (\pi_1 \dots \pi_{i-1}\pi_j\pi_{j+1}\pi_{j+2}\pi_i \dots \pi_{j-1}\pi_{j+3} \dots \pi_n)$$

Assignments

An assignment can be represented as a mapping $\sigma : \{X_1 \dots X_n\} \to \{v : v \in D, |D| = k\}$:

$$\sigma = \{X_i = v_i, X_j = v_j, \dots\}$$

One-exchange operator

$$\Delta_{1E} = \{\delta_{1E}^{il} \mid 1 \leq i \leq n, 1 \leq l \leq k\}$$

$$\delta_{1E}^{il}(\sigma) = \{\sigma' : \sigma'(X_i) = v_l \text{ and } \sigma'(X_j) = \sigma(X_j) \ \forall j \neq i\}$$

Two-exchange operator

$$\Delta_{2E} = \{\delta_{2E}^{ij} \mid 1 \leq i < j \leq n\}$$

$$\delta_{2E}^{ij}(\sigma) = \{\sigma' : \sigma'(X_i) = \sigma(X_j),\ \sigma'(X_j) = \sigma(X_i) \text{ and } \sigma'(X_l) = \sigma(X_l) \ \forall l \neq i, j\}$$

Partitioning

An assignment can be represented as a partition of objects selected and not selected
$s : \{X\} \to \{C, \overline{C}\}$ (it can also be represented by a bit string)

One-addition operator

$$\Delta_{1E} = \{\delta^v_{1E} \mid v \in \bar{C}\}$$

$$\delta^v_{1E}(s) = \{s : C' = C \cup v \text{ and } \bar{C}' = \bar{C} \setminus v\}$$

One-deletion operator

$$\Delta_{1E} = \{\delta^v_{1E} \mid v \in C\}$$

$$\delta^v_{1E}(s) = \{s : C' = C \setminus v \text{ and } \bar{C}' = \bar{C} \cup v\}$$

Swap operator

$$\Delta_{1E} = \{\delta^v_{1E} \mid v \in C, u \in \bar{C}\}$$

$$\delta^v_{1E}(s) = \{s : C' = C \cup u \setminus v \text{ and } \bar{C}' = \bar{C} \cup v \setminus u\}$$

Fundamental Properties

The behavior and performance of an LS algorithm on a given problem instance crucially depends on properties of the respective search landscape.

Simple properties:

- **search space size** $|S|$
- **reachability**: solution j is reachable from solution i if neighborhood graph has a path from i to j.
  - **strongly connected neighborhood graph**
  - **weakly optimally connected neighborhood graph**
- distance between solutions
- neighborhood size (ie, degree of vertices in neigh. graph)
- cost of fully examining the neighborhood
- relation between different neighborhood functions
  (if $N_1(s) \subseteq N_2(s)$ forall $s \in S$ then N_2 dominates N_1)

Neighborhood Domination

Definition (Neighborhood Domination)

Let N_1 and N_2 be two different neighborhood functions for the same instance (S, f, π) of a combinatorial optimization problem.

If for all solutions $s \in S$ we have $N_1(s) \subseteq N_2(s)$ then we say that N_2 **dominates** N_1

Example:

In TSP, 1-insert is dominated by 3-exchange.
(1-insert corresponds to 3-exchange and there are 3-exchanges that are not 1-insert)

Computational Complexity of LS

For a local search algorithm to be effective, search initialization and individual search steps should be efficiently computable.

Complexity class $\mathcal{PLS}$: class of problems for which a local search algorithm exists with polynomial time complexity for:

- search initialization
- any single search step, including computation of evaluation function value

For any problem in $\mathcal{PLS}$ ...

- local optimality can be verified in polynomial time
- improving search steps can be computed in polynomial time
- **but:** finding local optima may require super-polynomial time

Computational Complexity of LS

$\mathcal{PLS}$-**complete**: Among the most difficult problems in $\mathcal{PLS}$;
if for any of these problems local optima can be found
in polynomial time, the same would hold for all problems in $\mathcal{PLS}$.

Some complexity results:

- TSP with k-exchange neighborhood with $k > 3$
  is $\mathcal{PLS}$-complete.
- TSP with 2- or 3-exchange neighborhood is in $\mathcal{PLS}$, but $\mathcal{PLS}$-completeness is unknown.

Examples: Search Space

The **search space** is the set of all candidate solutions that may be visited during the solving process

- Only feasible solutions are considered in local search
  The objective function is defined on the whole search space
- The internal solution structure may not be specified (indirect solution representartion)
- Solutions are points in the search space
- Initial feasible solution(s) may be:
  - Generated at random
  - Obtained by constructive search
  - Obtained heuristically in other ways

Examples: Search Space and Initializations

How to generate solutions guaranteed to be picked **uniformly at random** for the following problems?

- Travelling salesman
  Generate a random permutation of the N cities
- Binary Knapsack
  Generate a random binary vector of length equal to the number of available items and reject sets of items that do not meet the capacity constraint(s)
  Possibly (very) inefficient if the problem is tightly constrained
- Clique partitioning problem / community detection problem
  1. Draw a number of bins at random according to a specific distribution (see https://doi.org/10.1016/0097-3165(83)90009-2)
  2. Randomly assign each vertex to one of those bins (some bins may end up empty)
- Graph Coloring
- Scheduling

Examples: Neighbourhoods

What are similar solutions?

- "Parts" of the two solutions are somehow identical
- Similar performance (in most cases)
- Connect the whole space

Symmetric Travelling Salesman Problem:

- Tour length is the sum of the lengths of the tour edges
- Solutions are similar if they differ in a small number of edges
- 2-opt and 3-opt moves

Asymmetric Travelling Salesman Problem

- Tour length is the sum of the lengths of the tour arcs
- Solutions are similar if they differ in a small number of arcs
- Due to asymmetry, 2-opt moves and some 3-opt moves are not suitable because they reverse parts of the tour
- Insertion move as a special case of 3-opt

Neighbourhood Exploration

Local search algorithms in a nutshell

1. Visit neighbours of a current solution
2. Decide whether to reject them or to accept one as the next solution
3. Repeat

Local move generation

- Enumeration
- Random sampling with replacement
- Random sampling without replacement

Neighbourhood exploration

Local move enumeration

- Full neighbourhood exploration
- Enumeration order dictated by convenience
- Filter out invalid moves if needed
- Neighbourhood size may not be known in advance

Random sampling with replacement

- Sampling uniformly at random typically preferred
- Rejection sampling useful when neighbourhood size not known in advance

Neighbourhood exploration

Random sampling without replacement

- Partial to full neighbourhood exploration
- Random enumeration order to avoid search bias
- Filter out invalid moves if needed (rejection)
- Neighbourhood size may not be known in advance
- Generating (pseudo-)random permutations
  - Fisher-Yates shuffle
  - Linear congruential generator (low quality but constant space)
  - A plethora of other approaches

Digression: Random Numbers

Needed to randomize search (eg, initial solution, neigborhood exploration)

Carachtersitics of a good pseudo-random generator
(from stochastic simulation)

- long period
- uniform unbiased distribution
- uncorrelated (time series analysis)
- efficient

Suggested: MRG32k3a by L'Ecuyer http://www.iro.umontreal.ca/~lecuyer/

Ideal Random Shuffle – Fisher-Yates shuffle

Let's consider a sequence of n elements: $\{e_1, e_2, \ldots e_n\}$.
The **ideal random shuffle** is a permutation chosen uniformly at random from the set of all possible $n!$ permutations.

- π_1 is uniformly randomly chosen among $\{e_1, e_2, \ldots e_n\}$.
- π_2 is uniformly randomly chosen among $\{e_1, e_2, \ldots e_n\} - \{\pi_1\}$.
- π_3 is uniformly randomly chosen among $\{e_1, e_2, \ldots e_n\} - \{\pi_1, \pi_2\}$
- ...

Joint probability of $(\pi_1, \pi_2 \ldots \pi_n)$ is $\frac{1}{n} \cdot \frac{1}{n-1} \cdot \ldots 1 = \frac{1}{n!}$

```
long int* Random::generate_random_array(const int& size) { // C code
   long int  i, j, help;
   long int  *v = new long int[size];
   for ( i = 0 ; i < size; i++ )
     v[i] = i;
   for ( i = 0 ; i < size-1 ; i++) {
     j = (long int) ( ranU01( ) * (size - i));
     help = v[i];
     v[i] = v[i+j];
     v[i+j] = help;
   }
   return v; }
```

Neighbourhood exploration

Random sampling without replacement

It can be implemented using a Fisher-Yates shuffled mask.

Python implementation:

```
def fisher_yates_iter(n):
    p = list(range(n))
    for i in range(n-1, -1, -1):
        r = random.randrange(i+1)
        yield p[r]
        # p[r], p[i] = p[i], p[r] # preserve the permutation
        p[r] = p[i] # lazy
```

Neighbourhood exploration

Random sampling without replacement

It can be implemented using a Fisher-Yates shuffled mask.

Python implementation:

```
def sparse_fisher_yates_iter(n):
  p = dict()
  for i in range(n-1, -1, -1):
      r = random.randrange(i+1)
      yield p.get(r, r)
      if i != r:
          # p[r] = p.pop(i, i) # saves memory, takes time
          p[r] = p.get(i, i) # lazy, but faster
```

Reservoir Sampling

How to select an element at random from a sequence of n elements where n is unknown?

- Keep the first item in memory.
- When the i-th item arrives (for $i > 1$):
  - with probability $1/i$, keep the new item (discard the old one)
  - with probability $1 - 1/i$ keep the old item (ignore the new one)

Probability of an element to be selected:

$$\Pr(\text{being selected once}) \cdot \Pr(\text{not being swapped later}) = 1 \cdot \prod_{i=2}^{n} (1 - \frac{1}{i})$$

Extension:
How to select a sample of k elements from a sequence S of unknown length?

- Keep the first k items in memory.
- When the ith item arrives (for $i > k$):
  - with probability k/i, keep the new item (discard an old one, selecting which to replace at random, each with chance 1/k)
  - with probability $1 - k/i$, keep the old items (ignore the new one)

For the first element of the sequence the probability of being selected is:

$$\Pr(\text{being selected first time}) \cdot \prod_{i=k+1}^{|S|} \Pr(\text{not being swapped}) = 1 \cdot \prod_{i=k+1}^{|S|} \left(1 - \frac{k}{i} \cdot \frac{1}{k}\right)$$

where

$$\Pr(\text{not being swapped}) = 1 - \Pr(\text{swapping exactly that one}) = 1 - \frac{k}{i}\frac{1}{k}$$

$$\Pr(\text{not being swapped}) = \Pr(\text{not swapping}) + p(\text{swapping one of the others}) = \left(1 - \frac{k}{i}\right) + \left(\frac{k}{i}\frac{k-1}{k}\right)$$

Implementation:

```
//  S has items to sample, R will contain the result
ReservoirSample(S[1..n], R[1..k])
  // fill the reservoir array
  for i = 1 to k
      R[i] := S[i]

  // replace elements with gradually decreasing probability
  for i = k+1 to n
    j := random(1, i)   // important: inclusive range
    if j <= k
        R[j] := S[i]
```

19. Metaheuristics

Single Machine Total Weighted Tardiness

Given: a set of n jobs $\{1, \ldots, n\}$ to be processed on a single machine and for each job j a processing time p_j, a weight w_j and a due date d_j.

Task: Find a schedule that minimizes the total weighted tardiness $\sum_{j=1}^{n} w_j \cdot T_j$, where $T_j = \max\{C_j - d_j, 0\}$ (C_j completion time of job j)

Example (Instance)

Job	1	2	3	4	5	6
Processing Time	3	2	2	3	4	3
Due date	6	13	4	9	7	17
Weight	2	3	1	5	1	2

Sol. representation:
Linear permutation

$\phi = [3, 1, 5, 4, 1, 6]$

Job	3	1	5	4	2	6
C_j	2	5	9	12	14	17
T_j	0	0	2	3	1	0
$w_j \cdot T_j$	0	0	2	15	3	0

Single Machine Total Weighted Tardiness Problem

- Interchange: size $\binom{n}{2}$ and $O(|i-j|)$ evaluation each
  - first-improvement: π_j, π_k
    - $p_{\pi_j} \leq p_{\pi_k}$ for improvements, $w_j T_j + w_k T_k$ must decrease because jobs in $\pi_j, \ldots, \pi_k$ can only increase their tardiness.
    - $p_{\pi_j} \geq p_{\pi_k}$ possible use of auxiliary data structure to speed up the computation
  - best-improvement: π_j, π_k
    - $p_{\pi_j} \leq p_{\pi_k}$ for improvements, $w_j T_j + w_k T_k$ must decrease at least as the best interchange found so far because jobs in $\pi_j, \ldots, \pi_k$ can only increase their tardiness.
    - $p_{\pi_j} \geq p_{\pi_k}$ possible use of auxiliary data structure to speed up the computation
- Swap: size $n-1$ and $O(1)$ evaluation each
- Insert: size $(n-1)^2$ and $O(|i-j|)$ evaluation each
  But possible to speed up with systematic examination by means of swaps: an interchange is equivalent to $|i-j|$ swaps hence overall examination takes $O(n^2)$.
- The ROAR-NET API makes difficult but not impossible to implement these "efficiency tricks".

Remarks

See solutions to Sheet 11 on SMTWTP

- Logging
- Testing
- Multiple neighborhoods
- Metaheuristics

Outline

33. Satisfiability

34. LS Based Metaheuristics
    - Randomized (or Stochastic) Local Search
    - Guided Local Search
    - Simulated Annealing
    - Iterated Local Search
    - Tabu Search
    - Variable Neighborhood Search

35. Population Based Metaheuristics

SAT Problem

Satisfiability problem in propositional logic

$$
\begin{array}{l}
(x_5 \vee x_8 \vee \bar{x}_2) \wedge (x_2 \vee \bar{x}_1 \vee \bar{x}_3) \wedge (\bar{x}_8 \vee \bar{x}_3 \vee \bar{x}_7) \wedge (\bar{x}_5 \vee x_3 \vee x_8) \wedge \\
(\bar{x}_6 \vee \bar{x}_1 \vee \bar{x}_5) \wedge (x_8 \vee \bar{x}_9 \vee x_3) \wedge (x_2 \vee x_1 \vee x_3) \wedge (\bar{x}_1 \vee x_8 \vee x_4) \wedge \\
(\bar{x}_9 \vee \bar{x}_6 \vee x_8) \wedge (x_8 \vee x_3 \vee \bar{x}_9) \wedge (x_9 \vee \bar{x}_3 \vee x_8) \wedge (x_6 \vee \bar{x}_9 \vee x_5) \wedge \\
(x_2 \vee \bar{x}_3 \vee \bar{x}_8) \wedge (x_8 \vee \bar{x}_6 \vee \bar{x}_3) \wedge (x_8 \vee \bar{x}_3 \vee \bar{x}_1) \wedge (\bar{x}_8 \vee x_6 \vee \bar{x}_2) \wedge \\
(x_7 \vee x_9 \vee \bar{x}_2) \wedge (x_8 \vee \bar{x}_9 \vee x_2) \wedge (\bar{x}_1 \vee \bar{x}_9 \vee x_4) \wedge (x_8 \vee x_1 \vee \bar{x}_2) \wedge \\
(x_3 \vee \bar{x}_4 \vee \bar{x}_6) \wedge (\bar{x}_1 \vee \bar{x}_7 \vee x_5) \wedge (\bar{x}_7 \vee x_1 \vee x_6) \wedge (\bar{x}_5 \vee x_4 \vee \bar{x}_6) \wedge \\
(\bar{x}_4 \vee x_9 \vee \bar{x}_8) \wedge (x_2 \vee x_9 \vee x_1) \wedge (x_5 \vee \bar{x}_7 \vee x_1) \wedge (\bar{x}_7 \vee \bar{x}_9 \vee \bar{x}_6) \wedge \\
(x_2 \vee x_5 \vee x_4) \wedge (x_8 \vee \bar{x}_4 \vee x_5) \wedge (x_5 \vee x_9 \vee x_3) \wedge (\bar{x}_5 \vee \bar{x}_7 \vee x_9) \wedge \\
(x_2 \vee \bar{x}_8 \vee x_1) \wedge (\bar{x}_7 \vee x_1 \vee x_5) \wedge (x_1 \vee x_4 \vee x_3) \wedge (x_1 \vee \bar{x}_9 \vee \bar{x}_4) \wedge \\
(x_3 \vee x_5 \vee x_6) \wedge (\bar{x}_6 \vee x_3 \vee \bar{x}_9) \wedge (\bar{x}_7 \vee x_5 \vee x_9) \wedge (x_7 \vee \bar{x}_5 \vee \bar{x}_2) \wedge \\
(x_4 \vee x_7 \vee x_3) \wedge (x_4 \vee \bar{x}_9 \vee \bar{x}_7) \wedge (x_5 \vee \bar{x}_1 \vee x_7) \wedge (x_5 \vee \bar{x}_1 \vee x_7) \wedge \\
(x_6 \vee x_7 \vee \bar{x}_3) \wedge (\bar{x}_8 \vee \bar{x}_6 \vee \bar{x}_7) \wedge (x_6 \vee x_2 \vee x_3) \wedge (\bar{x}_8 \vee x_2 \vee x_5)
\end{array}
$$

Does there exist a truth assignment satisfying all clauses?

Search for a satisfying assignment (or prove none exists)

SAT Problem

Satisfiability problem in propositional logic

$$
\begin{array}{l}
(x_5 \vee x_8 \vee \bar{x}_2) \wedge (x_2 \vee \bar{x}_1 \vee \bar{x}_3) \wedge (\bar{x}_8 \vee \bar{x}_3 \vee \bar{x}_7) \wedge (\bar{x}_5 \vee x_3 \vee x_8) \wedge \\
(\bar{x}_6 \vee \bar{x}_1 \vee \bar{x}_5) \wedge (x_8 \vee \bar{x}_9 \vee x_3) \wedge (x_2 \vee x_1 \vee x_3) \wedge (\bar{x}_1 \vee x_8 \vee x_4) \wedge \\
(\bar{x}_9 \vee \bar{x}_6 \vee x_8) \wedge (x_8 \vee x_3 \vee \bar{x}_9) \wedge (x_9 \vee \bar{x}_3 \vee x_8) \wedge (x_6 \vee \bar{x}_9 \vee x_5) \wedge \\
(x_2 \vee \bar{x}_3 \vee \bar{x}_8) \wedge (x_8 \vee \bar{x}_6 \vee \bar{x}_3) \wedge (x_8 \vee \bar{x}_3 \vee \bar{x}_1) \wedge (\bar{x}_8 \vee x_6 \vee \bar{x}_2) \wedge \\
(x_7 \vee x_9 \vee \bar{x}_2) \wedge (x_8 \vee \bar{x}_9 \vee x_2) \wedge (\bar{x}_1 \vee \bar{x}_9 \vee x_4) \wedge (x_8 \vee x_1 \vee \bar{x}_2) \wedge \\
(x_3 \vee \bar{x}_4 \vee \bar{x}_6) \wedge (\bar{x}_1 \vee \bar{x}_7 \vee x_5) \wedge (\bar{x}_7 \vee x_1 \vee x_6) \wedge (\bar{x}_5 \vee x_4 \vee \bar{x}_6) \wedge \\
(\bar{x}_4 \vee x_9 \vee \bar{x}_8) \wedge (x_2 \vee x_9 \vee x_1) \wedge (x_5 \vee \bar{x}_7 \vee x_1) \wedge (\bar{x}_7 \vee \bar{x}_9 \vee \bar{x}_6) \wedge \\
(x_2 \vee x_5 \vee x_4) \wedge (x_8 \vee \bar{x}_4 \vee x_5) \wedge (x_5 \vee x_9 \vee x_3) \wedge (\bar{x}_5 \vee \bar{x}_7 \vee x_9) \wedge \\
(x_2 \vee \bar{x}_8 \vee x_1) \wedge (\bar{x}_7 \vee x_1 \vee x_5) \wedge (x_1 \vee x_4 \vee x_3) \wedge (x_1 \vee \bar{x}_9 \vee \bar{x}_4) \wedge \\
(x_3 \vee x_5 \vee x_6) \wedge (\bar{x}_6 \vee x_3 \vee \bar{x}_9) \wedge (\bar{x}_7 \vee x_5 \vee x_9) \wedge (x_7 \vee \bar{x}_5 \vee \bar{x}_2) \wedge \\
(x_4 \vee x_7 \vee x_3) \wedge (x_4 \vee \bar{x}_9 \vee \bar{x}_7) \wedge (x_5 \vee \bar{x}_1 \vee x_7) \wedge (x_5 \vee \bar{x}_1 \vee x_7) \wedge \\
(x_6 \vee x_7 \vee \bar{x}_3) \wedge (\bar{x}_8 \vee \bar{x}_6 \vee \bar{x}_7) \wedge (x_6 \vee x_2 \vee x_3) \wedge (\bar{x}_8 \vee x_2 \vee x_5)
\end{array}
$$

Does there exist a truth assignment satisfying all clauses?

Search for a satisfying assignment (or prove none exists)

Motivation

- SAT used to solve many other problems!
- Applications:
  Hardware and Software Verification, Planning, Scheduling, Optimal Control, Protocol Design, Routing, Combinatorial problems, Equivalence Checking, etc.
- From 100 variables, 200 constraints (early 90s)
  to 1,000,000 vars. and 20,000,000 clauses in 20 years.

Propositional logic: Syntax

Propositional logic is the simplest logic—illustrates basic ideas
There are other types of logic: first-order logic, temporal logic, etc.

The proposition symbols x_1, x_2, etc. are sentences

If x is a sentence, $\neg x$ is a sentence (negation)
If x_1 and x_2 are sentences, $x_1 \wedge x_2$ is a sentence (conjunction)
If x_1 and x_2 are sentences, $x_1 \vee x_2$ is a sentence (disjunction)
If x_1 and x_2 are sentences, $x_1 \implies x_2$ is a sentence (implication)
If x_1 and x_2 are sentences, $x_1 \equiv x_2$ is a sentence (biconditional)

Logical equivalence

Two sentences are logically equivalent iff true in same models: $\alpha \equiv \beta$ if and only if $\alpha \models \beta$ and $\beta \models \alpha$

$$
\begin{aligned}
(\alpha \wedge \beta) &\equiv (\beta \wedge \alpha) && \text{commutativity of } \wedge \\
(\alpha \vee \beta) &\equiv (\beta \vee \alpha) && \text{commutativity of } \vee \\
((\alpha \wedge \beta) \wedge \gamma) &\equiv (\alpha \wedge (\beta \wedge \gamma)) && \text{associativity of } \wedge \\
((\alpha \vee \beta) \vee \gamma) &\equiv (\alpha \vee (\beta \vee \gamma)) && \text{associativity of } \vee \\
\neg(\neg\alpha) &\equiv \alpha && \text{double-negation elimination} \\
(\alpha \implies \beta) &\equiv (\neg\beta \implies \neg\alpha) && \text{contraposition} \\
(\alpha \implies \beta) &\equiv (\neg\alpha \vee \beta) && \text{implication elimination} \\
(\alpha \equiv \beta) &\equiv ((\alpha \implies \beta) \wedge (\beta \implies \alpha)) && \text{bicond. elimination} \\
\neg(\alpha \wedge \beta) &\equiv (\neg\alpha \vee \neg\beta) && \text{De Morgan} \\
\neg(\alpha \vee \beta) &\equiv (\neg\alpha \wedge \neg\beta) && \text{De Morgan} \\
(\alpha \wedge (\beta \vee \gamma)) &\equiv ((\alpha \wedge \beta) \vee (\alpha \wedge \gamma)) && \text{distributivity of } \wedge \text{ over } \vee \\
(\alpha \vee (\beta \wedge \gamma)) &\equiv ((\alpha \vee \beta) \wedge (\alpha \vee \gamma)) && \text{distributivity of } \vee \text{ over } \wedge
\end{aligned}
$$

Validity and Satisfiability

A sentence is valid if it is true in all models,
e.g., True, $A \vee \neg A$, $A \implies A$, $(A \wedge (A \implies B)) \implies B$

A sentence is satisfiable if it is true in some model
e.g., $A \vee B$, C

A sentence is unsatisfiable if it is true in no models
e.g., $A \wedge \neg A$

Conjunctive Normal Form

Every sentence in Propositional Logic is logically equivalent to a conjunction of clauses:

- A formula is in **conjunctive normal form (CNF)** iff it is of the form

$$\bigwedge_{i=1}^{m} \bigvee_{j=1}^{k_i} l_{ij} = (l_{11} \vee \ldots \vee l_{1k_1}) \wedge \ldots \wedge (l_{m1} \vee \ldots \vee l_{mk_m})$$

  where each **literal** l_{ij} is a propositional variable or its negation.

  The disjunctions of literlas: $c_i = (l_{i1} \vee \ldots \vee l_{ik_i})$ are called **clauses**.

- A formula is in k-**CNF** iff it is in CNF and all clauses contain exactly k literals (*i.e.*, for all i, $k_i = k$).
- In many cases, the restriction of SAT to CNF formulae is considered.
- For every propositional formula, there is an equivalent formula in 3-CNF.

Example:

$$
\begin{aligned}
F := \quad & \wedge \left(\neg x_2 \vee x_1\right) \\
& \wedge \left(\neg x_1 \vee \neg x_2 \vee \neg x_3\right) \\
& \wedge \left(x_1 \vee x_2\right) \\
& \wedge \left(\neg x_4 \vee x_3\right) \\
& \wedge \left(\neg x_5 \vee x_3\right)
\end{aligned}
$$

- F is in CNF.
- Is F satisfiable?
  Yes, *e.g.*, $x_1 := x_2 := \top$, $x_3 := x_4 := x_5 := \bot$ is a model of F.

Conversion to CNF

$x_1 \iff (x_2 \vee x_3)$

1. Eliminate $\iff$, replacing $\alpha \iff \beta$ with $(\alpha \implies \beta) \wedge (\beta \implies \alpha)$.

   $(x_1 \implies (x_2 \vee x_3)) \wedge ((x_2 \vee x_3) \implies x_1)$

2. Eliminate $\implies$, replacing $\alpha \implies \beta$ with $\neg\alpha \vee \beta$.

   $(\neg x_1 \vee x_2 \vee x_3) \wedge (\neg(x_2 \vee x_3) \vee x_1)$

3. Move $\neg$ inwards using de Morgan's rules and double-negation:

   $(\neg x_1 \vee x_2 \vee x_3) \wedge ((\neg x_2 \wedge \neg x_3) \vee x_1)$

4. Apply distributivity law ($\vee$ over $\wedge$) and flatten:

   $(\neg x_1 \vee x_2 \vee x_3) \wedge (\neg x_2 \vee x_1) \wedge (\neg x_3 \vee x_1)$

SAT Problem: The General Problem

SAT Problem (decision problem, search variant):

- **Given:** Formula F in propositional logic
- **Task:** Find an assignment of truth values to variables in F that renders F true, or decide that no such assignment exists.

SAT Problem: A Specific Problem Instance

- **Given:** Formula $F := (x_1 \vee x_2) \wedge (\neg x_1 \vee \neg x_2)$
- **Task:** Find an assignment of truth values to variables x_1, x_2 that renders F true, or decide that no such assignment exists.

Max SAT

Definition ((Maximum) k-Satisfiability (SAT))

Input: A set X of variables, a collection C of disjunctive clauses of at most k literals, where a literal is a variable or a negated variable in X.
k is a constant, $k > 2$.
Task: A truth assignment for X or a truth assignment that maximizes the number of clauses satisfied.

MAX-SAT (optimization problem)

Which is the maximal number of clauses satisfiable in a propositional logic formula F?

Outline

33. Satisfiability

34. LS Based Metaheuristics
    - Randomized (or Stochastic) Local Search
    - Guided Local Search
    - Simulated Annealing
    - Iterated Local Search
    - Tabu Search
    - Variable Neighborhood Search

35. Population Based Metaheuristics

Escaping Local Optima

Possibilities:

- **Restart:** re-initialize search whenever a local optimum is encountered.
  (Often rather ineffective due to cost of initialization.)
- **Non-improving steps**: in local optima, allow selection of candidate solutions with equal or worse evaluation function value, *e.g.*, using minimally worsening steps.
  (Can lead to long walks in **plateaus**, *i.e.*, regions of search positions with identical evaluation function.)
- **Diversify the neighborhood**

Note: None of these mechanisms is guaranteed to always escape effectively from local optima.

A Trade Off

Diversification vs Intensification

- Goal-directed and randomized components of LS strategy need to be balanced carefully.
- **Intensification (aka exploitation)**: aims at greedily increasing solution quality, *e.g.*, by exploiting the evaluation function.
- **Diversification (aka exploration)**: aims at preventing search stagnation, that is, the search process getting trapped in confined regions.

Examples:

- Iterative Improvement (First improvement or Best improvement): **intensification** strategy.
- Uninformed Random Walk/Picking (URW/P): **diversification** strategy.

Balanced combination of intensification and diversification mechanisms forms the basis for advanced LS methods.

Outline

33. Satisfiability

34. LS Based Metaheuristics
    - Randomized (or Stochastic) Local Search
    - Guided Local Search
    - Simulated Annealing
    - Iterated Local Search
    - Tabu Search
    - Variable Neighborhood Search

35. Population Based Metaheuristics

Greedy Local Search

Key idea: Best improvement (Hill Climber or Steepest Descent) + Sideways Moves + seldom worsening moves

Algorithm 6.1: GSAT (F)

```
Input      : A CNF formula F
Parameters : Integers MAX-FLIPS, MAX-TRIES
Output     : A satisfying assignment for F, or FAIL
begin
    for i ← 1 to MAX-TRIES do
        σ ← a randomly generated truth assignment for F
        for j ← 1 to MAX-FLIPS do
            if σ satisfies F then return σ                    // success
            v ← a variable flipping which results in the greatest decrease
                (possibly negative) in the number of unsatisfied clauses
            Flip v in σ
    return FAIL                          // no satisfying assignment found
end
```

- GSAT begins with a rapid greedy descent towards a better truth assignment
- then long sequences of **sideways** moves take place. Sideways moves are moves that do not increase or decrease the total number of unsatisfied clauses. They navigate through **plateaux**, which is SAT are many and large
- GSAT [Selman et al. 1992] at its times was able to beat complete search algorithms (they were not using CDC)

Randomized Iterative Improvement

aka, Stochastic Hill Climbing

Key idea: Allow worsening moves: In each search step, with a fixed probability perform an uninformed random walk step instead of an iterative improvement step.
greedy + uniform random walk

Randomized Iterative Improvement (RII):
determine initial candidate solution s
while termination condition is not satisfied **do**
  With probability wp:
    choose a neighbor s' of s uniformly at random
  Otherwise:
    choose a neighbor s' of s such that $f(s') < f(s)$ or,
      if no such s' exists, choose s' such that $f(s')$ is minimal
  $s := s'$

With infite time it reaches optimum with $p > 0$ [Hoos and Tsang].

Example: Randomized Iterative Improvement for SAT

```
procedure RIISAT(F, wp, maxSteps)
  input: a formula F, probability wp, integer maxSteps
  output: a model φ for F or ∅
  choose assignment φ for F uniformly at random;
  steps := 0;
  while not(φ is not proper) and (steps < maxSteps) do
    with probability wp do
      select x in X uniformly at random and flip;
    otherwise
      select x in X^c uniformly at random from those that
        maximally decrease number of clauses violated;
    change φ;
    steps := steps+1;
  end
  if φ is a model for F then return φ
  else return ∅
  end
end RIISAT
```

X^c set of variables in violated clauses

Note:

- No need to terminate search when local minimum is encountered

  Instead: Impose limit on number of search steps or CPU time, from beginning of search or after last improvement.

- Probabilistic mechanism permits arbitrary long sequences of random walk steps

  Therefore: When run sufficiently long, RII is guaranteed to find (optimal) solution to any problem instance with arbitrarily high probability.

- GWSAT [Selman et al., 1994], was at some point state-of-the-art for SAT.

Focused Local Search: WalkSAT

```
procedure WalkSAT (F, maxTries, maxSteps, slc)
    input: CNF formula F, positive integers maxTries and maxSteps,
        heuristic function slc
    output: model of F or 'no solution found'
    for try := 1 to maxTries do
        a := randomly chosen assignment of the variables in formula F;
        for step := 1 to maxSteps do
            if a satisfies F then return a end
            c := randomly selected clause unsatisfied under a;
            x := variable selected from c according to heuristic function slc;
            a := a with x flipped;
        end
    end
    return 'no solution found'
end WalkSAT
```

Example of **slc** heuristic: with prob. wp select a random move, with prob. $1 - wp$ select the best

Extension to CSP. Recall the Definitions

Constraint Satisfaction Problem (CSP)

A CSP is a finite set of variables X, together with a finite set of constraints C, each on a subset of X. A **solution** to a CSP is an assignment of a value $d \in D(x)$ to each $x \in X$, such that all constraints are satisfied simultaneously.

Constraint Optimization Problem (COP)

A COP is a CSP P defined on the variables $x_1, \ldots, x_n$, together with an objective function $f : D(x_1) \times \cdots \times D(x_n) \to Q$ that assigns a value to each assignment of values to the variables. An **optimal solution** to a minimization (maximization) COP is a solution d to P that minimizes (maximizes) the value of $f(d)$.

Recall: Constraints in a CSP can be relaxed and their violations determine the evaluation function. This is the most common approach in LS

Min-Conflict Heuristic

procedure *MCH* (*P, maxSteps*)
  input: *CSP instance P, positive integer maxSteps*
  output: *solution of P or* "no solution found"
  a := randomly chosen assignment of the variables in P;
  for *step* := 1 **to** *maxSteps* **do**
    if a satisfies all constraints of P **then return** a **end**
    x := randomly selected variable from conflict set $K(a)$;
    v := randomly selected value from the domain of x such that
      setting x to v minimises the number of unsatisfied constraints;
    a := a with x set to v;
  end
  return "no solution found"
end *MCH*

Outline

33. Satisfiability

34. LS Based Metaheuristics
    - Randomized (or Stochastic) Local Search
    - Guided Local Search
    - Simulated Annealing
    - Iterated Local Search
    - Tabu Search
    - Variable Neighborhood Search

35. Population Based Metaheuristics

Guided Local Search

- **Key Idea:** Modify the evaluation function whenever a local optimum is encountered.
- Associate **weights** (**penalties**) with solution components; these determine impact of components on evaluation function value.
- Perform Iterative Improvement; when in local minimum, increase penalties of some solution components until improving steps become available.

Guided Local Search (GLS):
determine **initial candidate solution** s
initialize penalties
while **termination criterion** is not satisfied **do**
  compute **modified evaluation function** g' from g
    based on **penalties**
  perform **subsidiary local search** on s
    using **evaluation function** g'
  update penalties based on s

Guided Local Search

- **Modified evaluation function:**

$$g'(s) := f(s) + \sum_{i \in SC(s)} \texttt{penalty}(i),$$

  where $SC(s)$ is the set of solution components used in candidate solution s.

- **Penalty initialization:** For all i: $\texttt{penalty}(i) := 0$.

- **Penalty update** in local minimum s: Typically involves **penalty increase** of some or all solution components of s; often also occasional **penalty decrease** or **penalty smoothing**.

- **Subsidiary local search:** Often **Iterative Improvement**.

Potential problem:
Solution components required for (optimal) solution may also be present in many local minima.

Possible solutions:

- **A:** Occasional decreases/smoothing of penalties.
- **B:** Only increase penalties of solution components that are least likely to occur in (optimal) solutions.

Implementation of **B**: Only increase penalties of solution components i with maximal utility [Voudouris and Tsang, 1995]:

$$\texttt{util}(s, i) := \frac{f_i(s)}{1 + \texttt{penalty}(i)}$$

where $f_i(s)$ is the solution quality contribution of i in s.

Example: Guided Local Search (GLS) for the TSP

[Voudouris and Tsang 1995; 1999]

- **Given:** TSP instance π
- **Search space:** Hamiltonian cycles in π with n vertices;
- **Neighborhood:** 2-edge-exchange;
- **Solution components** edges of π;
  $f_e(G, p) := w(e)$;
- **Penalty initialization:** Set all edge penalties to zero.
- **Subsidiary local search:** Iterative First Improvement.
- **Penalty update:** Increment penalties of all edges with maximal utility by

  $$\lambda := 0.3 \cdot \frac{w(s_{2\text{-}opt})}{n}$$

  where $s_{2\text{-}opt}$ = 2-optimal tour.

Guided Local Search for SAT

- Assign a positive weight to each clause
- attempt to minimize the sum of the weights of the unsatisfied clauses.
- The clause weights are dynamically modified (additively or multiplicatively) as the search progresses, increasing the weight of the clauses that are currently unsatisfied.
- Depends on:
  how often and by how much the weights of unsatisfied clauses are increased, and
  how are all weights periodically decreased in order to prevent certain weights from becoming dis-proportionately high.

Discrete Lagrangian Method

- Change the objective function bringing constraints g_i into it

$$L(\mathbf{s}, \boldsymbol{\lambda}) = f(\mathbf{s}) + \sum_i \lambda_i g_i(\mathbf{s})$$

- λ_i are continous variables called Lagrangian Multipliers
- $L(\mathbf{s}^*, \lambda) \leq L(\mathbf{s}^*, \boldsymbol{\lambda}^*) \leq L(\mathbf{s}, \boldsymbol{\lambda}^*)$
- Alternate optimizations in $\mathbf{s}$ and in $\boldsymbol{\lambda}$

Discrete Lagrangian Method for SAT

let $U_i(x)$ be a function that is 0 if C_i is satisfied by a solution x, and 1 otherwise.

$$\begin{aligned} &\text{minimize } N(x) \\ &\quad \text{s.t. } U_i(x) = 0 \qquad \forall i \in \{1, 2, \ldots, m\} \end{aligned}$$

Discrete Lagrangian Function:

$$L_d(x, \lambda) = N(x) + \sum_{i=1}^{m} \lambda_i U_i(x)$$

A point $(x^*, \lambda^*) \in \{0, 1\}^n \times \mathbb{R}^m$ is called a **saddle point** of the Lagrange function $L_d(x, \lambda)$ if it is a local minimum w.r.t. x^* and a local maximum w.r.t. λ^*. Formally, (x^*, λ^*) is a saddle point for L_d if $L_d(x^*, \lambda) \leq L_d(x^*, \lambda^*) \leq L_d(x, \lambda^*)$

Probabilistic Iterative Improvement

Key idea: Accept worsening steps with probability that depends on respective deterioration in evaluation function value: bigger deterioration $\cong$ smaller probability

Realization:

- Function $p(f, s, s')$: determines probability distribution over neighbors s' of s based on their values under evaluation function f.
- Accept s' neighbor of s with probability $p(f, s, s')$.

Note:

- Behavior of PII crucially depends on choice of p.
- II and RII are special cases of PII.

Example: Metropolis PII for the TSP

- **Search space S:** set of all Hamiltonian cycles in given graph G.
- **Solution set:** same as S
- **Neighborhood relation $\mathcal{N}(s)$:** 2-edge-exchange
- **Initialization:** an Hamiltonian cycle uniformly at random.
- **Step function:** implemented as 2-stage process:

  1. select neighbor $s' \in N(s)$ uniformly at random;
  2. accept as new search position with probability:

  $$p(T, s, s') := \begin{cases} 1 & \text{if } f(s') \leq f(s) \\ \exp \frac{-(f(s')-f(s))}{T} & \text{otherwise} \end{cases}$$

  (Metropolis condition), where **temperature** parameter T controls likelihood of accepting worsening steps.

- **Termination:** upon exceeding given bound on run-time.

Outline

33. Satisfiability

34. LS Based Metaheuristics
    - Randomized (or Stochastic) Local Search
    - Guided Local Search
    - Simulated Annealing
    - Iterated Local Search
    - Tabu Search
    - Variable Neighborhood Search

35. Population Based Metaheuristics

Inspired by statistical mechanics in matter physics:

- candidate solutions $\cong$ states of physical system
- evaluation function $\cong$ thermodynamic energy
- globally optimal solutions $\cong$ ground states
- parameter $T \cong$ physical temperature

Note: In physical process (*e.g.*, annealing of metals), perfect ground states are achieved by very slow lowering of temperature.





Simulated Annealing

Key idea: Vary temperature parameter, *i.e.*, probability of accepting worsening moves, in Probabilistic Iterative Improvement according to annealing schedule (aka **cooling schedule**).

Simulated Annealing (SA):

determine initial candidate solution s
set initial temperature T according to annealing schedule
while termination condition is not satisfied: **do**
    while maintain same temperature T according to annealing schedule **do**
        probabilistically choose a neighbor s' of s using proposal mechanism
        if s' satisfies probabilistic acceptance criterion (depending on T) **then**
            $s := s'$
    update T according to annealing schedule

- 2-stage step function based on
  - proposal mechanism (often uniform random choice from $N(s)$)
  - acceptance criterion (often **Metropolis condition**)

- Annealing schedule
  (function mapping run-time t onto temperature $T(t)$):
  - initial temperature T_0
    (may depend on properties of given problem instance)
  - temperature update scheme
    (*e.g.*, linear cooling: $T_{i+1} = T_0(1 - i/I_{max})$,
    geometric cooling: $T_{i+1} = \alpha \cdot T_i$)
  - number of search steps to be performed at each temperature
    (often multiple of neighborhood size)
  - may be **static** or **dynamic**
  - seek to balance moderate execution time with asymptotic behavior properties

- Termination predicate: often based on **acceptance ratio**,
  i.e., ratio accepted / proposed steps **or** number of idle iterations

Example: Simulated Annealing for TSP

Extension of previous PII algorithm for the TSP, with

- proposal mechanism: uniform random choice from 2-exchange neighborhood;
- acceptance criterion: Metropolis condition (always accept improving steps, accept worsening steps with probability $\exp[-(f(s') - f(s))/T]$);
- annealing schedule: geometric cooling $T := 0.95 \cdot T$ with $n \cdot (n-1)$ steps at each temperature (n = number of vertices in given graph), T_0 chosen such that 97% of proposed steps are accepted;
- termination: when for five successive temperature values no improvement in solution quality and acceptance ratio $< 2\%$.

Improvements:

- neighborhood pruning (*e.g.*, candidate lists for TSP)
- greedy initialization (*e.g.*, by using NNH for the TSP)
- **low temperature starts** (to prevent good initial candidate solutions from being too easily destroyed by worsening steps)

Profiling

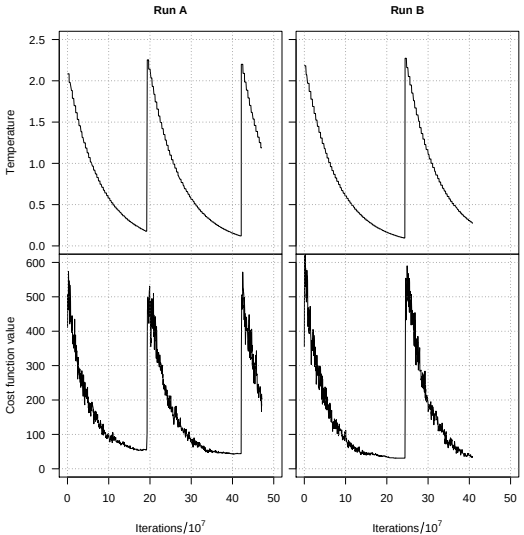
Run A
Run B
Temperature
Cost function value
Iterations/10^7
Iterations/10^7

Outline

33. Satisfiability

34. LS Based Metaheuristics
    - Randomized (or Stochastic) Local Search
    - Guided Local Search
    - Simulated Annealing
    - Iterated Local Search
    - Tabu Search
    - Variable Neighborhood Search

35. Population Based Metaheuristics

Iterated Local Search

Key Idea: Use two types of LS steps:

- **subsidiary local search** steps for reaching local optima as efficiently as possible (intensification)
- **perturbation steps** for effectively escaping from local optima (diversification).

Also: Use **acceptance criterion** to control diversification **vs** intensification behavior.

Iterated Local Search (ILS):
determine initial candidate solution s
perform **subsidiary local search** on s
while termination criterion is not satisfied **do**
  $r := s$
  perform **perturbation** on s
  perform **subsidiary local search** on s
  based on **acceptance criterion**,
    keep s or revert to $s := r$

Note:

- **Subsidiary local search** results in a local minimum.
- ILS trajectories can be seen as walks in the space of local minima of the given evaluation function.
- **Perturbation phase** and **acceptance criterion** may use aspects of **search history** (*i.e.*, limited memory).
- In a high-performance ILS algorithm, **subsidiary local search**, **perturbation mechanism** and **acceptance criterion** need to complement each other well.

Components

Subsidiary local search: (1)

- More effective subsidiary local search procedures lead to better ILS performance.
  Example: 2-opt **vs** 3-opt **vs** LK for TSP.

- Often, subsidiary local search = iterative improvement,
  but more sophisticated LS methods can be used.
  (*e.g.*, Tabu Search).

Components

Perturbation mechanism: (1)

- Needs to be chosen such that its effect **cannot** be easily undone by subsequent local search phase.
  (Often achieved by search steps larger neighborhood.)
  Example: local search = 3-opt, perturbation = 4-exchange steps in ILS for TSP.
- A perturbation phase may consist of one or more perturbation steps.
- Weak perturbation $\Rightarrow$ short subsequent local search phase;
  but: risk of revisiting current local minimum.
- Strong perturbation $\Rightarrow$ more effective escape from local minima;
  but: may have similar drawbacks as random restart.
- Advanced ILS algorithms may change nature and/or strength of perturbation adaptively during search.

Components

Acceptance criteria: (1)

- Always accept the **best** of the two candidate solutions

  $\Rightarrow$ ILS performs Iterative Improvement in the space of local optima reached by subsidiary local search.

- Always accept the **most recent** of the two candidate solutions

  $\Rightarrow$ ILS performs random walk in the space of local optima reached by subsidiary local search.

- Intermediate behavior: select between the two candidate solutions based on the **Metropolis criterion** (*e.g.*, used in **Large Step Markov Chains** [Martin et al., 1991].

- Advanced acceptance criteria take into account search history,
  e.g., by occasionally reverting to **incumbent solution**.

Examples

Example: Iterated Local Search for the TSP (1)

- **Given:** TSP instance π.
- **Search space:** Hamiltonian cycles in π.
- **Subsidiary local search:** Lin-Kernighan variable depth search algorithm
- **Perturbation mechanism:**
  'double-bridge move' = particular 4-exchange step:

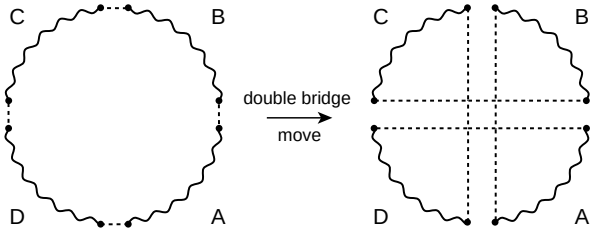

- **Acceptance criterion:** Always return the best of the two given candidate round trips.

Outline

33. Satisfiability

34. LS Based Metaheuristics
    - Randomized (or Stochastic) Local Search
    - Guided Local Search
    - Simulated Annealing
    - Iterated Local Search
    - Tabu Search
    - Variable Neighborhood Search

35. Population Based Metaheuristics

Tabu Search

Key idea: Avoid repeating history (memory)
How can we remember the history without

- memorizing full solutions (space)
- computing hash functions (time)

⇝ use attributes

Tabu Search

Key idea: Use aspects of search history (memory) to escape from local minima.

- Associate **tabu attributes** with candidate solutions or solution components.
- Forbid steps to search positions recently visited by underlying iterative best improvement procedure based on tabu attributes.

Tabu Search (TS):

determine initial candidate solution s
While **termination criterion** is not satisfied:
  determine set N' of non-tabu neighbors of s
  choose a best candidate solution s' in N'
  update tabu attributes based on s'
  $s := s'$

Example: Tabu Search for CSP

- **Search space:** set of all complete assignments of X.
- **Neighborhood structure:** one exchange
- **Memory:** Associate tabu status (Boolean value) with each pair (variable,value) (x, val).
- **Initialization:** a random assignment
- **Search steps:**
  - pairs (x, v) are tabu if they have been changed in the last `tt` steps;
  - neighboring assignments are admissible if they can be reached by changing a non-tabu pair or have fewer unsatisfied constraints than the best assignments seen so far (aspiration criterion);
  - choose uniformly at random admissible neighbors with minimal number of unsatisfied constraints.
- **Termination:** upon finding a feasible assignment **or**
  after given bound on number of search steps has been reached **or**
  after a number of idle iterations

Note:

- **Admissible neighbors of s**: Non-tabu search positions in $N(s)$
- **Tabu tenure**: a fixed number of subsequent search steps
  for which the last search position
  or the solution components just added/removed from it
  are declared **tabu**
- **Aspiration criterion** (often used): specifies conditions under which
  tabu status may be overridden (*e.g.*, if considered step leads to improvement in incumbent solution).
- Crucial for efficient implementation:
  - efficient **best improvement** local search
    $\rightsquigarrow$ pruning, delta updates, (auxiliary) data structures
  - efficient determination of tabu status:
    store for each variable x the number of the search step
    when its value was last changed it_x; x is tabu if
    $it - it_x < tt$, where it = current search step number.

Design Choices

Design choices:

- Neighborhood exploration:
  - no reduction
  - min-conflict heuristic
- Prohibition power for `move = <x,new_v,old_v>`
  - `<x,-,->`
  - `<x,-,old_v>`
  - `<x,new_v,old_v>, <x,old_v,new_v>`
- Tabu list dynamics:
  - Interval: $\texttt{tt} \in [t_b, t_b + w]$
  - Adaptive: $\texttt{tt} = \lfloor \alpha \cdot c \rfloor + \texttt{RandU}(0, t_b)$

Outline

33. Satisfiability

34. LS Based Metaheuristics
    - Randomized (or Stochastic) Local Search
    - Guided Local Search
    - Simulated Annealing
    - Iterated Local Search
    - Tabu Search
    - Variable Neighborhood Search

35. Population Based Metaheuristics

Variable Neighborhood Search

Variable Neighborhood Search is a method based on the systematic change of the neighborhood during the search.

Central observations

- a local minimum w.r.t. one neighborhood function is not necessarily locally minimal w.r.t. another neighborhood function
- a global optimum is locally optimal w.r.t. **all** neighborhood functions

Key principle: change the neighborhood during the search

- Several adaptations of this central principle
  - (Basic) Variable Neighborhood Descent (VND)
  - Variable Neighborhood Search (VNS)
  - Reduced Variable Neighborhood Search (RVNS)
  - Variable Neighborhood Decomposition Search (VNDS)
  - Skewed Variable Neighborhood Search (SVNS)
- Notation
  - N_k, $k = 1, 2, \ldots, k_m$ is a set of neighborhood functions
  - $N_k(s)$ is the set of solutions in the k-th neighborhood of s

How to generate the various neighborhood functions?

- for many problems different neighborhood functions (local searches) exist / are in use
- change parameters of existing local search algorithms
- use k-exchange neighborhoods; these can be naturally extended
- many neighborhood functions are associated with distance measures; in this case increase the distance

Basic Variable Neighborhood Descent

Procedure BVND
input : N_k, $k = 1, 2, \ldots, k_{max}$, and an initial solution s
output: a local optimum s for N_k, $k = 1, 2, \ldots, k_{max}$
$k \leftarrow 1$
repeat
  $s' \leftarrow$ FindBestNeighbor(s,N_k)
  if $f(s') < f(s)$ **then**
    $s \leftarrow s'$
    $(k \leftarrow 1)$
  else
    $k \leftarrow k + 1$
until $k = k_{max}$;

Variable Neighborhood Descent

Procedure VND
input : N_k, $k = 1, 2, \ldots, k_{max}$, and an initial solution s
output: a local optimum s for N_k, $k = 1, 2, \ldots, k_{max}$
$k \leftarrow 1$
repeat
  $s' \leftarrow$ **IterativeImprovement**(s,N_k)
  if $f(s') < f(s)$ **then**
    $s \leftarrow s'$
    $k \leftarrow 1$
  else
    $k \leftarrow k + 1$
until $k = k_{max}$;

- Final solution is locally optimal w.r.t. all neighborhoods
- First improvement may be applied instead of best improvement
- Typically, order neighborhoods from smallest to largest
- If iterative improvement algorithms II_k, $k = 1, \ldots, k_{max}$ are available as black-box procedures:
  - order black-boxes
  - apply them in the given order
  - possibly iterate starting from the first one
  - order chosen by: **solution quality** and **speed**

Basic Variable Neighborhood Search

Procedure BVNS
input : N_k, $k = 1, 2, \ldots, k_{max}$, and an initial solution s
output: a local optimum s for N_k, $k = 1, 2, \ldots, k_{max}$
repeat
  $k \leftarrow 1$
  repeat
    $s' \leftarrow$ RandomPicking(s,N_k)
    $s'' \leftarrow$ IterativeImprovement(s',N_k)
    if $f(s'') < f(s)$ **then**
      $s \leftarrow s''$
      $k \leftarrow 1$
    else
      $k \leftarrow k + 1$
  until $k = k_{max}$;
until Termination Condition;

To decide:

- which neighborhoods
- how many
- which order
- which change strategy

- Extended version: parameters k_{min} and k_{step}; set $k \leftarrow k_{min}$ and increase by k_{step} if no better solution is found (achieves diversification)

Adaptive Large Neighborhood Search

https://imada.sdu.dk/u/marco/DM841/slides/dm841-hr-alns.pdf

Outline

33. Satisfiability

34. LS Based Metaheuristics
    - Randomized (or Stochastic) Local Search
    - Guided Local Search
    - Simulated Annealing
    - Iterated Local Search
    - Tabu Search
    - Variable Neighborhood Search

35. Population Based Metaheuristics

Ant Colony Optimization

https://imada.sdu.dk/u/marco/DM841/slides/dm841-hr-aco.pdf

Evolutionary Algorithms

https://imada.sdu.dk/u/marco/DM841/slides/dm841-hr-evolutionary.pdf

ROHs: Reasoning, Metaheuristics

- Stochastic Local Ssearch
- Simulated Annealing
- Iterated Local Search
- Tabu Search
- Variable Neighborhood Search
- Adaptive Large Neighborhood Search
- Evolutionary Algorithms
- Ant Colony Optimization
- Estimation-of-Distribution Algorithms
- Artificial Immune Systems
- ...
- Evolutionary Computation Bestiary `http://fcampelo.github.io/EC-Bestiary/`
- **Super**natural inspired [Maturana, Fouhey, 2013]