
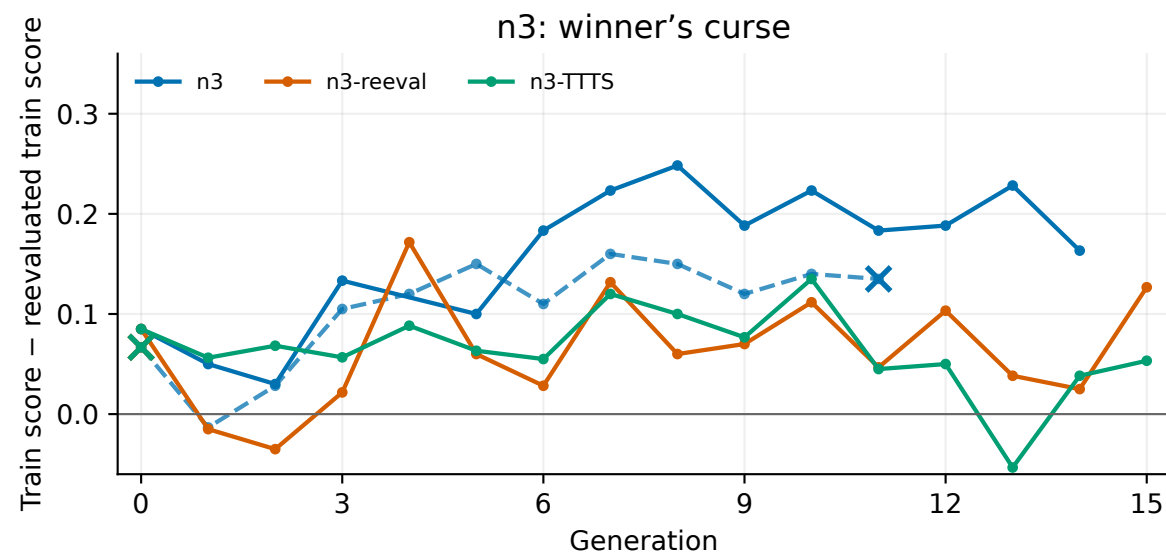
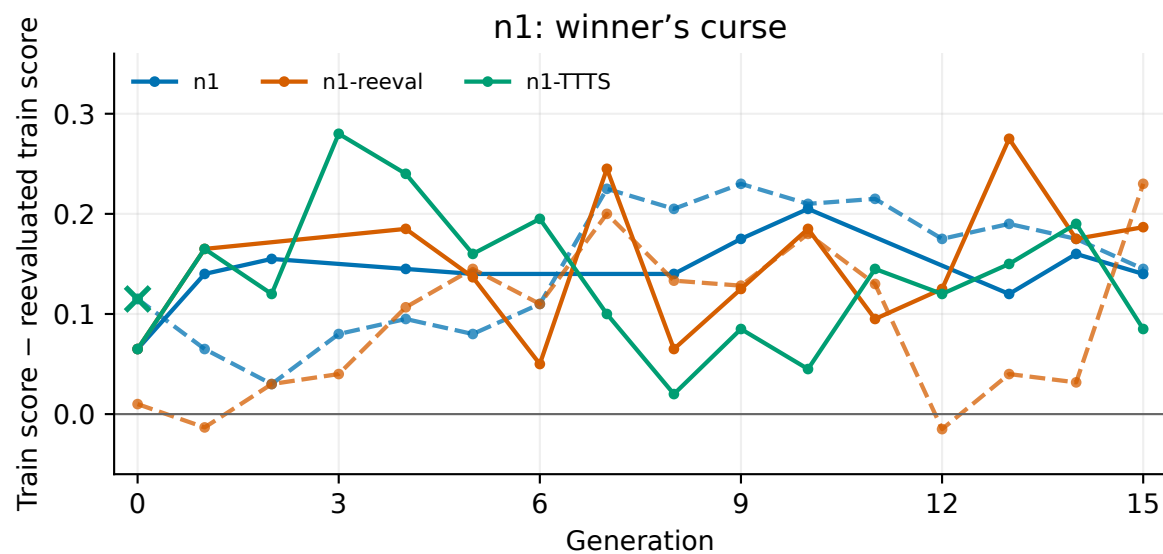
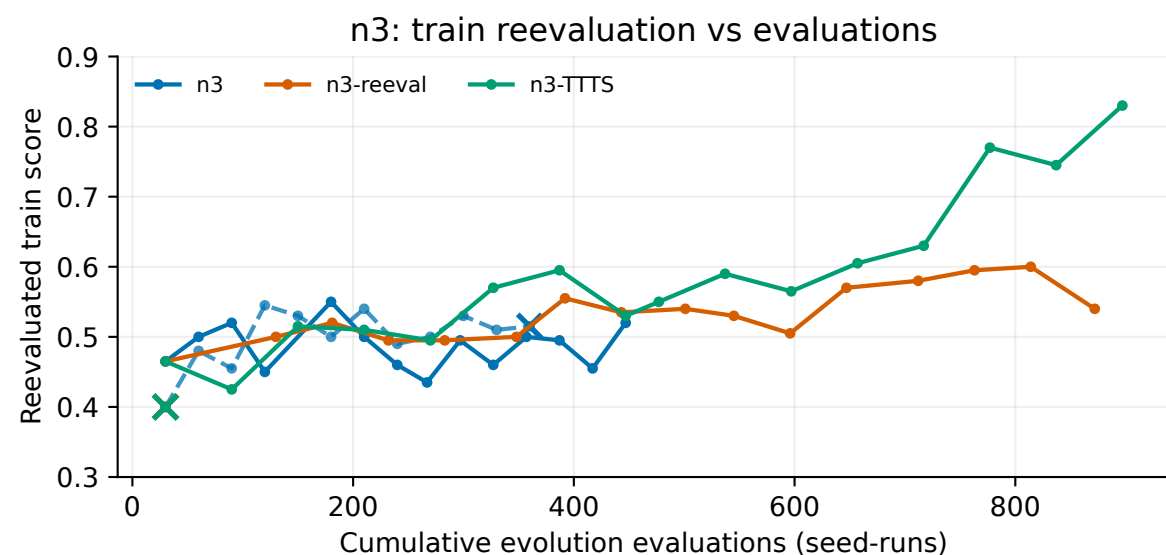
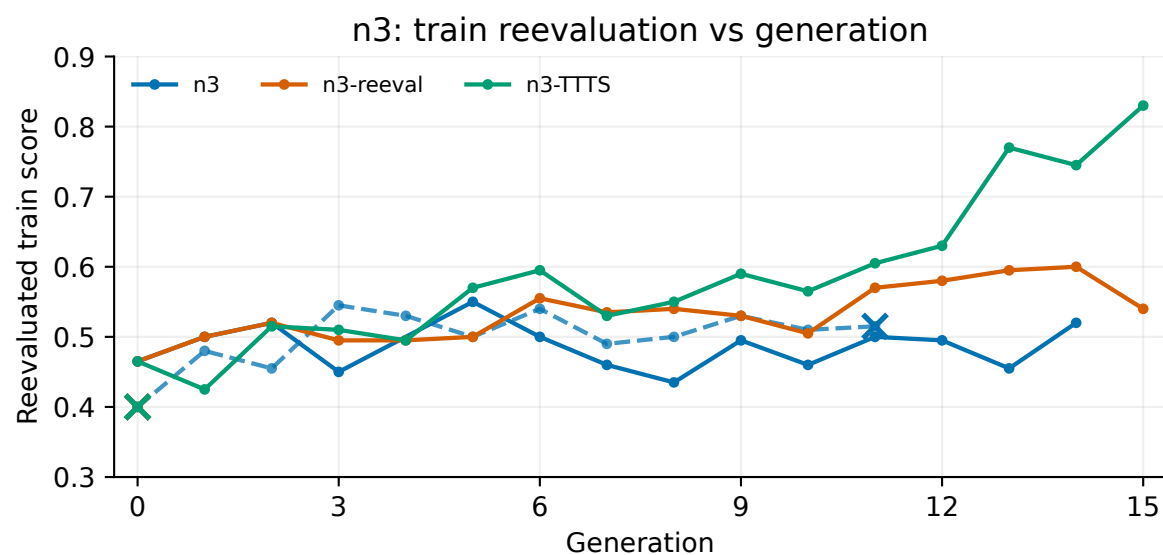
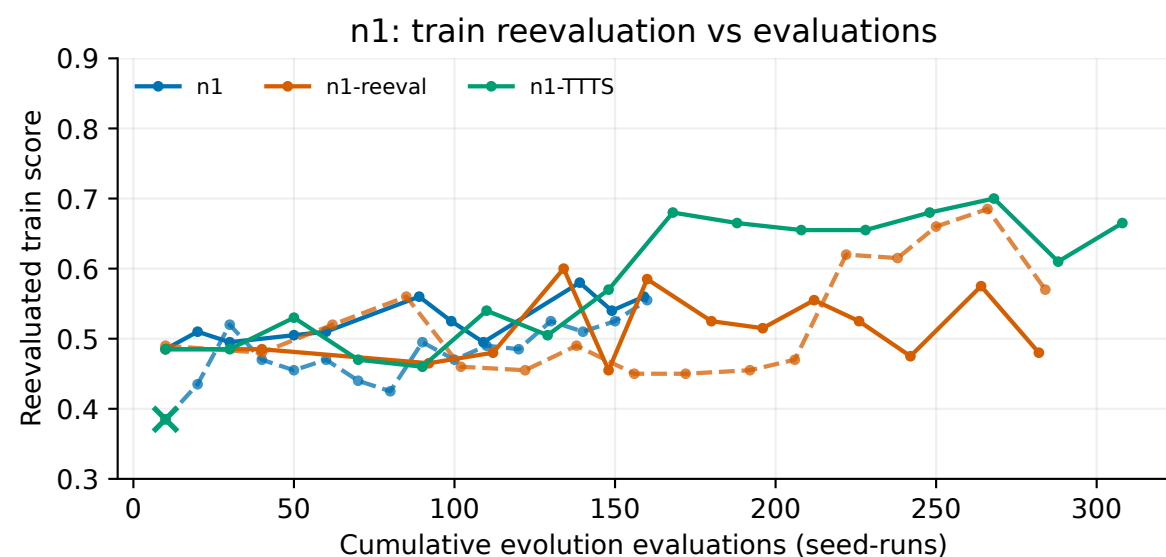


90-second PySR ablations · best-candidate train reevaluation

— Seed 1 - - - Seed 2 × Failed run: last observed diagnostic

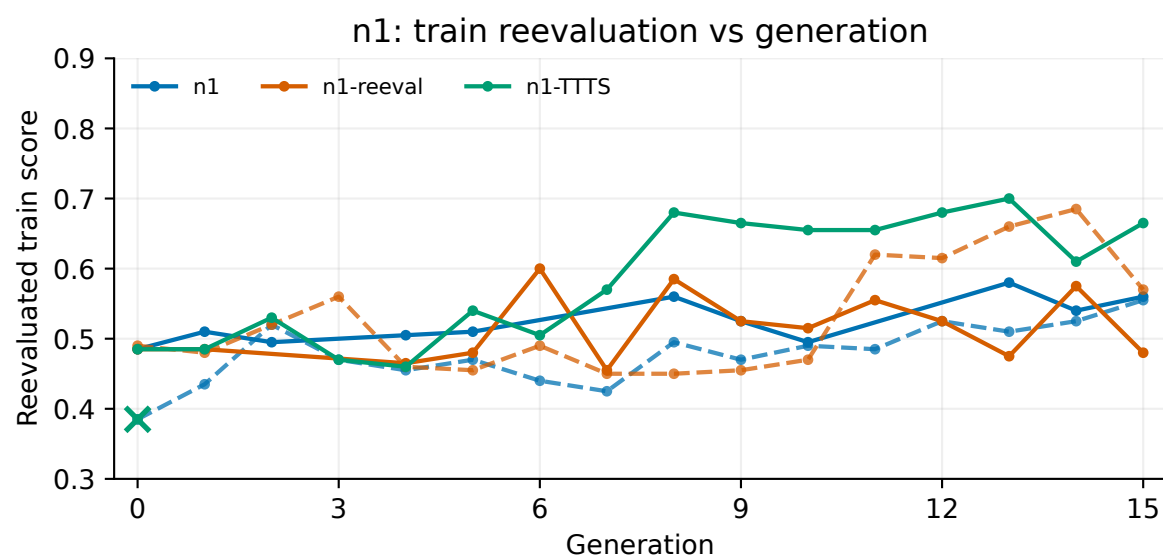

Each point: best candidate reevaluated on training tasks with 10 fresh seeds. Lines join observed points; missing diagnostics are not filled.
Evaluations = cumulative evolution seed-runs (including selection reevaluations; excluding diagnostics). One seed-run covers the train task set.
8/12 runs completed 15 generations; 4 seed-2 runs failed (OpenRouter HTTP 402). n3-reeval uses population reevaluation, 3 → 10 seeds.