
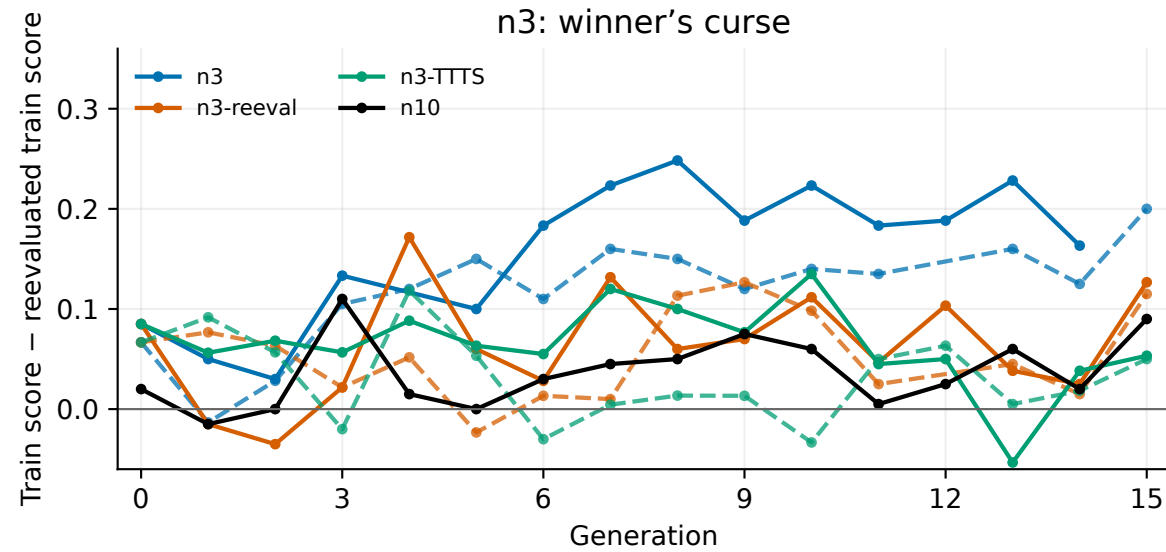
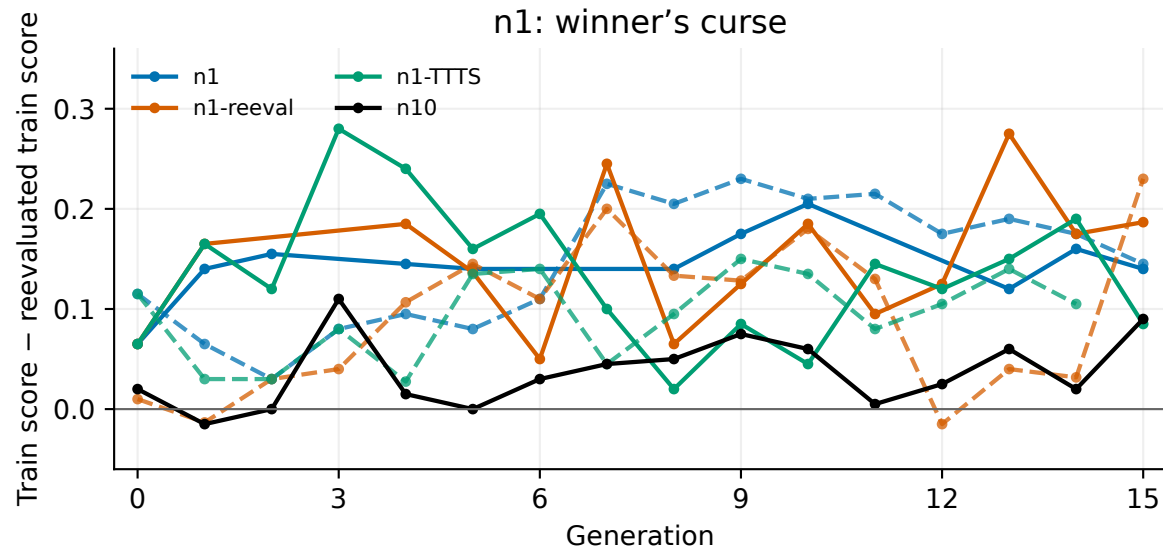
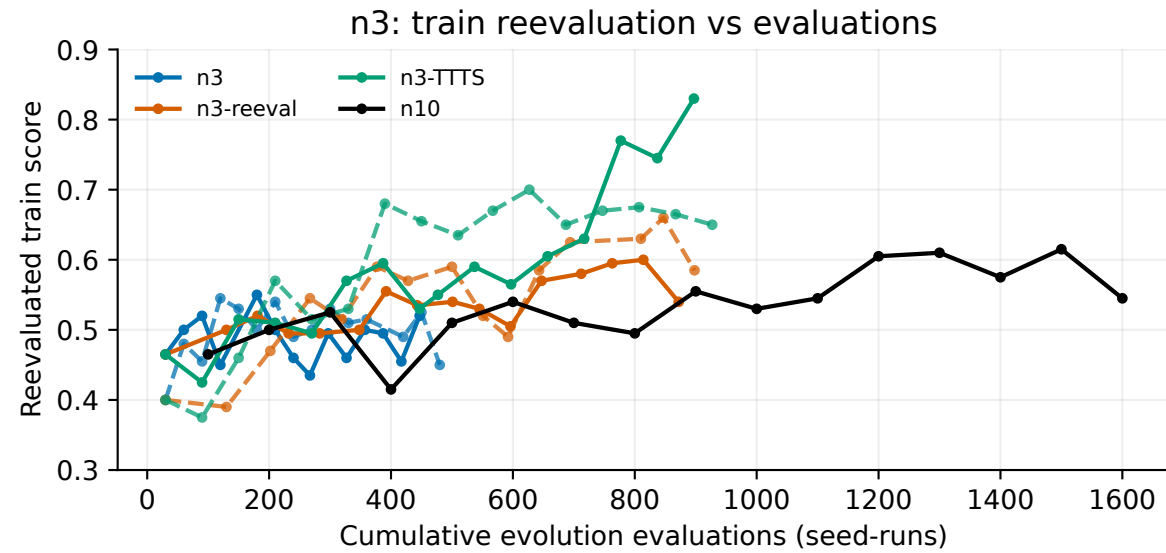
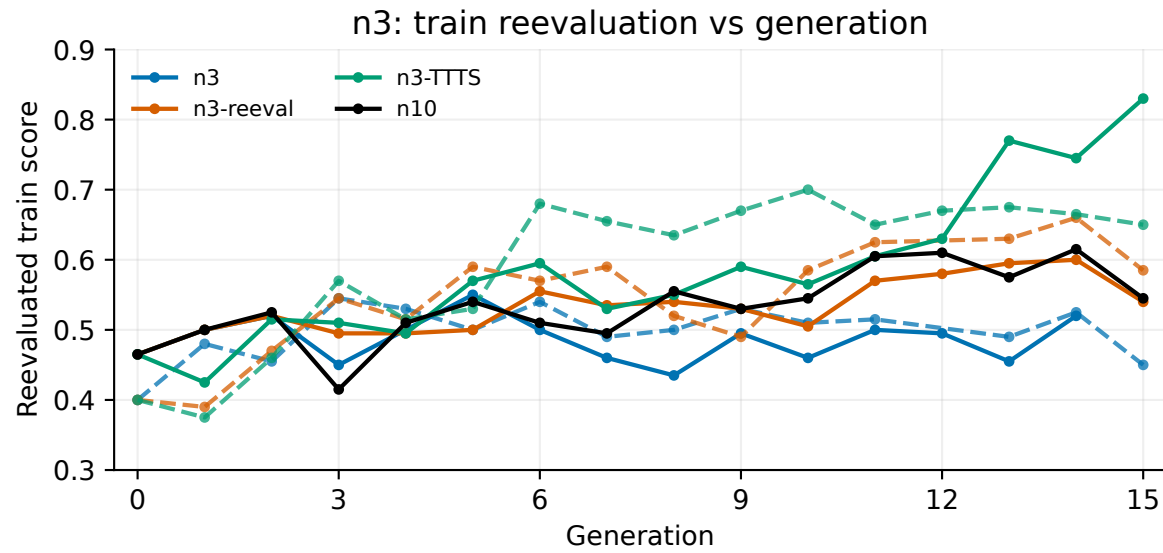
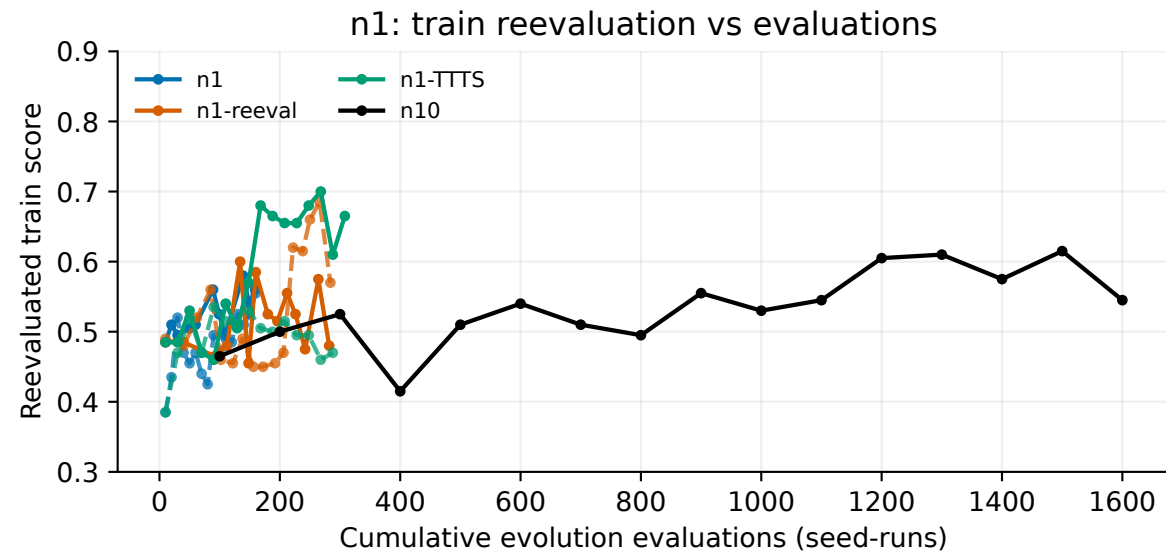


90-second PySR ablations · best-candidate train reevaluation

— Seed 1 - - - Seed 2

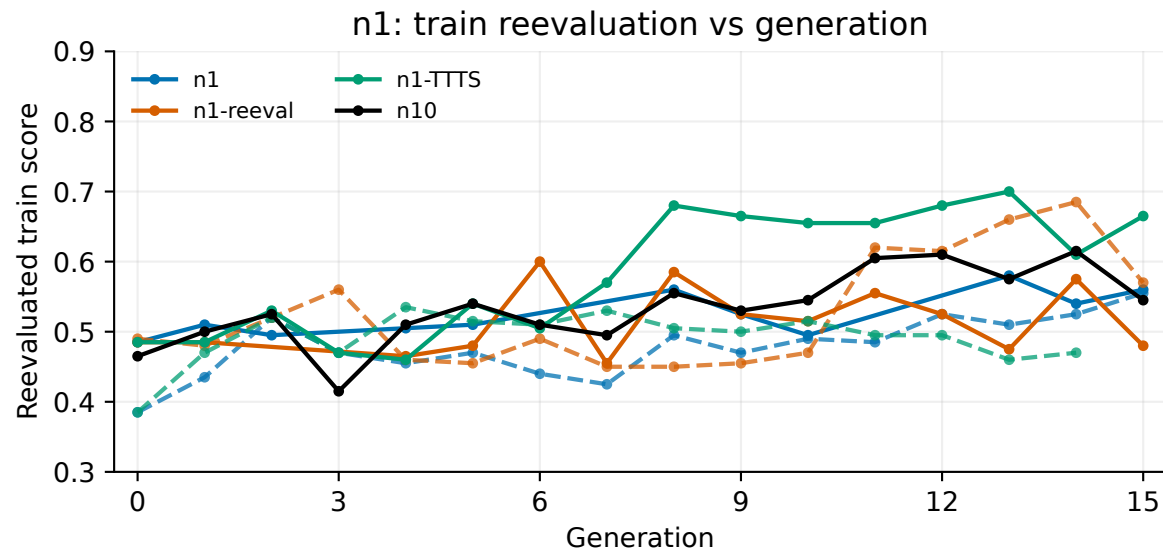

Each point: best candidate reevaluated on training tasks with 10 fresh seeds. Lines join observed points; missing diagnostics are not filled.
 Evaluations = cumulative evolution seed-runs (including selection reevaluations; excluding diagnostics). One seed-run covers the train task set.
 Completed seeds only; resumed n3 seed 2 includes its pre-resume history. n3-reeval uses population reevaluation, 3 → 10 seeds.