

Figure 1: Runtime of `rrr_vector` dependent on block size K .
 Compile options: `-msse4.2 -O9 -funroll-loops`
`-fomit-frame-pointer -ffast-math -DNDEBUG`.

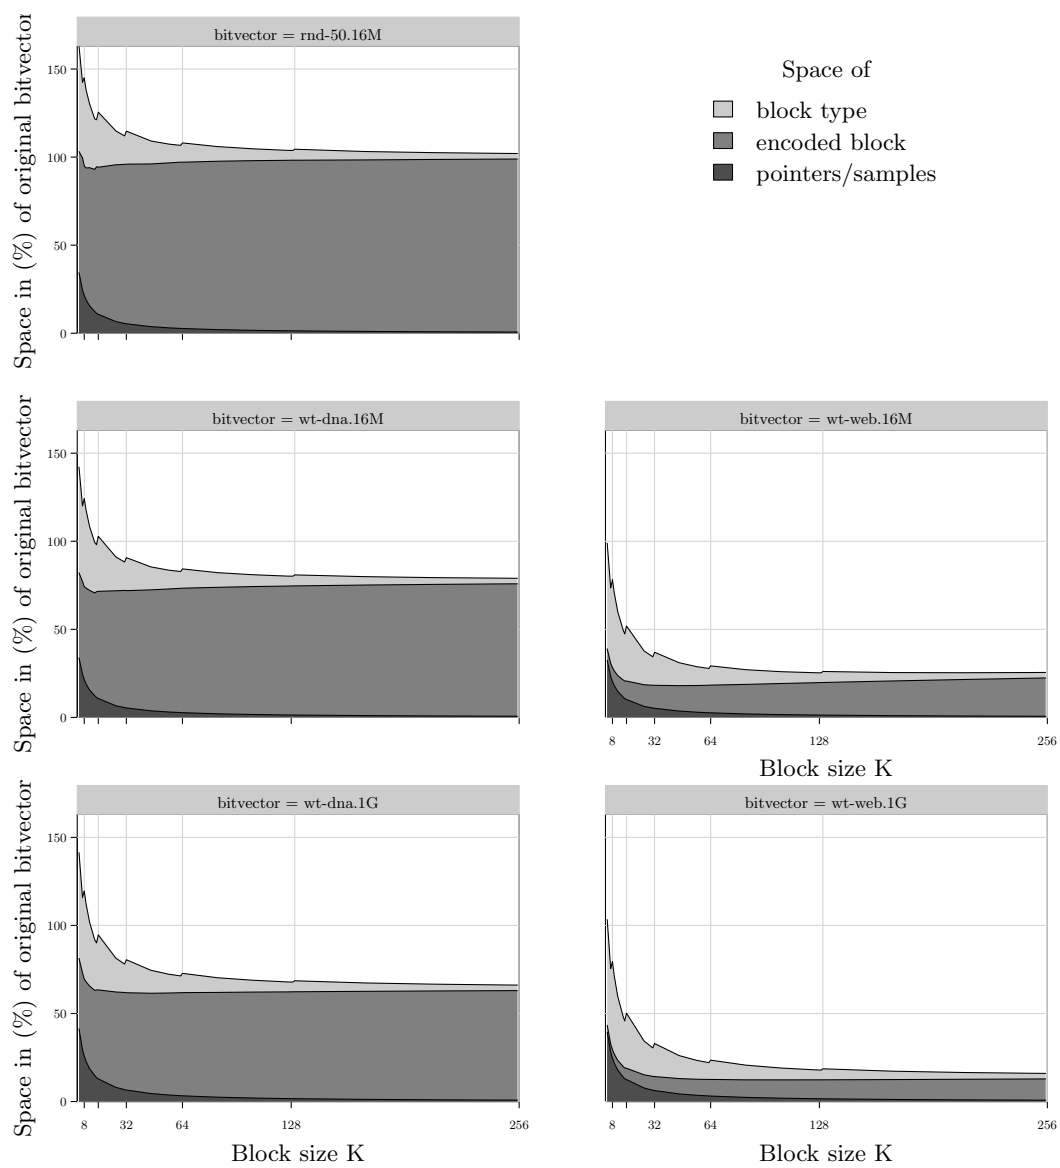


Figure 2: Space of `rrr_vector` dependent on block size `K`.