

# Aurora: An open-source python implementation of the EMTF package for magnetotelluric data processing using MTH5 and mt\_metadata

Karl N. Kappler<sup>1</sup>, Jared R. Peacock<sup>1</sup>, Gary D. Egbert<sup>2</sup>, Andrew Frassetto<sup>3</sup>, Lindsey Heagy<sup>4</sup>, Anna Kelbert<sup>1</sup>, Laura Keyson<sup>3</sup>, Douglas Oldenburg<sup>4</sup>, Timothy Ronan<sup>3</sup>, and Justin Sweet<sup>3</sup>

<sup>1</sup> United States Geological Survey, USA <sup>2</sup> Oregon State University, USA <sup>3</sup> Earthscope, USA <sup>4</sup> University of British Columbia, USA <sup>5</sup> Independent Researcher, USA

DOI: [10.xxxxxx/draft](https://doi.org/10.xxxxxx/draft)

## Software

- [Review](#)
- [Repository](#)
- [Archive](#)

Editor: [Open Journals](#)

## Reviewers:

- [@openjournals](#)

Submitted: 01 January 1970

Published: unpublished

## License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](#)).

## Summary

The Aurora software package robustly estimates single station and remote reference electromagnetic transfer functions (TFs) from magnetotelluric (MT) time series. Aurora is part of an open-source processing workflow that leverages the self-describing data container MTH5, which in turn leverages the general mt\_metadata framework to manage metadata. These pre-existing packages simplify the processing by providing managed data structures, allowing for transfer functions to be generated with only a few lines of code. The processing depends on two inputs – a table specifying the data to use for TF estimation, and a JSON file specifying the processing parameters, both of which are generated automatically, and can be modified if desired. Output TFs are returned as mt\_metadata objects, and can be exported to a variety of common formats for plotting, modelling and inversion.

## Introduction

MT is a geophysical technique for probing subsurface electrical conductivity using co-located electric and magnetic field measurements. After data collection, standard practice is to estimate the time invariant (frequency domain) transfer function (TF) between electric and magnetic channels before proceeding to interpretation and modelling. If measurements are orthogonal the TF is equivalent to the electrical impedance tensor ( $Z$ ) (Vozoff, 1991).

$$\begin{bmatrix} E_x \\ E_y \end{bmatrix} = \begin{bmatrix} Z_{xx} & Z_{xy} \\ Z_{yx} & Z_{yy} \end{bmatrix} \begin{bmatrix} H_x \\ H_y \end{bmatrix}$$

where  $(E_x, E_y)$ ,  $(H_x, H_y)$  denote orthogonal electric and magnetic fields respectively. TF estimation involves requires the E and H time series and metadata (locations, orientations, timestamps,) and uses a collection of signal processing and statistical techniques (Egbert (1997) and references therein). MTH5 supplies time series as xarray objects for efficient, lazy access to data and easy application of scientific computing libraries available in the python.

## Statement of Need

Uncompiled FORTRAN processing codes have long been available (e.g. EMTF Egbert et al. (2017), or BIRRP Chave (1989)) but lack the readability of high-level languages and modifications to these programs are seldom attempted (Egbert et al., 2017). Recently several python versions of MT processing codes have been released by the open source community,

including Shah et al. (2019), Smaï & Wawrzyniak (2020), Ajithabh & Patro (2023), and Friedrichs (2022). Aurora adds to this canon of options but differs by leveraging the MTH5 and mt\_metadata packages eliminating a need for internal development of time series or metadata containers. As a python representation of Egbert's EMTF Remote Reference processing software, Aurora provides a sort of continuity in the MT code space as the languages evolve. By providing an example workflow employing MTH5 we hope other developers may benefit from following this model, allowing researchers interested in signal-and-noise separation in MT to spend more time exploring and testing algorithms to improve TF estimates, and less time (re)-developing formats and management tools for data and metadata.


This manuscript describes the high-level concepts of the software – for information about MT data processing Ajithabh & Patro (2023) provides a concise summary, and more in-depth details can be found in Vozoff (1991), Egbert (2002) and references therein.

## Key Features

- Tabular Data indexing and management (pandas data frames),
- Dictionary-like Processing parameters configuration
- Both allow for programatic or manual editing.

A TF instance depends on two key prior decisions: a) The data input to the TF computation algorithm, b) The algorithm itself including the specific values of the processing parameters. Aurora formalizes these concepts as classes (KernelDataset and Processing, respectively), and a third class TransferFunctionKernel (TFK Figure 1), a composition of the Processing, and KernelDataset. TFK provides a place for validating consistency between selected data and processing parameters. and specifies all information needed to make the calculation of a TF reproducible (supporting the R in FAIRly archived TFs).

Generation of robust TFs can be done in only a few lines starting from an MTH5 archive (Figure 3). Simplicity of workflow is due to the MTH5 container already storing comprehensive metadata, including a channel summary table describing all time series stored in the archive including start/end times and sample rates. Users can easily view a tabular summary of available data and select station pairs to process. Once a station – and optionally a remote reference station – are defined, the simultaneous time intervals of data coverage at both stations are identified automatically, providing the Kernel Dataset. Reasonable starting processing parameters can be automatically generated for a given Kernel Dataset, and edited programatically or via a JSON file. Once the TFK is defined, the processing automatically follows the flow of Figure 2.

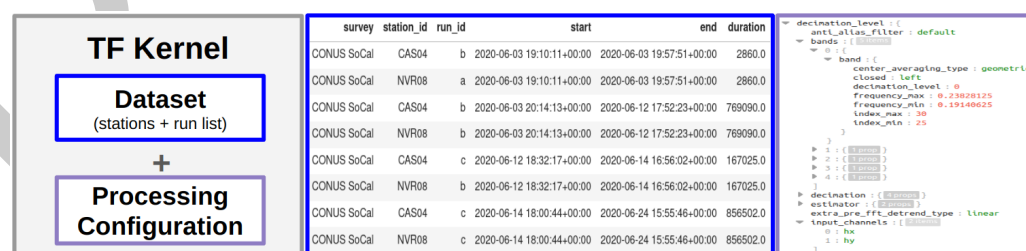

**Figure 1:** TF Kernel concept diagram: A box representing the TF Kernel with two inlay boxes representing the dataset (pandas DataFrame) and processing config (JSON). Processing config image is clipped to show only a few lines.

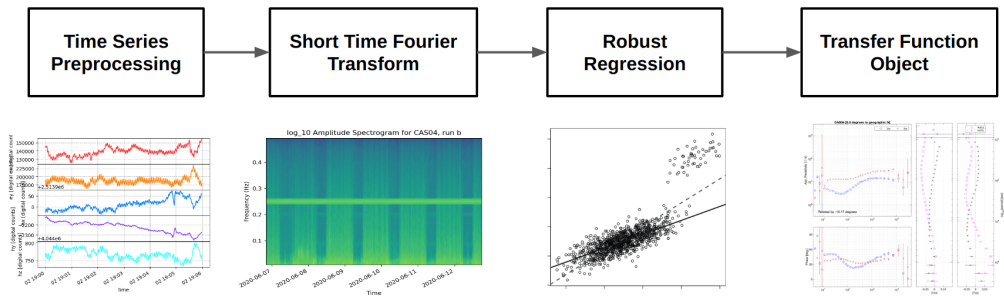


Figure 2: The main interfaces of Aurora TF processing. Example time series from mth5 archive in linked notebook (using MTH5 built-in time series plotting), spectrogram from FC data structure, cartoon from Hand (2018) and TF from SPUD. Input time series are from MTH5, these can initially be drawn from Phoenix, LEMI, FDSN, Metronix, Zonge, systems etc. and the resultant transfer functions can similarly export to most common TF formats such as .edi, .zmm, .j, .avg, .xml etc.

Examples

An example of the aurora data processing flow is given using data from Earthscope. This section refers to Jupyter notebooks intended as companions to this paper. A relatively general notebook about accessing Earthscope data with MTH5 can be found in the link from row 1 of Table 1.

Table 1: Referenced jupyter notebooks with links.


Table with 2 columns: ID, Link. Row 1: 1, earthscope\_magnetic\_data\_tutorial. Row 2: 2, make\_mth5\_driver\_v0.2.0. Row 3: 3, process\_cas04\_multiple\_station.

The MTH5 dataset can be built by executing the example notebook in row 2 of Table 1. The data processing can be executed by following the tutorial in row 3 of Table 1 – a condensed version of which is shown in Figure 3. Resultant apparent resistivities are plotted in Figure 4 along with the results hosted at Earthscope from EMTF.

```
from aurora.config.config_creator import ConfigCreator
from aurora.pipelines.process_mth5 import process_mth5
from aurora.pipelines.run_summary import RunSummary
from aurora.transfer_function.kernel_dataset import KernelDataset
```

```
run_summary = RunSummary()
run_summary.from_mth5s(["8P_CAS04_NVR08.h5",])
kernel_dataset = KernelDataset()
kernel_dataset.from_run_summary(run_summary, "CAS04", "NVR08")
cc = ConfigCreator()
config = cc.create_from_kernel_dataset(kernel_dataset)
tf = process_mth5(config, kernel_dataset)
tf.write(fn="CAS04_rrNVR08.edi", file_type="edi")
```

**Figure 3:** Code snippet with steps to generate a TF from an MTH5 (generated by row 2 of Table 1). With MTH5 file ("8P\_CAS04\_NVR08.h5") in present working directory, a table of available contiguous blocks of multichannel time series is generated ("RunSummary"). – In this example, the file contains data from two stations, "CAS04" and "NVR08" which are accessed from the EarthScope data archives – Then station(s) to process are selected (by inspection of the RunSummary dataframe) to generate a KernelDataset. The KernelDataset identifies simultaneous data at the local and reference site, and generates processing parameters, which can be edited before passing them to process\_mth5, and finally exporting TF to a standard output format, in this case edi.

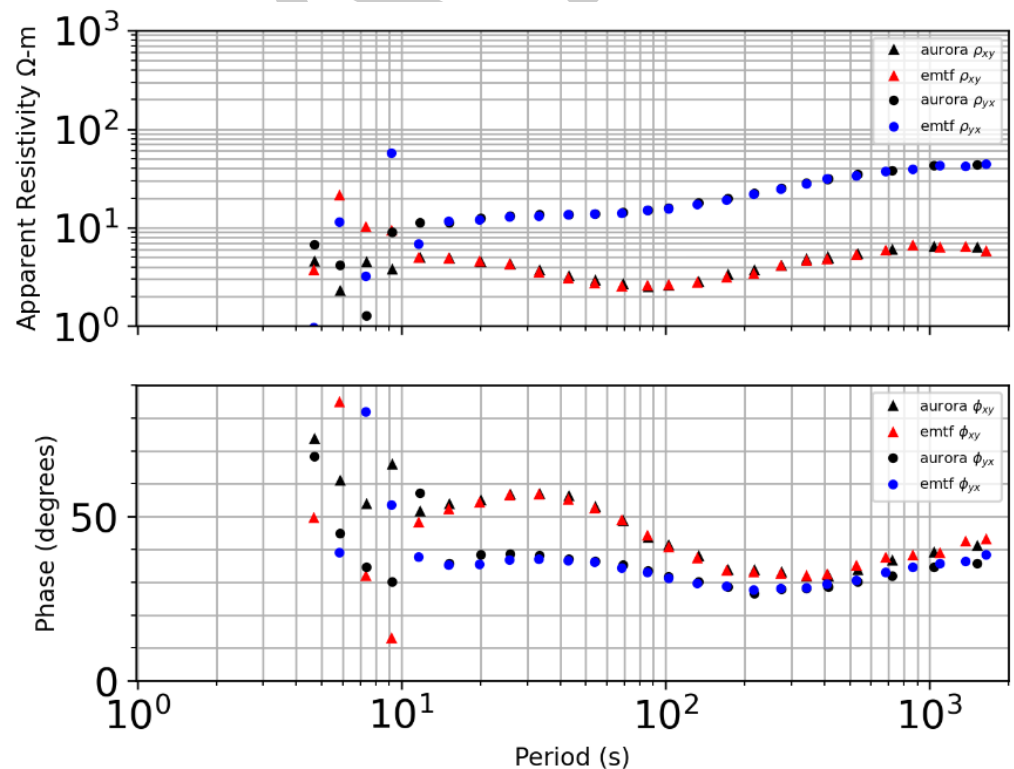

**Figure 4:** Comparison of apparent resistivities from Aurora and EMTF for station CAS04. Both curves exhibit scatter in the low SNR MT "dead band" between 1-10s, but most of estimates are very similar.

## Testing

Aurora uses continuous integration (Duvall et al., 2007) via unit and integrated tests, with ongoing improvement of test coverage is ongoing. Currently CodeCov measures 77% code coverage (core dependencies `mt_metadata` and `MTH5` at 84% and 60% respectively). Aurora uses a small synthetic MT dataset for integrated tests. On push to github the synthetic data are processed and the results compared against manually validated values that are also stored in the repo. Deviation from expected results causes test failures, alerting developers a code change resulted in an unexpected baseline processing result. In the summer of 2023, widescale testing on Earthscope data archives was performed indicating that the aurora TF results are similar to those from the EMTF fortran codes, in this case for hundreds of real stations rather than a few synthetic ones. Before PyPI, and conda forge releases, example Jupyter notebooks are also run via github actions.

## Future Work

Aurora uses github issues to track tasks and planned improvements. In the near future we want to add noise suppression techniques, for example coherence and polarization sorting and Mahalanobis distance (e.g. Ajithabh & Patro (2023), Platz & Weckmann (2019)). We would also like to develop, or plug into a graphical data selection/rejection interface with time series plotting. Besides these improvements to TF quality, we also would like to embed the TFKernel information into both the `MTH5` and the output `EMTF_XML` (Kelbert (2020)). Unit and integrated tests should be expanded, including a test dataset from audio MT band (most test data is sampled at 1Hz). Aurora will continue to codevelop with `mt_metadata`, `MTH5` and `MTPy` to maintain the ability to provide outputs for inversion and modelling. Ideally the community can participate in a comparative analysis of the opensource codes available to build a recipe book for handling noise from various open-archived datasets.

## Conclusion

Aurora provides an open-source Python implementation of the EMTF package for magnetotelluric data processing. Processing is relatively simple and requires very limited domain knowledge in time series analysis. Aurora also serves as a prototype worked example of how to plug processing into an existing opensource data and metadata ecosystem (`MTH5`, `mt_metadata`, & `MTPy`). We hope Aurora can be used as an example interface to these packages for the open source MT community, and that these tools will contribute to workflows which can focus more on geoscience analysis, and less on the nuances of data management.

## Appendix

### Installation Instructions

The package is installable via the Python Package Index (PyPI) as well as via conda-forge.

The installation in pip: `> pip install aurora`

And via conda forge: `> conda install aurora`

### Documentation

Documentation is hosted by SimPEG Cockett et al. (2015) and can be found at this [link](#)

## 118 Licence

119 Aurora is distributed under the [MIT](#) open-source licence.

## 120 Acknowledgments

121 The authors would like to thank IRIS (now Earthscope) for supporting the development of  
122 Aurora. Joe Capriotti at SimPEG helped with online documentation and the initial release.

123 TODO:

- 124 ☐ Spellcheck
- 125 ☐ Update links to ipynb to release branches after mth5/aurora releases.
- 126 ☐ remove draft watermark

127 Ajithabh, K., & Patro, P. K. (2023). SigMT: An open-source python package for magnetotelluric  
128 data processing. *Computers & Geosciences*, 171, 105270.

129 Chave, A. D. (1989). BIRRP: Bounded influence, remote reference processing. *Journal of*  
130 *Geophysical Research*, 94(B10), 14–215.

131 Cockett, R., Kang, S., Heagy, L. J., Pidlisecky, A., & Oldenburg, D. W. (2015). SimPEG:  
132 An open source framework for simulation and gradient based parameter estimation in  
133 geophysical applications. *Computers & Geosciences*.

134 Duvall, P. M., Matyas, S., & Glover, A. (2007). *Continuous integration: Improving software*  
135 *quality and reducing risk*. Pearson Education.

136 Egbert, G. D. (1997). Robust multiple-station magnetotelluric data processing. *Geophysical*  
137 *Journal International*, 130(2), 475–496.

138 Egbert, G. D. (2002). Processing and interpretation of electromagnetic induction array data.  
139 *Surveys in Geophysics*, 23(2-3), 207–249.

140 Egbert, G. D., Kelbert, A., & Meqbel, N. M. (2017). Mod3DMT and EMTF: Free software  
141 for MT data processing and inversion. *AGU Fall Meeting Abstracts*, 2017, NS44A–04.

142 Friedrichs, B. (2022). MTHotel. In *GitHub repository*. GitHub. [https://github.com/bfrmtx/](https://github.com/bfrmtx/MTHotel)  
143 [MTHotel](https://github.com/bfrmtx/MTHotel)

144 Hand, D. J. (2018). Statistical challenges of administrative and transaction data. *Journal of*  
145 *the Royal Statistical Society Series A: Statistics in Society*, 181(3), 555–605.

146 Kelbert, A. (2020). EMTF XML: New data interchange format and conversion tools for  
147 electromagnetic transfer functions. *Geophysics*, 85(1), F1–F17.

148 Platz, A., & Weckmann, U. (2019). An automated new pre-selection tool for noisy magne-  
149 totelluric data using the mahalanobis distance and magnetic field constraints. *Geophysical*  
150 *Journal International*, 218(3), 1853–1872.

151 Shah, N., Samrock, F., & Saar, M. O. (2019). Resistics: A versatile native python 3  
152 package for processing of magnetotelluric data. 28. *Schmucker-Weidelt-Kolloquium für*  
153 *Elektromagnetische Tiefenforschung*.

154 Smaï, F., & Wawrzyniak, P. (2020). Razorback, an open source python library for robust  
155 processing of magnetotelluric data. *Frontiers in Earth Science*, 8, 296.

156 Vozoff, K. (1991). *The Magnetotelluric Method*. [https://pubs.geoscienceworld.org/seg/](https://pubs.geoscienceworld.org/seg/books/book/2087/chapter-abstract/114406941/THE-MAGNETOTELLURIC-METHOD?redirectedFrom=fulltext)  
157 [books/book/2087/chapter-abstract/114406941/THE-MAGNETOTELLURIC-METHOD?](https://pubs.geoscienceworld.org/seg/books/book/2087/chapter-abstract/114406941/THE-MAGNETOTELLURIC-METHOD?redirectedFrom=fulltext)  
158 [redirectedFrom=fulltext](https://pubs.geoscienceworld.org/seg/books/book/2087/chapter-abstract/114406941/THE-MAGNETOTELLURIC-METHOD?redirectedFrom=fulltext)