


1.7.3 Creating & Using Hyperlinks

The <a> HTML element (or anchor element), with its href attribute, creates a hyperlink to web pages, files, email addresses, locations in the same page, or anything else a URL can address.

```
<!DOCTYPE html>
<html lang="en">
  <head>
    <meta charset="UTF-8" />
    <title>hyperlink in HTML</title>
  </head>
  <body>
    <h1>Hyperlink in HTML</h1>
    <!-- Hyperlink Example -->
    <a href="http://www.facebook.com" target= " _blank" > This is a link</a>
  </body>
</html>
```

Output:

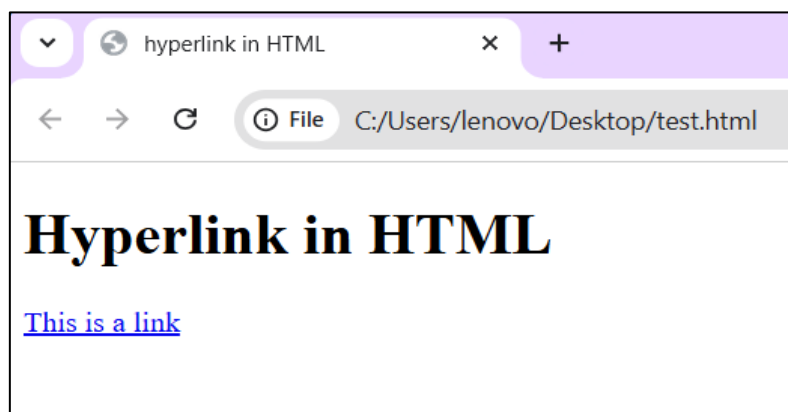

1.8 Accessibility & Semantic Considerations

Semantic elements = elements with a meaning.

Accessibility considerations focus on designing websites for users of all abilities, while semantic HTML provides the structural meaning and context that assistive technologies like

screen readers rely on to interpret content for visually impaired users and enable keyboard navigations.

When using lists in HTML, it is important to follow semantic and accessibility best practices to ensure that content is understandable and navigable for all users, including those using assistive technologies. **Semantic HTML means using the correct tags for their intended purpose:** `<ul>` for unordered lists, `<ol>` for ordered lists, `<dl>` for description lists, and `<nav>` for navigation menus. This not only improves readability for developers but also allows screen readers and other assistive tools to interpret the structure of the content accurately.

For navigation menus, wrapping menu items inside `<li>` elements within a `<ul>` and enclosing the whole menu in a `<nav>` element provides clear semantic meaning. Each link (`<a>` tag) should have descriptive text, avoiding generic phrases like “Click here,” so users understand the purpose of each link. Proper use of semantic tags helps screen readers announce the type and number of items in a list, enabling users to navigate efficiently.

Other accessibility considerations include maintaining sufficient color contrast, providing visible focus indicators for keyboard navigation, and avoiding excessive list nesting that may confuse users. Following these semantic and accessibility principles ensures that HTML lists are both meaningful and user-friendly across different devices and abilities.

Accessibility & Semantic Features in this Example: semantic glossary using a description list (`<dl>`). Each term (`<dt>`) like “HTML” or “CSS” is paired with its description (`<dd>`), making the relationship clear. Semantic tags help screen readers announce terms and definitions correctly, improving accessibility. Optional id attributes allow linking directly to specific terms. CSS can style the list for readability without affecting its structure, ensuring the glossary is both user-friendly and accessible.

Example:

```
<!DOCTYPE html>
<html lang="en">
<head>
</head>
<body style="background-color: #ffb6c1;">
  <h2>Web Development Glossary</h2>
  <dl>
    <dt id="html-term">HTML</dt>
    <dd>
      HyperText Markup Language, the standard language for creating web pages.
    </dd>
    <dt id="css-term">CSS</dt>
    <dd>
      Cascading Style Sheets, used for styling and layout of web pages.
    </dd>
    <dt id="js-term">JavaScript</dt>
    <dd>
      A programming language used to make web pages interactive.
    </dd>
    <dt id="api-term">API</dt>
    <dd>
      Application Programming Interface, a set of rules that allows software
      programs to communicate with each other.
    </dd>
  </dl>
</body> </html>
```

Output:

Web Development Glossary

HTML

HyperText Markup Language, the standard language for creating web pages.

CSS

Cascading Style Sheets, used for styling and layout of web pages.

JavaScript

A programming language used to make web pages interactive.

API

Application Programming Interface, a set of rules that allows software programs to communicate with each other.

Practical Use case:

1. A company website lists its main navigation items like Home, About, Services, and Contact. Additionally, a product page lists key features using bullet points.

Code:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1.0" />
  <title>HTML</title>
</head> <body style="background-color: rgb(180, 233, 120);">
  <!-- Navigation Menu -->
  <h3>Company Navigation Menu</h3>
  <nav aria-label="Main Navigation">
    <ul>
      <li><a href="index.html">Home</a></li>
      <li><a href="about.html">About</a></li>
      <li><a href="services.html">Services</a></li>
      <li><a href="contact.html">Contact</a></li>
    </ul> </nav> <!-- Product Features -->
  <h3>Product Key Features</h3>
  <div class="features">
    <ul>
      <li>High-speed performance</li>
      <li>Durable design</li>
      <li>Affordable price</li>
      <li>24/7 customer support</li>
    </ul> </div> </body> </html>
```

Output:



2. A cooking website lists a recipe where steps must be followed in order, such as mixing ingredients, baking, and serving.

Code:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1.0" />
  <title>HTML</title>
</head>
<body>
  <h1>Welcome to My Cooking Page</h1>
  <p>This page contains a simple recipe for baking a cake.</p>

  <h3>Recipe: How to Bake a Cake</h3>
  <ol>
    <li>Preheat the oven to 180°C (350°F).</li>
    <li>Mix flour, sugar, eggs, and butter in a bowl.</li>
    <li>Pour the batter into a greased baking tray.</li>
    <li>Bake for 25–30 minutes or until golden brown.</li>
    <li>Remove from oven and let it cool.</li>
    <li>Serve and enjoy!</li>
  </ol>
</body>
</html>
```

Output:

Welcome to My Cooking Page

This page contains a simple recipe for baking a cake.

Recipe: How to Bake a Cake

1. Preheat the oven to 180°C (350°F).
2. Mix flour, sugar, eggs, and butter in a bowl.
3. Pour the batter into a greased baking tray.
4. Bake for 25–30 minutes or until golden brown.
5. Remove from oven and let it cool.
6. Serve and enjoy!

3. A web development tutorial defines terms like HTML, CSS, and JavaScript.

Code:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1.0" />
  <title>HTML</title>
</head>
<body style="background-color: rgb(180, 233, 120);">
  <h3>Web Development Glossary</h3>
  <dl>
    <dt>HTML</dt>
    <dd>HyperText Markup Language, used to structure content on the web.</dd>
    <dt>CSS</dt>
    <dd>Cascading Style Sheets, used to style and layout web pages.</dd>
    <dt>JavaScript</dt>
    <dd>A programming language that makes web pages interactive.</dd>
    <dt>API</dt>
    <dd>Application Programming Interface, allows communication between
software programs.</dd>
  </dl>
</body>
</html>
```

Output:

Web Development Glossary

HTML

HyperText Markup Language, used to structure content on the web.

CSS

Cascading Style Sheets, used to style and layout web pages.

JavaScript

A programming language that makes web pages interactive.

API

Application Programming Interface, allows communication between software programs.

4. An e-commerce website has a main category “Products” with subcategories “Electronics” and “Clothing.” Electronics further includes “Mobiles” and “Laptops.”

Code:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8" />
  <meta name="viewport" content="width=device-width, initial-scale=1.0" />
  <title>HTML</title>
</head>
<body style="background-color: rgb(180, 233, 120);">
  <h3>Product Categories</h3>
  <ul>
    <li>Products
      <ul>
        <li>Electronics
          <ul>
            <li>Mobiles</li>
            <li>Laptops</li>
          </ul>
        </li>
        <li>Clothing</li>
      </ul>
    </li>
    <li>About Us</li>
    <li>Contact</li>
  </ul>
</body>
</html>
```

Output:

Product Categories

- Products
 - Electronics
 - Mobiles
 - Laptops
 - Clothing
- About Us
- Contact