


Topic-Concept of console.error() and console.warn()

Code snippet 1

```
index0.html code0.js
day21-DOM > index0.html > html > body > script
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>Document</title>
7 </head>
8 <body>
9   <script src="code0.js"></script>
10 </body>
11 </html>
```

```
index0.html code0.js
day21-DOM > code0.js
1 console.error("it is used to print some error's that has occurred by the code");
2 
3 console.warn("it is used to print the warning's that has occurred by the code");
```


*console.error() is used to print the error's.
console.warn() is used to print the warnings.*

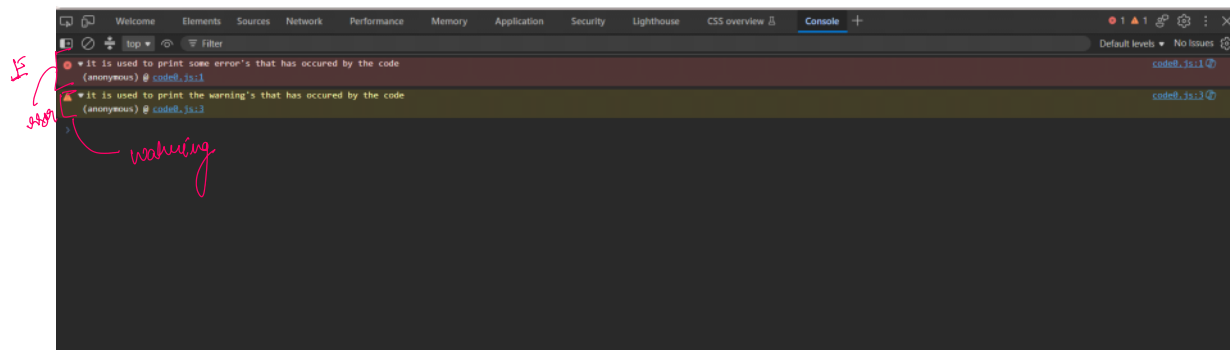

Topic-Concept of window in js:

Window is part of a browser not js. You can consider the window as a browser's window.

The window object is the **global object for JavaScript running in a web browser environment**. It represents the browser window or tab containing the webpage

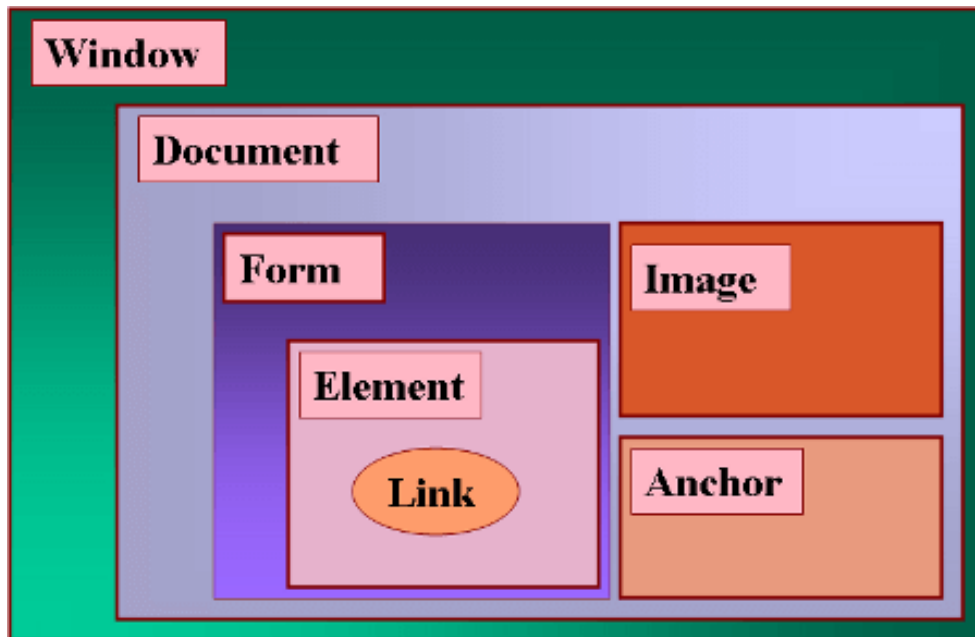


Code snippet 1-using window.alert()


```
index0.html  code0.js
day21-DOM > index0.html > html
1  <!DOCTYPE html>
2  <html lang="en">
3  <head>
4      <meta charset="UTF-8">
5      <meta name="viewport" content="width=device-width, initial-scale=1.0">
6      <title>Document</title>
7  </head>
8  <body>
9      <script src="code0.js"></script>
10 </body>
11 </html>


code0.js
day21-DOM > code0.js
1  window.alert("hi, there!");
```

here, i have used the window.alert() function

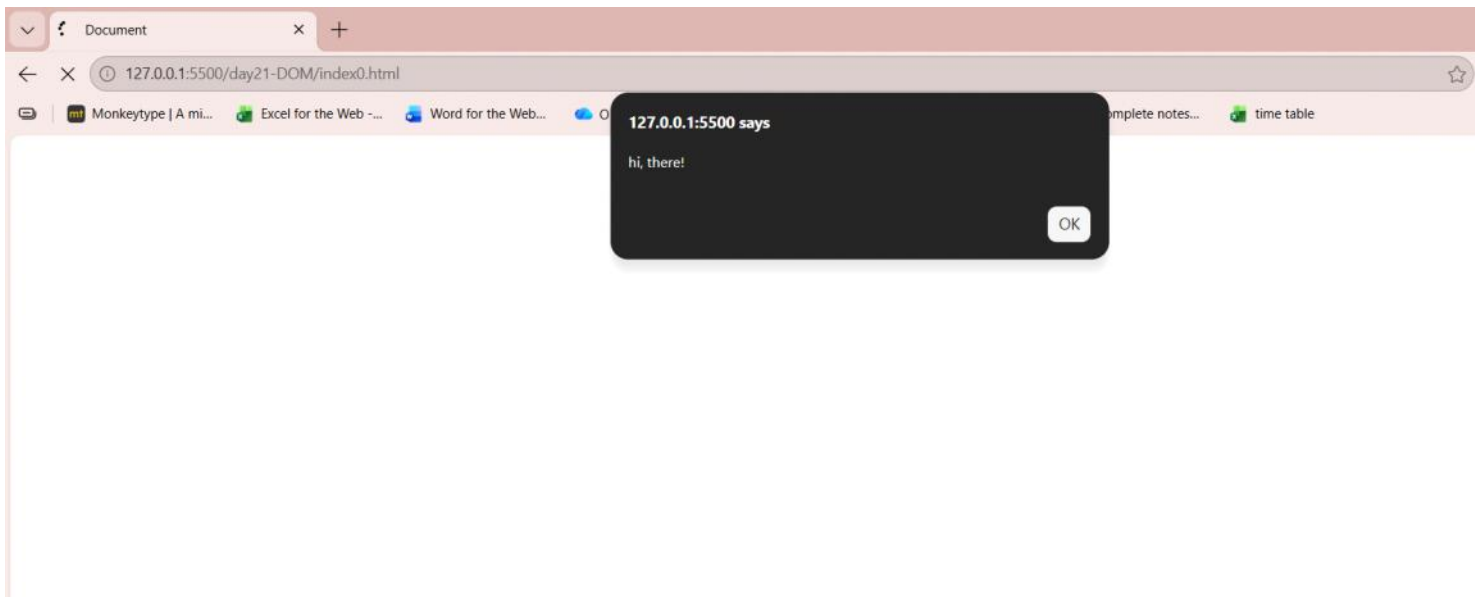


Code snippet 2-using alert()

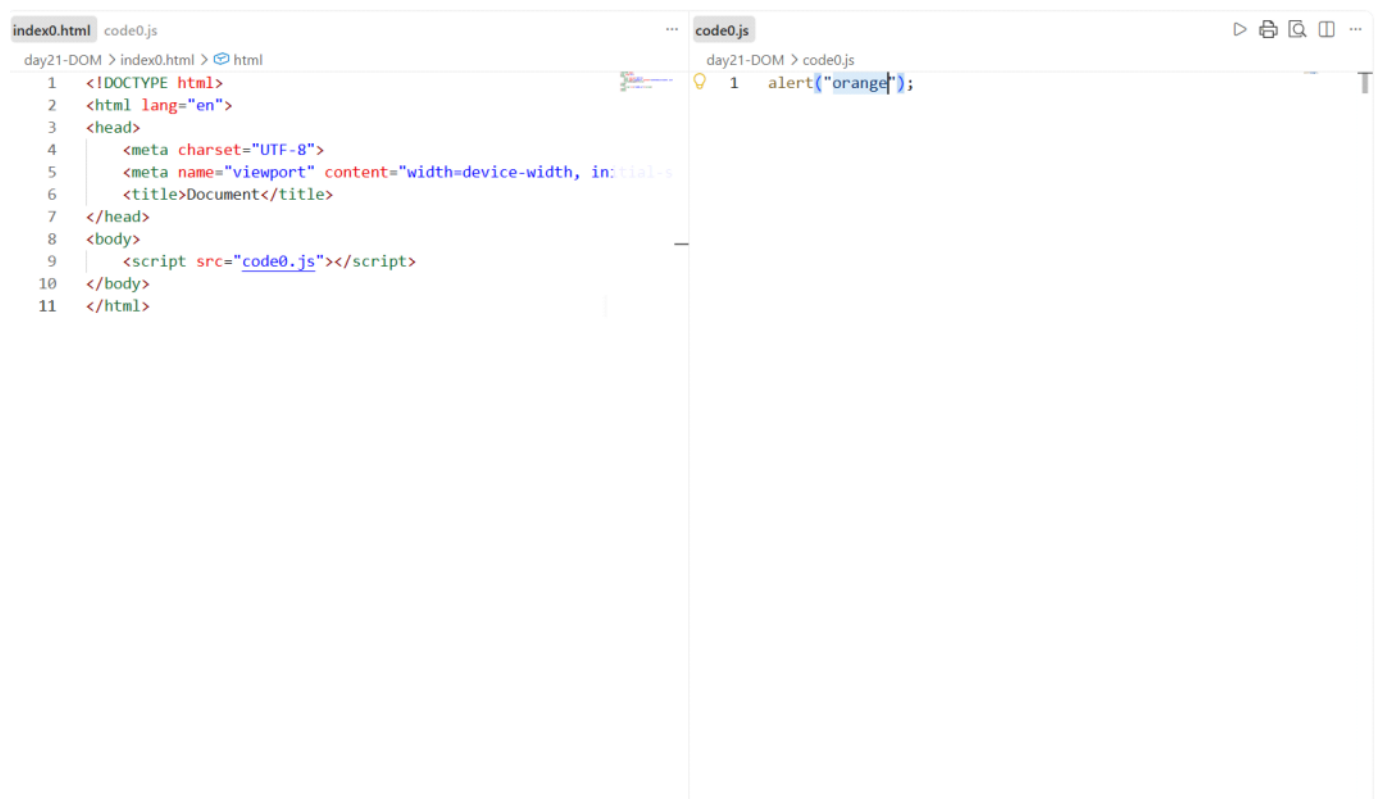

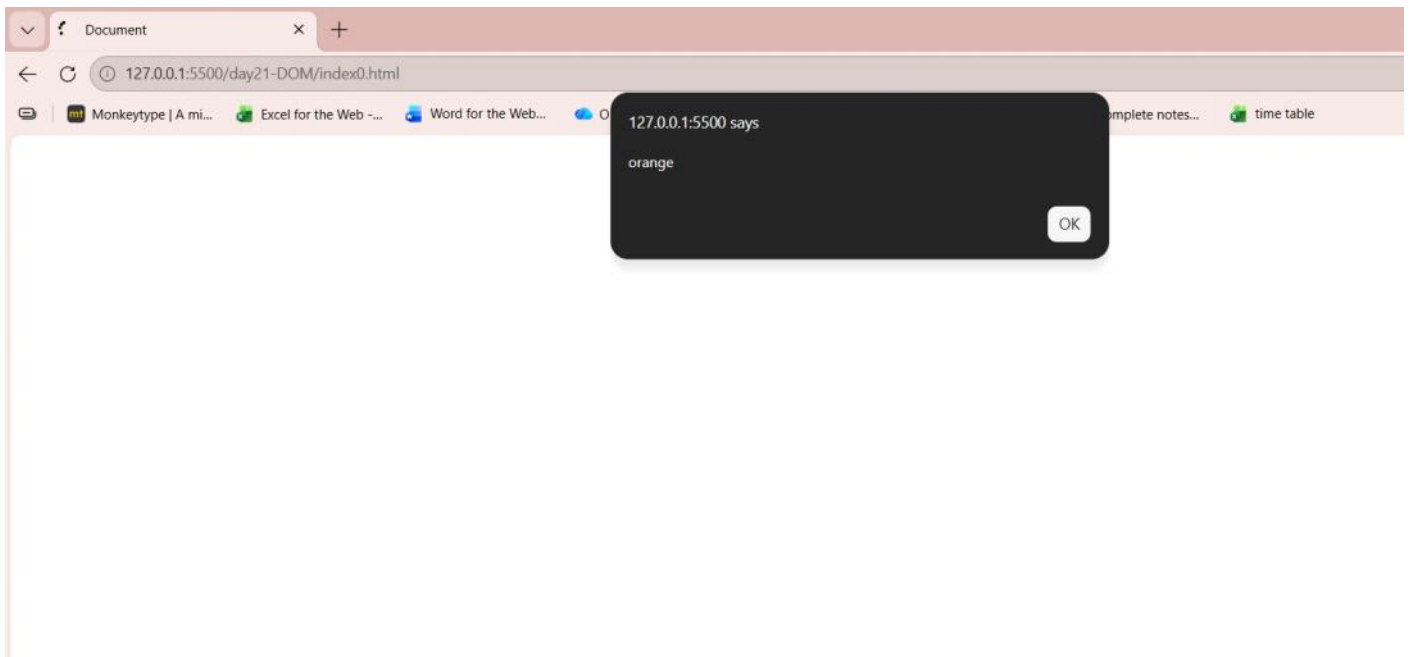

Code snippet 3-using prompt method to take input from the user




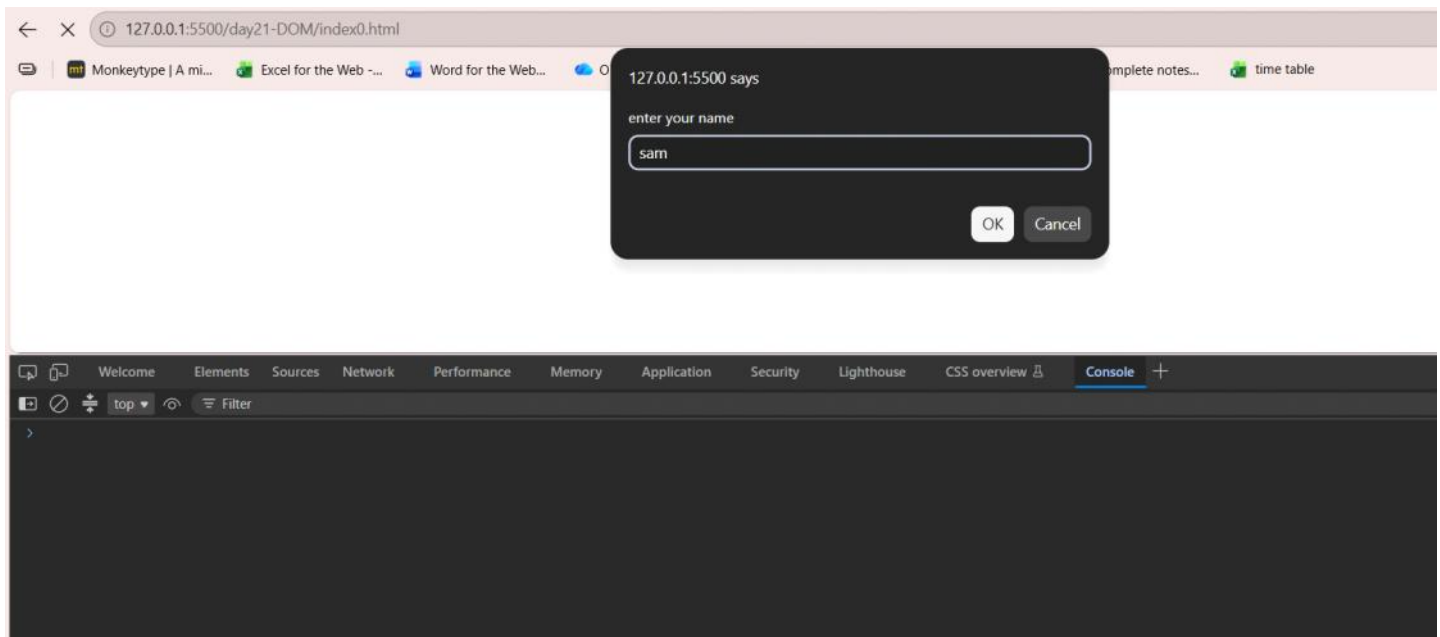

Code snippet 4- using window globally and inside the function

The window object is the **global object for JavaScript running in a web browser environment**. It represents the browser window or tab containing the webpage



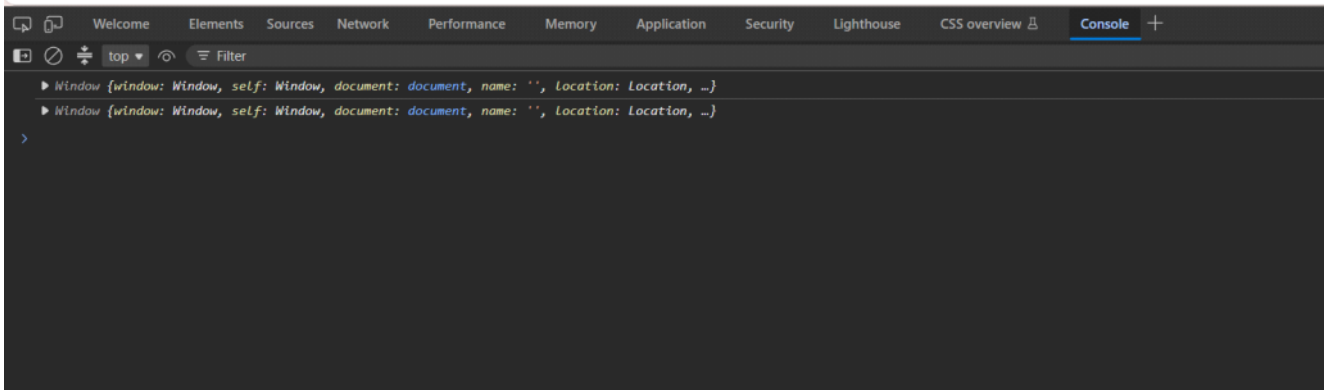

Topic-closure in JavaScript:

A function (basically, the parent function) which returns another function (i.e. child function), and the child function uses some value of its parent function.

Code snippet 1

