

# HANDSON-Microservices:

## Exercise 1: Creating Account Microservice

```
package com.cognizant.account;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;

@SpringBootApplication
public class AccountApplication {

    public static void main(String[] args) {
        SpringApplication.run(AccountApplication.class, args);
    }
}
```

```
package com.cognizant.account.controller;

import com.cognizant.account.model.Account;
import org.springframework.web.bind.annotation.*;

@RestController
@RequestMapping("/accounts")
public class AccountController {


    @GetMapping("/{number}")
    public Account getAccount(@PathVariable String number) {

        return new Account(
            number,
            type: "Savings",
            balance: 234343
        );
    }
}
```

← → ↻ ⓘ localhost:8080/accounts/00987987973432

pretty print ☐

```
{"number":"00987987973432","type":"Savings","balance":234343.0}
```

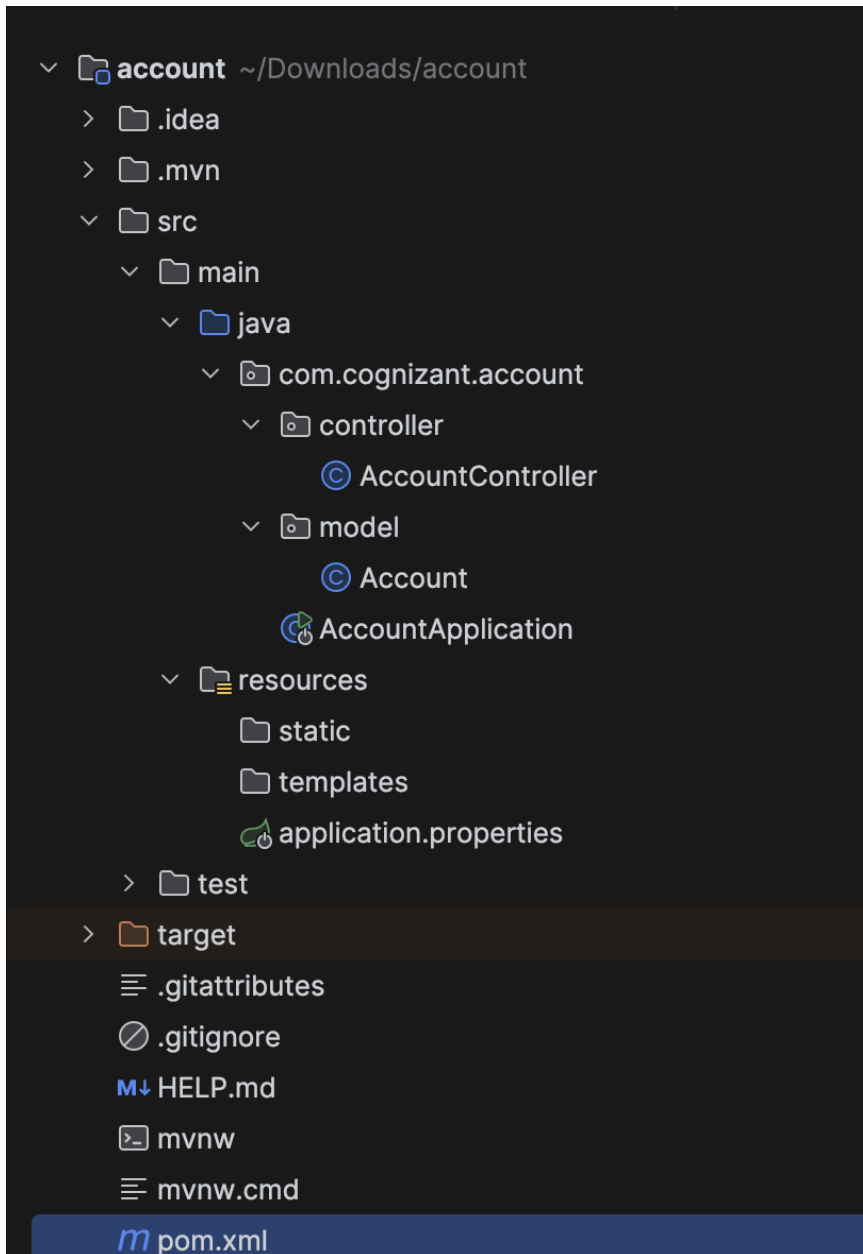

## Exercise 2: Creating Loan Microservice:

GET

http://localhost:8081/loans/H00987987972342

Send

Docs

Params

Auth

Headers (7)

Body

Scripts

Settings

raw

JSON

Schema

1

^P to Ask AI

Body

200 OK

160 ms

238 B

{}

JSON

Preview

Visualize

1

{

2

"number": "H00987987972342",

3

"type": "Car",

4

"loan": 400000.0,

5

"emi": 3258.0,

6

"tenure": 18

7

}

GET

http://localhost:8080/accounts/00987987973...

Send

Docs

Params

Auth

Headers (7)

Body

Scripts

Settings

raw

JSON

Schema

1

^P to Ask AI

Body

200 OK

121 ms

219 B

{}

JSON

Preview

Visualize

1

{

2

"number": "00987987973432",

3

"type": "Savings",

4

"balance": 234343.0

5

}

```

package com.cognizant.loan.controller;

import com.cognizant.loan.model.Loan;
import org.springframework.web.bind.annotation.*;

@RestController
@RequestMapping("/loans")
public class LoanController {

    @GetMapping("/{number}")
    public Loan getLoan(@PathVariable String number) {

        return new Loan(
            number,
            type: "Car",
            loan: 400000,
            emi: 3258,
            tenure: 18
        );
    }
}

```

```

package com.cognizant.loan.model;

public class Loan {
    no usages

    private String number; 3 usages
    private String type; 3 usages
    private double loan; 3 usages
    private double emi; 3 usages
    private int tenure; 3 usages

    public Loan() { no usages
    }

    public Loan(String number, String type, double loan, double emi, int tenure) {
        this.number = number;
        this.type = type;
        this.loan = loan;
        this.emi = emi;
        this.tenure = tenure;
    }

    public String getNumber() { no usages
        return number;
    }

    public void setNumber(String number) { no usages
        this.number = number;
    }

    public String getType() { no usages
        return type;
    }

    public void setType(String type) { no usages
        this.type = type;
    }
}

```

```

    public String getType() { no usages
        return type;
    }

    public void setType(String type) { no usages
        this.type = type;
    }

    public double getLoan() { no usages
        return loan;
    }

    public void setLoan(double loan) { no usages
        this.loan = loan;
    }

    public double getEmi() { no usages
        return emi;
    }

    public void setEmi(double emi) { no usages
        this.emi = emi;
    }

    public int getTenure() { no usages
        return tenure;
    }

    public void setTenure(int tenure) { no usages
        this.tenure = tenure;
    }
}

```

```

package com.cognizant.loan;

> import ...

@SpringBootApplication
public class LoanApplication {

    public static void main(String[] args) {

        SpringApplication.run(LoanApplication.class, args);

    }

}

```

```

package com.cognizant.account.controller;

import com.cognizant.account.model.Account;
import org.springframework.web.bind.annotation.*;

@RestController
@RequestMapping("/accounts")
public class AccountController {

    @GetMapping("/{number}")
    public Account getAccount(@PathVariable String number) {

        return new Account(
            number,
            type: "Savings",
            balance: 234343
        );
    }
}

```

```

package com.cognizant.account.model;

public class Account { 3 usages

    private String number; 3 usages
    private String type; 3 usages
    private double balance; 3 usages

    public Account() { no usages
    }

    public Account(String number, String type, double balance) { 1 usage
        this.number = number;
        this.type = type;
        this.balance = balance;
    }

    public String getNumber() { return number; }

    public void setNumber(String number) { this.number = number; }

    public String getType() { return type; }

    public void setType(String type) { this.type = type; }

    public double getBalance() { return balance; }

    public void setBalance(double balance) { no usages
        this.balance = balance;
    }
}

```

```
package com.cognizant.account;

import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;

@SpringBootApplication
public class AccountApplication {

    public static void main(String[] args) {

        SpringApplication.run(AccountApplication.class, args);
    }
}
```