
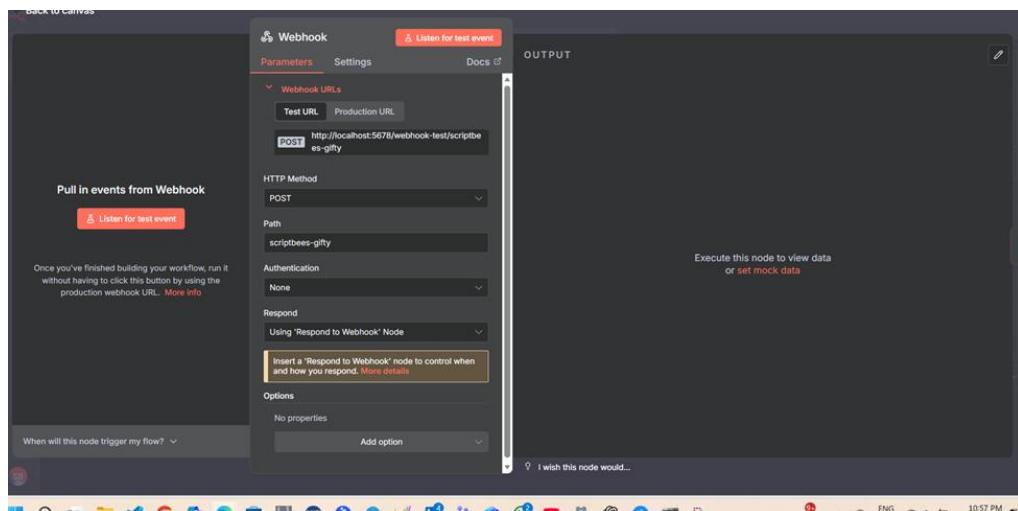


N8n workflow steps:

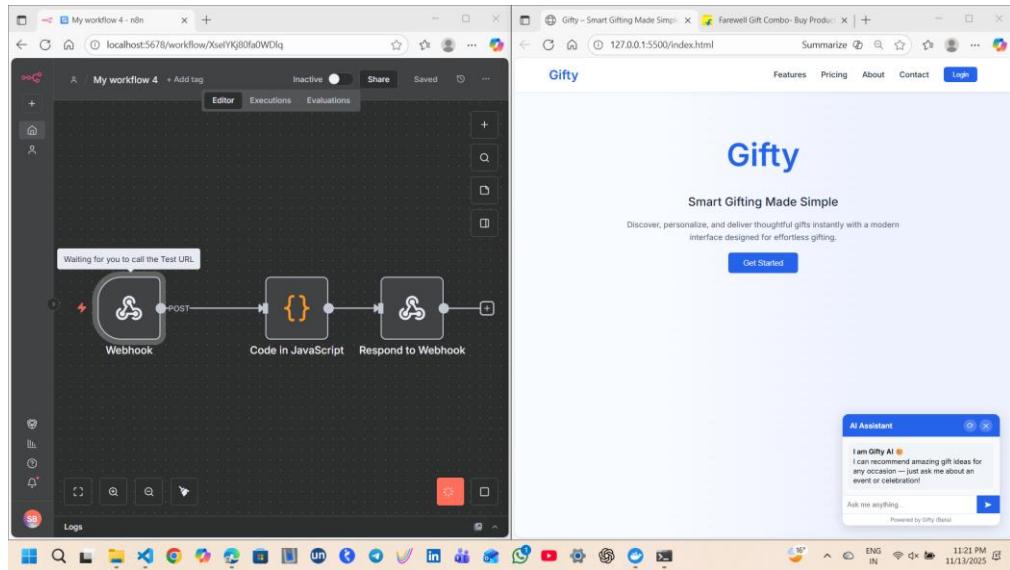

The fields below come from the last successful execution. Execute node to refresh them.

headers

host

connection

content-length

sec-ch-ua-platform

user-agent

sec-ch-ua

content-type

sec-ch-ua-mobile

accept

origin

sec-fetch-site

sec-fetch-mode

sec-fetch-dest

referel

const userMessage = (\$json.body?.message || "").toLowerCase();
let reply = "";

// GIFTY responses
const qabeta = [
 { q: "what is gifty", a: "Gifty is an AI-powered assistant that helps you find perfect gifts for any occasion." },
 { q: "who created you", a: "I was created by the ScriptBees team to make gifting smarter and easier!" },
 { q: "how to use gifty", a: "Simply tell me the occasion or person, and I'll suggest thoughtful gifts instantly." },
 { q: "what can you do", a: "I can suggest personalized gifts, share product links, and help you explore ideas for birthdays, anniversaries, farewells, and more!" }
];

for (const q of userMessage) {
 const a = qabeta.find((qa) => qa.q === q);
 if (a) {
 reply += a.a + "\n";
 }
}

return { reply };

Execute this node to view data
or set mock data

The fields below come from the last successful execution. Execute node to refresh them.

reply

Webhook

Variables and context

Verify that the "Webhook" node's "Respond" parameter is set to "Using Respond to Webhook Node". [More details](#)

First Incoming Item

Response Code

200

Add option

Execute this node to view data
or set mock data