Lab Exercise 04 – Add JavaScript to a web page

Objectives

By the end of this lab session, you will familiarize with basic programming constructs and functions in scripting languages using JavaScript (JS).

Introduction

- JavaScript is a scripting language for web-based systems.
- It can calculate, manipulate, validate data and change content in both HTML and CSS.
- There are three ways to use JS in an HTML page.
 - o JS in <head>

It adds JS content inside <script> tag which is in inside of the <head>.

o JS in <body>

Write functions inside body

- Using an external file (preferred)
- All JavaScript variables must be identified with unique names along with 'var' keyword.

```
Ex: var person = "John Doe"
```

- There are 2 basic types of JS arrays.
 - o Indexed Arrays Access elements using numerical indexes.

```
Ex: fruits = ["Banana", "Orange", "Apple", "Mango"];
```


o Associative Arrays - Access elements using user given indexes.

```
Ex: var vehicle = [];
vehicle ["brand"] = "Honda";
vehicle ["model"] = "fit";
vehicle ["number"] = 5146;
```

Lab Exercise 04 – Add JavaScript to a web page

Exercise 1:

Following is the outcome of today's lab session.

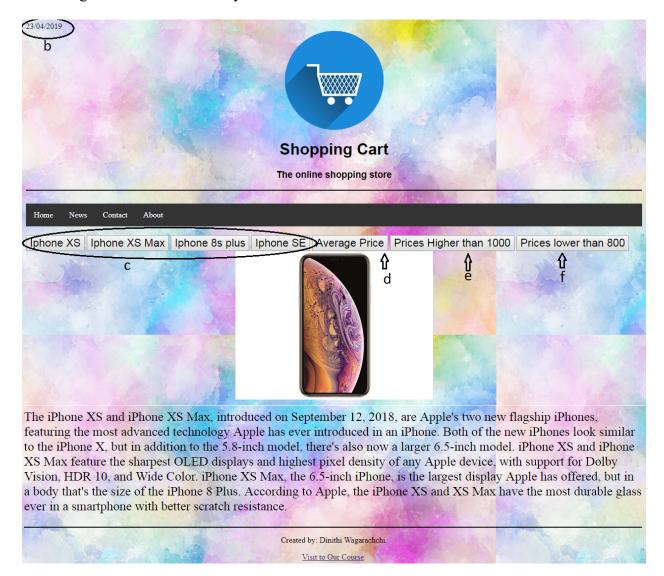

- Go to the IWT folder structure which you created on the first lab session.
- Create a file named "myScript.js" inside the "IWT/js" folder.
- Create a file named "news.html" and save it inside "IWT/src" folder.
- Open the "index.html" file.
- Link that file to the "NEWS" button in the index.html

Lab Exercise 04 – Add JavaScript to a web page

- Copy the entire code in the "index.html" file and paste it in the "news.html".
- Delete the content between navigation bar and the footer.
- Fill the following boxes with the relevant codes for the given activities and edit the "news.html" file.
 - I. Display the Date
 - Display the system date as a text in the top of the web page.
 - Write JS inside the <head> tag.

https://www.w3schools.com/jsref/met_doc_write.asp

- II. If/else conditional statements
 - Create multiple buttons (at least 3) by product names in **news.html**.
 - Create a function named loadData() inside **myScript.js.** add a string parameter into that.

Ex - loadData(data)

- Send the name of the button when clicking that button into the above created function.
- Inside loadData(), check whether which button has clicked using if else statement.
- And display an image and text according to the selected button.

If/else - https://www.w3schools.com/js/js if else.asp

String comparison - https://www.w3schools.com/js/js comparisons.asp

Change text - https://www.w3schools.com/js/js htmldom html.asp

Change image - https://www.w3schools.com/jsref/prop img src.asp

BSc (Hons) in Information Technology Year 1, Semester II, 2023 IT1100 – Internet and Web Technologies

Lab Exercise 04 – Add JavaScript to a web page

III. Loops

- a) For Loop
 - Create a button named "average Price" in **news.html**.
 - Create a function called priceForLoop() in myScript.js.
 - Create an array with product name and price in the function.

Ex – ["product X - \$100", "product Y - \$200"];

Arrays - https://www.w3schools.com/js/js arrays.asp

• Display the array elements using a for loop as shown below.

For loop - https://www.w3schools.com/js/js loop for.asp

Iphome XS	Iphome XS Max	Iphome 8s plus	Iphome SE	Average Price
Iphone XS -	\$1,349			
Iphone XS -	\$1.349			
Iphone XS -	A TORONTO CONTRACTOR OF THE PARTY OF THE PAR			
Iphone 8 plu	s- \$599			
Iphone SE -				

BSc (Hons) in Information Technology Year 1, Semester II, 2023 IT1100 – Internet and Web Technologies

Lab Exercise 04 – Add JavaScript to a web page

 <u> </u>
b) For In Loop
 Redo the above function using a for-in loop and name the function as "productForInLoop()".
• Display the data as the above given example.
https://www.w3schools.com/jsref/jsref_forin.asp

BSc (Hons) in Information Technology Year 1, Semester II, 2023 IT1100 – Internet and Web Technologies

Lab Exercise 04 - Add JavaScript to a web page

	Lab Exercise 64 Add Javaseript to a tree page
c) For In	1 Loop
•	Create a button named "Prices higher than 1000".
•	Create a function named "priceHigher()" in the myScript.js file.
•	Call that function in the button click event.
•	Create an array which contains at least 5 values (at least 2 must be higher
	than 1000 and 2 must be lower).
•	Display the array elements which have the prices higher than 1000.
d) For Ir	- T
d) For In	-
•	Create a button named "Prices lower than 1000".
•	Create a function named "priceLower()" in the myScript.js file.
•	Call that function when the button click event.
	Copy and paste the array which has created in the above exercise.



BSc (Hons) in Information Technology Year 1, Semester II, 2023 IT1100 – Internet and Web Technologies

Lab Exercise 04 – Add JavaScript to a web page

Exercise 2: Write a program to calculate the sum of first 10 natural numbers. (While loop)				
,	3			
<i>.</i> Ļ	5	6		
7	8	9	10	