
## **Cucumber Report**

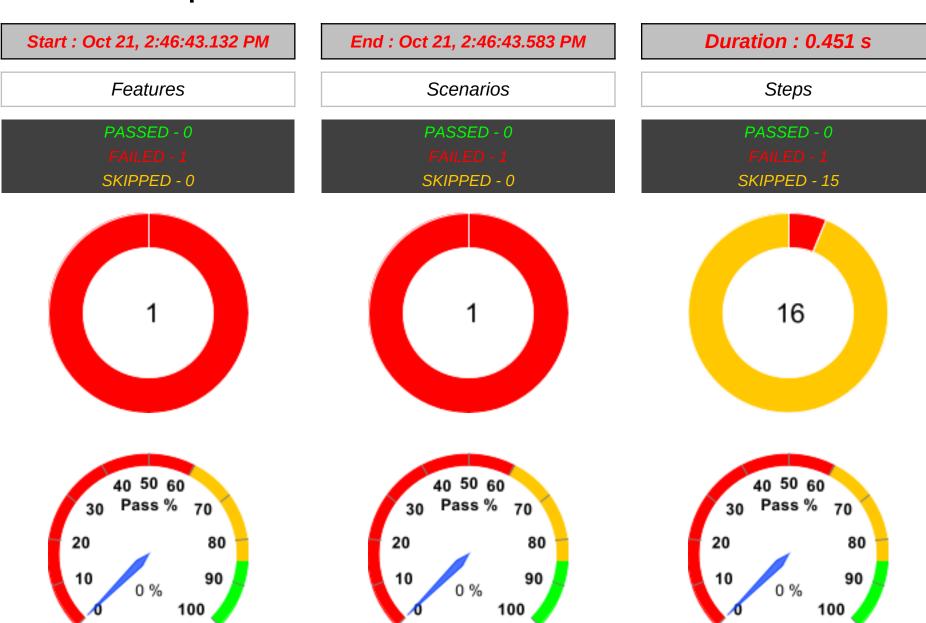

Feature		Scenario			Step				
Name	Duration	T	P	F	S	T	P	F	S
<u>API</u>	0.451 s	1	0	1	0	16	0	1	15

FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
1	<u>API</u>	<u>First scenario</u>


TAG		Scei	nario			Fea	ture	
Name	T	P	F	S	T	P	F	S
@api	1	0	1	0	1	0	1	0

FEATURES SUMMARY -- 5 --



#	Feature Name	T	P	F	S	Duration
1	<u>API</u>	1	0	1	0	0.451 s


SCENARIOS SUMMARY

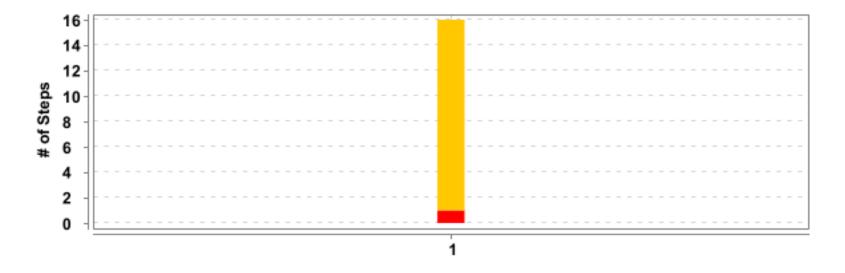


#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>API</u>	<u>First scenario</u>	16	0	1	15	0.451 s

DETAILED SECTION -- 7 --

## **API**

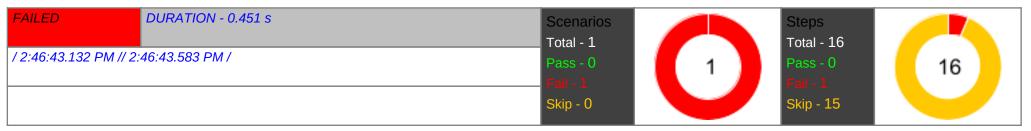

## **First scenario**

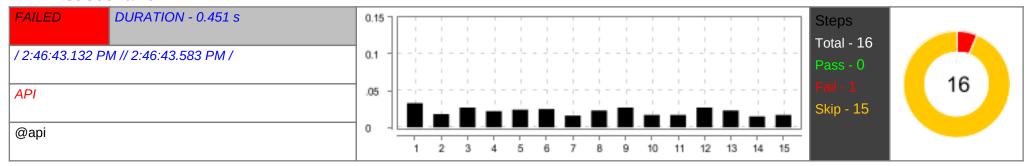

#	Step / Hook Details	Status	Duration
1	And compose a post request to "https://test-aws-web.vastucorp.com/api/sales_timesheet_view" with headers	FAILED	0.033 s
	io.cucumber.core.exception.CucumberException: Step [^compose a (get post put patch delete) request to "([^"]*)" with headers\$ io.cucumber.core.exception.CucumberException: Step [^compose a (get post put patch delete) request to "([^"]*)" with headers\$ is defined with 3 parameters at 'com.nimble.stepDefinitions.ApiSteps.sendAPIRequest(java.lang.String,java.lang.String,java.util.Map <java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.lan< td=""><td>FAILED</td><td>0.033 s</td></java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.lan<>	FAILED	0.033 s
	at io.cucumber.core.runtime.Retrirowing rnrowableCollector.executeAnd rnrow(Retrirowing rnrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129)		

#	Step / Hook Details	Status	Duration
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:566)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221)		
	at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50)		
	at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194)		
	at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148)		
	at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1541)		
	at org.testng.TestRunner.privateRun(TestRunner.java:829)		
	at org.testng.TestRunner.run(TestRunner.java:602)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:437)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:330)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1176)		
	at org.testng.TestNG.runSuites(TestNG.java:1099)		
	at org.testng.TestNG.run(TestNG.java:1067)		
	at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324)		
	at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74)		
	at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123)		
	at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456)		
	at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169)		
	at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595)		
	at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581)		
2	And  stagingtoken 9e107d9d372bb6826bd81d3542a419d6	SKIPPED	0.018 s
3	And with the below JSON request	SKIPPED	0.027 s
4	And """	SKIPPED	0.022 s
5	And {	SKIPPED	0.024 s
6	And "username": "user_15@vastuhfc.com",	SKIPPED	0.025 s
7	And "password": "123456",	SKIPPED	0.016 s

DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
8	And "deviceid": "b401d05b86dd2f95",	SKIPPED	0.023 s
9	And "version": "3.2.9",	SKIPPED	0.027 s
10	And "app_name": "pulse_app",	SKIPPED	0.017 s
11	And "userid": "15"	SKIPPED	0.017 s
12	And }	SKIPPED	0.027 s
13	And """	SKIPPED	0.023 s
14	And execute and save the response as "APIresponse"	SKIPPED	0.015 s
15	And check that variable {API_response} is equals to "completed" with exact phrase	SKIPPED	0.017 s
16	And check that response {param} has "200" as status code	SKIPPED	0.034 s
	AFTER - com.nimble.hooks.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.033 s
	java.lang.RuntimeException: Teardown step failed because scenario failed at com.nimble.hooks.Hooks.tearDown(Hooks.java:202)		