100

Start: Oct 21, 3:34:00.773 PM End: Oct 21, 3:34:01.230 PM **Duration**: 0.457 s Scenarios **Features** Steps PASSED - 0 PASSED - 0 PASSED - 0 SKIPPED - 0 SKIPPED - 0 SKIPPED - 15 16 40 50 60 40 50 60 40 50 60 30 Pass % 70 30 Pass % 70 30 Pass % 70 20 20 20 80 80 80 90 90

Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>API</u>	0.457 s	1	0	1	0	16	0	1	15

FAIL & SKIP SCENARIOS -- 3 --

#	Feature Name	Scenario Name
1	<u>API</u>	<u>First scenario</u>


TAG	Scenario Featur				Feature			
Name	T	P	F	S	T	P	F	S
@api	1	0	1	0	1	0	1	0

FEATURES SUMMARY -- 5 --



#	Feature Name	T	P	F	S	Duration
1	<u>API</u>	1	0	1	0	0.457 s

SCENARIOS SUMMARY

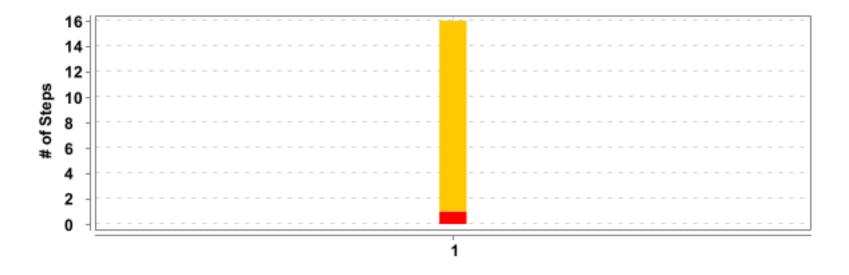


	Feature Name	Scenario Name	T	P	F	S	Duration
-	API	<u>First scenario</u>	16	0	1	15	0.446 s

DETAILED SECTION -- 7

## **API**

FAILED	DURATION - 0.457 s	Scenarios		Steps	
		Total - 1		Total - 16	
/ 3:34:00.773 PM //	3:34:01.230 PM /	Pass - 0	1	Pass - 0	16
		Fail - 1		Fail - 1	10
		Skip - 0		Skip - 15	

## **First scenario**

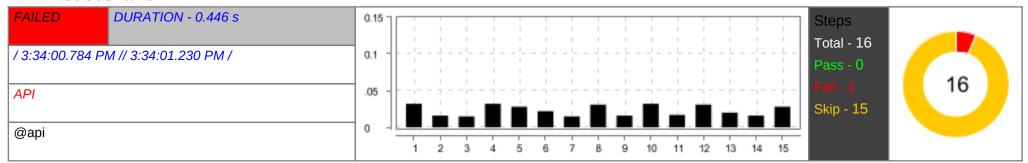

And compose a post request to "https://test-aws-web.vastucorp.com/api/sales_timesheet_view" with headers	FAILED	0.032 s
o.cucumber.core.exception.CucumberException: Step [^compose a (get post put patch delete) request to "([^n]*)" with headers\$] is defined with a parameters at 'com.nimble.stepDefinitions.ApiSteps.sendAPIRequest(java.lang.String,java.lang.String,java.util.Map <java.lang.string, ang.string="" java.="">)'. However, the gherkin step has 2 arguments: * post * https://test-aws-web.vastucorp.com/api/sales_timesheet_view Step text: compose a post request to "https://test-aws-web.vastucorp.com/api/sales_timesheet_view" with headers at io.cucumber.core.runner.PickleStepDefinitionMatch.arityMismatch(PickleStepDefinitionMatch.java:83) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:42) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</java.lang.string,>	PAILED	0.032 5
0 3 a	o.cucumber.core.exception.CucumberException: Step [^compose a (get post put patch delete) request to "([^"]*)" with headers\$] is defined with parameters at 'com.nimble.stepDefinitions.ApiSteps.sendAPIRequest(java.lang.String,java.lang.String,java.util.Map <java.lang.string, java.lang.string,java.lang.string,java.lang.string,java.lang.string,java.lang.string,java.lang.string,java.lang.string,java.lang.string,java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.util.map<java.lang.string,java.lang.string,java.util.map<java.lang.string,j<="" td=""><td>o.cucumber.core.exception.CucumberException: Step [^compose a (get post put patch delete) request to "([^"]*)" with headers\$] is defined with parameters at 'com.nimble.stepDefinitions.ApiSteps.sendAPIRequest(java.lang.String,java.lang.String,java.util.Map indextended in the parameters at 'com.nimble.stepDefinitions.ApiSteps.sendAPIRequest(java.lang.String,java.lang.Str</td></java.lang.string,>	o.cucumber.core.exception.CucumberException: Step [^compose a (get post put patch delete) request to "([^"]*)" with headers\$] is defined with parameters at 'com.nimble.stepDefinitions.ApiSteps.sendAPIRequest(java.lang.String,java.lang.String,java.util.Map indextended in the parameters at 'com.nimble.stepDefinitions.ApiSteps.sendAPIRequest(java.lang.String,java.lang.Str

#	Step / Hook Details	Status	Duration
	at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method)		
	at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62)		
	at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43)		
	at java.base/java.lang.reflect.Method.invoke(Method.java:566)		
	at org.testng.internal.invokers.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:139)		
	at org.testng.internal.invokers.TestInvoker.invokeMethod(TestInvoker.java:677)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethod(TestInvoker.java:221)		
	at org.testng.internal.invokers.MethodRunner.runInSequence(MethodRunner.java:50)		
	at org.testng.internal.invokers.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:969)		
	at org.testng.internal.invokers.TestInvoker.invokeTestMethods(TestInvoker.java:194)		
	at org.testng.internal.invokers.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:148)		
	at org.testng.internal.invokers.TestMethodWorker.run(TestMethodWorker.java:128)		
	at java.base/java.util.ArrayList.forEach(ArrayList.java:1541)		
	at org.testng.TestRunner.privateRun(TestRunner.java:829)		
	at org.testng.TestRunner.run(TestRunner.java:602)		
	at org.testng.SuiteRunner.runTest(SuiteRunner.java:437)		
	at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:431)		
	at org.testng.SuiteRunner.privateRun(SuiteRunner.java:391)		
	at org.testng.SuiteRunner.run(SuiteRunner.java:330)		
	at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:52)		
	at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:95)		
	at org.testng.TestNG.runSuitesSequentially(TestNG.java:1256)		
	at org.testng.TestNG.runSuitesLocally(TestNG.java:1176)		
	at org.testng.TestNG.runSuites(TestNG.java:1099)		
	at org.testng.TestNG.run(TestNG.java:1067)		
	at org.apache.maven.surefire.testng.TestNGExecutor.run(TestNGExecutor.java:324)		
	at org.apache.maven.surefire.testng.TestNGXmlTestSuite.execute(TestNGXmlTestSuite.java:74)		
	at org.apache.maven.surefire.testng.TestNGProvider.invoke(TestNGProvider.java:123)		
	at org.apache.maven.surefire.booter.ForkedBooter.runSuitesInProcess(ForkedBooter.java:456)		
	at org.apache.maven.surefire.booter.ForkedBooter.execute(ForkedBooter.java:169)		
	at org.apache.maven.surefire.booter.ForkedBooter.run(ForkedBooter.java:595)		
	at org.apache.maven.surefire.booter.ForkedBooter.main(ForkedBooter.java:581)		
2	And  stagingtoken 9e107d9d372bb6826bd81d3542a419d6	SKIPPED	0.016 s
3	And with the below JSON request	SKIPPED	0.015 s
4	And """	SKIPPED	0.032 s
5	And {	SKIPPED	0.028 s
6	And "username": "user_15@vastuhfc.com",	SKIPPED	0.022 s
7	And "password": "123456",	SKIPPED	0.015 s

DETAILED SECTION -- 9 --

#	Step / Hook Details	Status	Duration
8	And "deviceid": "b401d05b86dd2f95",	SKIPPED	0.031 s
9	And "version": "3.2.9",	SKIPPED	0.016 s
10	And "app_name": "pulse_app",	SKIPPED	0.032 s
11	And "userid": "15"	SKIPPED	0.017 s
12	And }	SKIPPED	0.031 s
13	And """	SKIPPED	0.020 s
14	And execute and save the response as "APIresponse"	SKIPPED	0.016 s
15	And check that variable {API_response} is equals to "completed" with exact phrase	SKIPPED	0.028 s
16	And check that response {API_response} has "200" as status code	SKIPPED	0.014 s
	AFTER - com.nimble.hooks.Hooks.tearDown(io.cucumber.java.Scenario)	FAILED	0.031 s
	java.lang.RuntimeException: Teardown step failed because scenario failed at com.nimble.hooks.Hooks.tearDown(Hooks.java:202)		