



Subject Name-WEB DESIGNING

Course Code:-BECSS25-103

UNIT-C

Cascading Style Sheets



UNIT- C TOPICS- 1

- **CSS Selectors**
- **Specifying Fonts & Font Sizes**
- **More CSS Text Styling Properties;**
- **Styling**
- **Colour With CSS**
- **Styling Lists, Forms, Images, Tables and Links With CSS.**



Introduction of CSS

- CSS is the language we use to style a Web page.
- CSS stands for **Cascading Style Sheets**
- CSS describes how HTML elements are to be displayed on screen, paper, or in other media
- CSS saves a lot of work. It can control the layout of multiple web pages all at once
- External stylesheets are stored in CSS files.



Why use CSS?

CSS is used to define styles for your web pages, including the design, layout and variations in display for different devices and screen sizes.

1. Separates content from design

HTML handles the **structure** (headings, paragraphs, images).

CSS handles the **look and feel** (colors, layout, fonts).

2. Saves time and effort

You can style **hundreds of elements** at once using CSS:

CSS

```
p {  
  color: blue;  
}
```

All `<p>` tags turn blue — no need to style each one manually.



Why use CSS?

3. Responsive design (mobile-friendly)

CSS lets you design pages that **adapt** to different screen sizes (phones, tablets, desktops) using **media queries**:

CSS

```
@media (max-width: 600px) {  
  body {  
    font-size: 14px;  
  }  
}
```

4. Better user experience (UX)

With CSS, you can make pages:

Visually attractive

Easier to read

More interactive (hover effects, transitions)



Why use CSS?

5. Reusability with classes and IDs

Define styles once, reuse them:

CSS

```
.button {  
  background-color: green;  
  color: white;  
  padding: 10px;  
}
```

Apply to any element:

html

```
<button class="button">Click Me</button>
```



Why use CSS?

CSS is used to define styles for your web pages, including the design, layout and variations in display for different devices and screen sizes.

```
div
File Edit View


<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-color: lightblue;
}

h1 {
  color: white;
  text-align: center;
}

p {
  font-family: verdana;
  font-size: 20px;
}
</style>
</head>
<body>

<h1>RBIENT</h1>
<p>this institutes is in Punjab</p>

</body>
</html>
```

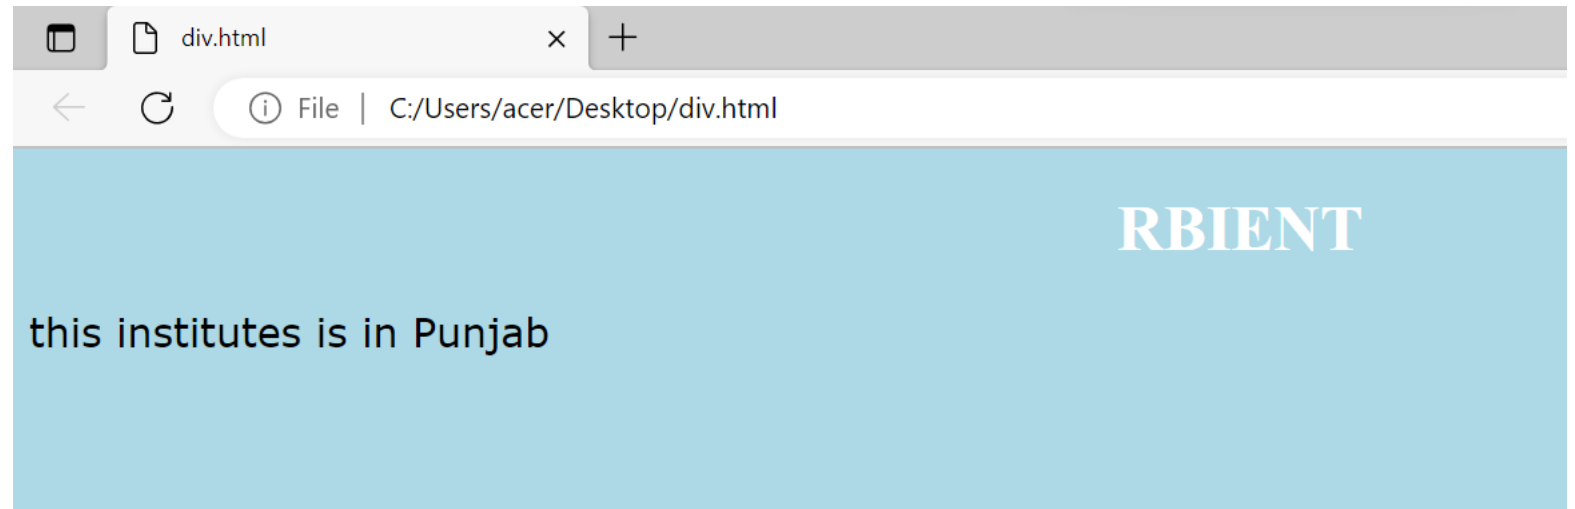




CSS Syntax

A CSS rule consists of a selector and a declaration block.

CSS Syntax

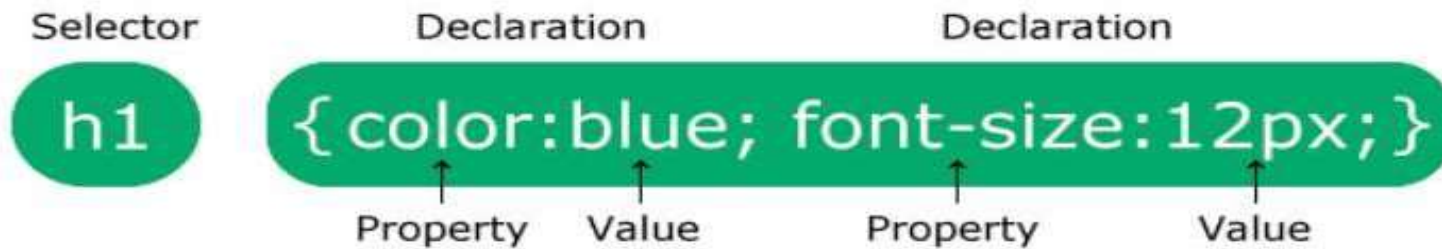

The selector points to the HTML element you want to style.

The declaration block contains one or more declarations separated by semicolons.

Each declaration includes a CSS property name and a value, separated by a colon.

Multiple CSS declarations are separated with semicolons, and declaration blocks are surrounded by curly braces.



CSS Selectors

A CSS selector selects the HTML element(s) you want to style.

CSS Selectors

CSS selectors are used to "find" (or select) the HTML elements you want to style.

We can divide CSS selectors into five categories:

- Simple selectors (select elements based on name, id, class)
- Combinator selectors (select elements based on a specific relationship between them)
- Pseudo-class selectors (select elements based on a certain state)
- Pseudo-elements selectors (select and style a part of an element)
- Attribute selectors (select elements based on an attribute or attribute value)



The CSS element Selector

The element selector selects HTML elements based on the element name.

Example

Here, all <p> elements on the page will be center-aligned, with a red text color:

```
p {  
  text-align: center;  
  color: red;  
}
```



The CSS id Selector

The CSS id Selector

The id selector uses the id attribute of an HTML element to select a specific element.

The id of an element is unique within a page, so the id selector is used to select one unique element!

To select an element with a specific id, write a hash (#) character, followed by the id of the element.

Example

The CSS rule below will be applied to the HTML element with id="para1":

```
#para1 {  
  text-align: center;  
  color: red;  
}
```

Note: An id name cannot start with a number!



Example

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
  text-align: center;
  color: red;
}
#para1 {
  text-align: center;
  color: blue;
}
</style>
</head>
<body>

<p>Every paragraph will be affected by the style.</p>
<p>And me!</p>
<p id="para1">Hello World!</p>

</body>
</html>
```



Every paragraph will be affected by the style.

And me!

Hello World!



The CSS class Selector

The class selector selects HTML elements with a specific class attribute.

To select elements with a specific class, write a period (.) character, followed by the class name.

Example

In this example all HTML elements with class="center" will be red and center-aligned:

```
.center {  
  text-align: center;  
  color: red;  
}
```

You can also specify that only specific HTML elements should be affected by a class.

Example

In this example only <p> elements with class="center" will be red and center-aligned:

```
p.center {  
  text-align: center;  
  color: red;  
}
```



The CSS class Selector Example

```
div
File Edit View
<!DOCTYPE html>
<html>
<head>
<style>
p {
  text-align: center;
  color: red;
}
#para1 {
  text-align: left;
  color: blue;
}
.center
{
  text-align:center;
  color:green;|
}
</style>
</head>
<body>

<p>Every paragraph will be affected by the style.</p>
<p>And me!</p>
<p id="para1">Hello World!</p>
<h1 class="center">this is heading</h1>

</body>
</html>
```

Hello World!

Every paragraph will be affected by the style.

And me!

this is heading



The CSS Universal Selector

The universal selector (*) selects all HTML elements on the page.

Example

The CSS rule below will affect every HTML element on the page:

```
* {  
  text-align: center;  
  color: blue;  
}
```



The CSS Universal Selector Example

div

×

+

.html

×

+

File | C:/Users/acer/Desktop/div.html

File Edit View

```
<!DOCTYPE html>
<html>
<head>
<style>
*{
text-align:center;
color:green;
}
</style>
</head>
<body>

<p>Every paragraph will be affected by the style.</p>
<p>And me!</p>
<p>Hello World!</p>
<h1>this is heading</h1>

</body>
</html>
```

Every paragraph will be affected by the style.

And me!

Hello World!

this is heading



The CSS Grouping Selector

The grouping selector selects all the HTML elements with the same style definitions.

Look at the following CSS code (the h1, h2, and p elements have the same style definitions):

```
h1 {  
  text-align: center;  
  color: red;  
}  
  
h2 {  
  text-align: center;  
  color: red;  
}  
  
p {  
  text-align: center;  
  color: red;  
}
```

It will be better to group the selectors, to minimize the code.

To group selectors, separate each selector with a comma.

Example

In this example we have grouped the selectors from the code above:

```
h1, h2, p {  
  text-align: center;  
  color: red;  
}
```



The CSS Grouping Selector Example

div

File Edit View

```
<!DOCTYPE html>
<html>
<head>
<style>
p,h1{
text-align:center;
color:green;
}
</style>
</head>
<body>

<p>Every paragraph will be affected by the style.</p>
<h2>And me!</h2>
<p>Hello World!</p>
<h1>this is heading</h1>

</body>
</html>
```

div.html

File | C:/Users/acer/Desktop/div.html

Every paragraph will be affected by the style.

And me!

Hello World!

this is heading




Ways to CSS

Three Ways to Insert CSS

There are three ways of inserting a style sheet:

- External CSS
- Internal CSS
- Inline CSS

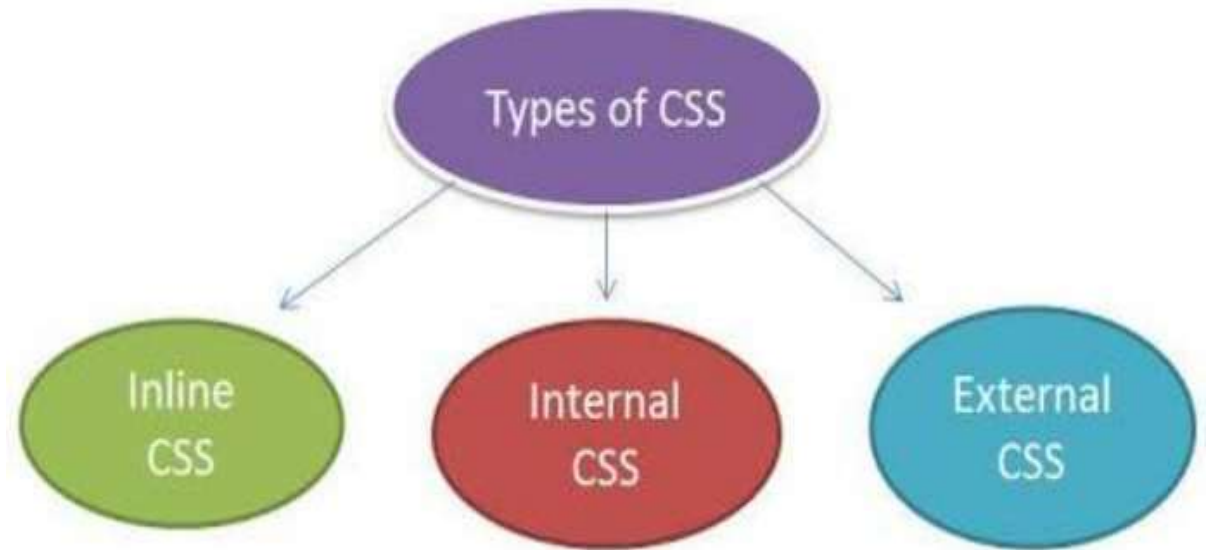



Internal CSS

Inline CSS:

Inline CSS is applied directly to individual HTML elements using the style attribute within the opening tag of the element. It only affects the specific element it is applied to.

Example:

`<p style="color: blue; font-size: 16px;">`This text is styled with inline CSS.`</p>`



Internal CSS

```
<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-color: linen;
}

h1 {
  color: maroon;
  margin-left: 40px;
}
</style>
</head>
<body>

<h1>This is a heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

This is a heading

This is a paragraph.



External CSS

- External CSS is defined in a separate **.css file** and linked to the HTML document using the **<link>** tag in the **<head>** section.
- It allows for styling multiple HTML pages from a single CSS file, promoting reusability and easier maintenance across a website.
- **Example (in styles.css file):**

```
body {  
    background-color: lightgray;  
}  
h1 {  
    color: purple;  
}
```

```
<!DOCTYPE html>  
<html>  
<head>  
    <link rel="stylesheet" href="styles.css">  
</head>  
<body>  
    <h1>External CSS Example</h1>  
    <p>This page uses external CSS.</p>  
</body>  
</html>
```



External CSS

"mystyle.css"

```
body {  
    background-color: lightblue;  
}  
  
h1 {  
    color: navy;  
    margin-left: 20px;  
}
```

This is a heading

This is a paragraph.

```
<!DOCTYPE html>  
<html>  
<head>  
<link rel="stylesheet" href="mystyle.css">  
</head>  
<body>  
  
<h1>This is a heading</h1>  
<p>This is a paragraph.</p>  
  
</body>  
</html>
```



Internal CSS

Internal (or Embedded) CSS:

Internal CSS is placed within a `<style>` tag in the `<head>` section of an HTML document.

It applies styles to elements within that specific HTML document only.

Example:

```
<!DOCTYPE html>
<html>
<head>
  <style>
    h1 {
      color: green;
    }
    p {
      font-family: Arial, sans-serif;
    }
  </style>
</head>
<body>
  <h1>Internal CSS Example</h1>
  <p>This paragraph uses internal CSS.</p>
</body>
</html>
```



Inline CSS

```
<!DOCTYPE html>
<html>
<body>

<h1 style="color:blue;text-align:center;">This is a heading</h1>
<p style="color:red;">This is a paragraph.</p>

</body>
</html>
```

This is a heading

This is a paragraph.



Background images


```
div
File Edit View

<!DOCTYPE html>
<html>
<head>
<style>
body {
  background-image: url("acer.jpg");
}
</style>
</head>
<body>

<h1>Hello World!</h1>

<p>This page has a light blue background color!</p>

</body>
</html>
```

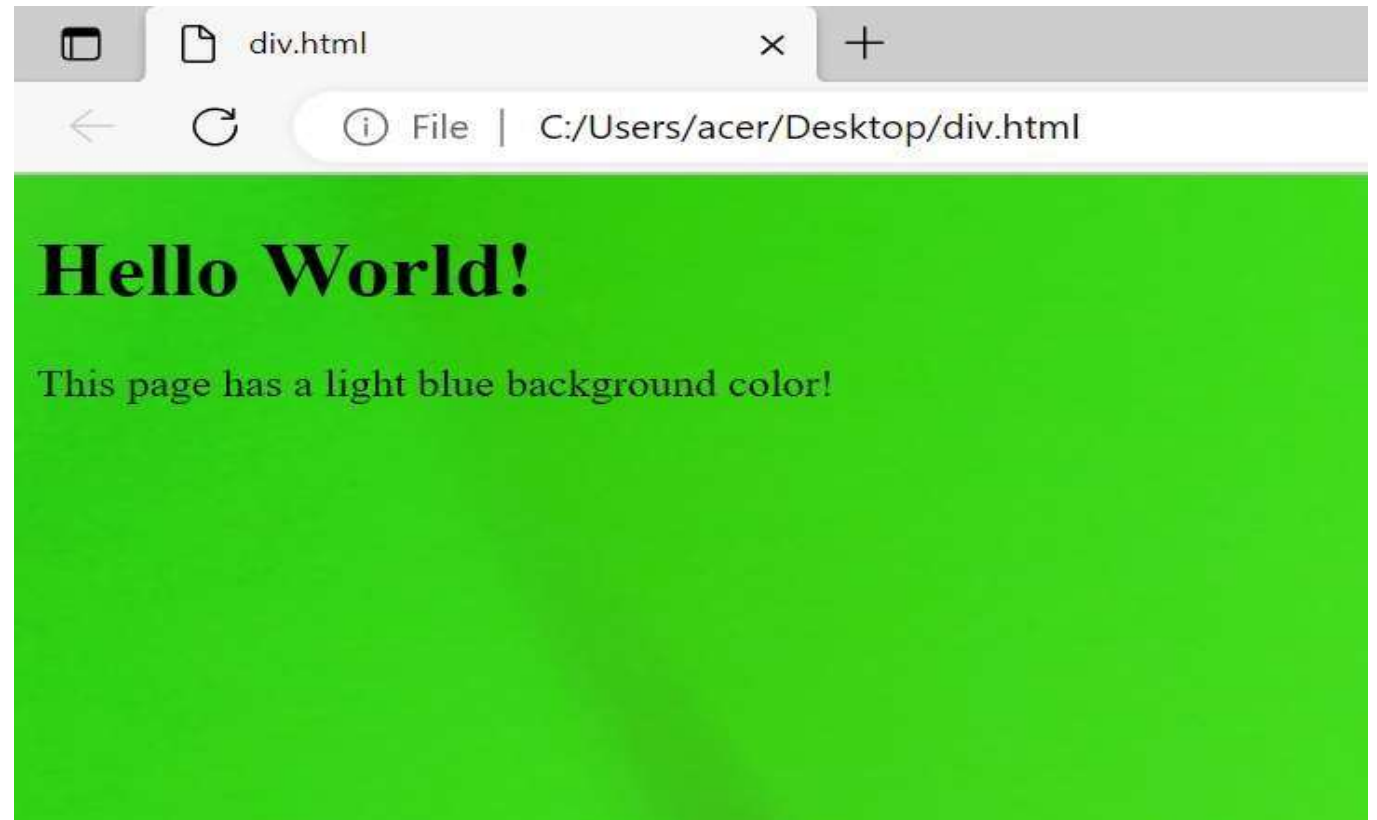



Specifying Fonts & Font Sizes

- To **specify fonts and font sizes**, use the dedicated text formatting tools in your application, like the Home tab in Microsoft Word.
- For web content, use CSS properties such as font-family for font choice and font-size with units like **px or rem** for sizing.
- For system-wide text adjustments, access Settings under Accessibility to modify text size for improved readability.



Specifying Fonts & Font Sizes

CSS FONT

- *Font Selection is Important*
- Choosing the right font has a huge impact on how the readers experience a website.
- The right font can create a strong identity for your brand.
- Choosing a font that is easy to read is important. It is also important to choose a good color and size for your font.



Specifying Fonts & Font Sizes

CSS FONT

The CSS font-family Property

➤ The CSS font-family property *specifies the font for an element.*

Tip: The font-family property should hold several font names as a "fallback" system. If the browser does not support the first font, it tries the next font. The font names should be separated with a comma.

➤ Always start with the font you want, and always end with a generic family, to let the browser pick a similar font in the generic family, if no other fonts are available.

Note: If the font name is more than one word, it must be in quotation marks, like: "Times New Roman".



Specifying Fonts & Font Sizes

CSS FONT

What are Web Safe Fonts?

Web safe fonts are fonts that are universally installed across all browsers and devices.

Fallback Fonts

- However, there are no 100% completely web safe fonts. There is always a chance that a font is not found or is not installed properly.
- Therefore, it is very important to always use fallback fonts.
- This means that you should add a list of similar "backup fonts" in the [font-family](#) property. If the first font does not work, the browser will try the next one, and the next one, and so on. Always end the list with a generic font family name.



Specifying Fonts & Font Sizes

CSS FONT

```
<!DOCTYPE html>
<html>
<head>
<style>
p {
font-family:"Times new Roman", Verdana, sans-serif;
}
</style>
</head>
<body>

<h1>CSS Fallback Fonts</h1>

<p>This is a paragraph.</p>
<p>This is another paragraph.</p>

</body>
</html>
```

CSS Fallback Fonts

This is a paragraph.

This is another paragraph.



Specifying Fonts & Font Sizes

CSS FONT

Web Safe Fonts for HTML and CSS

The following list are the best web safe fonts for HTML and CSS:

- Arial (sans-serif)
- Verdana (sans-serif)
- Tahoma (sans-serif)
- Trebuchet MS (sans-serif)
- Times New Roman (serif)
- Georgia (serif)
- Garamond (serif)
- Courier New (monospace)
- Brush Script MT (cursive)

Note: Before you publish your website, always check how your fonts appear on different browsers and devices, and always use fallback fonts!



Specifying Fonts & Font Sizes

CSS FONT

The CSS font-family Property

```
<!DOCTYPE html>
<html>
<head>
<style>
.p1 {
  font-family: "Times New Roman", Times, serif;
}

.p2 {
  font-family: Arial, Helvetica, sans-serif;
}

.p3 {
  font-family: "Lucida Console", "Courier New", monospace;
}
</style>
</head>
<body>

<h1>CSS font-family</h1>
<p class="p1">This is a paragraph, shown in the Times New Roman font.</p>
<p class="p2">This is a paragraph, shown in the Arial font.</p>
<p class="p3">This is a paragraph, shown in the Lucida Console font.</p>

</body>
</html>
```

CSS font-family

This is a paragraph, shown in the Times New Roman font.

This is a paragraph, shown in the Arial font.

This is a paragraph, shown in the Lucida Console font.



Specifying Fonts & Font Sizes

CSS FONT

Difference Between Serif and Sans-serif Fonts

CSS Generic Font Families

In CSS, there are five generic font families:

- **Serif fonts** - have a small stroke at the edges of each letter. They create a sense of formality and elegance.
- **Sans-serif fonts** - have clean lines (no small strokes attached). They create a modern and minimalistic look.
- **Monospace fonts** - here all the letters have the same fixed width. They create a mechanical look.
- **Cursive fonts** - imitate human handwriting.
- **Fantasy fonts** - are decorative/playful fonts.

All the different font names belong to one of the generic font families.





Specifying Fonts & Font Sizes

CSS FONT

Some Font Examples

Generic Font Family	Examples of Font Names
Serif	Times New Roman Georgia Garamond
Sans-serif	Arial Verdana Helvetica
Monospace	Courier New Lucida Console Monaco
Cursive	<i>Brush Script MT</i> <i>Lucida Handwriting</i>
Fantasy	Copperplate Papyrus



Specifying Fonts & Font Sizes

CSS FONT SIZE

- The CSS font-size property is used to specify the size of the text/font.
- Being able to manage the text size is very important in web design.
- However, we should not use font size adjustments to make paragraphs look like headings, or headings look like paragraphs. Always use the proper HTML tags, like `<h1>` - `<h6>` for headings and `<p>` for paragraphs.
- The font-size can be set to an absolute size or to a relative size.



Specifying Fonts & Font Sizes

CSS FONT SIZE

ABSOLUTE SIZES:

px: Pixels offers fixed and precise control over the font size.

xx-small, x-small, small, medium, large, x-large, xx-large.

These keywords has a predefined set of sizes in browsers.

RELATIVE SIZES:

em: This unit is relative to the font size of the parent element.

rem: This unit is relative to the font size of the root HTML element.

%: This unit is relative to the font size of the parent element

smaller and larger: These units adjust the font size relative to the parent element.



Specifying Fonts & Font Sizes

How to Pick the Right Unit?

- For fixed and precise control, **px** can be used.
- With **px**, the web page will not scale well on different screen sizes or with user preferences.
- Absolute size can be useful when the physical size of the output is known.
- For scalable web designs, use **em** or **rem**; they allow users to adjust text size in their browser settings.
- Percentage (%) can be useful for adjusting font sizes based on parent elements.



Specifying Fonts & Font Sizes

Set Font Size With Pixels

- Setting the text size with **pixels (px)** gives you full control over the text size.
- If you use pixels, the web page may not scale very well on different screen sizes and the users cannot adjust the text size in their browser settings. However, users can still use the zoom tool to resize the entire page.

```
<!DOCTYPE html>
<html>
<head>
<style>
h1 {
    font-size: 40px;
}
h2 {
    font-size: 30px;
}
p {
    font-size: 16px;
}
</style>
</head>
<body>

<h1>This is heading 1</h1>
<h2>This is heading 2</h2>
<p>This is a paragraph.</p>
<p>This is another paragraph.</p>

</body>
</html>
```

This is heading 1

This is heading 2

This is a paragraph.

This is another paragraph.



Specifying Fonts & Font Sizes

Example

Set font sizes with em:

```
body {  
    font-size: 16px; /* Base font size */  
}  
  
h1 {  
    font-size: 2.5em; /* 2.5 * 16 = 40px */  
}  
  
h2 {  
    font-size: 1.875em; /* 1.875 * 16 = 30px */  
}  
  
p {  
    font-size: 1em; /* 1 * 16 = 16px */  
}
```



Specifying Fonts & Font Sizes

Set Font Size With Em

The **em** unit is relative to the font size of the parent element. So, if the parent element has a font size of 16px, then 2.5em would result in 40px.

In the following example, the text size in **em** is the same as the previous example in pixels. However, the **em** unit allows the user to adjust the text size in the browser settings.



Specifying Fonts & Font Sizes

Set Font Size With Rem

- The **rem** unit is relative to the font size of the root HTML element (`<html>`).
- Unlike **em**, which is relative to the font-size of its parent element, rem always refers to the font-size of the `<html>` element, regardless of its position in the document tree. This makes **rem** very useful for creating scalable and responsive designs. By changing the font-size of the `<html>` element, all elements sized with **rem** units will scale proportionally throughout the entire page.
- The default font-size of the `<html>` element in most browsers, is 16px. So, by default, 1rem equals 16px unless explicitly overridden in the CSS.



Specifying Fonts & Font Sizes

Set Font Size With Rem

```
<!DOCTYPE html>
<html>
<head>
<style>
html {
  font-size: 16px; /* Sets the root font size */
}

h1 {
  font-size: 2.5rem; /* 2.5 * 16 = 40px */
}

h2 {
  font-size: 1.875rem; /* 1.875 * 16 = 30px */
}

p {
  font-size: 1rem; /* 1 * 16 = 16px */
}
</style>
</head>
<body>

<h1>This is heading 1</h1>
<h2>This is heading 2</h2>
<p>This is a paragraph.</p>
<p>Specifying the font-size in rem allows all major browsers to resize the text.</p>

</body>
</html>
```

This is heading 1

This is heading 2

This is a paragraph.

Specifying the font-size in rem allows all major browsers to resize the text.



Specifying Fonts & Font Sizes

```
<!DOCTYPE html>
<html style="font-size: 16px;"> <!-- root size for rem -->
<head>
  <style>
    .parent {
      font-size: 20px; /* base for em, %, smaller/larger */
    }

    .em {
      font-size: 1.5em; /* 1.5 x 20 = 30px */
      color: red;
    }

    .rem {
      font-size: 1.5rem; /* 1.5 x 16 = 24px */
      color: green;
    }

    .percent {
      font-size: 75%; /* 75% of 20 = 15px */
      color: blue;
    }

    .smaller {
      font-size: smaller; /* slightly smaller than 20px */
      color: orange;
    }

    .larger {
      font-size: larger; /* slightly larger than 20px */
      color: purple;
    }
  </style>
</head>
<body>
```

```
<body>
```

```
  <div class="parent">
    Parent font size is 20px

    <p class="em">1.5em (→ 30px)</p>
    <p class="rem">1.5rem (→ 24px)</p>
    <p class="percent">75% (→ 15px)</p>
    <p class="smaller">smaller</p>
    <p class="larger">larger</p>
  </div>
```

```
</body>
```

```
</html>
```

Parent font size is 20px

1.5em (→ 30px)

1.5rem (→ 24px)

75% (→ 15px)

smaller

larger



Specifying Fonts & Font Sizes

The vw Unit

- The font size can also be set with the vw unit, which means the "viewport width".
- The **vw** unit is a relative unit that represents a percentage of the width of the viewport.
- $1\text{vw} = 1\%$ of the current width of the browser's viewport. So, if the viewport is 500px wide, 1vw is 5px. This way the text size will follow the size of the browser window:



Specifying Fonts & Font Sizes

The vw Unit

```
<!DOCTYPE html>
<html>
<meta name="viewport" content="width=device-width, initial-scale=1.0">
<style>
h1 {
  font-size:10vw;
}

p {
  font-size:5vw;
}
</style>
<body>

<h1>The vw Unit</h1>

<p>Resize the browser window to see how the text size scales.</p>

</body>
</html>
```

The vw Unit

Resize the browser window to see how the text size scales.



Specifying Fonts & Font Sizes

Google Fonts

If you do not want to use any of the standard fonts in HTML, you can use Google Fonts.

Google Fonts are free to use, and have more than 1000 fonts to choose from.

How To Use Google Fonts

Just add a special style sheet link in the <head> section and then refer to the font in the CSS.



Specifying Fonts & Font Sizes

STEP-BY-STEP: HOW TO USE GOOGLE FONTS IN HTML


1. Go to Google Fonts

Visit: <https://fonts.google.com>

2. Choose a Font

Browse or search for a font you like (e.g., **Roboto**, **Open Sans**, **Poppins**).

Click on the font name to open its page.

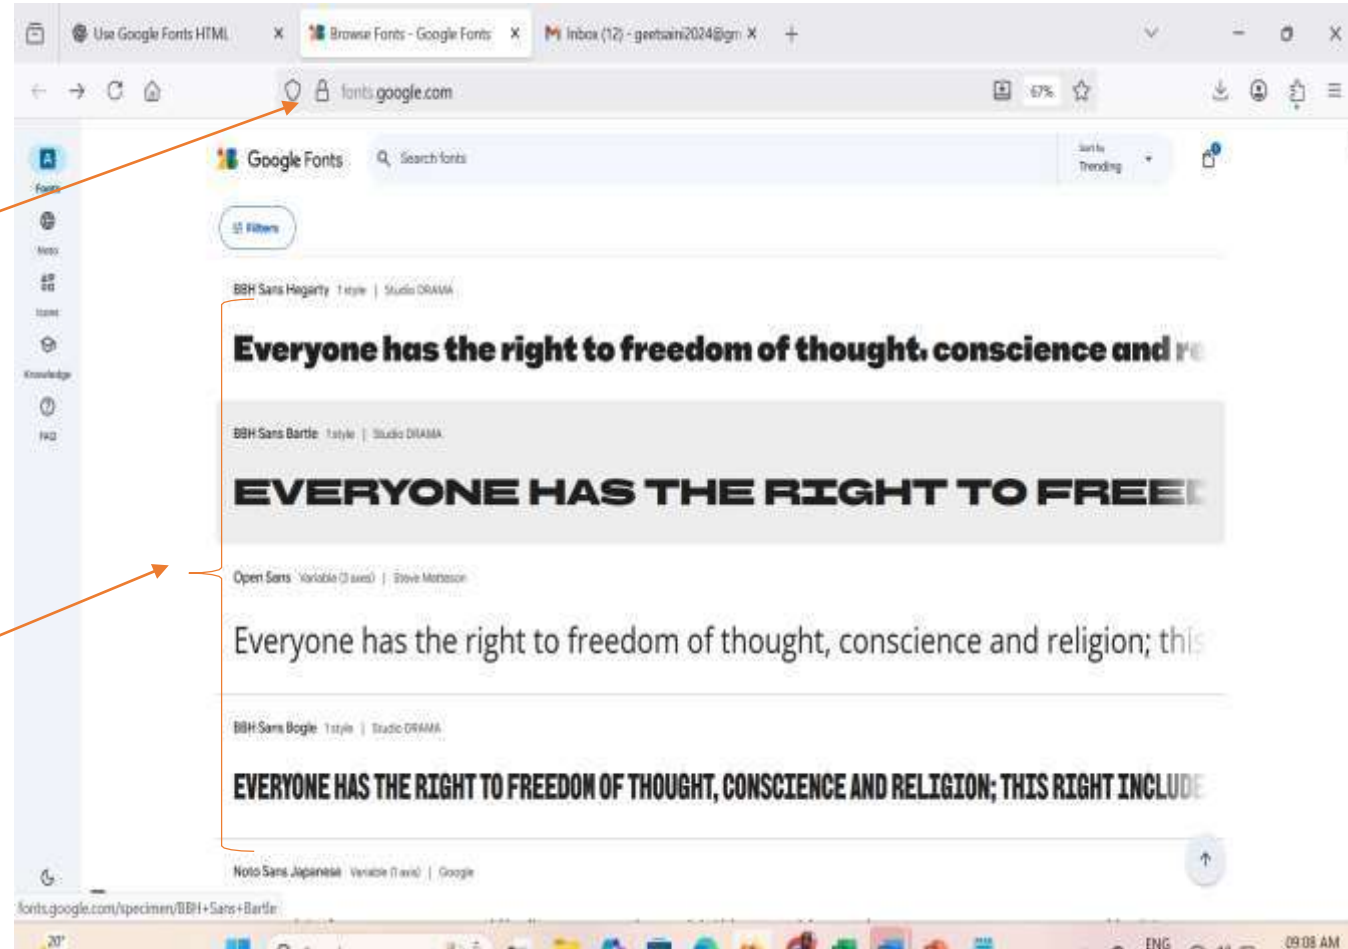




Specifying Fonts & Font Sizes

STEP-BY-STEP: HOW TO USE GOOGLE FONTS IN HTML

3. Select Styles

Choose the weights/styles you want (e.g., Regular 400, Bold 700).

On the right panel, you'll see an **"Embed"** section.

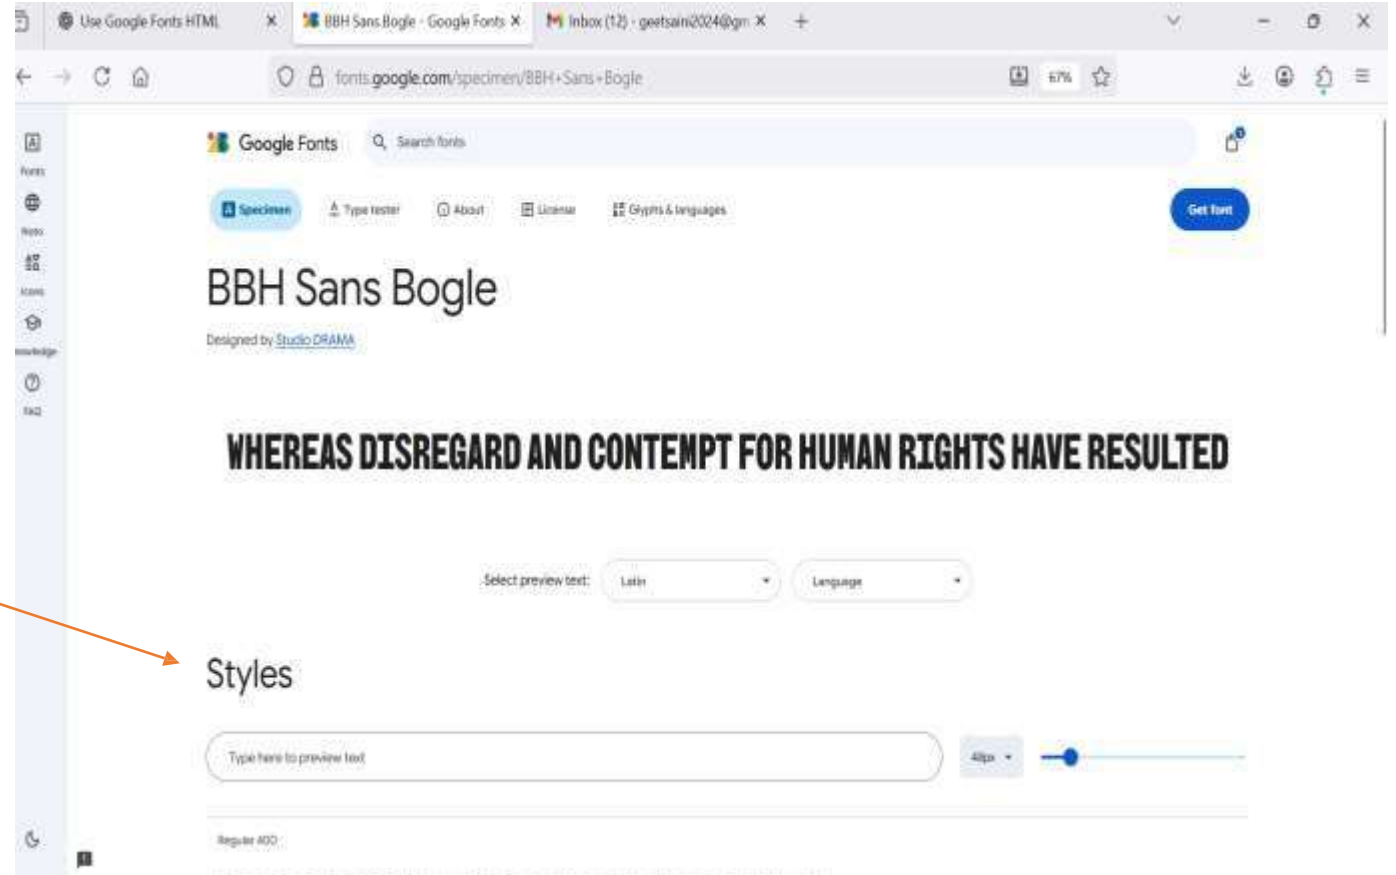




Specifying Fonts & Font Sizes

STEP-BY-STEP: HOW TO USE GOOGLE FONTS IN HTML

3. Select Styles

Choose the weights/styles you want (e.g., Regular 400, Bold 700).

On the right panel, you'll see an **"Embed"** section.

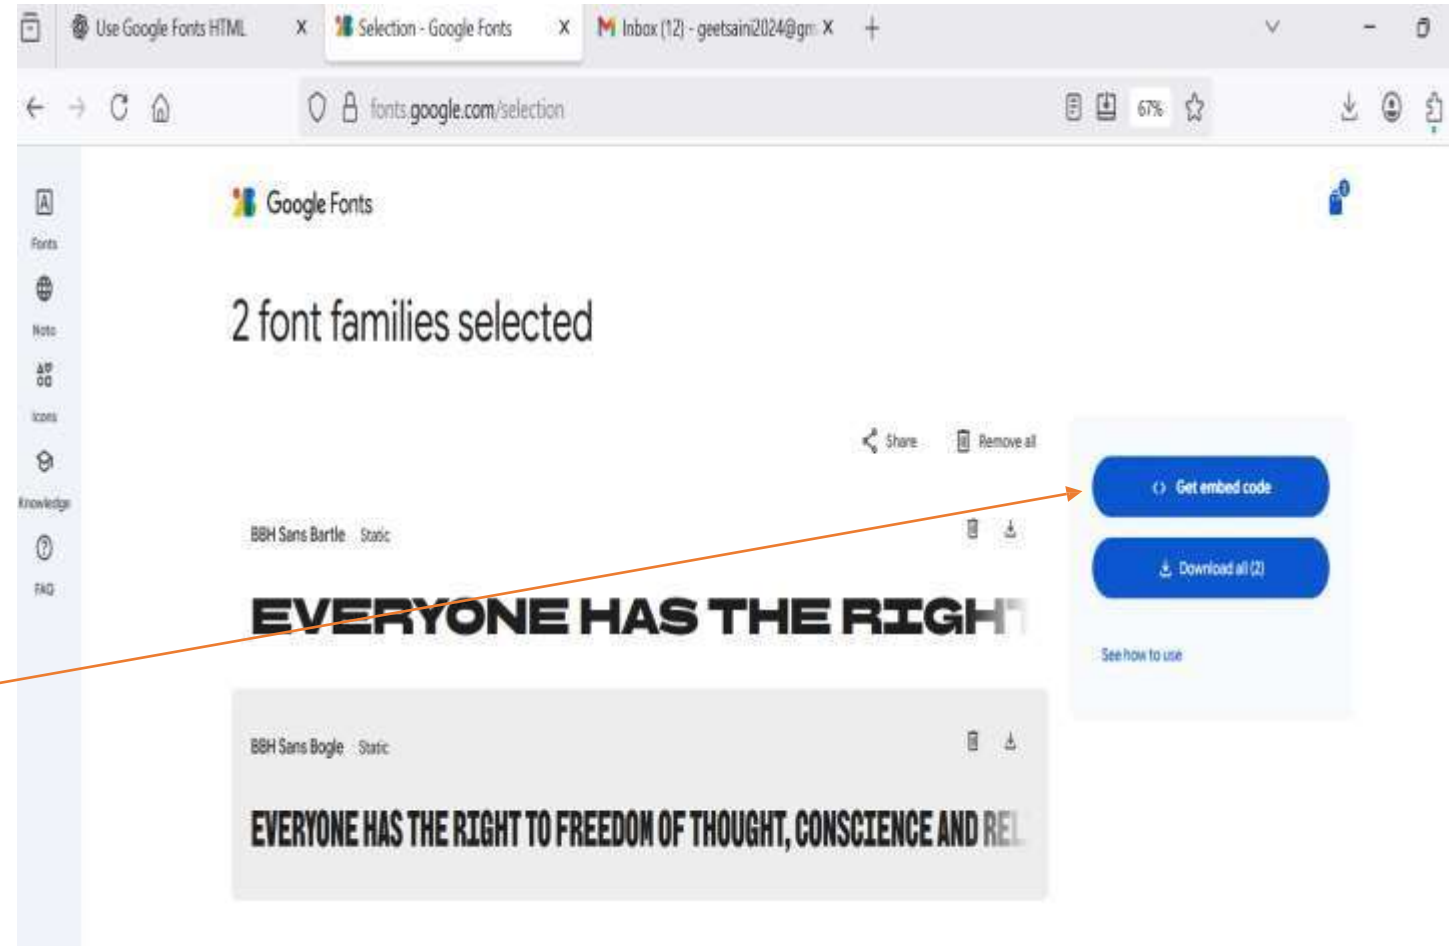




Specifying Fonts & Font Sizes

STEP-BY-STEP: HOW TO USE GOOGLE FONTS IN HTML

3. Select Styles

Choose the weights/styles you want (e.g., Regular 400, Bold 700).

On the right panel, you'll see an **"Embed"** section.

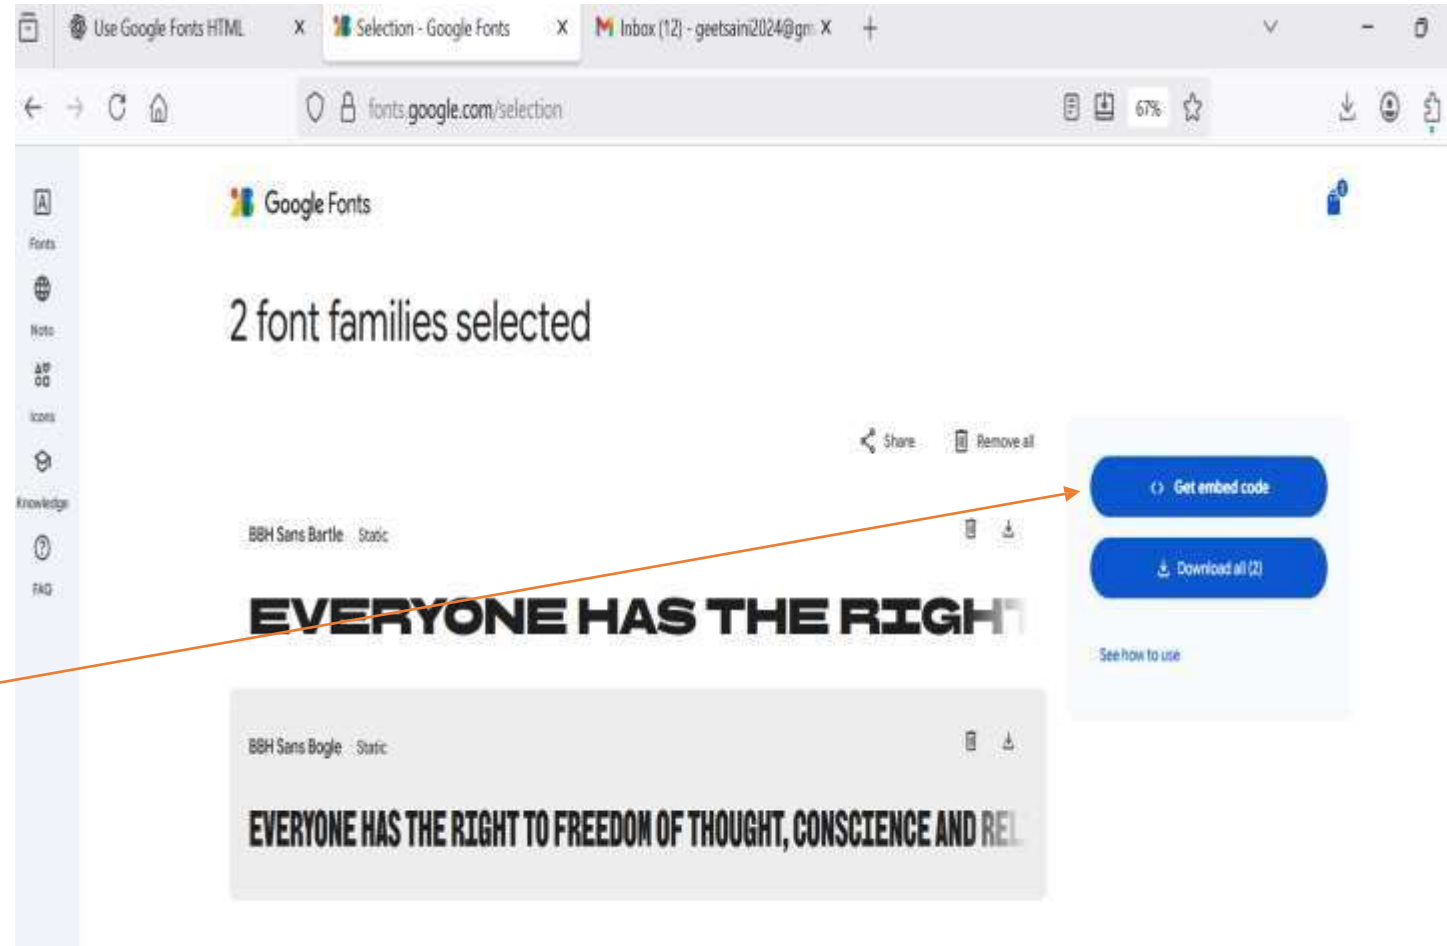



Specifying Fonts & Font Sizes

STEP-BY-STEP: HOW TO USE GOOGLE FONTS IN HTML

4. Copy the <link> Tag Google

Fonts will give you a <link> tag like this:

```
<link  
href="https://fonts.googleapis.com/css2?family=Roboto&display=swap" rel="stylesheet">
```

← Embed code



Specifying Fonts & Font Sizes

STEP-BY-STEP: HOW TO USE GOOGLE FONTS IN HTML

5. Place this inside the **<head>** section of your HTML:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <title>Google Fonts Example</title>
  <link href="https://fonts.googleapis.com/css2?family=Roboto&display=swap" rel="stylesheet">
  <style>
    body {
      font-family: 'Roboto', sans-serif;
    }
  </style>
</head>
<body>
  <h1>This text uses the Roboto font</h1>
</body>
</html>
```



Specifying Fonts & Font Sizes

STEP-BY-STEP: HOW TO USE GOOGLE FONTS IN CSS

Alternative: Use **@import** in CSS

If you're writing a separate CSS file, you can use **@import** instead of a **<link>** tag:

```
CSS

/* styles.css */
@import url('https://fonts.googleapis.com/css2?family=Roboto&display=swap');

body {
  font-family: 'Roboto', sans-serif;
}
```

And in your HTML:

```
html

<link rel="stylesheet" href="styles.css">
```



Specifying Fonts & Font Sizes

Example

Here, we want to use a font named "Sofia" from Google Fonts:

```
<head>
<link rel="stylesheet" href="https://fonts.googleapis.com/css?family=Sofia">
<style>
body {
  font-family: "Sofia", sans-serif;
}
</style>
</head>
```

Result:

Sofia Font

Lorem ipsum dolor sit amet.

123456790



Specifying Fonts & Font Sizes

CSS Great Font Pairings

Font pairing means **choosing two fonts** (usually one for **headings**, and one for **body text**) that look **good together**.

Why does it matter?

Because the right fonts can make your website:

- Easier to read
- More attractive
- More professional

Basic Rule of Thumb

- ☞ Use **one font for titles** (called a "display" or "heading" font)
- ☞ Use a **different font for paragraphs** (called a "body" font)



Specifying Fonts & Font Sizes

CSS Great Font Pairings

1. Add the fonts to your HTML

In the `<head>` section of your HTML file, paste this (example using Playfair + Source Sans):

```
<link  
href="https://fonts.googleapis.com/css2?family=Playfair+Display&family=Source+Sans+Pro&display=swap" rel="stylesheet">
```



Specifying Fonts & Font Sizes

CSS Great Font Pairings

2. Apply them in your CSS

Now use them like this:

h1, h2, h3

```
{  
  font-family: 'Playfair Display', serif; /* For headings */  
}
```

body, p

```
{ font-family: 'Source Sans Pro', sans-serif; /* For body text */  
}
```



Specifying Fonts & Font Sizes

CSS Great Font Pairings

Step 1: Go to Google Fonts

Visit <https://fonts.google.com>

Step 2: In the search bar, type: Montserrat

Click the font, and then click “+ Select this style” or “Get embed”

Step 3: Then search for: Lora

Also click “+ Select this style” or “Get embed”

Step 4: On the right, Google Fonts will give you a code to copy (like this):



Specifying Fonts & Font Sizes

CSS Great Font Pairings

Font Pairing Rules

Great font pairings are essential to great design!

Here are some basic rules to create great font pairings:

1. Complement

It is always safe to find font pairings that complement one another.

A great font combination should harmonize, without being too similar or too different.

2. Use Font Superfamilies

A font superfamily is a set of fonts designed to work well together. So, using different fonts within the same superfamily is safe.

For example, the Lucida superfamily contains the following fonts: Lucida Sans, Lucida Serif, Lucida Typewriter Sans, Lucida Typewriter Serif and Lucida Math.

3. Contrast is King

Two fonts that are too similar will often conflict. However, contrasts, done the right way, brings out the best in each font.

Example: Combining serif with sans serif is a well known combination.

A strong superfamily includes both serif and sans serif variations of the same font (e.g. Lucida and Lucida Sans).

4. Choose Only One Boss

One font should be the boss. This establishes a hierarchy for the fonts on your page. This can be achieved by varying the size, weight and color.



MORE CSS TEXT STYLING PROPERTIES

Property

color

font-family

font-size

font-weight

font-style

text-align

text-decoration

text-transform

Description

Sets the text color.

Defines the font of the text.

Sets the size of the font.

Controls the thickness of the font (e.g., normal, bold, 400, 700).

Sets the style (e.g., normal, italic, oblique).

Aligns text (left, center, right, justify).

Adds decorations like underline, overline, or line-through.

Changes case (uppercase, lowercase, capitalize).



MORE CSS TEXT STYLING PROPERTIES

Property

`letter-spacing`

`word-spacing`

`line-height`

`text-indent`

`white-space`

`direction`

Description

Controls space between characters.

Controls space between words.

Sets the vertical spacing between lines.

Indents the first line of text.

Controls how white space is handled (e.g., `nowrap`, `pre`, `normal`).

Sets text direction (`ltr` or `rtl`).



MORE CSS TEXT STYLING PROPERTIES

CSS

```
p {  
  font-family: 'Georgia', serif;  
  font-size: 18px;  
  font-style: italic;  
  font-weight: 600;  
  line-height: 1.6;  
  letter-spacing: 0.5px;  
  word-spacing: 1px;  
  text-align: justify;  
  text-indent: 30px;  
  text-shadow: 1px 1px 3px rgba(0, 0, 0, 0.3);  
  text-transform: capitalize;  
}
```



STYLING

Styling means changing how things **look** on your website using **CSS (Cascading Style Sheets)**. This includes:

- Colors
- Fonts
- Sizes
- Spacing
- Layouts
- Animations



STYLING

How Styling Works

You take an HTML element (like `<p>`, `<h1>`, or `<div>`) and use CSS to style it.

Example 1: Styling a Paragraph

```
html
<!DOCTYPE html>
<html>
<head>
  <style>
    p {
      color: green;
      font-size: 20px;
      text-align: center;
    }
  </style>
</head>
<body>

  <p>Hello! I'm a styled paragraph.</p>

</body>
</html>
```



STYLING

Common Styling Properties in CSS

Property	What it Does	Example
color	Changes text color	<code>color: red;</code>
background-color	Changes background color	<code>background-color: yellow;</code>
font-size	Sets text size	<code>font-size: 20px;</code>
font-family	Changes the font	<code>font-family: Arial;</code>
text-align	Aligns text	<code>text-align: center;</code>
margin	Space outside the element	<code>margin: 10px;</code>
padding	Space inside the element	<code>padding: 20px;</code>
border	Adds a border around the element	<code>border: 1px solid black;</code>
width/height	Sets size	<code>width: 300px;</code>



COLOUR WITH CSS

In CSS, **colors** are specified by using a predefined color name, or with a **RGB, HEX, HSL, RGBA, HSLA** value.

CSS Color Names:

In CSS, a color can be specified by using a predefined color name. CSS/HTML support **140 standard color names**.

Tomato	Orange	DodgerBlue	MediumSeaGreen
Gray	SlateBlue	Violet	LightGray



COLOUR WITH CSS

CSS Color Names:

In CSS, a color can be specified by using a predefined color name, CSS/HTML support 140 standard color names.

```
<!DOCTYPE html>
<html>
<body>

<h1 style="background-color:Tomato;">Tomato</h1>
<h1 style="background-color:Orange;">Orange</h1>
<h1 style="background-color:DodgerBlue;">DodgerBlue</h1>
<h1 style="background-color:MediumSeaGreen;">MediumSeaGreen</h1>
<h1 style="background-color:Gray;">Gray</h1>
<h1 style="background-color:SlateBlue;">SlateBlue</h1>
<h1 style="background-color:Violet;">Violet</h1>
<h1 style="background-color:LightGray;">LightGray</h1>

</body>
</html>
```

Tomato

Orange

DodgerBlue

MediumSeaGreen

Gray

SlateBlue

Violet



COLOUR WITH CSS

In CSS, **color** is used to set:

- The **text color**
- The **background color**
- The **border color**

CSS

```
p {  
  color: red;  
}
```

This makes the text in a `<p>` tag appear red.

CSS

```
div {  
  background-color: yellow;  
}
```

This gives the `<div>` a yellow background.

CSS

```
.box {  
  border: 2px solid blue;  
}
```

This gives the element a **blue border**.



STYLING LISTS WITH CSS.



STYLING LISTS WITH CSS.

In HTML, there are two main types of lists:

**** - unordered lists (list items are marked with bullets)

**** - ordered lists (list items are marked with numbers or letters)

CSS has the following properties for styling HTML lists:

- [list-style-type](#) - Specifies the type of list-item marker
- [list-style-image](#) - Specifies an image as the list-item marker
- [list-style-position](#) - Specifies the position of the list-item markers
- [list-style](#) - A shorthand property for the properties above



STYLING LISTS WITH CSS.

CSS Style List-item Markers

The CSS list-style-type property specifies the type of list-item marker in a list.

The following example shows some of the available list-item markers:

```
<!DOCTYPE html>
<html>
<head>
<style>
ul.a {list-style-type: circle;}
ul.b {list-style-type: disc;}
ul.c {list-style-type: square;}

ol.d {list-style-type: upper-roman;}
ol.e {list-style-type: lower-roman;}
ol.f {list-style-type: lower-alpha;}
ol.g {list-style-type: decimal;}
</style>
</head>
<body>

<h2>The list-style-type Property</h2>

<p>Example of unordered lists:</p>
<ul class="a">
  <li>Coffee</li>
  <li>Tea</li>
  <li>Coca Cola</li>
</ul>
```

```
<ul class="b">
  <li>Coffee</li>
  <li>Tea</li>
  <li>Coca Cola</li>
</ul>
```

```
<ul class="c">
  <li>Coffee</li>
  <li>Tea</li>
  <li>Coca Cola</li>
</ul>
```

```
<p>Example of ordered lists:</p>
<ol class="d">
  <li>Coffee</li>
  <li>Tea</li>
  <li>Coca Cola</li>
</ol>
```

```
<ol class="e">
  <li>Coffee</li>
  <li>Tea</li>
  <li>Coca Cola</li>
</ol>
```

```
<ol class="f">
  <li>Coffee</li>
  <li>Tea</li>
  <li>Coca Cola</li>
</ol>
```

```
<ol class="g">
  <li>Coffee</li>
  <li>Tea</li>
  <li>Coca Cola</li>
</ol>
```



STYLING LISTS WITH CSS.

CSS Style List-item Markers

The **CSS list-style-type** property specifies the type of list-item marker in a list.

The following example shows some of the available list-item markers:

The list-style-type Property

Example of unordered lists:

- Coffee
- Tea
- Coca Cola

- Coffee
- Tea
- Coca Cola

- Coffee
- Tea
- Coca Cola

Example of ordered lists:

- I. Coffee
- II. Tea
- III. Coca Cola

- i. Coffee
- ii. Tea
- iii. Coca Cola

- a. Coffee
- b. Tea
- c. Coca Cola

- 1. Coffee
- 2. Tea
- 3. Coca Cola



STYLING LISTS WITH CSS.

CSS Replace List-item Marker with an Image

The CSS [list-style-image](#) property is used to replace the list-item marker with an image.

Note: Always specify a list-style-type property in addition. This property is used if the image for some reason is unavailable.

```
<!DOCTYPE html>
<html>
<head>
<style>
ul {
  list-style-image: url('sqpurple.gif');
  list-style-type: square;
}
</style>
</head>
<body>

<h2>The list-style-image Property</h2>

<p>The list-style-image property specifies an image as the list item marker:</p>

<ul>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Coca Cola</li>
</ul>

</body>
</html>
```

The list-style-image Property

The list-style-image property specifies an image as the list item marker:

- Coffee
- Tea
- Coca Cola



STYLING LISTS WITH CSS.

CSS Position the List-item Markers

The CSS [list-style-position](#) property specifies the position of the list-item markers (bullet points).

- **list-style-position: outside;** means that the bullet points will be outside the list item. The start of each line of a list item will be aligned vertically.

This is default:

• Coffee
• Tea
• Coca-cola

- **list-style-position: inside;** means that the bullet points will be inside the list item. As it is part of the list item, it will be part of the text and push the text at the start:

• Coffee
• Tea
• Coca-cola



STYLING LISTS WITH CSS.

```
<!DOCTYPE html>
<html>
<head>
<style>
ul.a {
  list-style-position: outside;
}

ul.b {
  list-style-position: inside;
}
</style>
</head>
<body>

<h1>The list-style-position Property</h1>

<h2>list-style-position: outside (default):</h2>
<ul class="a">
```

The list-style-position Property

list-style-position: outside (default):

- Coffee - A brewed drink prepared from roasted coffee beans, which are the seeds of berries from the Coffea plant
- Tea - An aromatic beverage commonly prepared by pouring hot or boiling water over cured leaves of the Camellia sinensis, an evergreen shrub (bush) native to Asia
- Coca Cola - A carbonated soft drink produced by The Coca-Cola Company. The drink's name refers to two of its original ingredients, which were kola nuts (a source of caffeine) and coca leaves

list-style-position: inside:

- Coffee - A brewed drink prepared from roasted coffee beans, which are the seeds of berries from the Coffea plant
- Tea - An aromatic beverage commonly prepared by pouring hot or boiling water over cured leaves of the Camellia sinensis, an evergreen shrub (bush) native to Asia
- Coca Cola - A carbonated soft drink produced by The Coca-Cola Company. The drink's name refers to two of its original ingredients, which were kola nuts (a source of caffeine) and coca leaves



STYLING IMAGES WITH CSS.



STYLING IMAGES WITH CSS.

Rounded Images

You can use the **border-radius** property to create rounded images:



```
<!DOCTYPE html>
<html>
<head>
<style>
img {
  border-radius: 20px;
}
</style>
</head>
<body>

<h2>Rounded Image</h2>

<p>Use the border-radius property to create rounded images:</p>



</body>
</html>
```



STYLING IMAGES WITH CSS.

Rounded Images

You can use the **border-radius** property to create rounded images:

The border-radius property rounds the corners of the image, creating a circular or oval shape, based on the values provided.

```
<style>
  img {
    border-radius: 50%;
  }
</style>
```

- **border-radius: 50%** creates a circular image when applied to a square image.
- Width and height define the size of the image.



STYLING IMAGES WITH CSS.

Rounded Images

You can use the **border-radius** property to create rounded images:



```
<!DOCTYPE html>
<html>
<head>
<style>
img {
  border-radius: 50%;
}
</style>
</head>
<body>

<h2>Circled Image</h2>

<p>Use the border-radius property to create circled images:</p>



</body>
</html>
```



STYLING IMAGES WITH CSS.

Thumbnail Images

Use the **border** property to create thumbnail images:

The border property helps create thumbnail images by adding a border around the image, giving it a clean, defined look.

```
<style>
  img {
    border: 1px solid black;
    border-radius: 5px;
    padding: 5px;
  }
</style>
```

- The border property defines the size and color of the image's border.
- Width and height properties set the dimensions of the thumbnail image.



STYLING IMAGES WITH CSS.

Thumbnail Images

Use the **border** property to create thumbnail images:



```
<!DOCTYPE html>
<html>
<head>
<style>
img {
  border: 1px solid #ddd;
  border-radius: 4px;
  padding: 5px;
  width: 150px;
}
</style>
</head>
<body>

<h2>Thumbnail Image</h2>

<p>Use the border property to create thumbnail images:</p>



</body>
</html>
```



STYLING IMAGES WITH CSS.

Responsive Images

Responsive images will automatically adjust to fit the size of the screen.

Resize the browser window to see the effect:





STYLING IMAGES WITH CSS.

Responsive Images

Responsive images automatically adjust to fit the container size, ensuring they look good on different screen sizes.

```
<style>
  img {
    max-width: 100%;
    height: auto;
  }
</style>
```

- **width:** 100% makes the image adjust to the container's width.
- **height:** auto ensures the image maintains its aspect ratio.



STYLING IMAGES WITH CSS.

Responsive Images

If you want an image to scale down if it has to, but never scale up to be larger than its original size, add the following:

```
<!DOCTYPE html>
<html>
<head>
<style>
img {
  max-width: 100%;
  height: auto;
}
</style>
</head>
<body>

<h2>Responsive Image</h2>

<p>Responsive images will automatically adjust to fit the size of the screen.</p>
<p>Resize the browser window to see the effect:</p>



</body>
</html>
```

Responsive Image

Responsive images will automatically adjust to fit the size of the screen.

Resize the browser window to see the effect.





STYLING IMAGES WITH CSS.

Polaroid Images / Cards



Cinque Terre



Northern Lights



STYLING IMAGES WITH CSS.

Polaroid Images / Cards

```
<!DOCTYPE html>
<html>
<head>

<title>Polaroid Image Style</title>
<style>
  .polaroid {
    width: 500px;
    background: gray;
    padding: 10px 10px 40px 10px; /* More padding at bottom TRBL*/
    box-shadow: 10px 8px 8px rgba(0,0,0,2);
    margin: 20px;
    text-align: center;
    font-family: 'Arial', sans-serif;
    transform: rotate(-4deg); /* optional tilt */
    transition: transform 0.2s;
  }

  .polaroid img {
    width: 100%;
    height: auto;
    display: block;
  }

  .polaroid:hover {
    transform: rotate(0deg) scale(1.05); /* on hover
```

```

  }
  .caption {
    margin-top: 10px;
    font-size: 14px;
    color: #333;
  }
</style>
</head>
<body>

<h2>Responsive Polaroid Images / Cards</h2>

<div class="polaroid">
  
  <p>Cinque Terre</p>
```

Responsive Polaroid Images / Cards



Responsive Polaroid Images / Cards





STYLING IMAGES WITH CSS.

CSS Image Opacity:

The [opacity](#) property specifies the opacity/transparency of an element.

The opacity property can take a value from 0.0 - 1.0:

0.0 - The element will be completely transparent

0.5 - The element will be 50% transparent


1.0 - Default. The element will be fully opaque



opacity 0.2



opacity 0.5

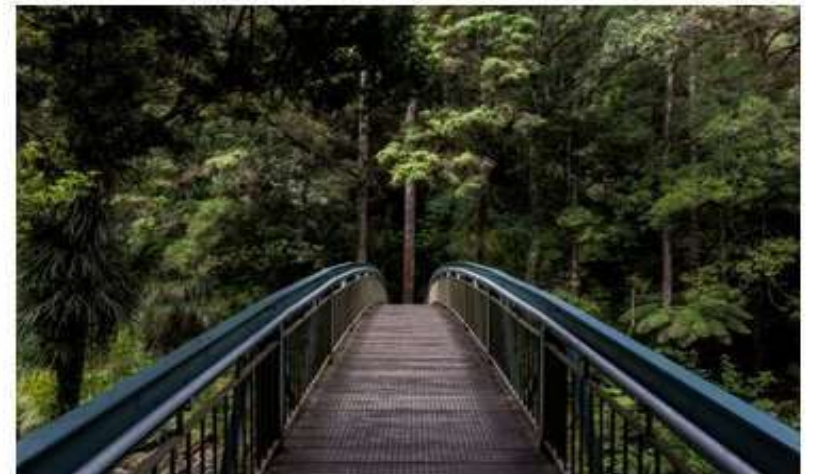

opacity 1.0
(default)



STYLING IMAGES WITH CSS.

CSS Image Opacity:

The opacity property is used to make an image transparent. The value ranges from 0 (fully transparent) to 1 (fully opaque).

```
<style>
  img {
    opacity: 0.5;
  }
</style>
```

- **opacity:** 0.5 makes the image semi-transparent.
- The image will appear with reduced opacity, allowing the background to be seen through it



STYLING IMAGES WITH CSS.

CSS Image Opacity:

```
<!DOCTYPE html>
<html>
<head>
<style>
img {
  opacity: 0.5;
}
</style>
</head>
<body>

<h2>The opacity Property</h2>

<p>The opacity property specifies the opacity of an element. The lower the value, the more transparent:</p>

<p>Image with 50% opacity:</p>


</body>
</html>
```

The opacity Property

The opacity property specifies the opacity of an element. The lower the value, the more transparent:

Image with 50% opacity:





STYLING IMAGES WITH CSS.

Flip an Image

Move your mouse over the image:

```
<!DOCTYPE html>
<html>
<head>
<style>
img:hover {
  transform: scaleX(-1);
}
</style>
</head>
<body>

<h2>Flip an Image</h2>
<p>Move your mouse over the image.</p>



</body>
</html>
```

Flip an Image

Move your mouse over the image.



Flip an Image

Move your mouse over the image.





STYLING IMAGES WITH CSS.

Flip an Image

Move your mouse over the image:

```
<!DOCTYPE html>
<html>
<head>
<style>
img:hover {
  transform: scaleY(-1);
}
</style>
</head>
<body>

<h2>Flip an Image</h2>
<p>Move your mouse over the image.</p>



</body>
</html>
```

Flip an Image

Move your mouse over the image.



Flip an Image

Move your mouse over the image.





STYLING TABLES WITH CSS.



STYLING TABLES WITH CSS.

CSS TABLE BORDERS

The CSS [border](#) property is used to specify the width, style, and color of table borders.

The [border](#) property is a shorthand property for:

[border-width](#) - sets the width of the border

[border-style](#) - sets the style of the border (required)

[border-color](#) - sets the color of the border

The example below specifies a 1px solid border for <table>, <th>, and <td> elements:

Firstname	Lastname
Peter	Griffin
Lois	Griffin

Why Double Borders?

Notice that the tables in the examples above have double borders. This is because both the <table>, <th>, and <td> elements have separate borders.

To remove double borders, take a look at the example below.



STYLING TABLES WITH CSS.

CSS Table Borders

```
<!DOCTYPE html>
<html>
<head>
<style>
table, th, td {
  border: 1px solid;
}
</style>
</head>
<body>

<h2>Add a border to a table:</h2>

<table>
  <tr>
    <th>Firstname</th>
    <th>Lastname</th>
  </tr>
  <tr>
    <td>Peter</td>
    <td>Griffin</td>
  </tr>
  <tr>
    <td>Lois</td>
    <td>Griffin</td>
  </tr>
</table>

</body>
</html>
```

Add a border to a table:

Firstname	Lastname
Peter	Griffin
Lois	Griffin

```
<style>
table, th, td {
  border: 1px dashed green;
}
</style>
```

Firstname	Lastname
Peter	Griffin
Lois	Griffin



STYLING TABLES WITH CSS.

CSS Collapse Table Borders

The CSS border-collapse property sets whether table borders should collapse into a single border or be separated as in standard HTML.

➤ This property can have one of the following values:

separate - Default value. Borders are separated; each cell will display its own borders

collapse - Borders are collapsed into a single border when possible

The following table has collapsed borders:

Firstname	Lastname
Peter	Griffin
Lois	Griffin



STYLING TABLES WITH CSS.

CSS Collapse Table Borders

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
  border: 5px solid;
}
table {
  border-collapse: collapse;
}
</style>
</head>
<body>

<h2>Let the table borders collapse</h2>

<table>
  <tr>
    <th>Firstname</th>
    <th>Lastname</th>
  </tr>
  <tr>
    <td>Peter</td>
    <td>Griffin</td>
  </tr>
  <tr>
    <td>Lois</td>
    <td>Griffin</td>
  </tr>
</table>

</body>
</html>
```

Let the table borders collapse

Firstname	Lastname
Peter	Griffin
Lois	Griffin



STYLING TABLES WITH CSS.

CSS Table Padding

To control the space between the border and the content in a table, use the padding property on `<td>` and `<th>` elements:

First Name	Last Name	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
  border: 5px solid;
  padding: 10px;
}

table {
  border-collapse: collapse;
}
</style>
</head>
<body>
```

Firstname	Lastname
Peter	Griffin
Lois	Griffin



STYLING TABLES WITH CSS.

CSS Border Spacing

The CSS border-spacing property sets the distance between the borders of adjacent cells.

Note: This property works only when border-collapse is set to "separate".
The following table has a border-spacing of 15px:

Firstname	Lastname
Peter	Griffin
Lois	Griffin



STYLING TABLES WITH CSS.

CSS Border Spacing

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
  border: 2px solid black;
}

#table1 {
  border-collapse: separate;
  border-spacing: 50px 10px;
}

#table2 {
  border-collapse: separate;
  border-spacing: 30px 50px;
}
</style>
</head>
<body>
```

```
<h2>border-spacing: 15px;</h2>
```

<p>When using "border-collapse: separate", the border-spacing property can be used to set the space between the cells:</p>

```
<table id="table1">
  <tr>
    <th>name</th>
    <th>Roll no</th>
  </tr>
  <tr>
    <td>Peter</td>
    <td>101</td>
  </tr>
  <tr>
    <td>Lois</td>
    <td>103</td>
  </tr>
</table>
```

border-spacing: 15px:

When using "border-collapse: separate", the border-spacing property can be used to set the space between the cells:

name	Roll no
Peter	101
Lois	103



STYLING TABLES WITH CSS.

CSS Border Spacing

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
  border: 2px solid black;
}

#table1 {
  border-collapse: separate;
  border-spacing: 50px 10px;
}

#table2 {
  border-collapse: separate;
  border-spacing: 30px 50px;
}
</style>
</head>
<body>
```

```
<h2>border-spacing: 15px 50px:</h2>
<p>Using two values (the first sets the horizontal spacing and the second sets the vertical spacing):</p>
<table id="table2">
  <tr>
    <th>Firstname</th>
    <th>Lastname</th>
  </tr>
  <tr>
    <td>Peter</td>
    <td>Griffin</td>
  </tr>
  <tr>
    <td>Lois</td>
    <td>Griffin</td>
  </tr>
</table>
</body>
</html>
```

border-spacing: 15px 50px:

Using two values (the first sets the horizontal spacing and the second sets the vertical spacing)

Firstname	Lastname
Peter	Griffin
Lois	Griffin



STYLING TABLES WITH CSS.

CSS Outside Table Borders

If you just want a border around the table (not inside), you specify the **border** property only for the `<table>` element:

Firstname	Lastname
Peter	Griffin
Lois	Griffin

```
<!DOCTYPE html>
<html>
<head>
<style>
table {
  border: 5px solid;
}
</style>
</head>
<body>

<h2>Single Border Around The Table</h2>

<table>
  <tr>
    <th>Firstname</th>
    <th>Lastname</th>
  </tr>
  <tr>
    <td>Peter</td>
    <td>Griffin</td>
  </tr>
  <tr>
    <td>Lois</td>
    <td>Griffin</td>
  </tr>
</table>

</body>
</html>
```

Single Border Around The Table

Firstname	Lastname
Peter	Griffin
Lois	Griffin



STYLING TABLES WITH CSS.

CSS TABLE SIZE

CSS Table Width and Height

The width and height of a table are defined by the [width](#) and [height](#) properties.

CSS Table Width

The CSS [width](#) property is used to set the width of a table.

The width can be set:

- in percent (%)
- as a fixed length (px)
- by the auto keyword



STYLING TABLES WITH CSS.

CSS TABLE SIZE

CSS Table Width in Percent

To create a table that spans the entire screen (full-width), use width: 100%;:

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
    border: 1px solid black;
}
table {
    border-collapse: collapse;
    width: 100%;
}
</style>
</head>
<body>
<h2>Set Table Width to 100%</h2>
<table>
  <tr>
    <th>Firstname</th>
    <th>Lastname</th>
    <th>Roll No</th>
  </tr>
  <tr>
    <td>Peter</td>
    <td>Griffin</td>
    <td>100</td>
  </tr>
  <tr>
    <td>Lois</td>
    <td>Griffin</td>
    <td>101</td>
  </tr>
</table>
</body>
</html>
```



STYLING TABLES WITH CSS.

CSS TABLE SIZE

CSS Table Width in Percent

To create a table that spans half the page, use `width: 50%;`:

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300

CSS Table Width in a Fixed Width

To create a table with a fixed width, use `width: 500px;`:

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
  border: 1px solid black;
}

table {
  border-collapse: collapse;
  width: 500px;
}
</style>
</head>
```



STYLING TABLES WITH CSS.

CSS TABLE SIZE

CSS Table Width Using auto

To let the browser calculate the width, use `width: auto;`

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
    border: 1px solid black;
}

table {
    border-collapse: collapse;
    width: auto;
}
</style>
</head>
```



STYLING TABLES WITH CSS.

CSS TABLE SIZE

CSS Table Height

The CSS `height` property is used to set the height of a table.

The height can be set:

- in percent (%)
- as a fixed length (px)
- by the `auto` keyword

The example below sets the height of the table headers (<th>) to 70px:

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
    border: 1px solid black;
}

table {
    border-collapse: collapse;
    width: 100%;
}

th {
    height: 60px;
}
</style>
</head>
```

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300



STYLING TABLES WITH CSS.

CSS TABLE ALIGNMENT

Horizontal Alignment

The CSS text-align property is used to set the horizontal alignment of the content in **<th> or <td>**.

This property can have one of the following values:

- **left** - Aligns the text to the left
- **right** - Aligns the text to the right
- **center** - Centers the text

Note: By default, the content of <th> elements are center-aligned and the content of <td> elements are left-aligned!



STYLING TABLES WITH CSS.

CSS Table Alignment

Horizontal Alignment

CSS text-align: center

To center-align the content of <td> elements, use `text-align: center;`

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
    border: 1px solid black;
}

table {
    border-collapse: collapse;
    width: 100%;
}

td {
    text-align: center;
}
</style>
</head>
```



STYLING TABLES WITH CSS.

CSS Table Alignment

Horizontal Alignment

CSS text-align: center

To center-align the content of <td> elements, use `text-align: center;`

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
    border: 1px solid black;
}

table {
    border-collapse: collapse;
    width: 100%;
}

td {
    text-align: center;
}
</style>
</head>
```



STYLING TABLES WITH CSS.

CSS Table Alignment

Horizontal Alignment

CSS text-align: left

To force the content of <th> elements to be left-aligned, use `text-align: left` on <th> elements:

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
    border: 1px solid black;
}

table {
    border-collapse: collapse;
    width: 100%;
}

th {
    text-align: left;
}
</style>
</head>
```



STYLING TABLES WITH CSS.

CSS Table Alignment

Vertical Alignment

The CSS [vertical-align](#) property sets the vertical alignment (like top, bottom, or middle) of the content in `<th>` or `<td>`.

Note: By default, the vertical alignment of the content in a table is middle (for both `<th>` and `<td>` elements).

The following example sets the vertical text alignment to bottom for `<td>` elements:

The following example sets the vertical text alignment to bottom for `<td>` elements.

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300



STYLING TABLES WITH CSS.

CSS Table Alignment

Vertical Alignment

the following example sets the vertical alignment of the table cells to bottom.

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
  border: 1px solid black;
}

table {
  border-collapse: collapse;
  width: 100%;
}

td {
  height: 50px;
  vertical-align: top;
}
</style>
</head>
```

Firstname	Lastname	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300
Cleveland	Brown	\$250

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
  border: 1px solid black;
}

table {
  border-collapse: collapse;
  width: 100%;
}

td {
  height: 50px;
  vertical-align: bottom;
}
</style>
</head>
```



STYLING TABLES WITH CSS.

CSS TABLE STYLING

CSS Table Padding

To add some more space between the inner borders and the content in a table, use the padding property on `<td>` and `<th>` elements:

First Name	Last Name	Savings
Peter	Griffin	\$100
Lois	Griffin	\$150
Joe	Swanson	\$300

```
<!DOCTYPE html>
<html>
<head>
<style>
table, td, th {
    border: 1px solid #ddd;
    text-align: left;
}

table {
    border-collapse: collapse;
    width: 100%;
}

th, td {
    padding: 10px;
}
</style>
</head>
```



STYLING TABLES WITH CSS.

CSS RESPONSIVE TABLES

CSS Responsive Tables

A responsive table will display a horizontal scrollbar if the screen is too small to display the full content.

Resize the browser window to see the effect:

First Name	Last Name	Points	Points	Points	Points	Points	Points	Points	Points	Points	Points	Points	Points	Points	Points
Jill	Smith	50	50	50	50	50	50	50	50	50	50	50	50	50	5
Jill	Smith	50	50	50	50	50	50	50	50	50	50	50	50	50	5
Jill	Smith	50	50	50	50	50	50	50	50	50	50	50	50	50	5
Jill	Smith	50	50	50	50	50	50	50	50	50	50	50	50	50	5
Jill	Smith	50	50	50	50	50	50	50	50	50	50	50	50	50	5
Eve	Jackson	94	94	94	94	94	94	94	94	94	94	50	50	50	5
Adam	Johnson	67	67	67	67	67	67	67	67	67	67	50	50	50	5

```
<!DOCTYPE html>
<html>
<head>
<style>
div.tablecontainer {
  overflow-x: auto;
}

table {
  border-collapse: collapse;
  width: 100%;
}

table, th, td {
  border: 1px solid #ddd;
  padding: 8px;
  text-align: left;
}
</style>
</head>
```



STYLING FORMS WITH CSS.



STYLING FORMS WITH CSS.

STYLE INPUT WIDTH

The width property is used to set the width of an input field.

Tip: The default width of an HTML input text field, is 20 characters.

Here we set the width to 100%:

```
<!DOCTYPE html>
<html>
<head>
<style>
input {
  width: 150%;
}
</style>
</head>
<body>
<h2>A Full-width Input Field</h2>
<form>
<table>
<tr>
<td> <label for="fname">First Name:</label></td>
<td><input type="text" id="fname" name="fname"></td>
</tr>
<tr>
<td><label for="lname">Last Name:</label></td>
<td><input type="text" id="lname" name="lname"></td>
</tr>
</table>
</form>
</body>
</html>
```

A Full-width Input Field

First Name:

Last Name:



STYLING FORMS WITH CSS.

STYLE INPUT PADDING

The padding property is used to **add some space inside the text field.**

Tip: When you have several input fields after each other, we might also want to add some margin, to add more space around them:

The example above applies to all `<input>` elements. If you only want to style a specific input type, you can use attribute selectors:

- `input[type=text]` - will only select text fields
- `input[type=password]` - will only select password fields
- `input[type=number]` - will only select number fields
- etc..



STYLING FORMS WITH CSS.

STYLE INPUT PADDING

```
<!DOCTYPE html>
<html>
<head>
<style>
label
{
display: block;
}
input[type=text]
{
width: 100%;
padding: 20px;
margin: 10px 0px;
}
</style>
</head>
<body>
<h2>A Full-width Input Field</h2>
<form>
<table>
<tr>
<td> <label for="fname">First Name:</label></td>
<td><input type="text" id="fname" name="fname"></td>
</tr>
<tr>
<td><label for="lname">Last Name:</label></td>
<td> <input type="text" id="lname" name="lname"></td>
</tr>
</table>
</form>
</body>
</html>
```

First Name:

Last Name:



STYLING FORMS WITH CSS.

STYLE INPUT BORDER

The border property is used to change the border size and color, and the **border-radius** property can be used to add rounded corners:

```
<!DOCTYPE html>
<html>
<head>
<style>
label
{
display: block;
}
input[type=text]
{
width: 100%;
padding: 20px;
margin: 10px 0px;
border: 2px solid red;
border-radius: 20px;
}
</style>
</head>
<body>
<h2>A Full-width Input Field</h2>
<form>
<table>
<tr>
<td> <label for="fname">First Name:</label></td>
<td><input type="text" id="fname" name="fname"></td>
</tr>
<tr>
<td><label for="lname">Last Name:</label></td>
<td><input type="text" id="lname" name="lname"></td>
</tr>
</table>
</form>
</body>
</html>
```

A Full-width Input Field

First Name:

Last Name:





STYLING FORMS WITH CSS.

STYLE INPUT BORDER

If you only want a bottom border, use the [border-bottom](#) property:

```
<!DOCTYPE html>
<html>
<head>
<style>
label
{
display: block;
}
input[type=text]
{
width: 100%;
padding: 20px;
margin: 10px 0px;
border: None;
border-bottom: 1px solid red;
}
</style>
</head>
```

A Full-width Input Field

First Name:

Last Name:



STYLING FORMS WITH CSS.

Style Input Background Color and Color

The **background-color** property is used to add a background color to the input, and the **color** property is used to change the text color:

```
<!DOCTYPE html>
<html>
<head>
<style>
label
{
display: block;
}
input[type=text]
{
width: 100%;
padding: 20px;
margin: 10px 0px;
border: None;
background-color: #3CBC8D;
color: white;
}
</style>
</head>
```

First Name:

Last Name:



STYLING FORMS WITH CSS.

Style Input with Focus

By default, some browsers will add a blue outline around the input when it gets focus (clicked on). You can remove this behavior by adding `outline: none;` to the input.

Use the `:focus` selector to do something with the input field when it gets focus:

```
<!DOCTYPE html>
<html>
<head>
<style>
label
{
display: block;
}
input[type=text]
{
width: 100%;
padding: 20px;
margin: 10px 0px;
border: None;
background-color: lightblue;
color: white;
}
input[type=text]:focus {
border: 5px solid green;
background-color: red;
}
</style>
</head>
```

First Name:

Last Name:



STYLING FORMS WITH CSS.

Style Input with icon/image

If you want an icon inside the input, use the background-image property and position it with the background-position property. Also notice that we add a large left padding to reserve the space of the icon:

```
<!DOCTYPE html>
<html>
<head>
<style>
input[type=text] {
  width: 50%;
  border: 2px solid #ccc;
  border-radius: 4px;
  font-size: 16px;
  background-color: white;
  background-image: url('searchicon.png');
  background-position: 10px 10px;
  background-repeat: no-repeat;
  padding: 12px 20px 12px 40px;
}
</style>
</head>
<body>

<h2>Input field with an icon inside</h2>

<form>
  <input type="text" name="search" placeholder="Search..">
</form>

</body>
</html>
```

Input field with an icon inside



STYLING FORMS WITH CSS.

Style Textarea

By default, a `<textarea>` can be resized with a "grabber" in the bottom right corner. To remove the grabber, set the **resize** property to **none**:

```
<!DOCTYPE html>
<html>
<head>
<style>
textarea {
  width: 70%;
  height: 150px;
  padding: 12px;
  border: 2px solid red;
  border-radius: 10px;
  background-color: lightblue;
  font-size: 18px;
  resize: none;
}
</style>
</head>
<body>
```

Styling textarea

Tip: Use the `resize` property to prevent textareas from being resized (disable the "grabber" in the bottom right corner):



Some text...



STYLING FORMS WITH CSS.

Style a Dropdown Menu

```
<!DOCTYPE html>
<html>
<head>
<style>
select {
  width: 100%;
  padding: 16px;
  border: none;
  border-radius: 10px;
  background-color: lightblue;
}
</style>
</head>
<body>
```

```
<h2>Styling a Dropdown Menu</h2>
```

```
<form>
  <select id="country" name="country">
    <option value="au">Australia</option>
    <option value="ca">Canada</option>
    <option value="usa">USA</option>
  </select>
</form>

</body>
</html>
```

Styling a Dropdown Menu

Australia	▼
Australia	
Canada	
USA	



STYLING FORMS WITH CSS.

Style Form Buttons

Form buttons of type "button", "submit" and "reset" can also be styled with CSS:

```
<!DOCTYPE html>
<html>
<head>
<style>
input[type=button], input[type=submit], input[type=reset] {
  background-color: red;
  border: none;
  color: white;
  padding: 16px 32px;
  text-decoration: underline;
  margin: 4px 2px;
  cursor: pointer;
}
</style>
</head>
<body>
```

Styling form buttons

Button

Reset

Submit





STYLING FORMS WITH CSS.

CSS Responsive Form

The following example uses CSS media queries to create a responsive form. You will learn more about media queries in a later chapter.

When the screen is less than 600px wide, we make the labels and input fields stack on top of each other, instead of next to each other.

Resize the screen to see the form layout change!



STYLING LINK WITH CSS.



STYLING LINK WITH CSS.

Styling Links

Links can be styled with any CSS property (e.g. `color`, `font-family`, `background`, etc.).

Example

```
a {  
  color: hotpink;  
}
```

Try it Yourself »

In addition, links can be styled differently depending on what **state** they are in.

The four links states are:

- `a:link` - a normal, unvisited link
- `a:visited` - a link the user has visited
- `a:hover` - a link when the user mouses over it
- `a:active` - a link the moment it is clicked



STYLING LINK WITH CSS.

Example

```
/* unvisited link */
a:link {
    color: red;
}

/* visited link */
a:visited {
    color: green;
}

/* mouse over link */
a:hover {
    color: hotpink;
}

/* selected link */
a:active {
    color: blue;
}
```

Link Button

This is a link

```
<!DOCTYPE html>
<html>
<head>
<style>
a:link, a:visited {
    background-color: white;
    color: black;
    border: 2px solid green;
    padding: 10px 20px;
    text-align: center;
    text-decoration: none;
    display: inline-block;
}

a:hover, a:active {
    background-color: green;
    color: white;
}
</style>
</head>
<body>

<h2>Link Button</h2>

<a href="default.asp" target="_blank">This is a link</a>

</body>
</html>
```



STYLING LINK WITH CSS.

```
<!DOCTYPE html>
<html>
<head>
<style>
/* unvisited link */
a:link {
  color: red;
}

/* visited link */
a:visited {
  color: green;
}

/* mouse over link */
a:hover {
  color: hotpink;
}

/* selected link */
a:active {
  color: blue;
}
</style>
</head>
<body>

<h1>Style a link depending on state</h1>

<p><a href="default.asp" target="_blank">This is a link</a></p>

<p><b>Note:</b> :hover must come after :link and :visited in order to be effective.</p>
<p><b>Note:</b> :active must come after :hover in order to be effective.</p>

</body>
</html>
```

Style a link depending on state

[This is a link](#)

Note: :hover must come after :link and :visited in order to be effective.

Note: :active must come after :hover in order to be effective.

Style a link depending on state

[This is a link](#)

Note: :hover must come after :link and :visited in order to be effective.

Note: :active must come after :hover in order to be effective.



STYLING LINK WITH CSS.

CSS Properties of Links: Some basic CSS properties of links are given below:

- Color
- Font-family
- text-decoration
- background-color



STYLING LINK WITH CSS.

CSS Properties of Links: Some basic CSS properties of links are given below:

➤ Color

Syntax:

```
a {  
    color: color_name;  
}
```

```
<!DOCTYPE html>  
<html>  
  
<head>  
    <title>Link color property</title>  
    <style>  
        p {  
            font-size: 20px;  
            text-align: center;  
        }  
  
        /*unvisited link will appear green*/  
        a:link {  
            color: red;  
        }  
  
        /*visited link will appear blue*/  
        a:visited {  
            color: blue;  
        }  
  
        /*when mouse hovers over link it will appear orange*/  
        a:hover {  
            color: orange;  
        }  
    </style>  
</head>  
<body>  
    <p>Link color property</p>  
</body>  
</html>
```



STYLING LINK WITH CSS.



CSS Properties of Links: Some basic CSS properties of links are given below:

➤ Color

```
/*when the link is clicked, it will appear black*/
a:active {
    color: black;
}
</style>
</head>

<body>
    <p>
        <a href="https://www.geeksforgeeks.org/">
            GeeksforGeeks
        </a>
        This link will change colours with different states.
    </p>
</body>

</html>
```

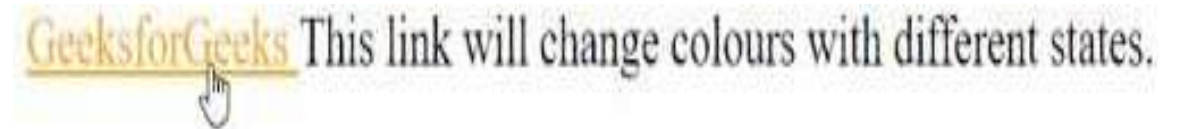



STYLING LINK WITH CSS.

CSS Properties of Links: Some basic CSS properties of links are given below:

➤ Font-family

font-family: This property is used to change the font type of a link using font-family property.

Syntax:

```
a {  
    font-family: "family name";  
}
```



STYLING LINK WITH CSS.

CSS Properties of Links: Some basic CSS properties of links are given below:

➤ Font-family

font-family: This property is used to change the font type of a link using font-family property.

Syntax:

```
a {  
    font-family: "family name";  
}
```



STYLING LINK WITH CSS.

➤ Font-family

```
<!DOCTYPE html>
<html>

<head>
  <style>
    /*Initial link font family arial*/
    a {
      font-family: Arial;
    }

    p {
      font-size: 30px;
      text-align: center;
    }

    /*unvisited link font family*/
    a:link {
      color: Arial;
    }

    /*visited link font family*/
    a:visited {
      font-family: Arial;
    }

    /*when mouse hovers over it will change to times new roman*/
    a:hover {
      font-family: Times new roman;
    }

    /*when the link is clicked, it will changed to Comic sans ms*/
    a:active {
      font-family: Comic Sans MS;
    }
  </style>
</head>
```

```
<body>
  <p>
    <a href="https://www.geeksforgeeks.org/" id="link">
      GeeksforGeeks
    </a>
    a Computer Science Portal for Geeks.
  </p>
</body>

</html>
```



STYLING LINK WITH CSS.

➤ text-decoration:

This property is basically used to remove/add underlines

```
<!DOCTYPE html>
<html>
<head>
<style>
a:link {
  text-decoration: none;
}
a:visited {
  text-decoration: none;
}
a:hover {
  text-decoration: underline;
}
a:active {
  text-decoration: underline;
}
</style>
</head>
<body>

<h1>Style a link with text-decoration</h1>

<p><a href="default.asp" target="_blank">This is a link</a></p>

<p><b>Note:</b> :hover must come after :link and :visited in order to be effective.</p>
<p><b>Note:</b> :active must come after :hover in order to be effective.</p>

</body>
</html>
```

Style a link with text-decoration

This is a link

Note: :hover must come after :link and :visited in order to be effective.

Note: :active must come after :hover in order to be effective.

Style a link with text-decoration

This is a link

Note: :hover must come after :link and :visited in order to be effective.

Note: :active must come after :hover in order to be effective.



STYLING LINK WITH CSS.

➤ background-color

The [background-color](#) property can be used to specify a background color for links:

```
<!DOCTYPE html>
<html>
<head>
<style>
a:link {
    background-color: yellow;
}

a:visited {
    background-color: cyan;
}

a:hover {
    background-color: lightgreen;
}

a:active {
    background-color: hotpink;
}
</style>
</head>
<body>

<h1>Style a link with background-color</h1>

<p><a href="default.asp" target="_blank">This is a link</a></p>

<p><b>Note:</b> :hover must come after :link and :visited in order to be effective.</p>
<p><b>Note:</b> :active must come after :hover in order to be effective.</p>

</body>
</html>
```

Style a link with background-color

[This is a link](#)

Note: :hover must come after :link and :visited in order to be effective.

Note: :active must come after :hover in order to be effective.

Style a link with background-color

[This is a link](#)

Note: :hover must come after :link and :visited in order to be effective.

Note: :active must come after :hover in order to be effective.