

# Chapter27PDF

## Text Formatting

*Italic*, **bold**, underline,

## First Level Header

### Second Level Header



## Running Code

When you click the **Render** button a document will be generated that includes both content and the output of embedded code. You can embed code like this:

```
1 + 1
```


[1] 2

You can add options to executable code like this

[1] 4

The `echo: false` option disables the printing of code (only output is displayed).

```
test <- tibble (  
  x = c(1:10),  
  y = c(1:10)  
)  
  
ggplot(test) +  
  geom_point(mapping = aes(x = x, y = y))
```

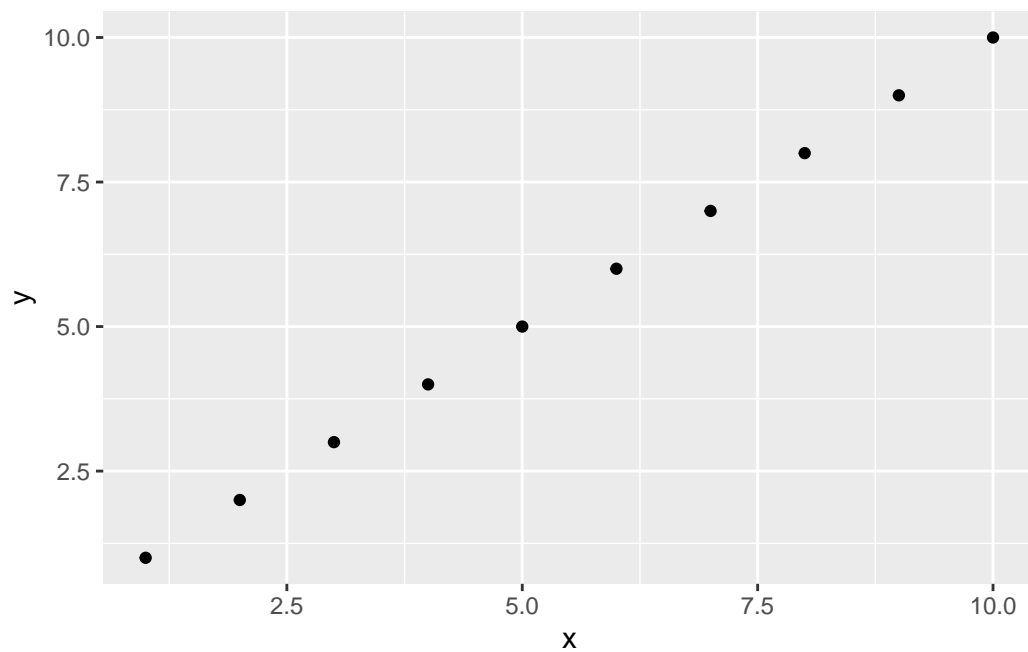

```
knitr::kable(mtcars[1:5,])
```

	mpg	cyl	disp	hp	drat	wt	qsec	vs	am	gear	carb
Mazda RX4	21.0	6	160	110	3.90	2.620	16.46	0	1	4	4
Mazda RX4 Wag	21.0	6	160	110	3.90	2.875	17.02	0	1	4	4
Datsun 710	22.8	4	108	93	3.85	2.320	18.61	1	1	4	1
Hornet 4 Drive	21.4	6	258	110	3.08	3.215	19.44	1	0	3	1
Hornet	18.7	8	360	175	3.15	3.440	17.02	0	0	3	2
Sportabout											