

編譯器設計

lex

A Lexical Analyzer Generator

lex : A Tool for Creating Lexical Analyzers

- ◆ Lexical analyzers tokenize input streams.
- ◆ Regular expressions define tokens.
- ◆ Tokens are the terminals of a language.

R.E. \Rightarrow NFA \Rightarrow DFA




LEX

keyword + then

Overview

用 RE 描述 Regular Language,
透過 Lex 產生 parser

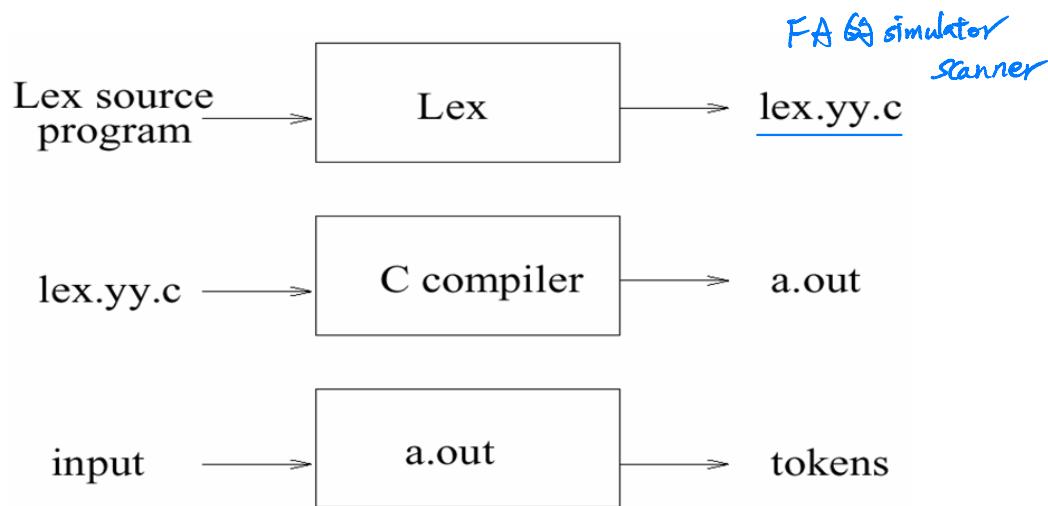


lex

編譯器設計

3

lex Internals

- ◆ Converts regular expressions into NFAs.
- ◆ NFAs are implemented as table driven state machines.

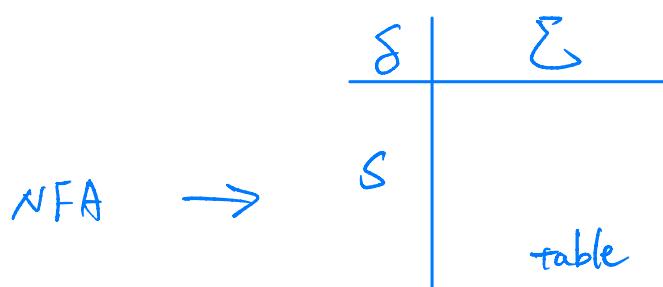


lex

編譯器設計


4

lex and yacc

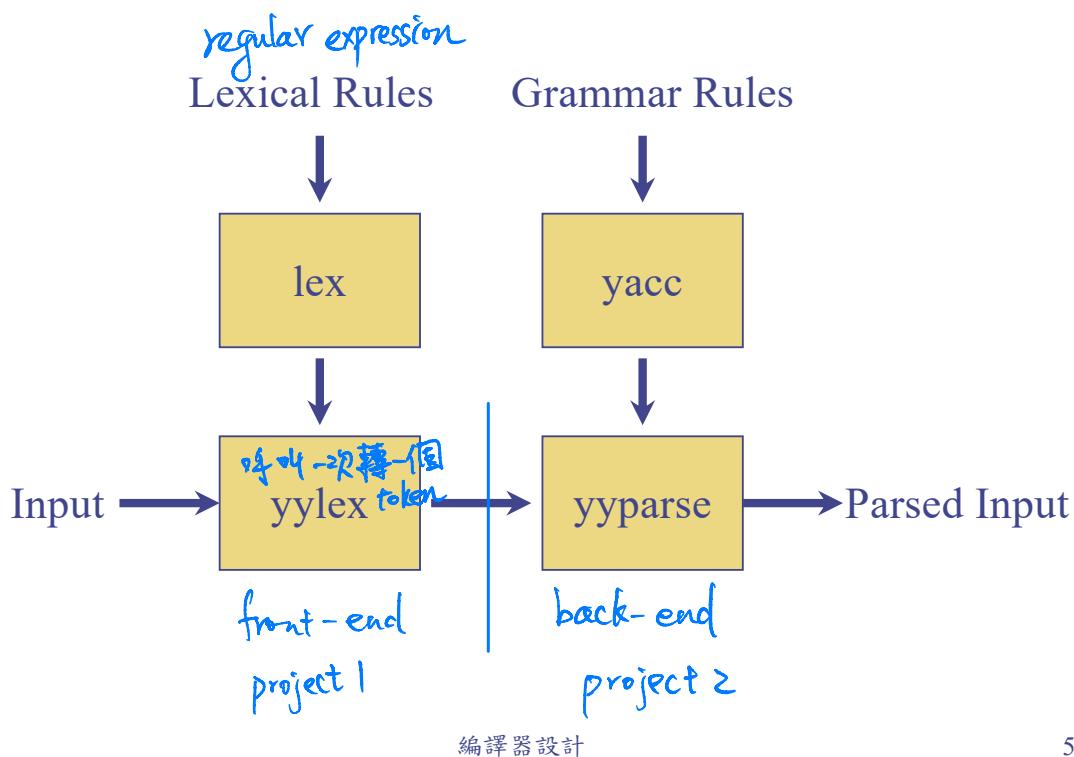

5

General Format of lex Source

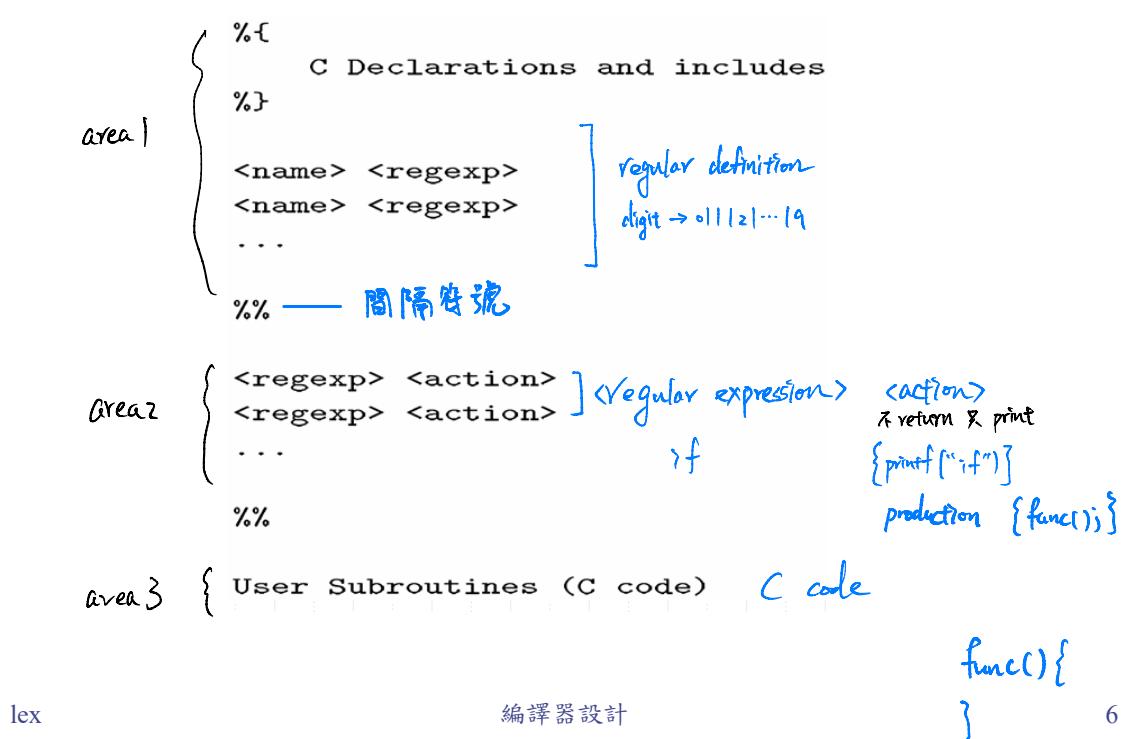

6

General Format of lex Source

- ◆ Input specification file is in 3 parts
 - Declarations: Definitions
 - Transition Rules: Token Descriptions and actions
 - Auxiliary Procedures: User-Written code
- ◆ Three parts are separated by %%
- ◆ Tips: In the first part we define patterns, in the third part we define actions, in the second part we put them together.

General Format of lex Source

- ◆ The first and second part must exist, but may be empty, the third part and the second %% are optional.
- ◆ A minimum lex program:
%%
 - It only copies the input to the output unchanged.
- ◆ Another trivial example:
%%
[\t]+\$;
 - It deletes from the input all blanks or tabs at the ends of lines.

A lex Source File Example

```
% {  
/*  
 * Example lex source file  
 * This first section contains necessary  
 * C declarations and includes  
 * to use throughout the lex specifications.  
 */  
#include <stdio.h>  
%}  
bin_digit [01] regular definition  
digit => 0|1|2|...|9
```

A lex Source File Example

```
%% pattern  
{bin_digit}* {  
/* match all strings of 0's and 1's */  
/* Print out message with matching text */  
/* action */  
printf("BINARY: %s\n", yytext);  
}  
([ab]*aa[ab]*bb[ab]*) | ([ab]*bb[ab]*aa[ab]*) {  
/* match all strings over  
* (a,b) containing aa and bb */  
/* */  
printf("AABB\n");  
}  
\n ; /* ignore newlines */
```

A lex Source File Example

```
%%
/*
 * Now this is where you want your main program
 */
int main(int argc, char *argv[]) {
/*
 * call yylex to use the generated lexer
 */
yylex();
/*
 * make sure everything was printed
 */
fflush(yyout);
exit(0);
}
```

Running lex

- ◆ To run lex on a source file, use the command:
lex source.l
- ◆ This produces the file *lex.yy.c* which is the C source for the lexical analyzer.
- ◆ To compile this, use:
cc -o scanner -O lex.yy.c -llex

liblex.a
compile 时 -llex include library

Different Versions Of lex

- ◆ AT&T -- lex

http://www.combo.org/lex_yacc_page/lex.html

在 windows 上面還要架 shell

- ◆ GNU -- flex

<http://www.gnu.org/manual/flex-2.5.4/flex.html>

- ◆ Find a Win32 version of flex :

<http://www.cygwin.com/>

Linux

lex → flex

yacc → bison

lex.yy.c : What it produces

```
# define YYTYPE unsigned char
struct yywork { YYTYPE verify, advance; } yyrank[] = {
0,0,      0,0,      1,3,      0,0,
0,0,      0,0,      0,0,      0,0,
...
}

struct yysvf yysvec[] = {
0,          0,          0,
yyrank+1,      0,          yyvstop+1,
yyrank+3,      yysvec+1,    yyvstop+3,
yyrank+0,      0,          yyvstop+5,
...
}

unsigned char yymatch[] = {
00 ,01 ,01 ,01 ,01 ,01 ,01 ,01 ,
01 ,01 ,012 ,01 ,01 ,01 ,01 ,01 ,
...
}
```

Token Definitions

◆ Elementary Operations

- single characters
 - ♦ except " \ . \$ ^ [] - ? * + | () / { } % < > 加 \ 或 " "
- concatenation (put characters together)
- alternation (a|b|c)
 - ♦ [ab] == a|b
 - ♦ [a-k] == a|b|c|...|i|j|k
 - ♦ [a-z0-9] == any letter or digit
 - ♦ [^a] == any character but a

Token Definitions

◆ Elementary Operations (cont.)

- NOTE: . matches any character except the newline
- * -- Kleene Closure
- + -- Positive Closure

◆ Examples:

- [0-9]+."[0-9]+
 - ♦ note: without the quotes it could be any character
- [\t]+ -- is whitespace
 - ♦ (except CR).
 - ♦ Yes there is a space inside the box before the \t

Token Definitions

◆ Special Characters:

- . -- matches any single character
 - 僅字母
 (except newline) (.)* 字母的 closure (不含 \n)
- " and \ -- quote the part as text
- \t -- tab
- \n -- newline
- \b -- backspace
- \" -- double quote
- \\ -- \
- ? -- this means the preceding was optional
 - ab? == a|ab
 - (ab)? == ab|ε

Token Definitions

◆ Special Characters (cont.)

- ^ means at the beginning of the line
(unless it is inside of a []) ^a ⇒ 開頭是 a at match
- \$ means at the end of the line, same as /\n a\$ ⇒ 編尾是 n at match
- [^] means anything except
 - \"[^\""]*\" is a double quoted string
- {n,m} means m through n occurrences
 - a{1,3} is a or aa or aaa
- {definition} means translation from definition
- / matches only if followed by right part of /
 - 0/1 means the 0 of 01 but not 02 or 03 or ...
- () grouping

Definitions

◆ NAME	REG_EXPR
■ digs	[0-9]+
■ integer	{digs}
■ plain_real	{digs}}.{digs}
■ expreal	{digs}}.{digs}[Ee][+-]?{digs}
■ real	{plainreal} {expreal}

Definitions

%{
 include <stro.h>
%} lex 會全部 copy and paste 到 lex.yy.c 中

- ◆ The definitions can also contain variables and other declarations used by the code generated by lex.

- These usually go at the start of this section, marked by %{ at the beginning and %} at the end or the line which begins with a blank or tab .
- Includes usually go here.
- It is usually convenient to maintain a line counter so that error messages can be keyed to the lines in which the errors are found.

```
%{  
  int linecount = 1;  
%}  
{\n} {linecount++}
```

Transition Rules

- ◆ The code copied into the generated lex program are the same as the definitions section
- ◆ The unmatched token is using a default action that ECHO from the input to the output
- ◆ A null statement ; will ignore the input
- ◆ An action character | indicates that the action for this rule is the action for the next rule

```
1. keyword if  
2. operator "+"  
3. number 123  
4. string Hello  
lex 5. id.
```

編譯器設計

21

Tokens and Actions

- ◆ Example:

{real}	return FLOAT;
{begin} ?	return BEGIN;
{newline}	linecount++;
{integer}	{ printf("I found an integer\n"); return INTEGER; }

Tokens and Actions

- ◆ identifiers used by lex and yacc begin with yy

可用於所有 token ■ yytext -- a string containing the lexeme "100"
■ yyleng -- the length of the lexeme 3
■ yylval -- holds the lexical value of the token. $yylval = 100$
return

- ◆ Example:

- {integer} {

string
scanf
⇒sscanf ← printf("I found an integer\n");
sscanf(yytext, "%d", &yylval);
return INTEGER;
}

- C++ Comments -- //
//.* ; 辨認註解

Lex I/O Functions

- ◆ c = input()

- reads another character

- ◆ unput(c)

- puts a character back to be read again a moment later

- ◆ output(c)

- writes a character on an output device

Lex library function calls

◆ yylex()

- default main() contains a return yylex();

◆ yywarp()


- called by lexical analyzer if end of the input file

◆ yyless(n)

- n characters in yytext are retained

◆ yymore()

- the next input expression recognized is to be tacked on to the end of this input

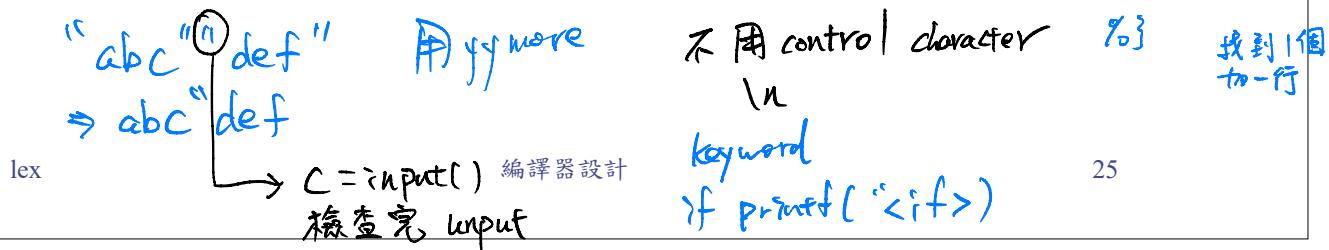

States

◆ lex allows the user to explicitly declare multiple states

%x COMMENT

◆ Default state is INITIAL or 0

◆ Actions for a matched string may be different states

◆ BEGIN is used to change state



User Written Code

- ◆ The actions associated with any given token are normally specified using statements in C. But occasionally the actions are complicated enough that it is better to describe them with a function call, and define the function elsewhere.
- ◆ Definitions of this sort go in the last section of the lex input.

Ambiguous Source Rules

- ◆ If 2 rules match the same pattern, lex will use the first rule.
- ◆ lex always chooses the longest matching substring for its tokens.
- ◆ To override the choice, use action REJECT
ex:
she {s++; REJECT;}
he {h++; REJECT;}
. | \n ;

More Example 1

```
int lengs[100];
%%
[a-z]+ lengs[yyleng]++;
.
\;
\n ;
%%
yywrap()
{
    int i;
    printf("Length No. words\n");
    for(i=0; i<100; i++)
        if (lengs[i] > 0)
            printf("%5d%10d\n", i, lengs[i]);
    return(1);
}
```

More Example 2

```
%{
int charCount=0, wordCount=0, lineCount=0;
%
word [^ \t\n]+
%%
{word} {wordCount++; charCount += yyleng; }
[\n]   {charCount++; lineCount++; }
.     {charCount++; }
%%
main() {
    yylex();
    printf("Characters: %d Words: %d Lines:%d\n",
           charCount,wordCount,lineCount); }
```

Using yacc with lex

- ◆ yacc will call yylex() to get the token from the input so that each lex rule should end with:
 return(token);
 where the appropriate token value is returned.
- ◆ An easy way is placing the line:
 #include "lex.yy.c"
 in the last section of yacc input.

Special Notes

- ◆ lex on different machines is not created equal.
- ◆ Manual page has more advanced topics for the specified lex version.
- ◆ Try things early. If you get stuck, ask!

Reference Books

- ◆ lex & yacc ,2/e by John R.Levine, Tony Mason & Doug Brown, O'Reilly
- ◆ Mastering Regular Expressions, by Jeffrey E.F. Friedl, O'Reilly

Reference Books

- ◆ lex & yacc ,2/e by John R.Levine, Tony Mason & Doug Brown, O'Reilly
- ◆ Mastering Regular Expressions, by Jeffrey E.F. Friedl, O'Reilly