

Seminar 02 — React Components, Tailwind CSS, shadcn/ui

PB138 — Basics of Web Development

Agenda

1. **React Components** — props, composition, conditional rendering (~20 min)
2. **Tailwind CSS** — utility-first styling, layout, interactivity (~25 min)
3. **shadcn/ui** — setup, component library, building UIs (~25 min)
4. **Buffer / Q&A** (~10 min)



Total coding time: ~30 min across 3 tasks + bonus

Part 1: React Components

What is a Component?

A component is a **function that returns JSX**: $UI = f(props, state)$

```
function Greeting() {  
  return <h1>Hello, world!</h1>;  
}
```

- Starts with an **uppercase** letter
- Returns **one root element** (or a fragment `<>...</>`)

Props — Passing Data to Components

Props are **inputs** to your component.

```
type GreetingProps = {  
  name: string;  
  subtitle?: string;  
};  
  
function Greeting({ name, subtitle }: GreetingProps) {  
  return (  
    <div>  
      <h1>Hello, {name}!</h1>  
      {subtitle && <p>{subtitle}</p>}  
    </div>  
  );  
}
```

```
<Greeting name="Alice" subtitle="Welcome back" />  
<Greeting name="Bob" />
```

Children — Composition

The `children` prop lets you **nest content** inside a component.

```
type CardProps = { children: React.ReactNode };

function Card({ children }: CardProps) {
  return <div className="border rounded p-4">{children}</div>;
}
```

```
<Card>
  <h2>Title</h2>
  <p>Any content goes here.</p>
</Card>
```

Conditional Rendering

```
// Short-circuit with &&
function Alert({ message, visible }: { message: string; visible: boolean }) {
  return <div>{visible && <p>⚠ {message}</p>}</div>;
}

// Ternary for if/else
function Status({ isOnline }: { isOnline: boolean }) {
  return <span>{isOnline ? "🟢 Online" : "🔴 Offline"}</span>;
}
```

Rendering Lists with .map()

Always provide a unique `key` prop.

```
type User = { id: number; name: string; role: string };

const users: User[] = [
  { id: 1, name: "Alice", role: "Admin" },
  { id: 2, name: "Bob", role: "Editor" },
];

function UserList() {
  return (
    <ul>
      {users.map((user) => (
        <li key={user.id}>
          {user.name} – {user.role}
        </li>
      ))}
    </ul>
  );
}
```


File Organization

One component per file. Named exports preferred.

```
src/  
├── components/  
│   ├── UserList.tsx  
│   ├── StatusBadge.tsx  
│   └── TeamMemberCard.tsx  
├── App.tsx  
└── main.tsx
```

Task 1 — TeamMemberCard Component (~5 min)

Create a `TeamMemberCard` component:

1. Props: `name` (string), `role` ("designer" | "developer" | "manager"), `email` (string), optional `available` (boolean)
2. Render name, email, and role label
3. If `available` is defined, show a status indicator ("Available" / "Busy")

In `App.tsx`, render a **list of team members** using `.map()`:

```
const team = [  
  { id: 1, name: "Alice", role: "designer", email: "alice@company.com", available: true },  
  { id: 2, name: "Bob", role: "developer", email: "bob@company.com", available: false },  
  { id: 3, name: "Charlie", role: "manager", email: "charlie@company.com", available: true },  
  { id: 4, name: "Diana", role: "developer", email: "diana@company.com" },  
];
```

Part 2: Tailwind CSS

What is Tailwind?

Utility-first CSS framework — compose styles directly in markup.

```
/* Traditional CSS */  
.card {  
  padding: 16px;  
  background: white;  
  border-radius: 8px;  
}
```

```
// Tailwind  
<div className="p-4 bg-white rounded-lg shadow-sm">
```

Why Tailwind?

- No naming things (`.card-wrapper-inner` ... never again)
- No switching between files
- Dead code elimination — only used classes ship to production

Setup in Vite + React

```
npm install -D tailwindcss @tailwindcss/vite
```

```
// vite.config.ts
import { defineConfig } from "vite";
import react from "@vitejs/plugin-react";
import tailwindcss from "@tailwindcss/vite";

export default defineConfig({
  plugins: [react(), tailwindcss()],
});
```

```
/* src/index.css */
@import "tailwindcss";
```

Core Utilities — Spacing & Typography

```
<div className="p-4 m-2">                                {/* 16px padding, 8px margin */}  
<div className="px-6 py-3">                                {/* horizontal / vertical */}  
  
<h1 className="text-3xl font-bold">Big Bold Title</h1>  
<p className="text-sm text-gray-500">Small muted text</p>
```

Spacing scale: 1 = 4px, 2 = 8px, 4 = 16px, 8 = 32px ...

Core Utilities — Colors & Borders

```
<div className="bg-blue-500 text-white">Blue box</div>  
<div className="bg-gray-100 text-gray-900">Light card</div>  
  
<div className="border border-gray-200 rounded-lg">Bordered</div>  
<div className="shadow-lg">Shadow</div>
```


Color scale: 50 (lightest) → 950 (darkest)

Layout — Flexbox

```
{
  /* Horizontal layout */
}
<div className="flex items-center gap-4">
  
  <div>
    <p className="font-bold">Alice</p>
    <p className="text-sm text-gray-500">Online</p>
  </div>
</div>;

{
  /* Space between */
}
<div className="flex justify-between items-center">
  <h2>Title</h2>
  <button>Action</button>
</div>;

{
  /* Centering */
}
<div className="flex items-center justify-center h-screen">
  <p>Dead center</p>
</div>;
```

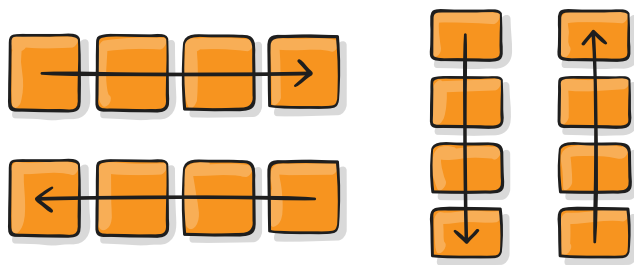

<p style="font-size: 0.55em; color: #555; margin-top: 4px;"><code>row</code> ·

<code>row-reverse</code> · <code>column</code> · <code>column-reverse</code>

</p> </div> <div style="text-align: center;"> <code>justify-content</code>

flex-start



flex-end



center





space-between




space-around



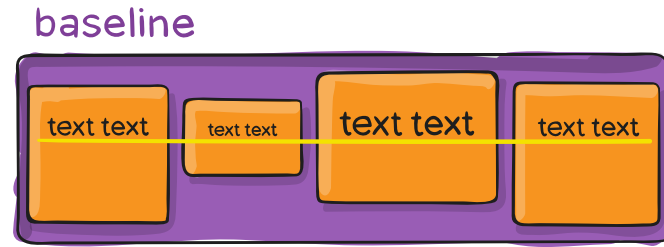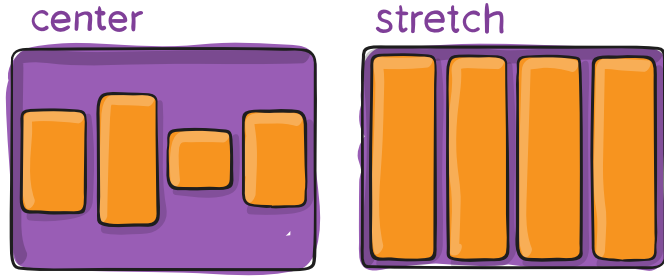


`</div> <div style="text-align: center;"> <code>gap</code>`

gap: 10px



gap: 30px

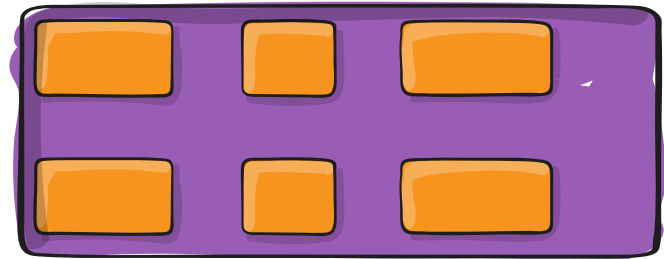


gap: 10px 30px




Layout — CSS Grid

```
<div className="grid grid-cols-3 gap-4">
  <div>Card 1</div>
  <div>Card 2</div>
  <div>Card 3</div>
</div>;

{
  /* Responsive: 1 col → 2 → 3 */
}
<div className="grid grid-cols-1 md:grid-cols-2 lg:grid-cols-3 gap-6">...</div>;
```

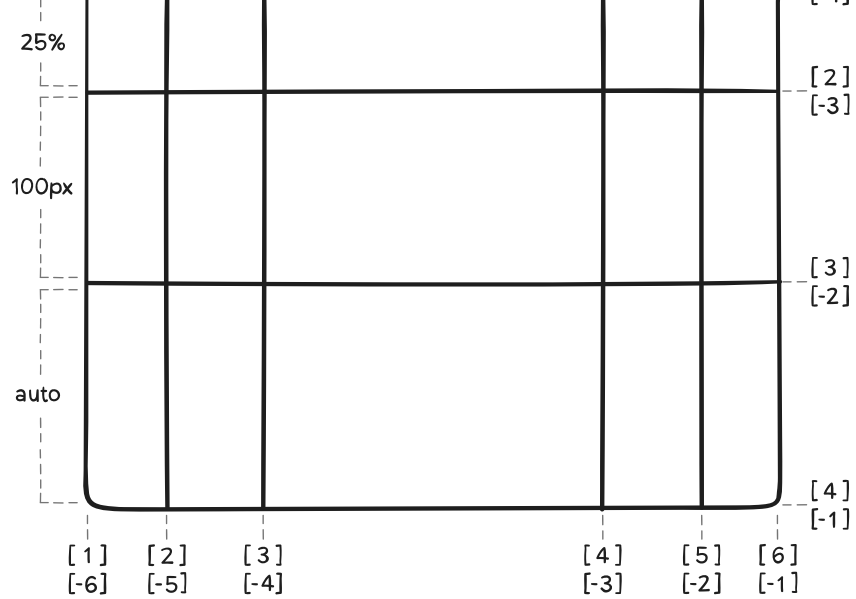

`</div> <div style="text-align: center;"> <code>grid-template-areas</code>`

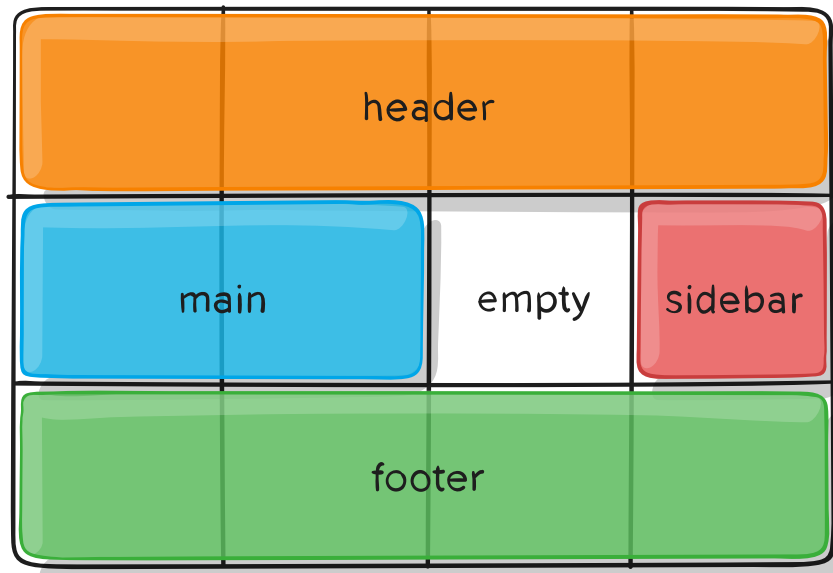

Responsive Design

Tailwind uses **mobile-first** breakpoints:

Prefix	Min-width	Device
sm:	640px	Large phone
md:	768px	Tablet
lg:	1024px	Laptop
xl:	1280px	Desktop

```
<div className="text-sm md:text-base lg:text-lg">Responsive text</div>
```

No prefix = mobile default. Add breakpoints to override upward.

Interactive States

```
<button className="bg-blue-500 hover:bg-blue-600 text-white px-4 py-2 rounded">  
  Hover me  
</button>  
  
<input  
  className="border px-3 py-2 rounded focus:outline-none focus:ring-2 focus:ring-blue-500"  
  placeholder="Focus me"  
>
```

Don't Repeat Utility Strings — Use Components

Tailwind classes **belong in reusable components**, not copy-pasted everywhere.

```
// ❌ Same styles duplicated across the app
<span className="inline-flex items-center rounded-full bg-blue-50 px-2 py-1
  text-xs font-medium text-blue-700">Developer</span>
{/* ...same thing 15 more times in different files */}
```

```
// ✅ One component, styled once, used everywhere
function RoleBadge({ role }: { role: string }) {
  return (
    <span className="inline-flex items-center rounded-full bg-blue-50 px-2 py-1
      text-xs font-medium text-blue-700">{role}</span>
  );
}

<RoleBadge role="Developer" />
```

This is the **React + Tailwind synergy** — components are your abstraction, not CSS classes.

Semantic Colors — Don't Hardcode Shades

The `blue-500`, `gray-100` scale is great, but **hardcoding it everywhere** is fragile.

```
// ❌ "blue-500" scattered across 40 files – want to rebrand? Good luck.  
<button className="bg-blue-500 hover:bg-blue-600 ..." >Save</button>  
<a className="text-blue-500 hover:text-blue-600">Link</a>
```

Define **semantic CSS variables** in your `index.css` and reference them:

```
/* index.css */  
@theme {  
  --color-primary: var(--color-blue-500);  
  --color-primary-hover: var(--color-blue-600);  
  --color-destructive: var(--color-red-500);  
}
```

```
// ✅ Change the brand color in one place → entire app updates  
<button className="bg-primary hover:bg-primary-hover ..." >Save</button>
```

This is exactly what **shadcn/ui** sets up for you — `primary`, `secondary`, `destructive`, etc.

Task 2 — Style Team Cards with Tailwind (~10 min)

Style `TeamMemberCard` with Tailwind:

1. **Role badge:** Display the role as a small colored pill/badge — each role should have a distinct soft color (e.g. purple for designer, blue for developer, green for manager)
2. **Card layout:** Each card should have a border, rounded corners, padding, and a subtle shadow. Arrange the content horizontally with spacing between elements
3. **Availability indicator:** Show a small colored dot — green for available (with a pulse animation), red for busy
4. **Responsive grid:** Wrap cards in a responsive grid — 1 column on mobile, 2 on medium screens, 3 on large screens

Task 2 — Expected Result

Team

A

Alice ●

alice@company....

designer

B

Bob ●

bob@company...

developer

C

Charlie ●

charlie@compa...

manager

D

Diana

diana@compa...

developer

Part 3: shadcn/ui

What is Shadcn?

Not a component library. A collection of components you **copy into your project**.

Traditional Library	Shadcn
<code>npm install</code> the package	<code>npx shadcn add</code> copies code
Styling locked behind API	You own the source
Heavy bundle size	Only what you use

Built on headless UI primitives + **Tailwind CSS** (styling).

- During init you choose **Radix UI** or **Base UI** — we recommend **Base UI** (actively maintained, single package instead of many `@radix-ui/*` deps, built-in multi-select & combobox, lower lock-in risk)

Setup

```
npx shadcn@latest init
```

Creates:

- `components.json` — config
- `src/components/ui/` — component directory
- `src/lib/utils.ts` — `cn()` helper for merging classes

Or use ui.shadcn.com/create to scaffold app with custom themes, components, and presets.

Adding & Using Components

```
npx shadcn@latest add button card input badge separator
```

```
import { Button } from "@/components/ui/button";  
  
<Button>Default</Button>  
<Button variant="secondary">Secondary</Button>  
<Button variant="outline">Outline</Button>  
<Button variant="destructive">Delete</Button>  
<Button size="sm">Small</Button>
```

You can open and edit `src/components/ui/button.tsx` — that's the whole point.

Using Components — Card

```
import {  
  Card,  
  CardHeader,  
  CardTitle,  
  CardContent,  
  CardFooter,  
} from "@components/ui/card";  
  
<Card className="w-80">  
  <CardHeader>  
    <CardTitle>Notifications</CardTitle>  
  </CardHeader>  
  <CardContent>  
    <p>You have 3 unread messages.</p>  
  </CardContent>  
  <CardFooter>  
    <Button className="w-full">View All</Button>  
  </CardFooter>  
</Card>;
```


Using Components — Input & Badge

```
import { Input } from "@components/ui/input";
import { Badge } from "@components/ui/badge";

<Input placeholder="Search..." className="max-w-sm" />

<div className="flex gap-2">
  <Badge>React</Badge>
  <Badge variant="secondary">TypeScript</Badge>
  <Badge variant="outline">Tailwind</Badge>
</div>
```

The cn() Helper

Merges Tailwind classes and **resolves conflicts** (last class wins).

Inside a shadcn component — `cn()` lets consumers override defaults:

```
function Button({ className, ...props }: ButtonProps) {  
  return <button className={cn("px-4 py-2 bg-blue-500", className)} {...props} />;  
}
```

Usage — your class overrides the default without conflict:

```
<Button className="bg-red-500">Delete</Button>  
<Badge className={cn("text-sm", active && "bg-green-100 text-green-800")} />
```

Task 3 — Movie Watchlist App (~15 min)

Setup: `npx shadcn@latest add card button input badge separator`

Build a Movie Watchlist using Shadcn + `useState`:

1. `Input` + `Button` to add a movie title
2. Display movies as `Card` list — title, `Badge` status ("To Watch" / "Watched ✓"), toggle + remove buttons
3. State: `useState<{ id: number; title: string; watched: boolean }[]> ( [])`
4. Responsive grid: 1 col → 2 on `md:` → 3 on `lg:`
5. `Separator` between input area and movie list

Task 3 — Expected Result

Movie Watchlist

2 to watch

Add

All

To Watch

Watched

Avatar: Fire and Ash

Watched ✓

Unwatch

Remove

Man vs. Bee

To Watch

Mark Watched

Remove

En el camino

To Watch

Mark Watched

Remove

Bonus — For Fast Finishers

Extend the watchlist (pick 1–2):

- **Filter buttons:** All / To Watch / Watched
- **Empty state:** Friendly message when no movies
- **Counter badge:** Unwatched count in header
- **localStorage:** Persist with `useEffect`

Summary

Concept	Key Idea
Components	Functions returning JSX, configured via typed props
Composition	<code>children</code> prop to nest content
Tailwind CSS	Utility classes — no separate CSS files
Responsive	Mobile-first: <code>sm:</code> , <code>md:</code> , <code>lg:</code>
Shadcn	Copy-paste components you own
<code>cn()</code>	Conditional Tailwind class merging

Useful Links

- [Tailwind CSS Docs](#)
- [Shadcn/ui Components](#)
- [React TypeScript Cheatsheet](#)

Next Seminar Preview

Seminar 03 — TypeScript type system, tsconfig, React TS patterns, Zod, ts-pattern