

M. Siri Chandana

2405A41139

1.Valid Palindrome - LC 125

https://leetcode.com/problems/valid-palindrome/submissions/2188019657/

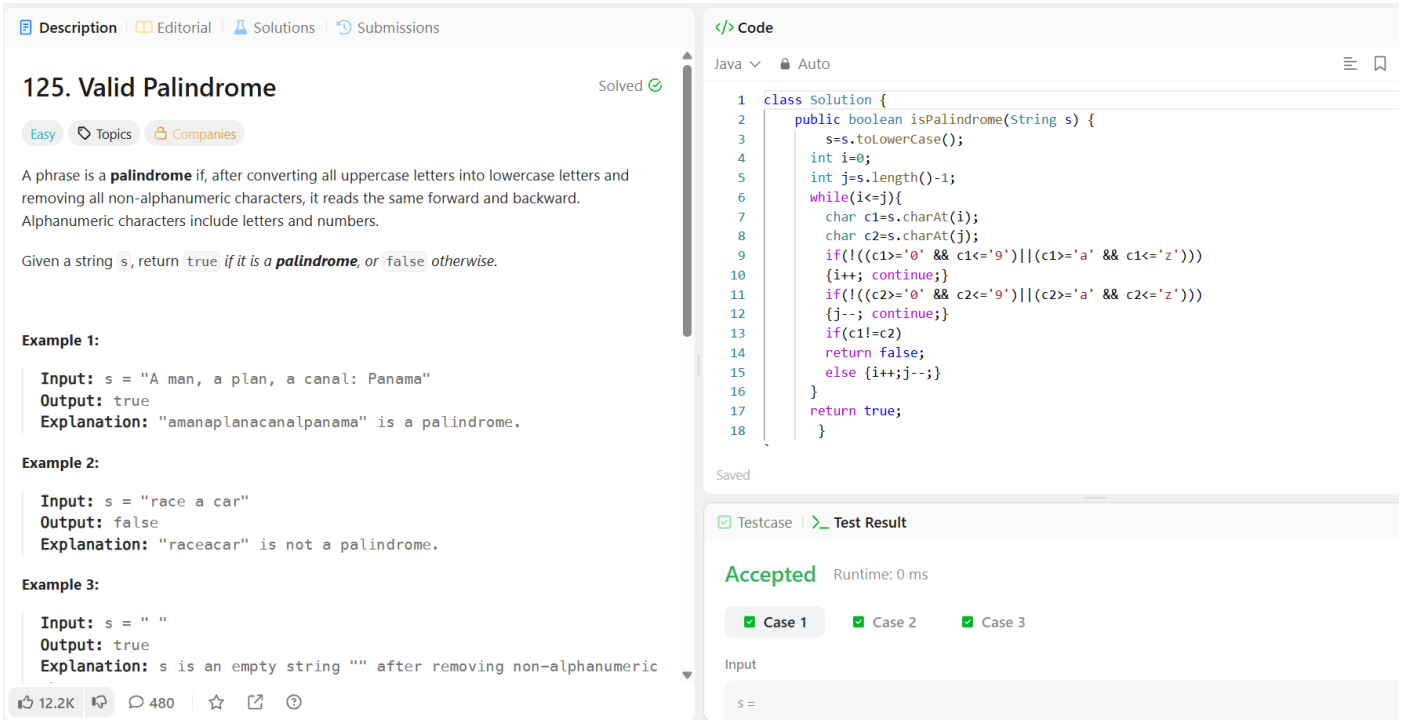

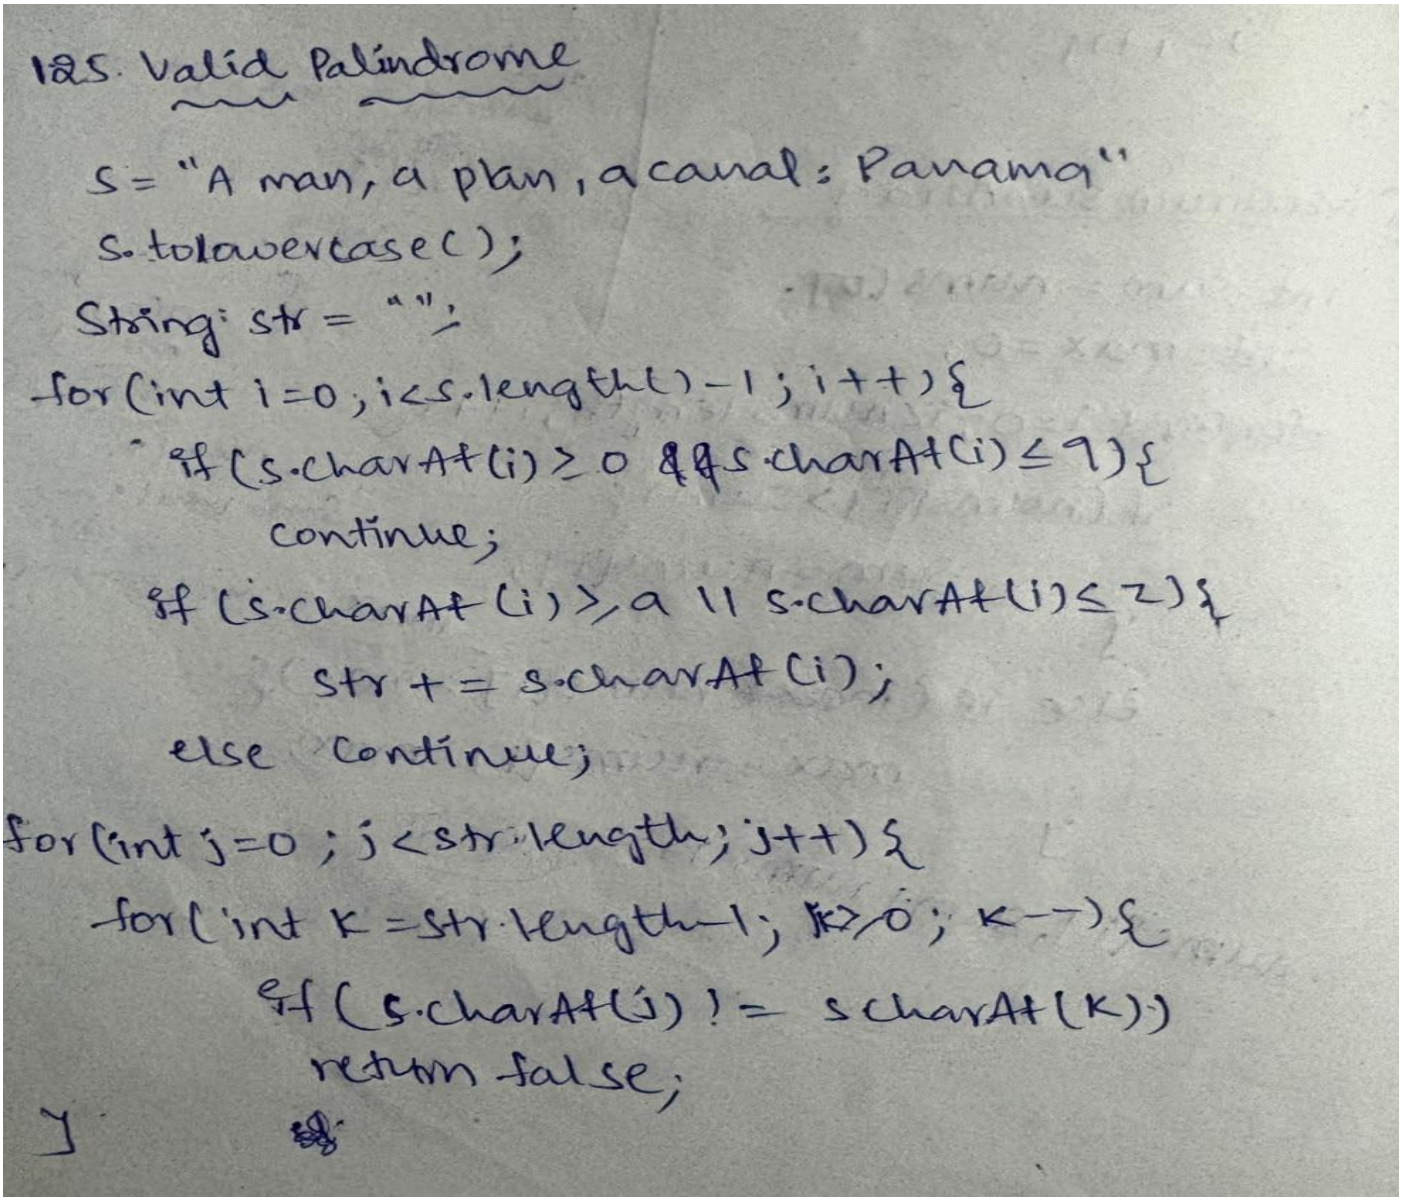

125. Valid Palindrome

```
S = "A man, a plan, a canal: Panama"
s.tolowercase();
String str = "";
for(int i=0; i<s.length()-1; i++){
    if(s.charAt(i) >= 0 && s.charAt(i) <= 9){
        continue;
    if(s.charAt(i) >= a || s.charAt(i) <= z){
        str += s.charAt(i);
    else continue;
for(int j=0; j<str.length; j++){
    for(int k = str.length-1; k>0; k--){
        if(s.charAt(j) != s.charAt(k))
            return false;
}
```

2. Valid Anagram - LC 242

https://leetcode.com/problems/valid-anagram/submissions/2188022262/

242. Valid Anagram

Solved

Easy | Topics | Companies

Given two strings `s` and `t`, return `true` if `t` is an anagram of `s`, and `false` otherwise.

Example 1:

> **Input:** `s = "anagram", t = "nagaram"`
>
> **Output:** `true`

Example 2:

> **Input:** `s = "rat", t = "car"`
>
> **Output:** `false`

Constraints:

- `1 <= s.length, t.length <= 5 * 10^4`
- `s` and `t` consist of lowercase English letters.

14.9K | 363

Java | Auto

```java
class Solution {
    public boolean isAnagram(String s, String t) {
        if(s.length() != t.length()) {
            return false;
        }
        int[] arr = new int[26];
        for(int i = 0; i < s.length(); i++) {
            arr[s.charAt(i) - 'a']++;
            arr[t.charAt(i) - 'a']--;
        }
        for(int i = 0; i < 26; i++) {
            if(arr[i] != 0) {
                return false;
            }
        }
        return true;
    }
}
```

Saved


Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2


Input


s =

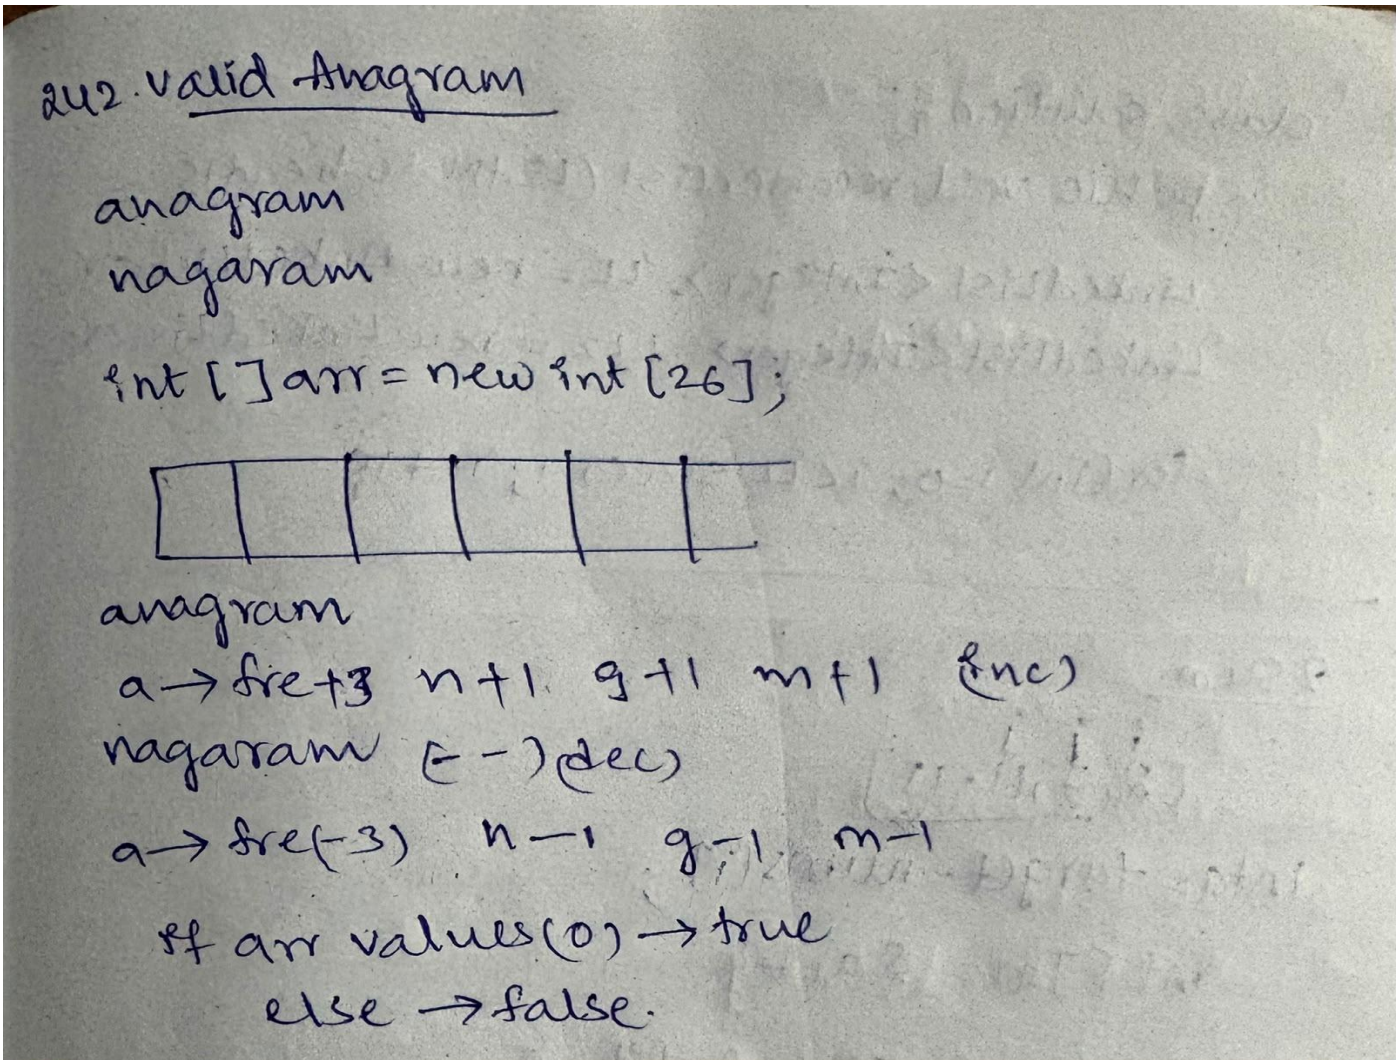

3. First Unique Character in a String - LC 387

https://leetcode.com/problems/first-unique-character-in-a-string/submissions/2188027211/

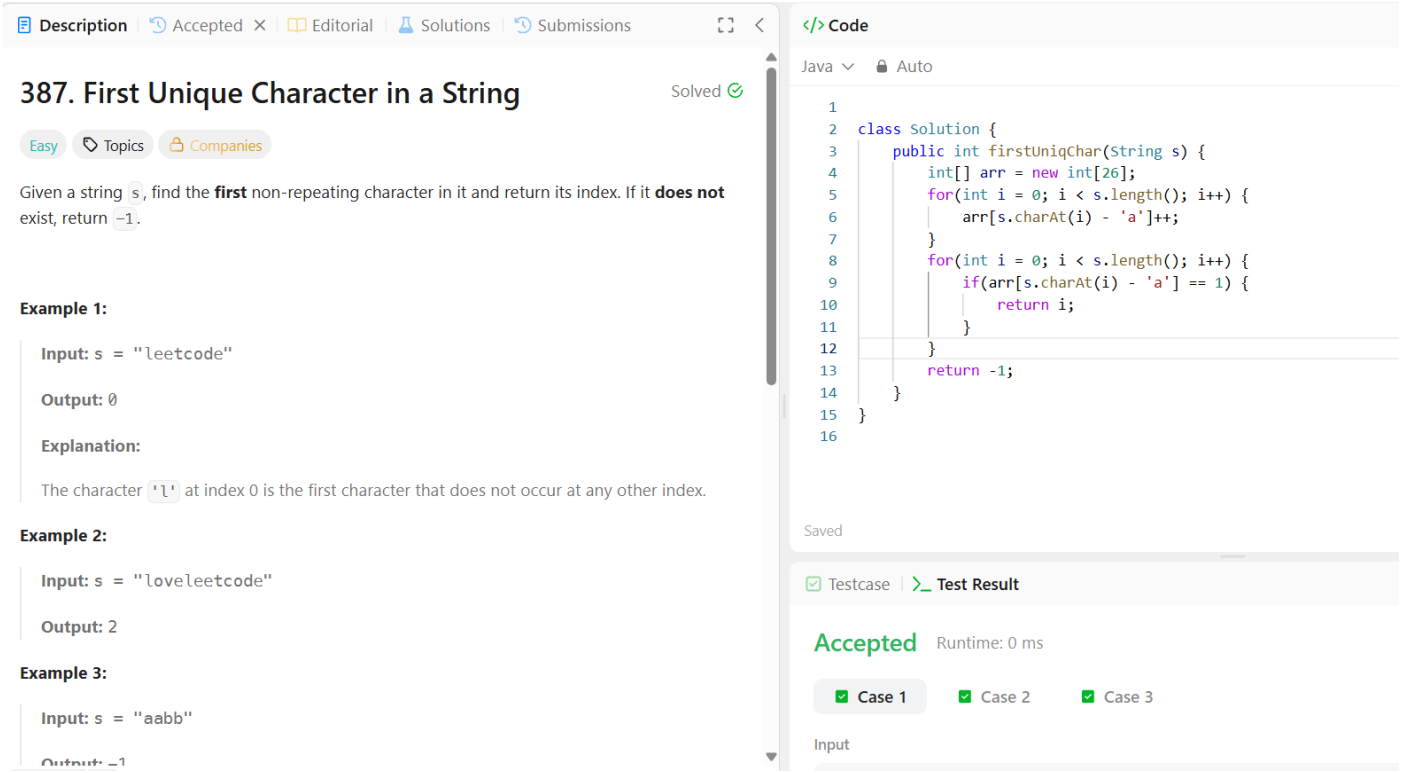

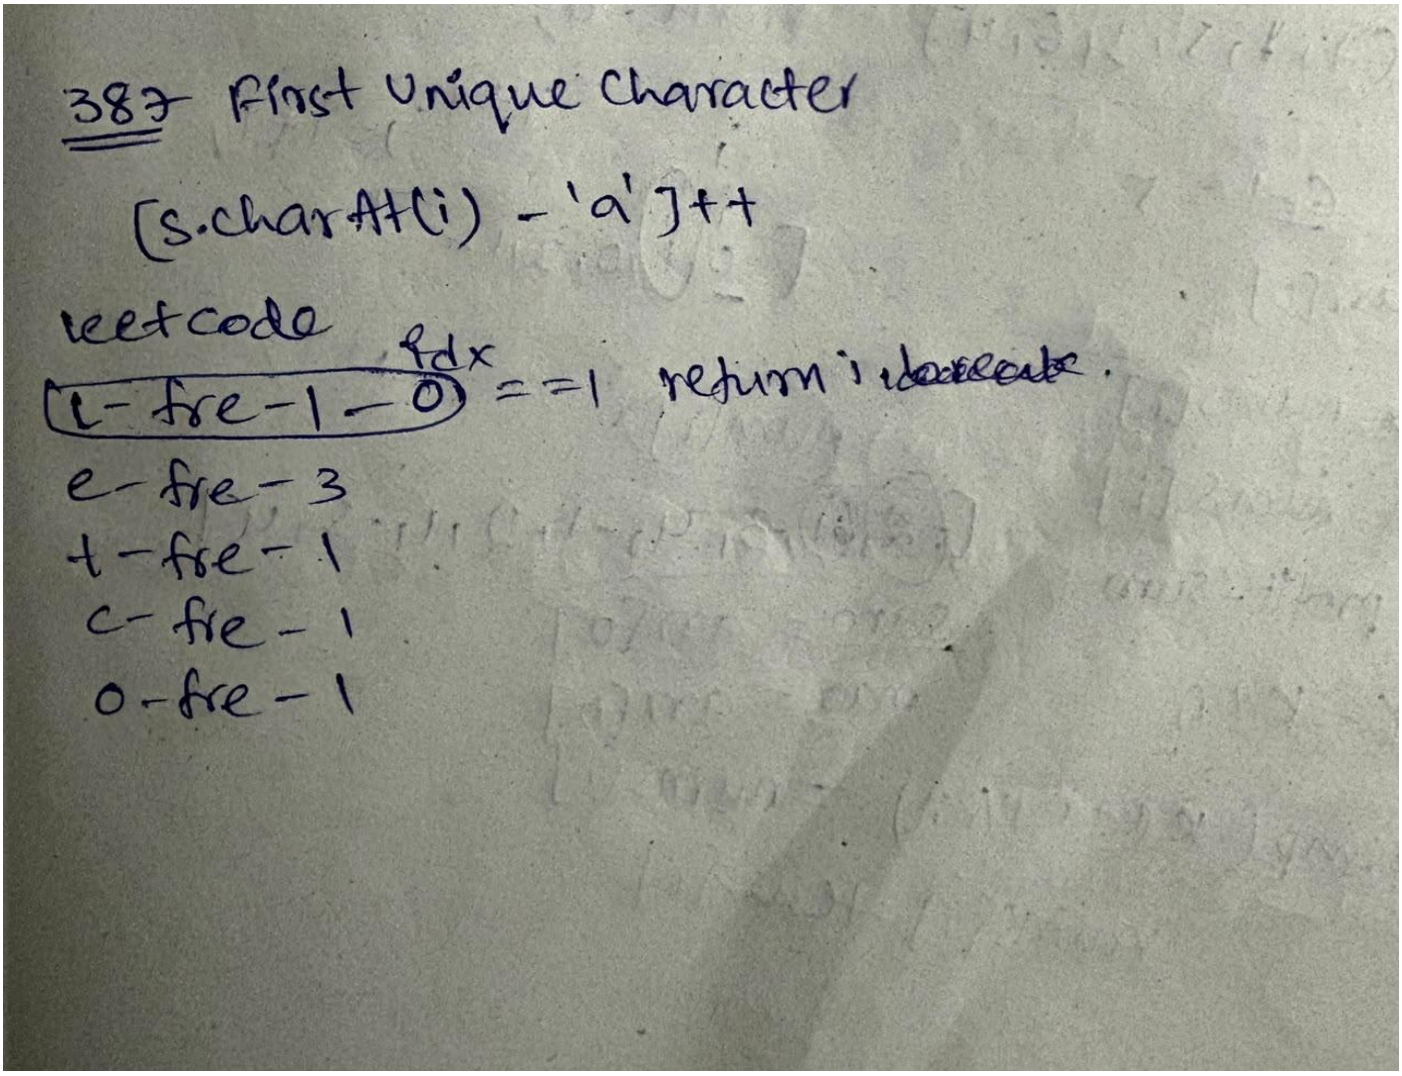

4. Longest Substring Without Repeating Characters

https://leetcode.com/problems/palindrome-number/submissions/2188032329/

Description | Accepted | Editorial | Solutions | Submissions

14. Longest Common Prefix

Solved

Easy | Topics | Companies

Write a function to find the longest common prefix string amongst an array of strings.

If there is no common prefix, return an empty string `""`.

Example 1:

```
Input: strs = ["flower","flow","flight"]
Output: "fl"
```

Example 2:

```
Input: strs = ["dog","racecar","car"]
Output: ""
Explanation: There is no common prefix among the input strings.
```

Constraints:

- `1 <= strs.length <= 200`
- `0 <= strs[i].length <= 200`
- `strs[i]` consists of only lowercase English letters if it is non-empty.

22.1K | 825

Code

Java | Auto

```java
class Solution {
    public String longestCommonPrefix(String[] strs) {
    int min=Integer.MAX_VALUE;
    String str="";
    String ans="";
    for(String s:strs){
        if(s.length()<min){
            min =s.length();
            str=s;
        }
    }
    for(int i=0;i<min;i++){
        for(int j=0;j<strs.length;j++){
            if(strs[j].charAt(i)!=str.charAt(i))
            return ans;
        }
        ans+=str.charAt(i);
    }
```

Saved


Testcase | Test Result

Accepted Runtime: 3 ms

Case 1 | Case 2


Input

strs =

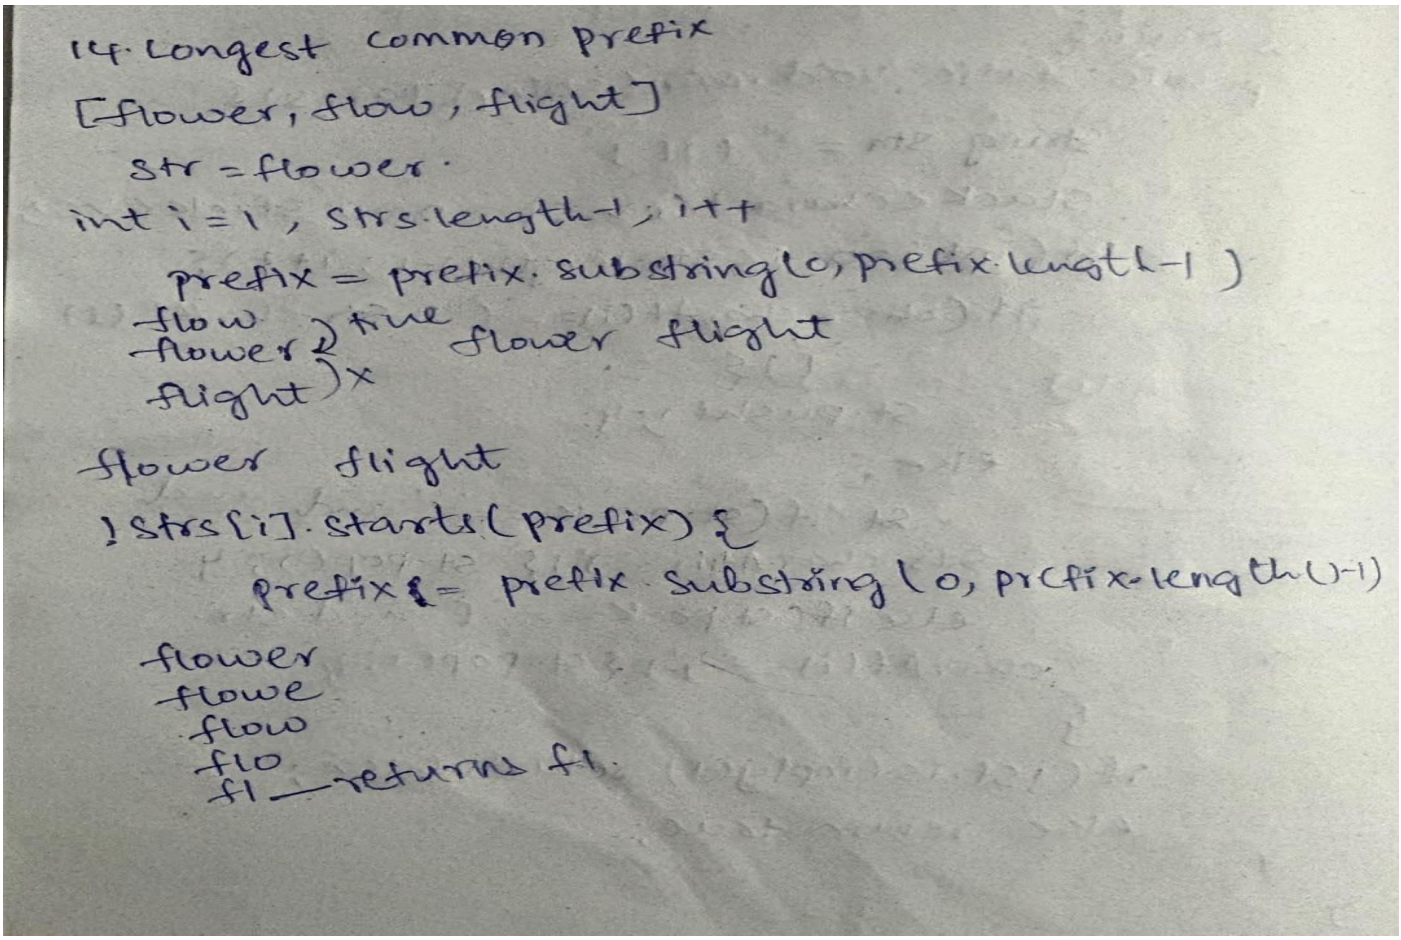

5. Longest Substring Without Repeating Characters - LC 3

https://leetcode.com/problems/longest-substring-without-repeating-characters/submissions/2188036468/

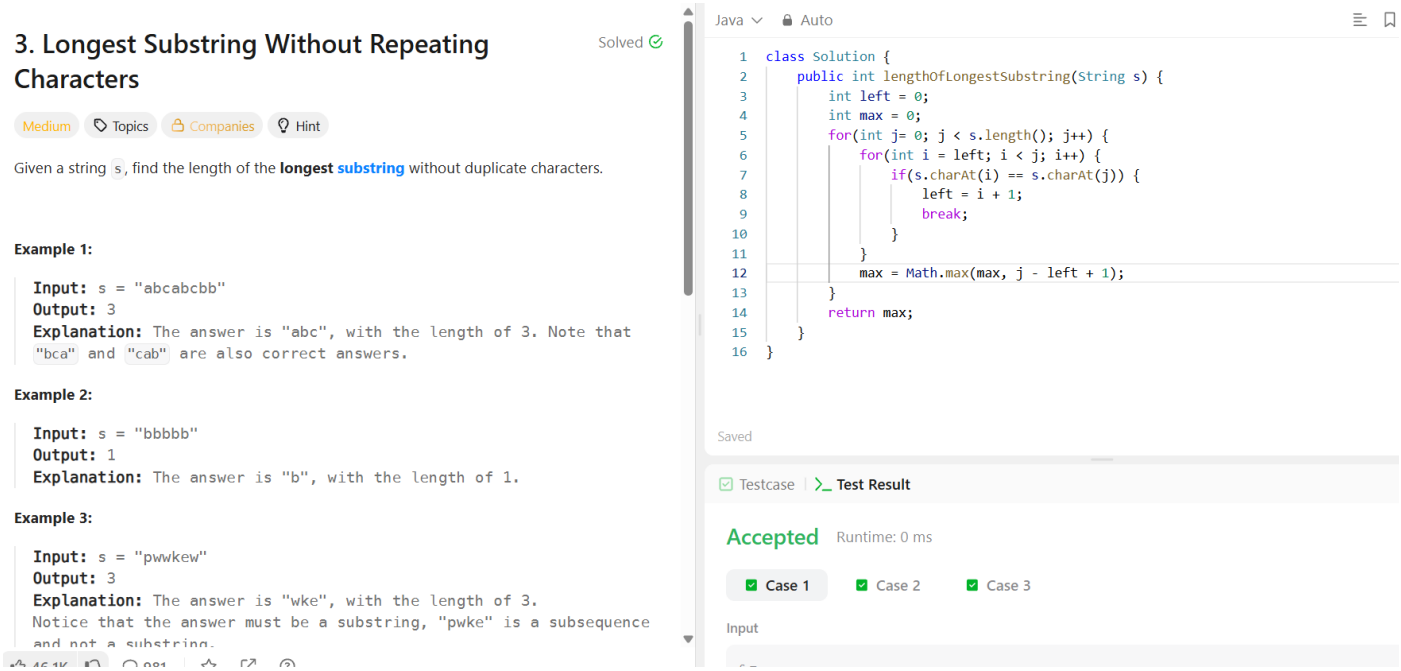

3. Longest Substring Without Repeating Characters

Solved

Medium | Topics | Companies | Hint

Given a string `s`, find the length of the **longest** **substring** without duplicate characters.

Example 1:

```
Input: s = "abcabcbb"
Output: 3
Explanation: The answer is "abc", with the length of 3. Note that "bca" and "cab" are also correct answers.
```

Example 2:

```
Input: s = "bbbbb"
Output: 1
Explanation: The answer is "b", with the length of 1.
```

Example 3:

```
Input: s = "pwwkew"
Output: 3
Explanation: The answer is "wke", with the length of 3.
Notice that the answer must be a substring, "pwke" is a subsequence and not a substring.
```

Java | Auto

```java
class Solution {
    public int lengthOfLongestSubstring(String s) {
        int left = 0;
        int max = 0;
        for(int j= 0; j < s.length(); j++) {
            for(int i = left; i < j; i++) {
                if(s.charAt(i) == s.charAt(j)) {
                    left = i + 1;
                    break;
                }
            }
            max = Math.max(max, j - left + 1);
        }
        return max;
    }
}
```

Saved

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3

Input

3. Longest substring without repeating characters

s = abcabccbb

bca
cba
abc
} substrings

output : 3

freq - abcabcabb

while (~~freq~~ arr[i] <= 1) count++

else

return count;