

M. Siri Chandana

2405a41139

1. Sort an Array - LC 912

https://leetcode.com/problems/sort-an-array/submissions/2188053405/

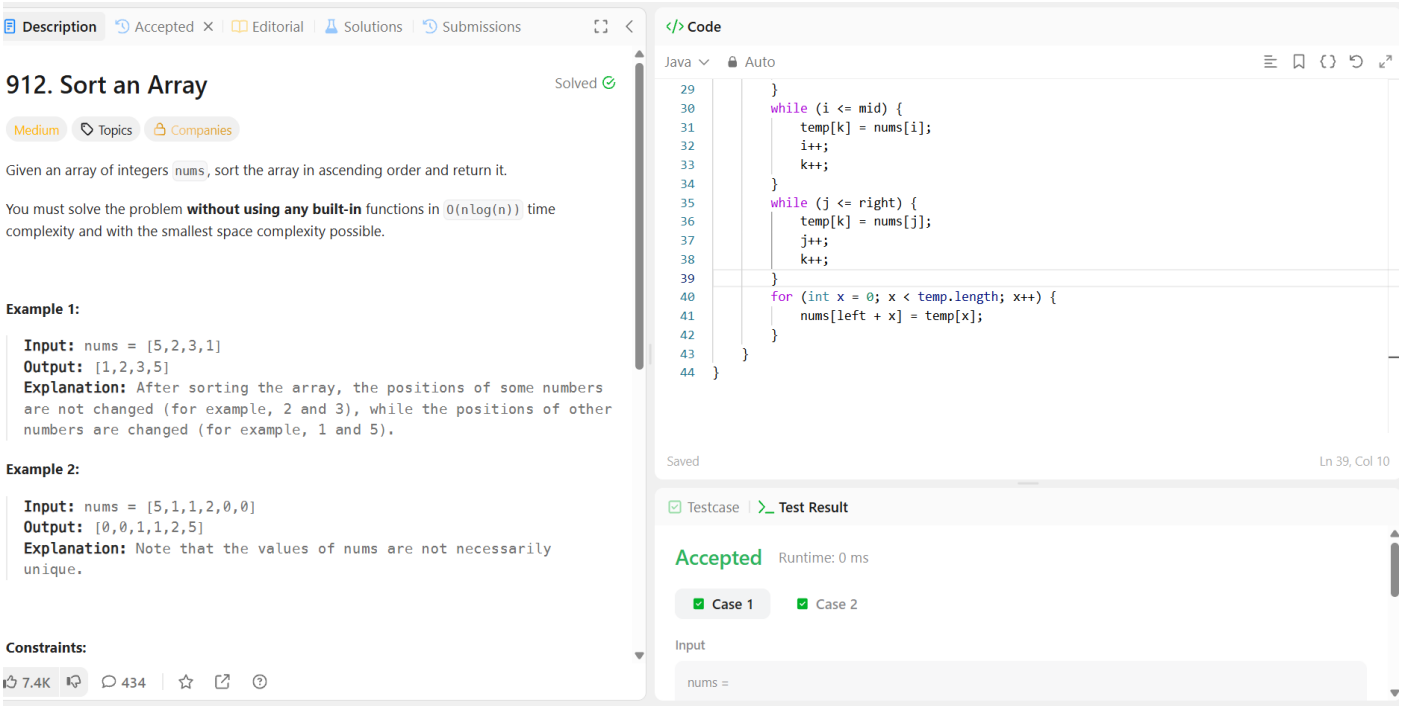

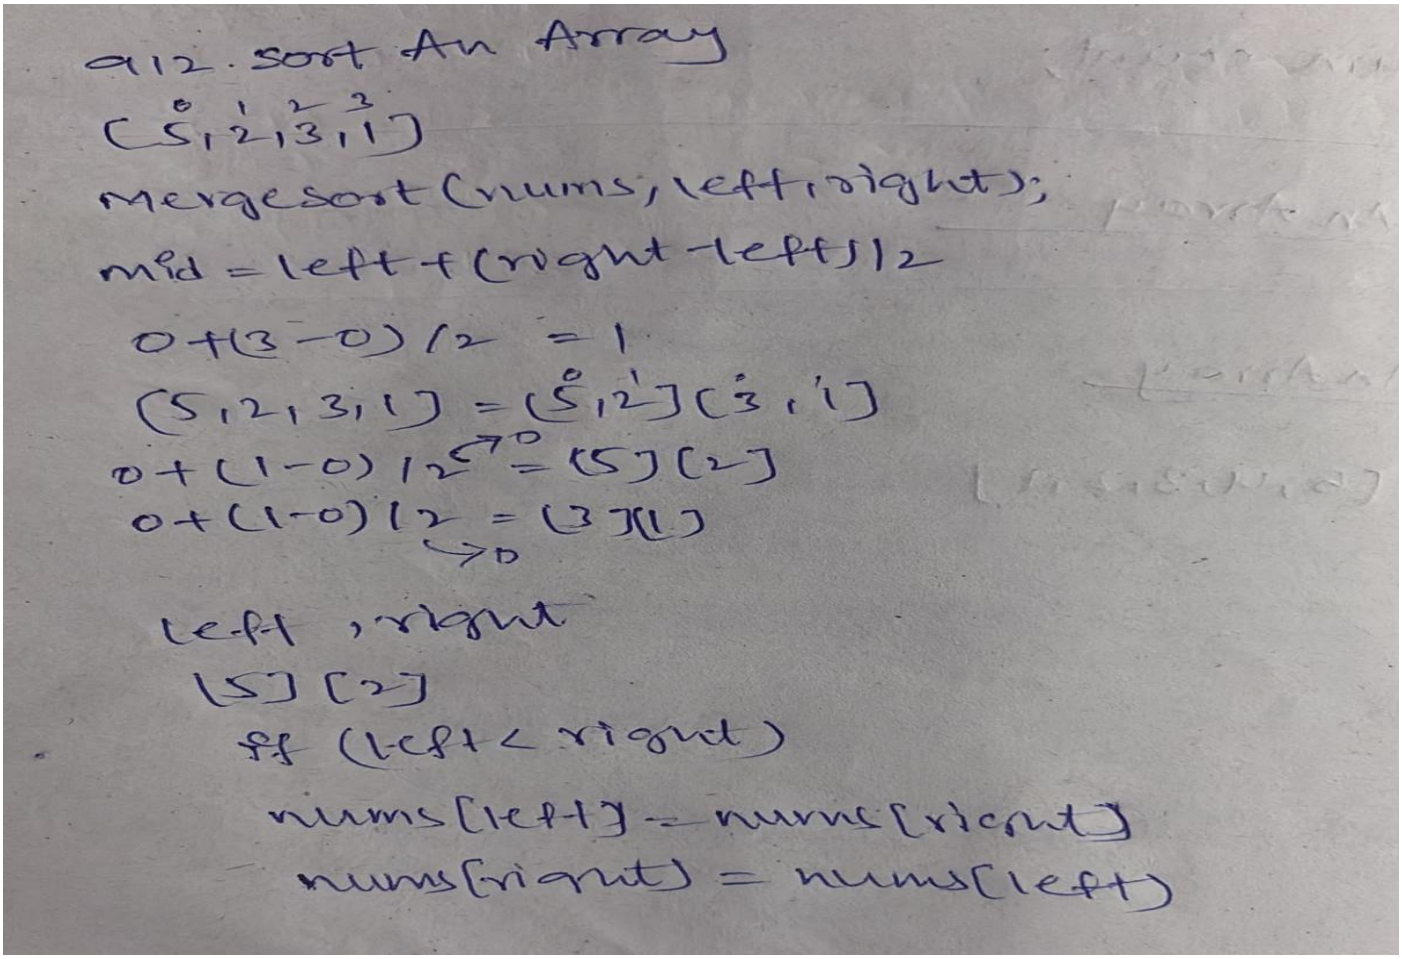

2. Merge Sorted Array - LC 88

https://leetcode.com/problems/merge-sorted-array/submissions/2188055297/

88. Merge Sorted Array

Solved

Easy | Topics | Companies | Hint

You are given two integer arrays `nums1` and `nums2`, sorted in **non-decreasing order**, and two integers `m` and `n`, representing the number of elements in `nums1` and `nums2` respectively.

Merge `nums1` and `nums2` into a single array sorted in **non-decreasing order**.

The final sorted array should not be returned by the function, but instead be *stored inside the array* `nums1`. To accommodate this, `nums1` has a length of `m + n`, where the first `m` elements denote the elements that should be merged, and the last `n` elements are set to `0` and should be ignored. `nums2` has a length of `n`.

Example 1:

```
Input: nums1 = [1,2,3,0,0,0], m = 3, nums2 = [2,5,6], n = 3
Output: [1,2,2,3,5,6]
Explanation: The arrays we are merging are [1,2,3] and [2,5,6].
The result of the merge is [1,2,2,3,5,6] with the underlined
elements coming from nums1.
```

Example 2:

```
Input: nums1 = [1], m = 1, nums2 = [], n = 0
Output: [1]
Explanation: The arrays we are merging are [1] and [].
```

19.8K | 1K

Java | Auto

```java
class Solution {
    public void merge(int[] nums1, int m, int[] nums2, int n) {
        int i = m - 1;
        int j = n - 1;
        int k = m + n - 1;
        while(i >= 0 && j >= 0) {
            if(nums1[i] > nums2[j]) {
                nums1[k] = nums1[i];
                i--;
            }
            else {
                nums1[k] = nums2[j];
                j--;
            }

            k--;
        }
        while(j >= 0) {
```

Saved


Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 | Case 2 | Case 3


Input

nums1 =

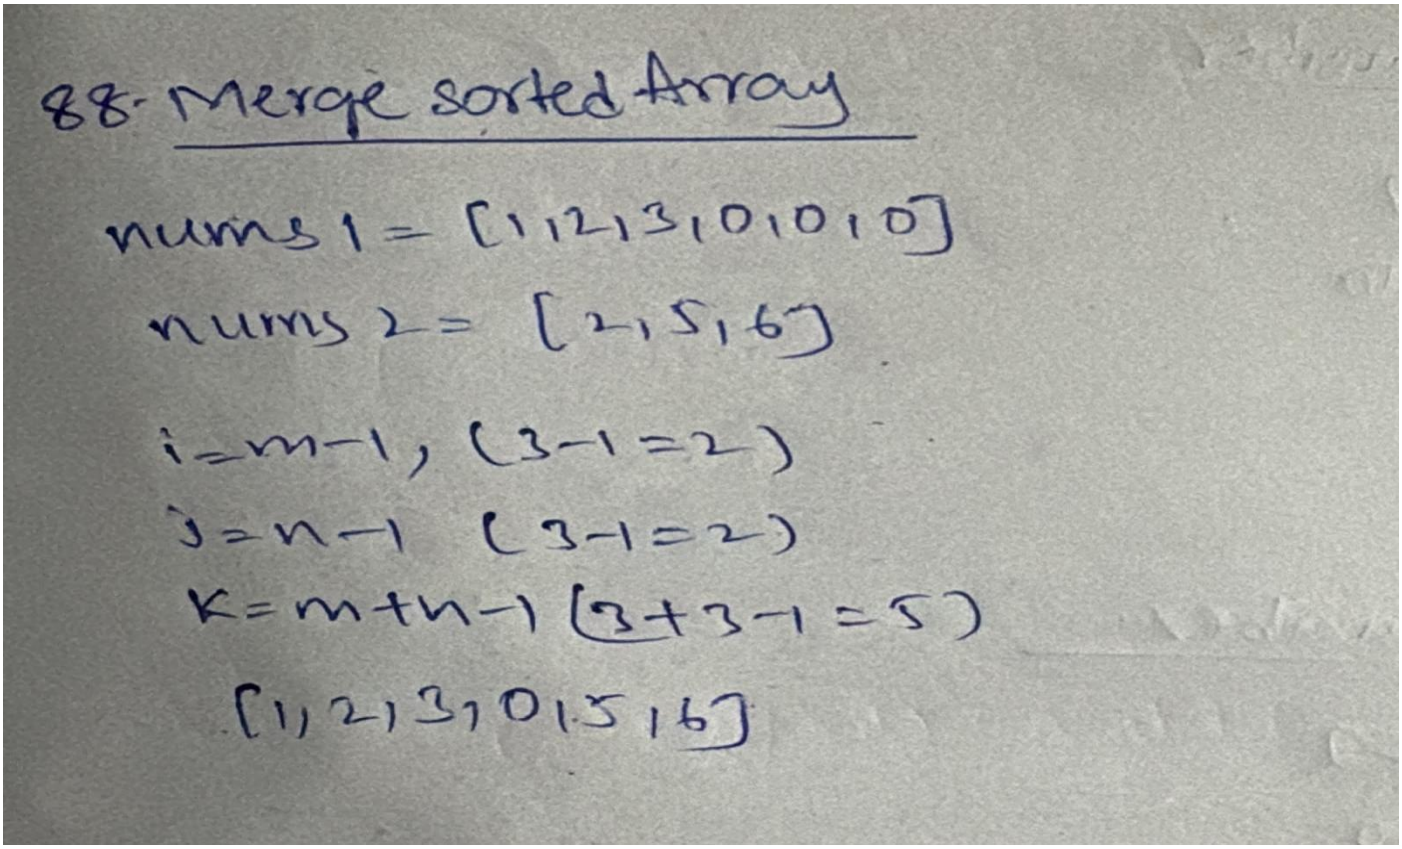

3. Sort Colors - LC 75

https://leetcode.com/problems/sort-colors/submissions/2188059294/

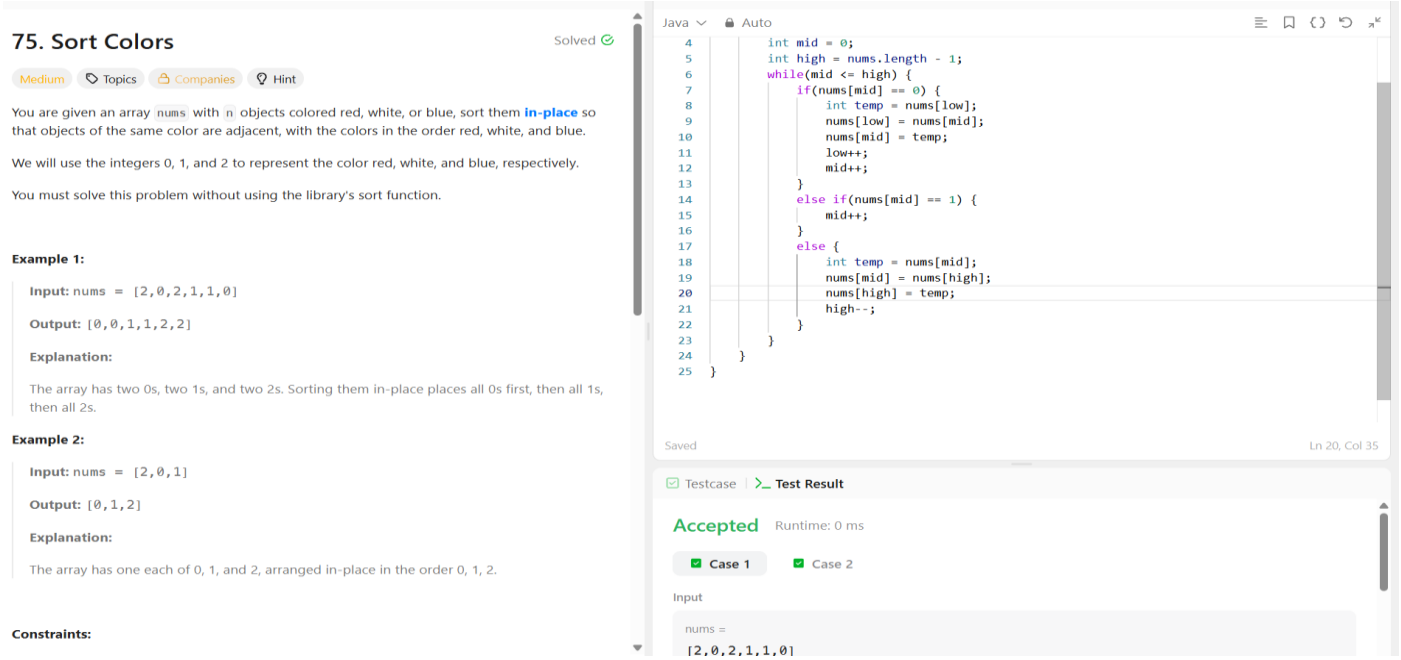

75. Sort Colors — Solved

Medium · Topics · Companies · Hint

You are given an array `nums` with `n` objects colored red, white, or blue, sort them **in-place** so that objects of the same color are adjacent, with the colors in the order red, white, and blue.

We will use the integers 0, 1, and 2 to represent the color red, white, and blue, respectively.

You must solve this problem without using the library's sort function.

Example 1:

Input: `nums = [2,0,2,1,1,0]`

Output: `[0,0,1,1,2,2]`

Explanation:

The array has two 0s, two 1s, and two 2s. Sorting them in-place places all 0s first, then all 1s, then all 2s.

Example 2:

Input: `nums = [2,0,1]`

Output: `[0,1,2]`

Explanation:

The array has one each of 0, 1, and 2, arranged in-place in the order 0, 1, 2.

Constraints:

Java · Auto

```
4       int mid = 0;
5       int high = nums.length - 1;
6       while(mid <= high) {
7           if(nums[mid] == 0) {
8               int temp = nums[low];
9               nums[low] = nums[mid];
10              nums[mid] = temp;
11              low++;
12              mid++;
13          }
14          else if(nums[mid] == 1) {
15              mid++;
16          }
17          else {
18              int temp = nums[mid];
19              nums[mid] = nums[high];
20              nums[high] = temp;
21              high--;
22          }
23      }
24  }
25  }
```

Saved — Ln 20, Col 35


Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 · Case 2

Input

nums =
[2,0,2,1,1,0]

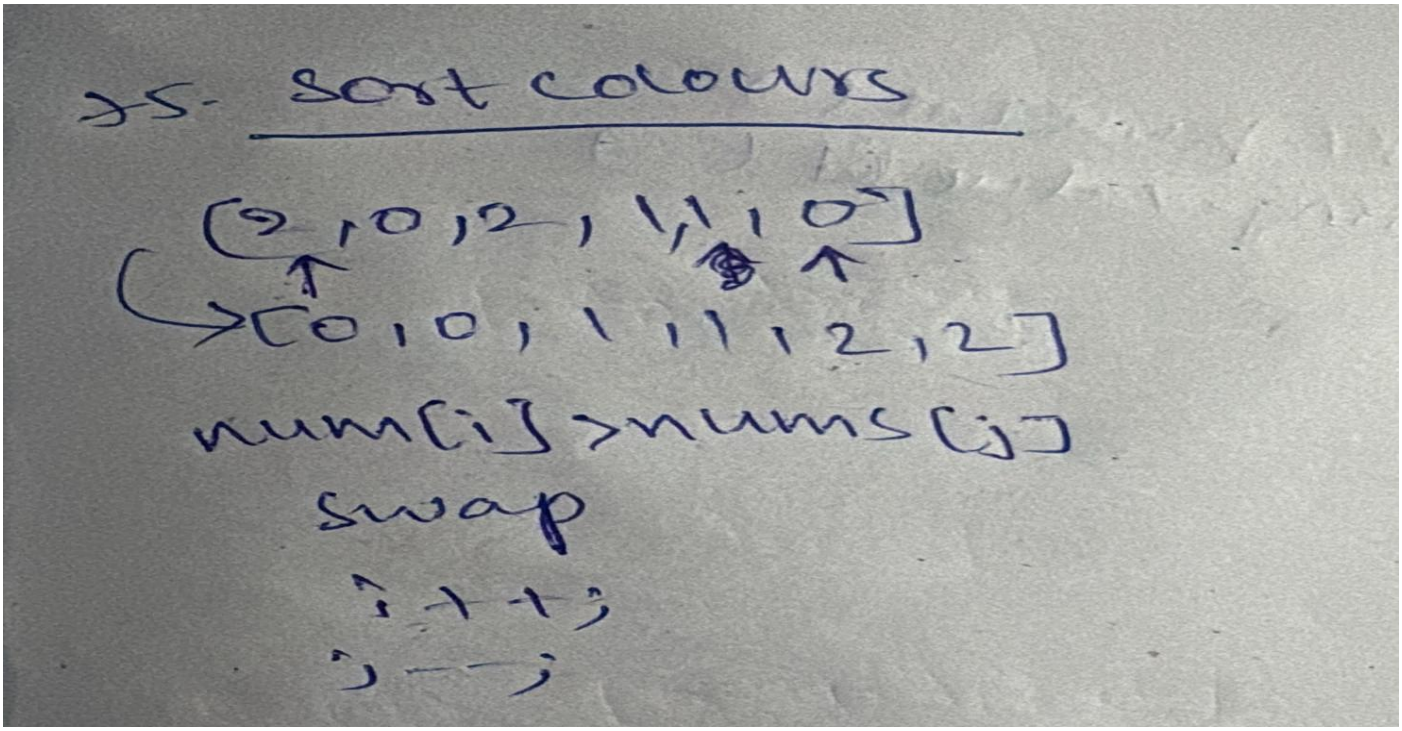

4. Relative Sort Array - LC 1122

https://leetcode.com/problems/relative-sort-array/submissions/2188062277/

1122. Relative Sort Array

Easy | Topics | Companies | Hint

Given two arrays `arr1` and `arr2`, the elements of `arr2` are distinct, and all elements in `arr2` are also in `arr1`.

Sort the elements of `arr1` such that the relative ordering of items in `arr1` are the same as in `arr2`. Elements that do not appear in `arr2` should be placed at the end of `arr1` in **ascending** order.

Example 1:

Input: arr1 = [2,3,1,3,2,4,6,7,9,2,19], arr2 = [2,1,4,3,9,6]
Output: [2,2,2,1,4,3,3,9,6,7,19]

Example 2:

Input: arr1 = [28,6,22,8,44,17], arr2 = [22,28,8,6]
Output: [22,28,8,6,17,44]

Constraints:

- `1 <= arr1.length, arr2.length <= 1000`
- `0 <= arr1[i], arr2[i] <= 1000`

3.4K 192

Java | Auto

```java
class Solution {
    public int[] relativeSortArray(int[] arr1, int[] arr2) {
        int[] count = new int[1001];
        for(int i = 0; i < arr1.length; i++) {
            count[arr1[i]]++;
        }
        int k = 0;
        for(int i = 0; i < arr2.length; i++) {
            while(count[arr2[i]] > 0) {
                arr1[k] = arr2[i];
                k++;
                count[arr2[i]]--;
            }
        }
        for(int i = 0; i < count.length; i++) {
            while(count[i] > 0) {
                arr1[k] = i;
                k++;
```

Saved


Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 Case 2


Input

arr1 =

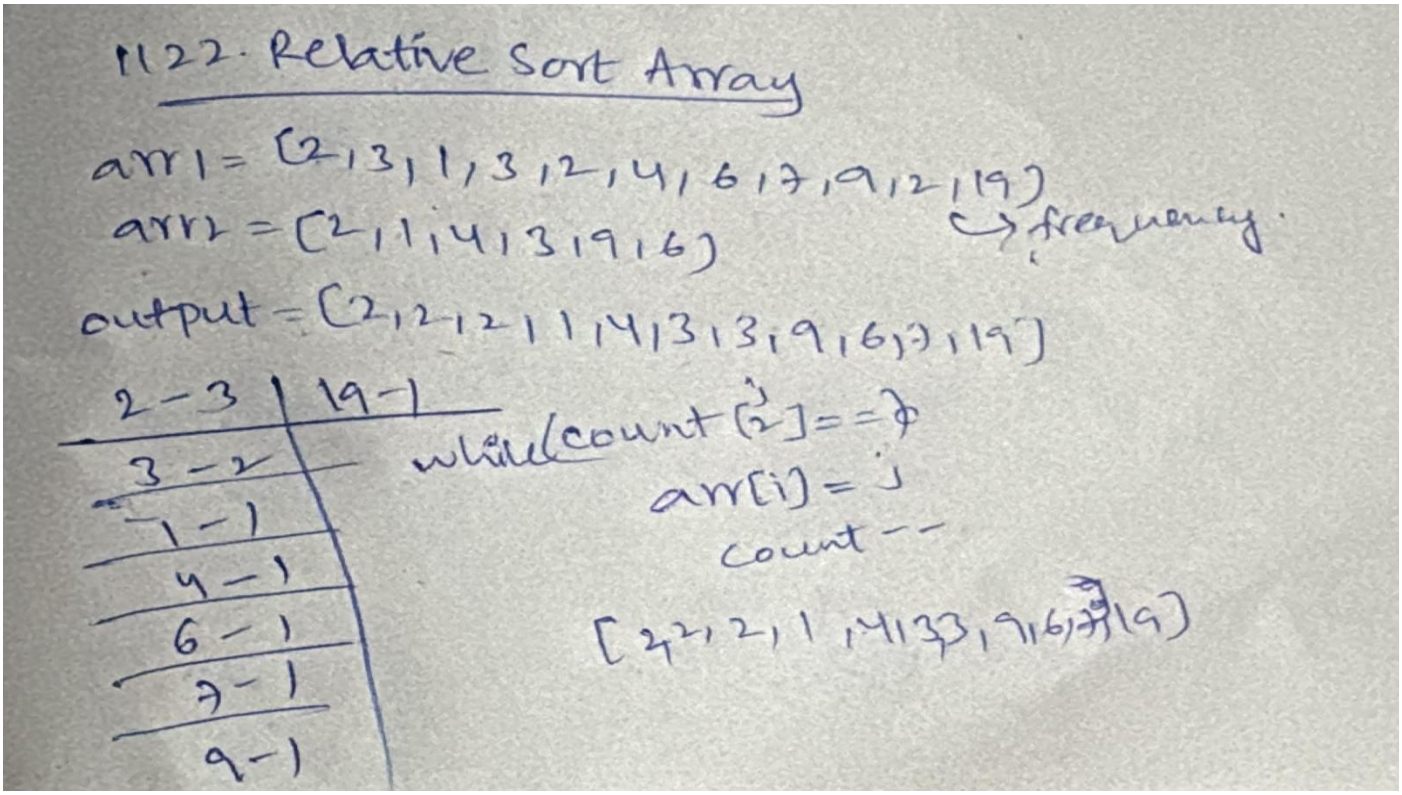

5. Largest Number - LC 179

https://leetcode.com/problems/largest-number/submissions/2188068188/

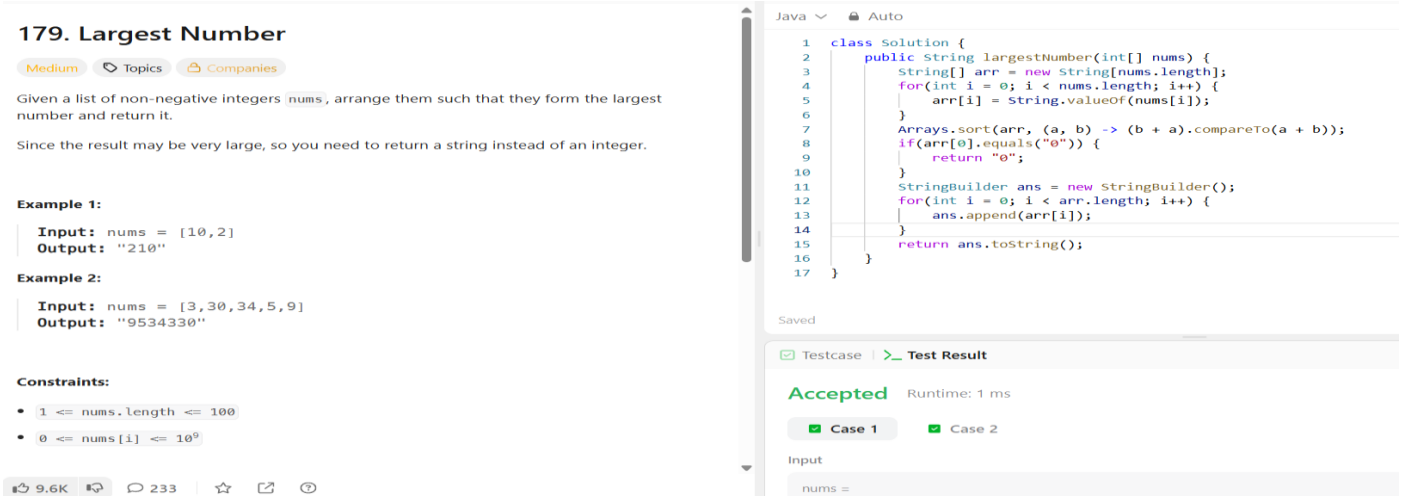

179. Largest Number

Medium · Topics · Companies

Given a list of non-negative integers `nums`, arrange them such that they form the largest number and return it.

Since the result may be very large, so you need to return a string instead of an integer.

Example 1:

```
Input: nums = [10,2]
Output: "210"
```

Example 2:

```
Input: nums = [3,30,34,5,9]
Output: "9534330"
```

Constraints:

- `1 <= nums.length <= 100`
- `0 <= nums[i] <= 10^9`

9.6K · 233

Java · Auto

```
class Solution {
    public String largestNumber(int[] nums) {
        String[] arr = new String[nums.length];
        for(int i = 0; i < nums.length; i++) {
            arr[i] = String.valueOf(nums[i]);
        }
        Arrays.sort(arr, (a, b) -> (b + a).compareTo(a + b));
        if(arr[0].equals("0")) {
            return "0";
        }
        StringBuilder ans = new StringBuilder();
        for(int i = 0; i < arr.length; i++) {
            ans.append(arr[i]);
        }
        return ans.toString();
    }
}
```

Saved

Testcase | Test Result

Accepted Runtime: 1 ms

Case 1 Case 2

Input

nums =

15. Largest number

Input = [10, 2]

output = 210

'10' + '2' = 102

'2' + '10' = 210

if (210 > 102)

output : 210.

Integer.parseInt( )

String.valueOf( )