

SQL Assignment – Week 2

Name: Akula Siri chandhana

Task: Query a sample database to find top customers and average order values.

Query 1: Top Customers

SELECT


customer_name,

SUM(total_price) AS total_spent

FROM orders

GROUP BY customer_name

ORDER BY total_spent DESC;

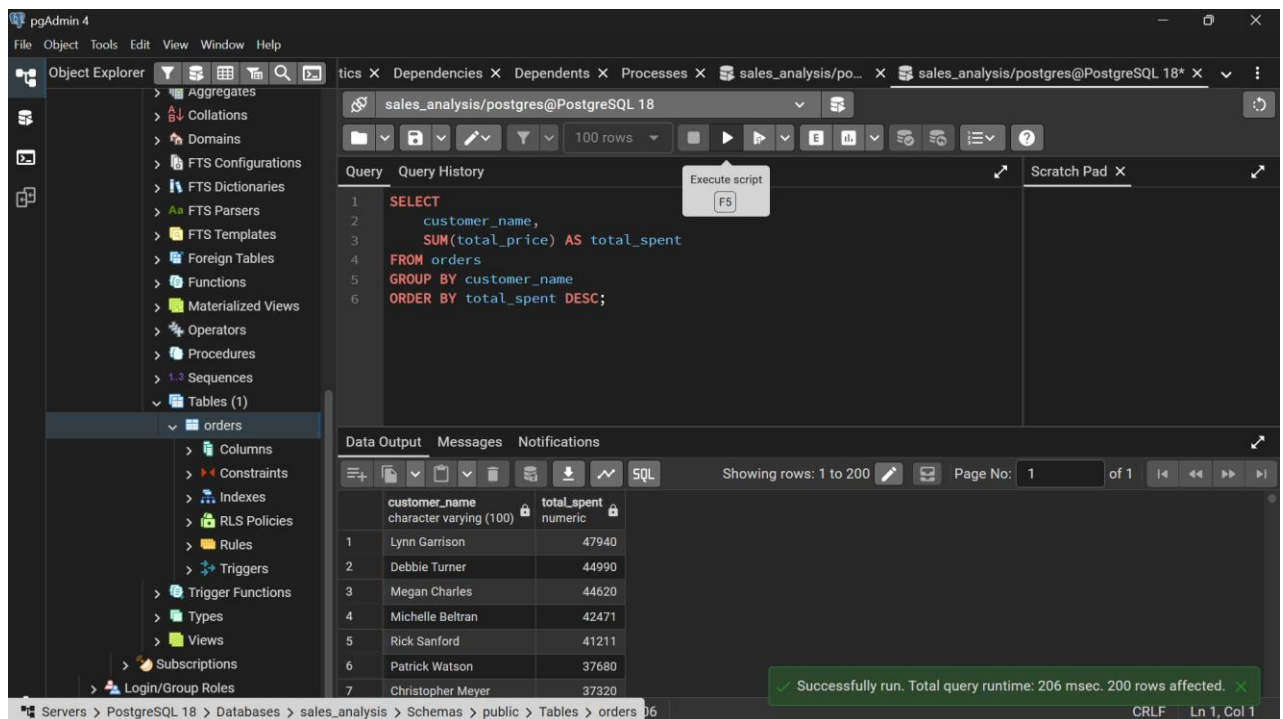

The screenshot shows the pgAdmin 4 interface. On the left, the Object Explorer shows the database structure, with the 'orders' table selected under the 'public' schema. The main query editor displays the following SQL query:

```
1 SELECT
2   customer_name,
3   SUM(total_price) AS total_spent
4 FROM orders
5 GROUP BY customer_name
6 ORDER BY total_spent DESC;
```

The query has been executed, and the results are shown in the Data Output pane. The results are as follows:

customer_name	total_spent
Lynn Garrison	47940
Debbie Turner	44990
Megan Charles	44620
Michelle Beltran	42471
Rick Sanford	41211
Patrick Watson	37680
Christopher Meyer	37320


A green message bar at the bottom right indicates: "Successfully run. Total query runtime: 206 msec. 200 rows affected."

Query 2: Average Order Value

SELECT

ROUND(AVG(total_price), 2) AS average_order_value

FROM orders;

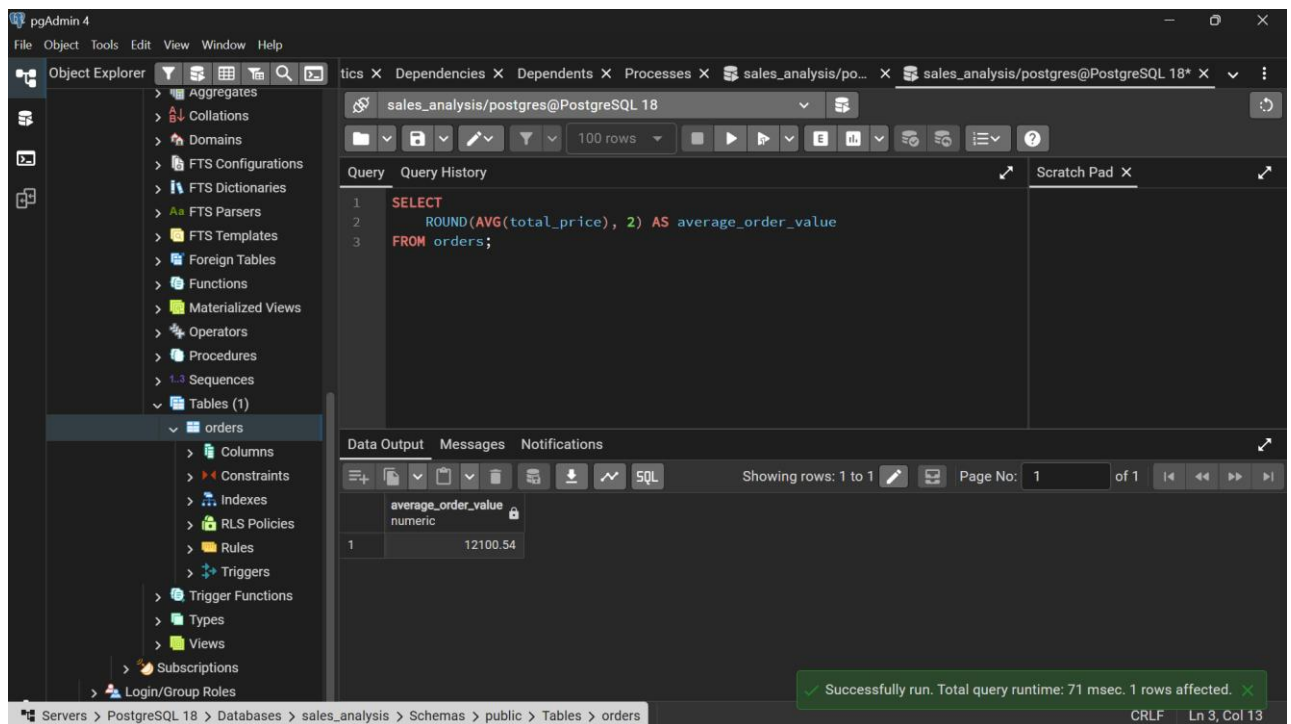

The screenshot shows the pgAdmin 4 interface. The left sidebar displays the Object Explorer with the 'orders' table selected under the 'public' schema. The main query editor shows the following SQL query:

```
1 SELECT
2   ROUND(AVG(total_price), 2) AS average_order_value
3 FROM orders;
```

The 'Data Output' tab at the bottom shows the result of the query, which is a single row with the value 12100.54 for the 'average_order_value' column.

average_order_value
12100.54

A green notification bar at the bottom right indicates: 'Successfully run. Total query runtime: 71 msec. 1 rows affected.'

Average order value for each category:


SELECT

category,

ROUND(AVG(total_price), 2) AS average_order_value

FROM orders

GROUP BY category;

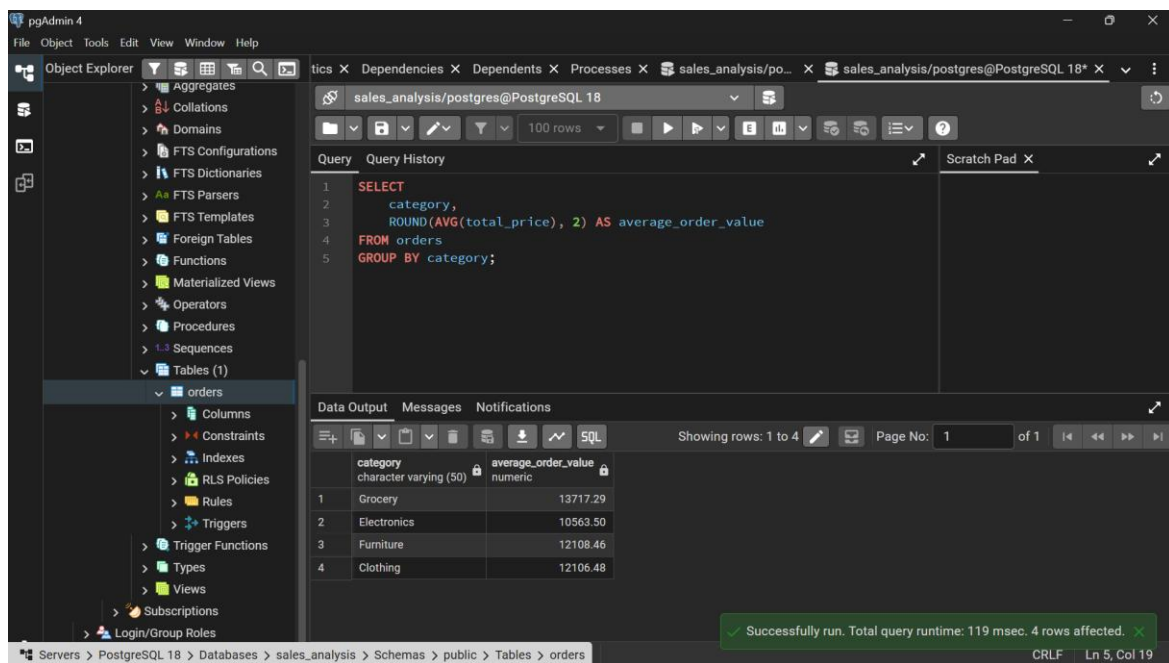

The screenshot shows the pgAdmin 4 interface. The left sidebar displays the database structure, with the 'orders' table selected under the 'public' schema. The main query editor contains the following SQL query:

```
1 SELECT
2   category,
3   ROUND(AVG(total_price), 2) AS average_order_value
4 FROM orders
5 GROUP BY category;
```

The 'Data Output' tab at the bottom shows the results of the query, displaying 4 rows of data:

	category character varying (50)	average_order_value numeric
1	Grocery	13717.29
2	Electronics	10563.50
3	Furniture	12108.46
4	Clothing	12106.48

A green status bar at the bottom indicates: 'Successfully run. Total query runtime: 119 msec. 4 rows affected.'

Average order value for each customer:


SELECT

customer_name,

ROUND(AVG(total_price), 2) AS average_order_value

FROM orders

GROUP BY customer_name;

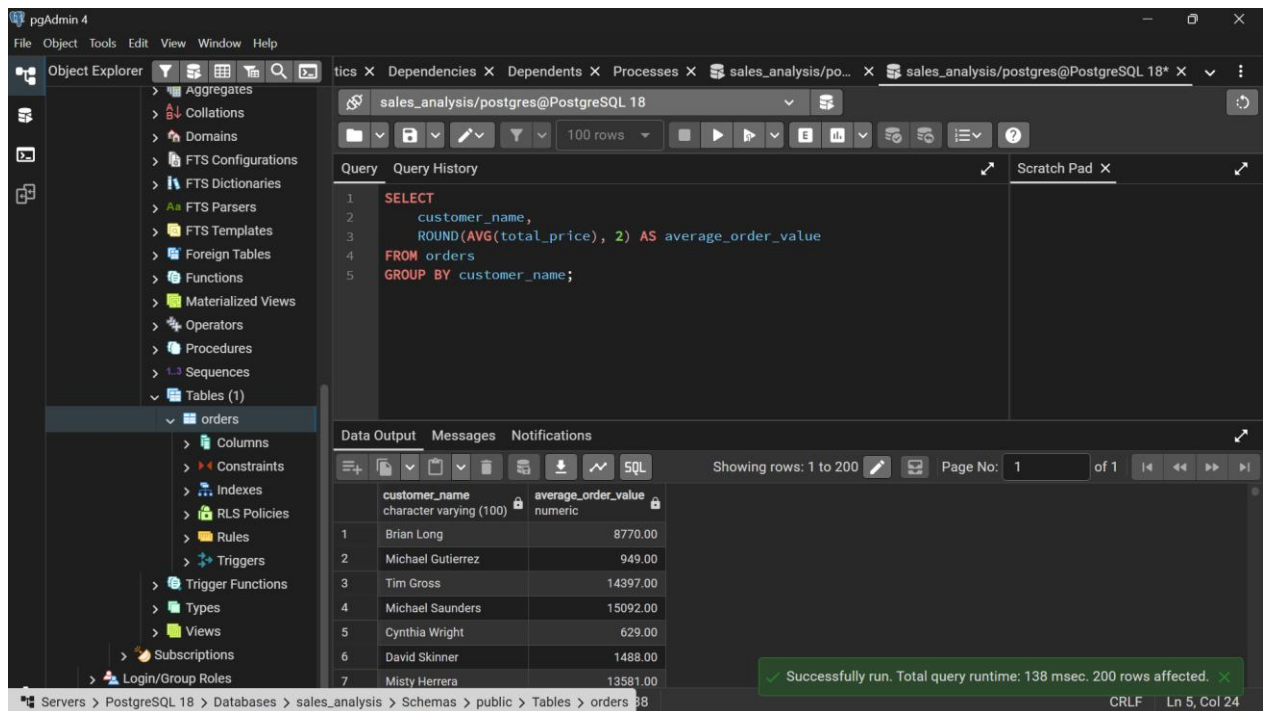

The screenshot shows the pgAdmin 4 interface. The left sidebar displays the Object Explorer with the 'orders' table selected under the 'public' schema. The main query editor shows the following SQL query:

```
1 SELECT
2   customer_name,
3   ROUND(AVG(total_price), 2) AS average_order_value
4 FROM orders
5 GROUP BY customer_name;
```

The 'Data Output' tab at the bottom displays the results of the query in a table with 2 columns: 'customer_name' and 'average_order_value'. The table contains 7 rows of data.

	customer_name	average_order_value
1	Brian Long	8770.00
2	Michael Gutierrez	949.00
3	Tim Gross	14397.00
4	Michael Saunders	15092.00
5	Cynthia Wright	629.00
6	David Skinner	1488.00
7	Misty Herrera	13581.00

A green status bar at the bottom right indicates: 'Successfully run. Total query runtime: 138 msec. 200 rows affected.'