

Joins

The screenshot shows a web browser window with the address bar displaying `programiz.com/sql/online-compiler`. The browser's tab bar shows several open tabs, including 'Eethika...', 'Correct MySQL C...', 'Microsoft Copilot', 'Document.docx', 'siripanchajanya-ne', 'Online SQL Editor', and 'Ask Gemini'. The page header is dark blue with the text 'Stop copy pasting code you don't actually understand' and a 'Become a PRO' button. The main content area is white and contains a code editor with a C++ program.

Programiz

Online SQL Editor

Interactive SQL Course

<

Input

>

Run SQL

Available Tables

Class [-]

id [integer]

name [varchar(30)]

Class_info [-]

id [integer]

address [varchar(30)]

Customers [-]

customer_id [int]

first_name [varchar(100)]

last_name [varchar(100)]

age [int]

country [varchar(100)]

First_table [-]

id [integer]

name [varchar(30)]

Orders [-]

-- Create Tables

```

CREATE TABLE class(
  id INTEGER,
  name VARCHAR(30)
);

CREATE TABLE class_info(
  id INTEGER,
  address VARCHAR(30)
);

-- Insert Data

```

Output

id	name	id	address
1	Siri	1	DELHI
1	Siri	2	MUMBAI
1	Siri	3	CHENNAI
1	Siri	7	NOIDA
1	Siri	8	PANIPAT
2	Prakshitha	1	DELHI
2	Prakshitha	2	MUMBAI

Class


id	name
1	Siri
2	Prakshitha
3	Mahija
4	Geethika
5	Varshika

Class_info

id	address
1	DELHI
2	MUMBAI
3	CHENNAI
7	NOIDA
8	PANIPAT

Customers

customer_id	first_name	last_name	age	country
-------------	------------	-----------	-----	---------



```

-- Class [-]
id [integer]
name [varchar(30)]

-- Class_info [-]
id [integer]
address [varchar(30)]

-- Customers [-]
customer_id [int]
first_name [varchar(100)]
last_name [varchar(100)]
age [int]
country [varchar(100)]

-- First_table [-]
id [integer]
name [varchar(30)]

-- Orders [-]
order_id [integer]
item [varchar(100)]
amount [integer]
customer_id [integer]

```

```

SELECT 1
FROM second_table s
WHERE s.id = f.id
AND s.name = f.name
);

-- MINUS Names
SELECT f.name
FROM first_table f
WHERE NOT EXISTS (
    SELECT 1
    FROM second_table s
    WHERE s.name = f.name
);

```

Output

	customer_id	first_name	last_name	age	country
4	Geethika	7	NOIDA		
4	Geethika	8	PANIPAT		
5	Varshika	1	DELHI		
5	Varshika	2	MUMBAI		
5	Varshika	3	CHENNAI		
5	Varshika	7	NOIDA		
5	Varshika	8	PANIPAT		

Second_table

id	name
2	Chinni
3	Geethika

First_table

id	name
1	Siri
2	Prakshitha
3	Mahija

Shippings

shipping_id	status	customer
1	Pending	2
2	Pending	4
3	Delivered	3
4	Pending	5
5	Delivered	1

Stop copy pasting code you don't actually understand
Build the coding confidence you need to become a developer companies will fight for

Become a PRO

Programiz Online SQL Editor

Interactive SQL Course

Class [-]

- id [integer]
- name [varchar(30)]

Class_info [-]

- id [integer]
- address [varchar(30)]

Customers [-]

- customer_id [int]
- first_name [varchar(100)]
- last_name [varchar(100)]
- age [int]
- country [varchar(100)]

First_table [-]

- id [integer]
- name [varchar(30)]

Orders [-]

Input

```

SELECT
  FROM second_table s
  WHERE s.id = f.id
  AND s.name = f.name
);

-- MINUS Names
SELECT f.name
FROM first_table f
WHERE NOT EXISTS (
  SELECT 1
  FROM second_table s
  WHERE s.name = f.name
);

```

Run SQL

Output

id	name	id	address
4	Geethika	7	NOIDA
4	Geethika	8	PANIPAT
5	Varshika	1	DELHI
5	Varshika	2	MUMBAI
5	Varshika	3	CHENNAI
5	Varshika	7	NOIDA
5	Varshika	8	PANIPAT

Available Tables

first_table

id	name
1	Siri
2	Chinni

Orders

order_id	item	amount	customer_id
1	Keyboard	400	4
2	Mouse	300	4
3	Monitor	12000	3
4	Keyboard	400	1
5	Mousepad	250	2

Second_table

id	name
2	Chinni
3	Geethika

Shippings

Stop copy pasting code you don't actually understand
Build the coding confidence you need to become a developer companies will fight for

Become a PRO

Programiz Online SQL Editor

Interactive SQL Course

Class [-]

- id [integer]
- name [varchar(30)]

Class_info [-]

- id [integer]
- address [varchar(30)]

Customers [-]

- customer_id [int]
- first_name [varchar(100)]
- last_name [varchar(100)]
- age [int]
- country [varchar(100)]

First_table [-]

- id [integer]
- name [varchar(30)]

Orders [-]

Input

```

SELECT
  FROM second_table s
  WHERE s.id = f.id
  AND s.name = f.name
);

-- MINUS Names
SELECT f.name
FROM first_table f
WHERE NOT EXISTS (
  SELECT 1
  FROM second_table s
  WHERE s.name = f.name
);

```

Run SQL

Output

id	name	id	address
4	Geethika	7	NOIDA
4	Geethika	8	PANIPAT
5	Varshika	1	DELHI
5	Varshika	2	MUMBAI
5	Varshika	3	CHENNAI
5	Varshika	7	NOIDA
5	Varshika	8	PANIPAT

Available Tables

Customers


customer_id	first_name	last_name	age	country
1	John	Doe	31	USA
2	Robert	Luna	22	USA
3	David	Robinson	22	UK
4	John	Reinhardt	25	UK
5	Betty	Doe	28	UAE

First_table

id	name
1	Siri
2	Chinni

Orders

order_id	item	amount	customer_id
1	Keyboard	400	4
2	Mouse	300	4
3	Monitor	12000	3
4	Keyboard	400	1

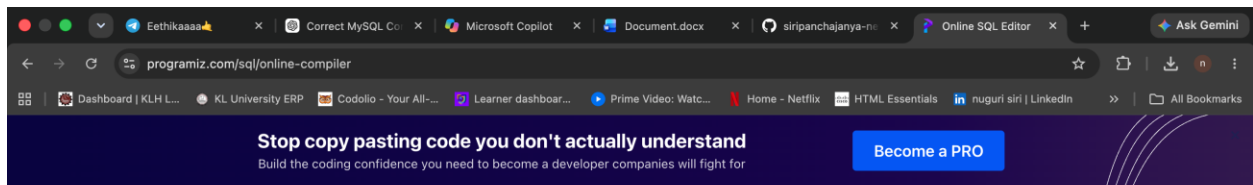

Class [-]

id [integer]

name [varchar(30)]

Class_info [-]

id [integer]

address [varchar(30)]

Customers [-]

customer_id [int]

first_name [varchar(100)]

last_name [varchar(100)]

age [int]

country [varchar(100)]

First_table [-]

id [integer]

name [varchar(30)]

Orders [-]

order_id [integer]

item [varchar(100)]

amount [integer]

customer_id [integer]

Input

```
SELECT
FROM second_table s
WHERE s.id = f.id
AND s.name = f.name
);

-- MINUS Names
SELECT f.name
FROM first_table f
WHERE NOT EXISTS (
  SELECT 1
  FROM second_table s
  WHERE s.name = f.name
);
```

Run SQL

Available Tables

Class

id	name
1	Siri
2	Prakshitha
3	Mahija
4	Geethika
5	Varshika

Class_info


id	address
1	DELHI
2	MUMBAI
3	CHENNAI
7	NOIDA
8	PANIPAT

Customers

customer_id	first_name	last_name	age	country
-------------	------------	-----------	-----	---------

Output

id	name	id	address
4	Geethika	7	NOIDA
4	Geethika	8	PANIPAT
5	Varshika	1	DELHI
5	Varshika	2	MUMBAI
5	Varshika	3	CHENNAI
5	Varshika	7	NOIDA
5	Varshika	8	PANIPAT

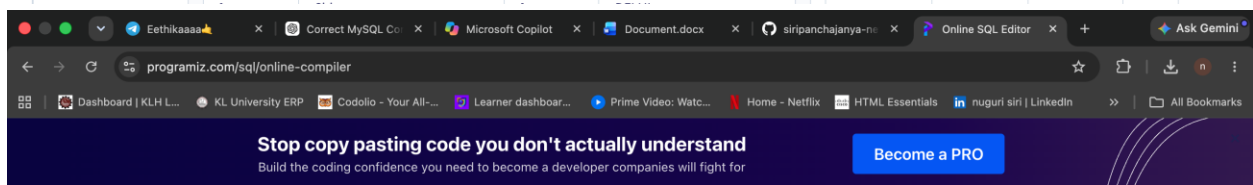

Class [-]

id [integer]

name [varchar(30)]

Class_info [-]

id [integer]

address [varchar(30)]

Customers [-]

customer_id [int]

first_name [varchar(100)]

last_name [varchar(100)]

age [int]

country [varchar(100)]

First_table [-]

id [integer]

name [varchar(30)]

Orders [-]

order_id [integer]

item [varchar(100)]

amount [integer]

customer_id [integer]

Input

```
SELECT
FROM second_table s
WHERE s.id = f.id
AND s.name = f.name
);

-- MINUS Names
SELECT f.name
FROM first_table f
WHERE NOT EXISTS (
  SELECT 1
  FROM second_table s
  WHERE s.name = f.name
);
```

Run SQL

Available Tables

Class

id	name
1	Siri
2	Prakshitha
3	Mahija
4	Geethika
5	Varshika

Class_info

id	address
1	DELHI
2	MUMBAI
3	CHENNAI
7	NOIDA
8	PANIPAT

Customers

customer_id	first_name	last_name	age	country
1	John	Doe	22	USA
2	Robert	Luna	22	USA
3	David	Robinson	22	UK

Output

id	name	id	address
2	Prakshitha	7	NOIDA
2	Prakshitha	8	PANIPAT
3	Mahija	1	DELHI
3	Mahija	2	MUMBAI
3	Mahija	3	CHENNAI
3	Mahija	7	NOIDA
3	Mahija	8	PANIPAT
4	Geethika	1	DELHI
4	Geethika	2	MUMBAI
4	Geethika	3	CHENNAI
4	Geethika	7	NOIDA
4	Geethika	8	PANIPAT

Stop copy pasting code you don't actually understand
Build the coding confidence you need to become a developer companies will fight for

Become a PRO

Class [-]

- id [integer]
- name [varchar(30)]

Class_info [-]

- id [integer]
- address [varchar(30)]

Customers [-]

- customer_id [int]
- first_name [varchar(100)]
- last_name [varchar(100)]
- age [int]
- country [varchar(100)]

First_table [-]

- id [integer]
- name [varchar(30)]

Orders [-]

- order_id [integer]
- item [varchar(100)]
- amount [integer]
- customer_id [integer]

```

SELECT
FROM second_table s
WHERE s.id = f.id
AND s.name = f.name
);

-- MINUS Names
SELECT f.name
FROM first_table f
WHERE NOT EXISTS (
    SELECT 1
    FROM second_table s
    WHERE s.name = f.name
);

```

Output

id	name	id	address
1	Siri	1	DELHI
1	Siri	2	MUMBAI
1	Siri	3	CHENNAI
1	Siri	7	NOIDA
1	Siri	8	PANIPAT
2	Prakshitha	1	DELHI
2	Prakshitha	2	MUMBAI
2	Prakshitha	3	CHENNAI
2	Prakshitha	7	NOIDA
2	Prakshitha	8	PANIPAT

Class

id	name
1	Siri
2	Prakshitha
3	Mahija
4	Geethika
5	Varshika

Class_info

id	address
1	DELHI
2	MUMBAI
3	CHENNAI
7	NOIDA
8	PANIPAT

Customers

customer_id	first_name	last_name	age	country
1	John	Doe	31	USA
2	Robert	Luna	22	USA
3	David	Robinson	22	UK

Stop copy pasting code you don't actually understand
Build the coding confidence you need to become a developer companies will fight for

Become a PRO

Programiz Online SQL Editor

Interactive SQL Course

Input

```

-- SET OPERATION TABLES

CREATE TABLE first_table(
    id INTEGER,
    name VARCHAR(30)
);

CREATE TABLE second_table(
    id INTEGER,
    name VARCHAR(30)
);

```

Output

id	name	id	address
1	Siri	1	DELHI
1	Siri	2	MUMBAI
1	Siri	3	CHENNAI
1	Siri	7	NOIDA
1	Siri	8	PANIPAT
2	Prakshitha	1	DELHI
2	Prakshitha	2	MUMBAI

Available Tables

Class

id	name
1	Siri
2	Prakshitha
3	Mahija
4	Geethika
5	Varshika

Class_info

id	address
1	DELHI
2	MUMBAI
3	CHENNAI
7	NOIDA
8	PANIPAT

Customers

customer_id	first_name	last_name	age	country
1	John	Doe	31	USA
2	Robert	Luna	22	USA
3	David	Robinson	22	UK

Stop copy pasting code you don't actually understand
Build the coding confidence you need to become a developer companies will fight for

Become a PRO

Programiz Online SQL Editor

Interactive SQL Course

Class [-]

- id [integer]
- name [varchar(30)]

Class_info [-]

- id [integer]
- address [varchar(30)]

Customers [-]

- customer_id [int]
- first_name [varchar(100)]
- last_name [varchar(100)]
- age [int]
- country [varchar(100)]

First_table [-]

- id [integer]
- name [varchar(30)]

Orders [-]

Input

```
-- FULL OUTER JOIN Equivalent
SELECT *
FROM class
LEFT JOIN class_info
ON class.id = class_info.id

UNION

SELECT *
FROM class_info
LEFT JOIN class
ON class.id = class_info.id;
```

Run SQL

Available Tables

Class

id	name
1	Siri
2	Prakshitha
3	Mahija
4	Geethika
5	Varshika

Class_info

id	address
1	DELHI
2	MUMBAI
3	CHENNAI
7	NOIDA
8	PANIPAT

Customers

customer_id	first_name	last_name	age	country
1	Siri			
2	Prakshitha			
2	Prakshitha			

Output

id	name	id	address
1	Siri	1	DELHI
1	Siri	2	MUMBAI
1	Siri	3	CHENNAI
1	Siri	7	NOIDA
1	Siri	8	PANIPAT
2	Prakshitha	1	DELHI
2	Prakshitha	2	MUMBAI

Stop copy pasting code you don't actually understand
Build the coding confidence you need to become a developer companies will fight for

Become a PRO

Programiz Online SQL Editor

Interactive SQL Course

Class [-]

- id [integer]
- name [varchar(30)]

Class_info [-]

- id [integer]
- address [varchar(30)]

Customers [-]

- customer_id [int]
- first_name [varchar(100)]
- last_name [varchar(100)]
- age [int]
- country [varchar(100)]

First_table [-]

- id [integer]
- name [varchar(30)]

Orders [-]

Input

```
-- LEFT JOIN Unmatched Records
SELECT *
FROM class
LEFT JOIN class_info
ON class.id = class_info.id
WHERE class_info.id IS NULL;

-- RIGHT JOIN Equivalent
SELECT *
FROM class_info
LEFT JOIN class
ON class.id = class_info.id;
```

Run SQL

Available Tables

Class

id	name
1	Siri
2	Prakshitha
3	Mahija
4	Geethika
5	Varshika

Class_info

id	address
1	DELHI
2	MUMBAI
3	CHENNAI
7	NOIDA
8	PANIPAT

Customers

customer_id	first_name	last_name	age	country
1	Siri			
2	Prakshitha			
2	Prakshitha			

Output

id	name	id	address
1	Siri	1	DELHI
1	Siri	2	MUMBAI
1	Siri	3	CHENNAI
1	Siri	7	NOIDA
1	Siri	8	PANIPAT
2	Prakshitha	1	DELHI
2	Prakshitha	2	MUMBAI

programiz.com/sql/online-compiler

Dashboard | KLH L... | KL University ERP | Codolio - Your All-... | Learner dashboar... | Prime Video: Watc... | Home - Netflix | HTML Essentials | nuguri siri | LinkedIn | All Bookmarks

Stop copy pasting code you don't actually understand
Build the coding confidence you need to become a developer companies will fight for

Become a PRO

Interactive SQL Course

Class [-]

id [integer]
name [varchar(30)]

Class_info [-]

id [integer]
address [varchar(30)]

Customers [-]

customer_id [int]
first_name [varchar(100)]
last_name [varchar(100)]
age [int]
country [varchar(100)]

First_table [-]

id [integer]
name [varchar(30)]

Orders [-]

Input

```
-- INNER JOIN
SELECT *
FROM class
INNER JOIN class_info
ON class.id = class_info.id;

-- INNER JOIN Selected Columns
SELECT class.name,
       class_info.address
FROM class
INNER JOIN class_info
ON class.id = class_info.id;
```

Run SQL

Available Tables

Output

id	name	id	address
1	Siri	1	DELHI
1	Siri	2	MUMBAI
1	Siri	3	CHENNAI
1	Siri	7	NOIDA
1	Siri	8	PANIPAT
2	Prakshitha	1	DELHI
2	Prakshitha	2	MUMBAI

Class

id	name
1	Siri
2	Prakshitha
3	Mahija
4	Geethika
5	Varshika

Class_info

id	address
1	DELHI
2	MUMBAI
3	CHENNAI
7	NOIDA
8	PANIPAT

Customers

customer_id	first_name	last_name	age	country
-------------	------------	-----------	-----	---------

programiz.com/sql/online-compiler

Dashboard | KLH L... | KL University ERP | Codolio - Your All-... | Learner dashboar... | Prime Video: Watc... | Home - Netflix | HTML Essentials | nuguri siri | LinkedIn | All Bookmarks

Stop copy pasting code you don't actually understand
Build the coding confidence you need to become a developer companies will fight for

Become a PRO

Interactive SQL Course

Class [-]

id [integer]
name [varchar(30)]

Class_info [-]

id [integer]
address [varchar(30)]

Customers [-]

customer_id [int]
first_name [varchar(100)]
last_name [varchar(100)]
age [int]
country [varchar(100)]

First_table [-]

id [integer]
name [varchar(30)]

Orders [-]

Input

```
-- Insert Data

INSERT INTO class VALUES
(1,'Siri'),
(2,'Prakshitha'),
(3,'Mahija'),
(4,'Geethika'),
(5,'Varshika');

INSERT INTO class_info VALUES
(1,'DELHI'),
(2,'MUMBAI'),
(3,'CHENNAI');
```

Run SQL

Available Tables

Output

id	name	id	address
1	Siri	1	DELHI
1	Siri	2	MUMBAI
1	Siri	3	CHENNAI
1	Siri	7	NOIDA
1	Siri	8	PANIPAT
2	Prakshitha	1	DELHI
2	Prakshitha	2	MUMBAI

Class

id	name
1	Siri
2	Prakshitha
3	Mahija
4	Geethika
5	Varshika

Class_info

id	address
1	DELHI
2	MUMBAI
3	CHENNAI
7	NOIDA
8	PANIPAT

Customers

customer_id	first_name	last_name	age	country
-------------	------------	-----------	-----	---------