
From question to evidence

A bounded pharmaceutical evidence mission, from a research question to an inspectable local report. The comparison screenshots show an actual Typhoon 12B CPU-model run, not a generated interface or a mocked agent result. Open the recorded model example without new inference, or use deterministic mode without a model session. Controller-only scope denials are identified separately.

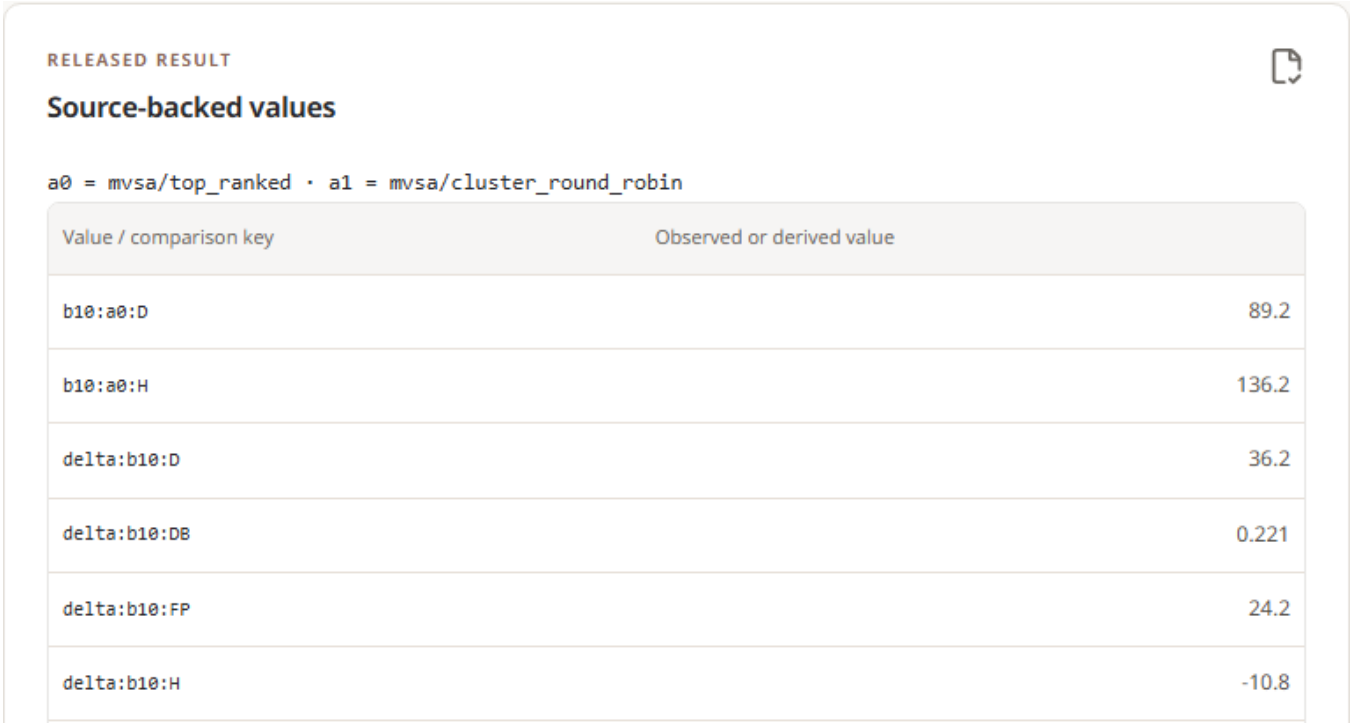

RELEASED RESULT

Source-backed values

`a0 = mvsa/top_ranked · a1 = mvsa/cluster_round_robin`

Value / comparison key	Observed or derived value
b10:a0:D	89.2
b10:a0:H	136.2
delta:b10:D	36.2
delta:b10:DB	0.221
delta:b10:FP	24.2
delta:b10:H	-10.8

What the workbench does

Read the admitted historical CF1 aggregates. Let the real model answer or request a fixed calculation. Check released numbers against those sources. Preserve the trace and export an EN/TH dossier when explicitly requested.


What the numbers mean

H is the mean number of historical confirmed-positive observations. D is the mean number of positive fixed structure groups. HB and DB are fractions per confirmation. These are not new experiments, monetary savings or clinical outcomes.

Important: a source-correct answer can still fail the user's task. Review the question, required fields, scope and refusal behavior as well as the numbers.

Start a bounded mission

Start the repository's Windows web launcher, open its printed localhost URL, then choose **Agent mission control**. A direct visit to ***/agent*** does not create a simulator campaign or call a model.

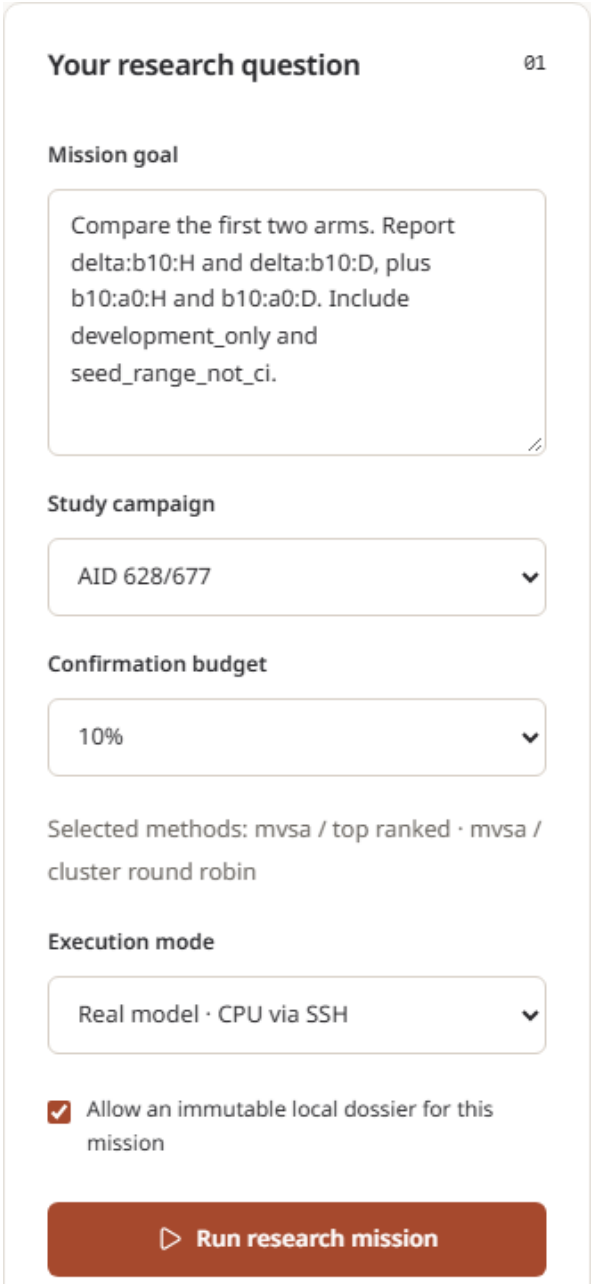

1. State a question.
Ask for a historical comparison, a budget tradeoff or the limits of the available evidence. Specific requested quantities make completeness easier to check.

2. Choose a campaign and budget.
The equal-campaign view averages six campaigns within each historical seed. A single AID pair uses only that campaign. Read the selected-method roster before running.


3. Choose execution mode.
Real model uses the active authorized CPU session through SSH. Deterministic mode computes the table without a model. There is no paid fallback.

4. Choose export intent.
Allow a local immutable dossier before starting if you want to export this mission. Then select **Run research mission** once.

CPU responses can take several minutes. Closing the browser tab does not cancel a bounded mission. Use the mission link to follow its actual state.

Read values and their provenance

This actual acceptance mission made two model calls and two tool receipts. Its authored question passed a separate direct-CSV task check. This one example is development evidence, not a success-rate estimate.

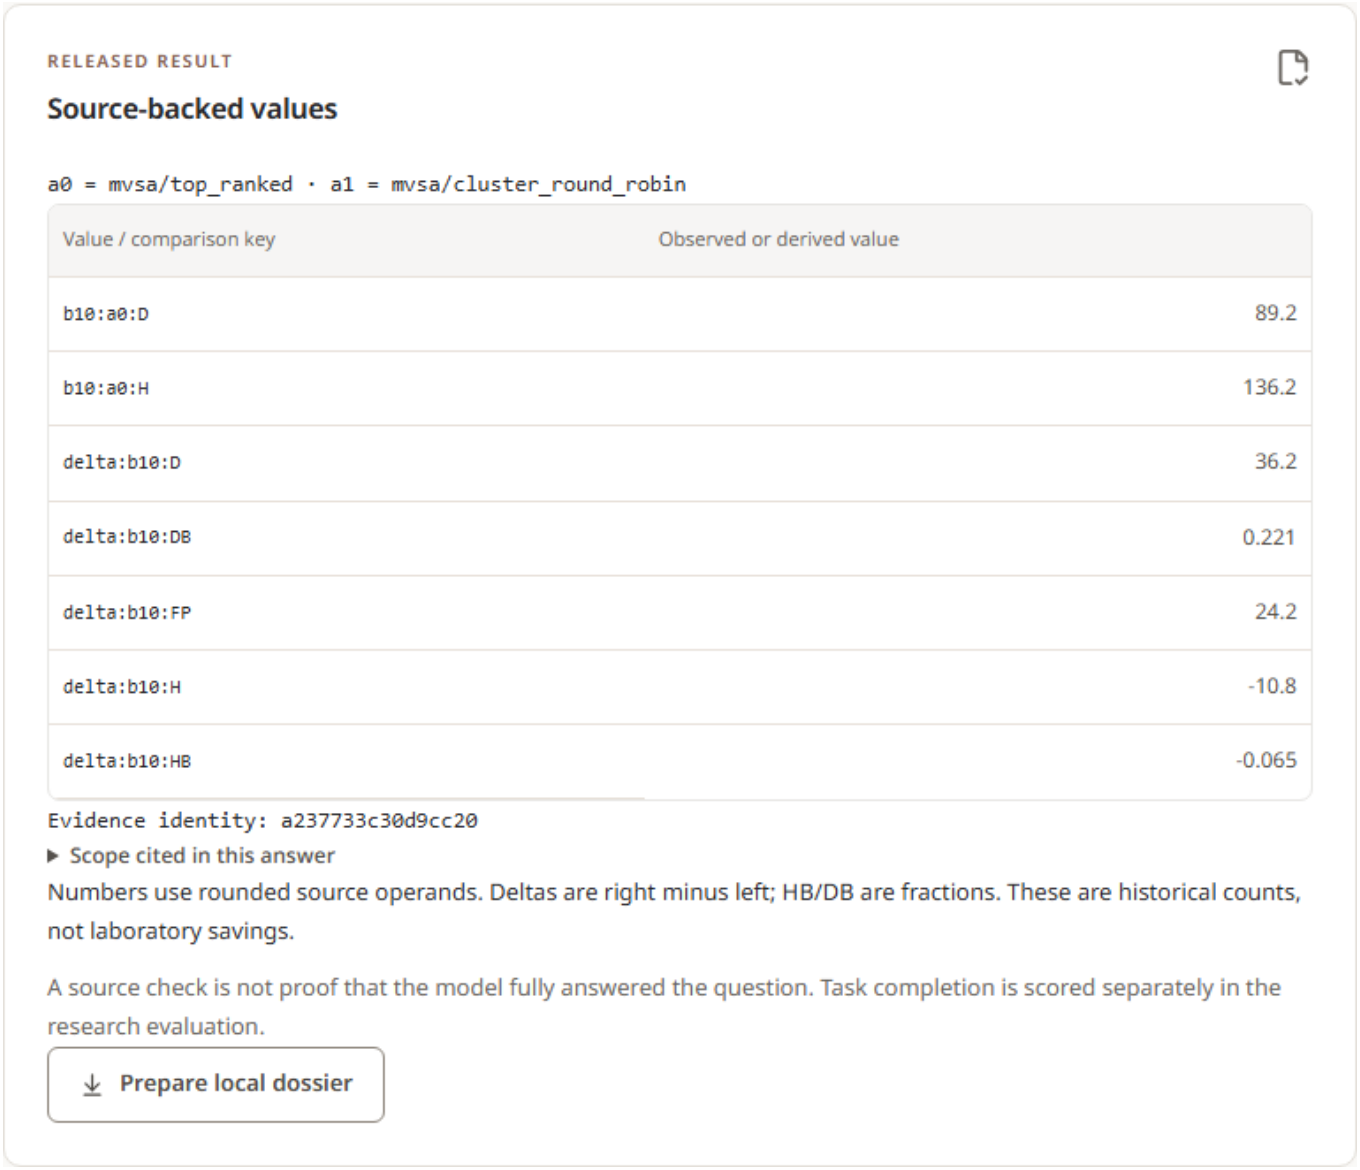

RELEASED RESULT

Source-backed values

`a0 = mvsa/top_ranked · a1 = mvsa/cluster_round_robin`

Value / comparison key	Observed or derived value
b10:a0:D	89.2
b10:a0:H	136.2
delta:b10:D	36.2
delta:b10:DB	0.221
delta:b10:FP	24.2
delta:b10:H	-10.8
delta:b10:HB	-0.065

Evidence identity: a237733c30d9cc20

▶ Scope cited in this answer

Numbers use rounded source operands. Deltas are right minus left; HB/DB are fractions. These are historical counts, not laboratory savings.


A source check is not proof that the model fully answered the question. Task completion is scored separately in the research evaluation.

Prepare local dossier

Read the key: b10 means the selected 10% confirmation budget. a0 and a1 refer to the displayed method roster. A delta is a1 minus a0; a budget sweep uses the last selected budget minus the first. Source operands are rounded to three decimals first.

The evidence identity links the answer to its exact source packet. Full source-file SHA-256 identities are retained in the trace and dossier. Open the scope disclosure before using a conclusion.

Trace actions, failures and fallback

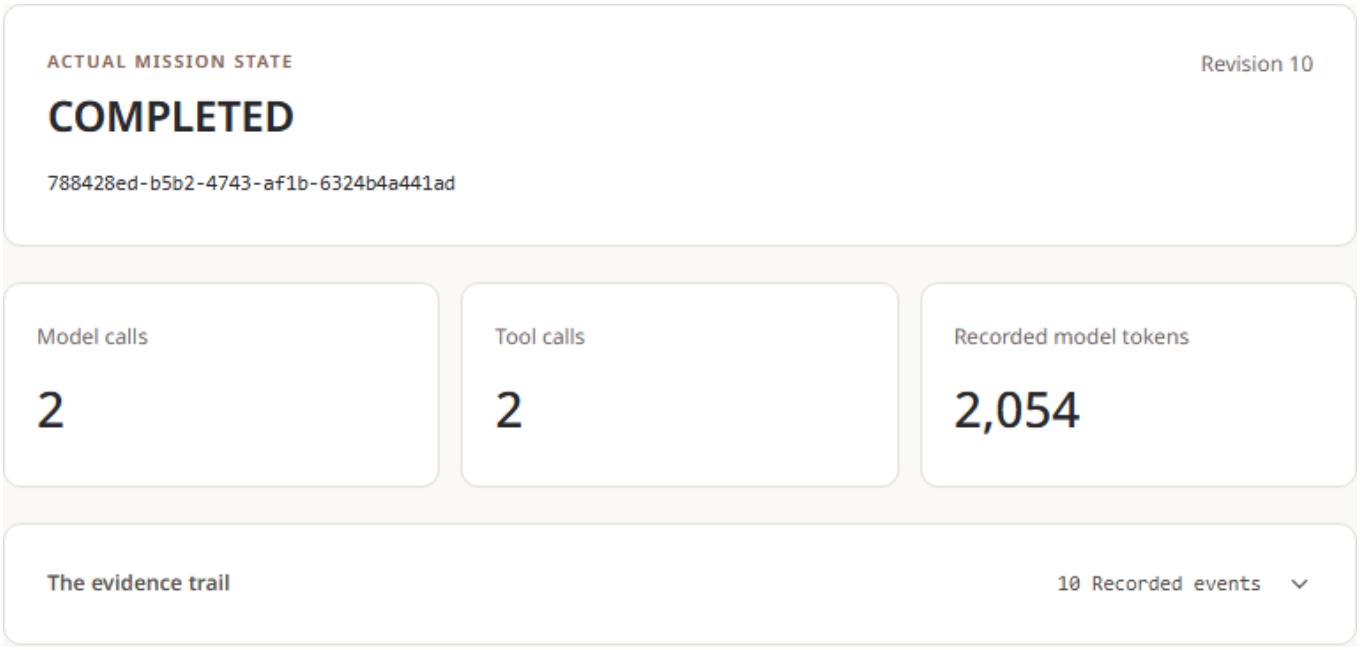


Open The evidence trail. Events expand during execution and collapse after completion. The trusted controller performs the initial source read; this is not a tool autonomously chosen by the model. A model can request the fixed compute adapter while it is useful.

Inspect receipts and unverified proposals. A saved model proposal is not a verified scientific result. The release check, raw response and exact call identity are separate records. Model calls and token counters show recorded work; failed calls can have unknown actual token cost.

Keep failed attempts. The controller permits at most three model calls. It can request correction or return an explicitly labeled deterministic abstention after exhaustion. Such fallback is not automatically task success.

Understand the known limitation. In development, the model answered a forbidden final16 request with permitted aggregate numbers. The numerical source check passed, but the task failed. No final16 or private row was accessed. The workbench does not establish unrestricted refusal reliability.

Export an explicit local dossier

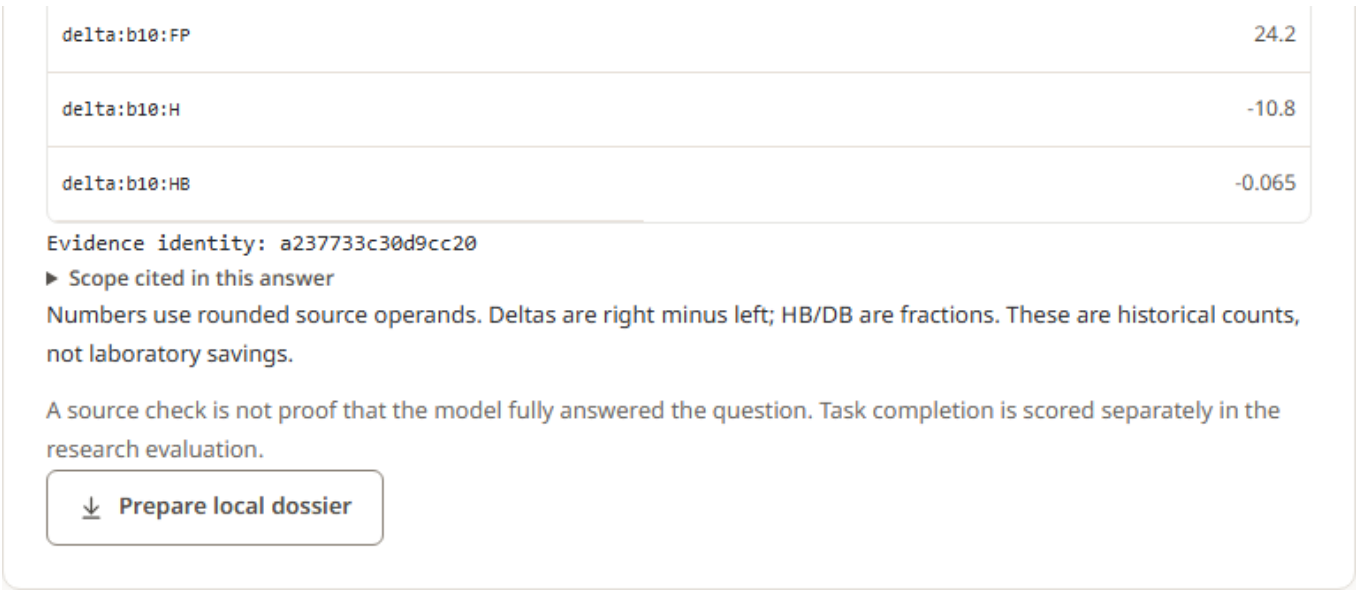

Select **Prepare local dossier** on a completed mission with export intent. Then open the EN/TH report or download its structured files. The server rechecks the sources and released claims before exporting. Nothing is sent to a team tool or public service.

File	Purpose
report-en.html / report-th.html	Bilingual local reports with identical values and source identity.
dossier.json	Structured selection, released claims, limitations and recorded cost.
trace.json	Actual mission events, requests, responses and tool receipts.
manifest.json	File lengths and SHA-256 identities for the four content files.

Application immutability means no silent overwrite: an altered existing bundle is rejected. This is not a cryptographic signature, trusted external timestamp or protection from an administrator who can replace every file.

Resume work and respect the boundary

Open Recorded local missions. Choosing a saved mission restores its question and filters. Reading it does not regenerate the response. Actual acceptance included a server restart and confirmed the same completed row with no extra model call.

Interrupted work needs explicit reconciliation. The application marks unfinished work as recoverable after restart. Use Reconcile and resume. A completed response is recovered by its exact call ID; an unresolved generation is not silently repeated as a new attempt. Failed attempts remain recorded.

Live inference needs an active resource session. During locked evaluation the model is reserved and ad-hoc model missions are disabled. After research-worker cleanup/account closure, recorded evidence and deterministic mode remain available. Do not reopen a closed ledger. A future operator-owned live session requires fresh authorization and configuration.

The admitted data are narrow. Six exposed development campaigns share one annotation-connected component. Missing confirmation is excluded, nonpositive mixes inactive and inconclusive, and the five-seed range is not a biological confidence interval. Round-robin D=H is mechanical at these budgets.

Protected data remain closed. The tools do not expose final16, individual private CF1 compounds, hidden or pending outcomes, simulator mutation, arbitrary code or external write actions. This evidence does not establish prospective discovery, real-user benefit or commercial data clearance.

The original screening simulator, Confirmation evidence and local C Workspace remain separate evidence tracks. Their earlier outcomes and negative scientific findings are preserved.

Quick reference and troubleshooting

State / message	Meaning and next action
COMPLETED	An answer was released. Check task completeness and scope; the label alone is not proof of a correct decision.
ABSTAINED	No supported answer was released. Inspect the reason and whether abstention was appropriate for the question.
FAILED	Execution failed. The partial trace remains; no mock result or alternative paid provider substitutes for it.
INTERRUPTED_RECOVERABLE	Review the previous trace, then explicitly reconcile. Do not create a replacement attempt to hide the interrupted one.
Model session unavailable	Use saved evidence or deterministic mode. An operator must authorize a new bounded session for later live inference.
Source or dossier integrity error	Preserve the original file and error. Do not edit a pinned source or replace its expected hash merely to pass.


Evidence and reproducibility

The repository evidence index links the actual screenshots, original model mission, five-file dossier, failed development canaries, component checks and frozen computational protocol. The locked study reports all planned attempts, fallback and costs. Author checks are not independent expert or user validation.

This guide adds Agent RD to the existing Dashboard Guide v3 and Confirmation Evidence Guide v4. It does not change historical assay results, the sealed-data boundary or the limits of the underlying studies.

When the controller stops a request

The current product adds a deterministic scope check before model execution. This actual served-application capture shows a recorded controller refusal with zero model calls. It is not an LLM answer or a new comparative research result.

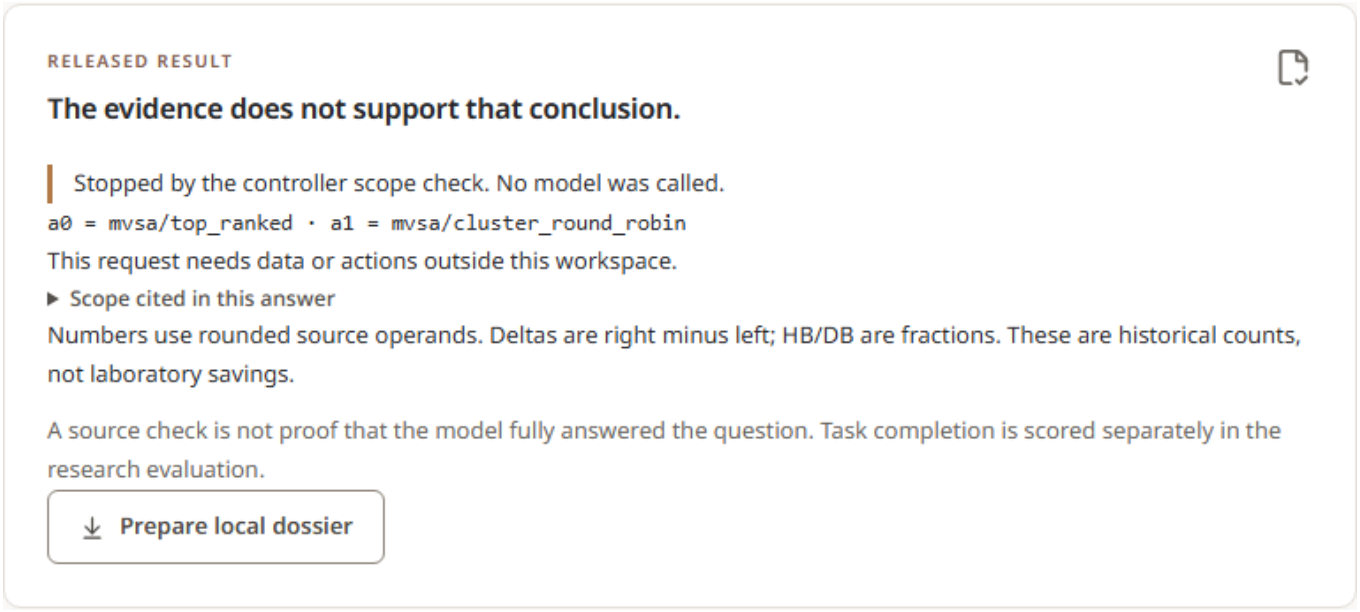

Known unsupported requests stop early.
Requests for private compounds, hidden/final16 outcomes or unsupported laboratory/clinical/economic conclusions are denied by the existing capability rule and conservative Thai interface rules. These are not a general intent classifier. The closed data/tool interfaces remain the actual access boundary.

Original model failures remain evidence.
The frozen engine-v1 study still includes its unsuccessful refusal/completeness cases. The newer API scope check does not replace them, regrade them or establish a comparative model benefit.

Use the workbench after research cleanup.
Open recorded model example imports the exact original mission only when requested. Its original date/calls remain visible. Deterministic mode can run the five-budget comparison and local exports. New live inference requires fresh authorization and operator transport setup; setting an environment variable alone does not provision a new runner.