Assignment-1

1) Image tog

1) The simg - tog is used to embed an image in an HIML page

- Images are not technically inserted. into a webpage, images are linked to webpages.

Attributes:

· SIC - Specifies the poth to the image

· alt - specifies on alternate text for the image, if the image for some reason cannot be displayed.

Code:

<! DOCTYPE html >

< html>

< body>

<hi> Image tag </hi>

<img src = "smiley.gif"</pre>

alt = "Smiley face" width = "42"

height = "42" -style = "vertical-

align: bottom">

</body? </html>

output:

Image tog



(1) List of 5 blocks and 5 inline elements.

Block elements -1)

< h17 - - < h67

>

< convas}

< main >

< div >

<-footer>

< u1 >

Inline elements

car

< sub>

< SUP>

< label >

<input>

- 3 Target attribute > self, parent, top
- 1) Torget

 The target attribute specifies

 where to open the linked

 document.
 - -self: Opens the linke d

 document in the some


 thame at it was clicked

 (-this is default)
 - -parent: Opens the linked obcument in the parent frame
 - -top: Opens the linked document in the full body of the window

Conbct -form <hIml> <head> <meta name = "Viewport" content = " width = device - width, initial-scale = 1"> <style> body S-font-binity: -Arial, Helvetica, cons-serif; 3 * {box-sizing: border-box; } input [-type=text], select, -textorea ? width : 100 %; Padding: 12px; border : Ipx solid #ccc; border-radius: 4PX; bor - sizing: border - box; margin-top: 6px; margin-bottom: 16 px; resize : vertical; input [type = submit] { background-color: #OUAAGD; codor : white : padding : 12px 20p1; border : none; bordon-radius: upx; cursor : pointer;

```
input (-type: submit); hover f
 background-color: =1 450049;
 · container ?
   border-radius: 5px;
   tackground-color: #f2f2f2;
    Padding: 20px
  </style>
  Thead-
   < 60 dy>
   <h3> Contact Form </h3>
  <div class="Container">
    cform action="/action-page.php">
  < label for = "fname" > First Name
  cinput type = "text" id = "fname"
   name = "-first name" place holder =
   "your name -- ">
   < label - for = "I name" > Last Name
                  </label>
<input type="text" id="I name"
 name = "last name" place holder =
 "your last name -- ">
< label -for = "country" > country
           </label>
 esclock id = "country" name =
                     "country">
coption value = "australia" >
   Australia </option>
```

voluc = "canada" > <option Conada </option> <option value:"usa" > UsA </option</pre> < Iselect -< lobel > -for="subject > Subject < /label > etextareo id = "subject" name = "subject" placeholder = " write something . " style = "height 200 Pa"> </textorea > einput type = "submit" value = "Submit"> c/form> </div> </body> </html> Output: Contact Form First Name Your name . - last Name Your last name ---

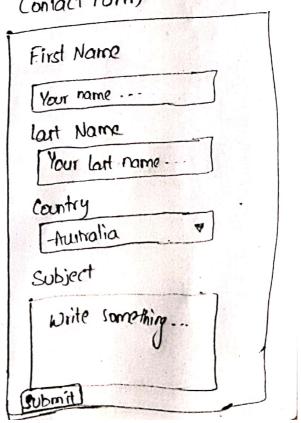

Scanned with CamScanner