

Implementation of Decision Tree Classifiers

ID3 versus C4.5

Depuydt Antoine
 Dansy Efila
 Mudura Mircea

May, 2017



- ▶ Data mining: compress, understand and predict
 - ▶ Clustering
 - ▶ Classification
 - ▶ Regression
 - ▶ ...


- ▶ Techniques to find links
 - ▶ Linear Regression
 - ▶ Decision Trees
 - ▶ Neural Networks
 - ▶ ...

Classification

- ▶ Classical example: play tennis today?
 - ▶ **Features:**
 - ▶ Outlook: sunny, overcast, rainy
 - ▶ Temperature: hot, cool, cold
 - ▶ Wind: high, weak
 - ▶ Humidity: high, normal
 - ▶ **Class labels:**
 - ▶ Yes
 - ▶ No

Decision Tree

- ▶ Visual model, easily understandable
- ▶ Model: tree with **decision** and **leaf nodes**

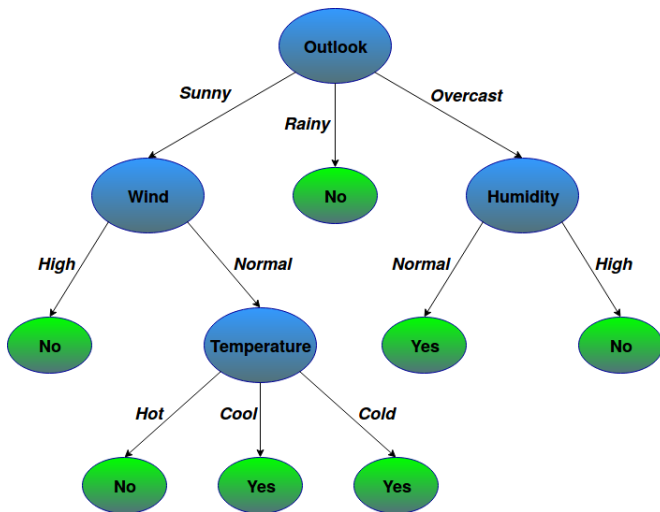



- ▶ Given a training data-set
- ▶ Recursively split on a node:
- ▶ If node is pure return leaf (class value)
- ▶ Else compute entropy & info gain:
 - ▶ Shannon's entropy: $E(S) = \sum_i -p_i \log_2(p_i)$
 - ▶ Subtree gain: $Gain(T, X) = E(T) - E(T, X)$



ID3 versus C4.5

- ▶ Goal: implement ID3 and C4.5 algorithms
- ▶ Objectives: compare ID3 and C4.5 output
 - ▶ Compare ID3 and C4.5
 - ▶ Create an application that classifies any data using both algorithms

- ▶ Initial implementation of decision trees
- ▶ Top down approach
- ▶ Split current node based on information gain:



Improvements?

- ▶ Entropy & information gain not sufficient metrics
- ▶ Missing data has to be handled
- ▶ Numerical values could provide order or dimension to a problem set
- ▶ Tree can be simplified



```

2,*,*,*,*,2
1,2,*,*,*,1
1,1,2,*,*,1
1,1,1,*,*,1
1,1,3,2,2,*,1
1,*,*,*,*,4,1
2,1,4,*,*,1,1
2,1,4,*,*,2,1
2,1,4,*,*,3,1
2,1,3,1,1,1,1
2,1,3,1,1,2,1
2,1,3,1,2,1,1
2,1,3,1,2,2,1
1,1,3,1,1,3,1
2,1,3,1,2,3,1
    
```

Missing data II

- ▶ Datatypes can co-exist (eg. strings, integer/float)
- ▶ Solutions
 - ▶ Replace missing values in column with most frequent
 - ▶ For numerical values replace with mean/mode/median
- ▶ Column 2:
 - ▶ No instances = 15
 - ▶ $\text{Card}(2) = 1$
 - ▶ $\text{Card}(1) = 12$
 - ▶ \rightarrow safest choice replace missing values with 1
- ▶ Column 3:
 - ▶ No instances = 15 (of course)
 - ▶ $\text{Card}(2) = 1$
 - ▶ $\text{Card}(1) = 1$
 - ▶ $\text{Card}(3) = 7$
 - ▶ $\text{Card}(4) = 3$
 - ▶ Missing = 3
 - ▶ \rightarrow replace missing values with 3





K-fold cross validation

