

# CodeKataBattle

## Design Document

Software Engineering 2  
Alessandro Saccone, Matteo Sissa, Sara Zappia

January 5, 2024

# Contents

<b>Contents</b>	<b>2</b>
<b>1 Introduction</b>	<b>4</b>
1.1 Purpose . . . . .	4
1.2 Scope . . . . .	5
1.3 Definitions, Acronyms, Abbreviations . . . . .	7
1.3.1 Definitions . . . . .	7
1.3.2 Acronyms . . . . .	9
1.4 Reference Documents . . . . .	11
1.5 Document Structure . . . . .	11
<b>2 Architectural Design</b>	<b>13</b>
2.1 Overview . . . . .	13
2.1.1 High Level View . . . . .	13
2.2 Component View . . . . .	16
2.2.1 RESTful APIs component diagram . . . . .	16
2.2.2 Service Discovery component diagram . . . . .	19
2.2.3 Event-driven pattern components . . . . .	20
2.2.4 Data layer access component diagram . . . . .	22
2.2.5 User interfaces component diagram . . . . .	23
2.3 Deployment View . . . . .	24
2.3.1 High-level Deployment View . . . . .	24
2.3.2 Detailed Deployment View . . . . .	25
2.4 Run Time Views . . . . .	27
2.5 Component Interfaces . . . . .	37
2.6 Selected Architectural Styles and Patterns . . . . .	50
2.6.1 Database Management . . . . .	51
<b>3 User Interface Design</b>	<b>53</b>
3.1 Login Phase . . . . .	53
3.2 Educator personal profile . . . . .	54
3.3 Creation of a new tournament . . . . .	55
3.4 Tournament home page . . . . .	56
3.5 Creation of a new battle . . . . .	57
3.6 Student personal profile . . . . .	58
3.7 Notification interface . . . . .	59

3.8	Joining a tournament . . . . .	60
3.9	Joining a Battle . . . . .	60
<b>4</b>	<b>Requirements Traceability</b>	<b>62</b>
<b>5</b>	<b>Implementation, Integration and Test plan</b>	<b>68</b>
5.1	Overview . . . . .	68
5.2	Implementation Plan . . . . .	68
5.2.1	Features Identification . . . . .	68
5.2.2	Components Integration and Testing . . . . .	68
5.3	System Testing . . . . .	68
5.4	Additional Specifications on testing . . . . .	68
<b>6</b>	<b>Effort spent</b>	<b>69</b>
<b>7</b>	<b>References</b>	<b>69</b>

# **1 Introduction**

## **1.1 Purpose**

The main idea behind the CodeKataBattle platform comes from the term "kata", which is a Japanese word describing detailed patterns of movements repeated many times in order to memorize and master them. This kind of exercise is usually applied in learning karate. CodeKataBattle aims at exporting the same learning process also in the domain of coding and programming.

The software described in this document involves two main actors, which are students and educators. Educators can propose code kata battles (or simply battles for brevity), which are problems and teasers to be addressed by coding with a specific programming language, while students can engage in these battles in order to find solutions to them. Code kata battles are published in the context of tournaments in which students compete with each other.

The main goals of this system are tightly related to the users of the application. On the educator's side, CodeKataBattle allows to easily organize tournaments and coding battles, also for a great number of students. On the student's side, CodeKataBattle creates an enjoyable and playful environment to foster and improve the student's coding skills.

## 1.2 Scope

The CodeKataBattle system is a dynamic web application fostering collaborative coding experiences for both students and educators. On this platform, students actively engage in tournaments and code kata battles to showcase their skills and monitor individual progress. Educators also play a crucial role in taking care of organizing tournaments and designing battles.

CodeKataBattle is integrated with GitHub, to leverage the GitHub abilities to store different versions of a coding project. For every battle generated on CodeKataBattle, a dedicated GitHub repository is created after the registration deadline of the battle expires. From that moment, students are able to push their code solutions for the battle in a personal repository that is forked by the one created as a reference by CodeKataBattle . Every student willing to participate in a battle, also has to autonomously develop a GitHub workflow (through GitHub Actions) in order to fire a notification from GitHub to CodeKataBattle every time a commit is performed on his/her repository. When CodeKataBattle receives a notification from GitHub, it pulls the source code from the remote GitHub repository and automatically computes the score to assign to that solution based on some aspects like number of test cases passed, time went by from the beginning of the battle and static analysis on the source code run by an external static analysis tool.

Both tournaments and battles have rankings, that are kept updated anytime by CodeKataBattle until the battle or the tournament ends. When a battle ends, all students involved in the battle are notified, and the enclosing tournament ranking updated accordingly. When a tournament is closed by the educator who created it all students that took part in the tournament are notified. The final ranking of the tournament is also published and the badges are assigned to students who deserve them.

This document offers a finer insight on the design decisions that have been taken in order to implement the CodeKataBattle platform. From a very high-level standpoint, CodeKataBattle is first of all a web application. This choice is relevant because it allows a straightforward and easy access to the functionalities of the application from any client device equipped with an internet connection.

The internal architecture follows the microservices architectural style, as all major functionalities of the system are scattered among different programs. The microservice architectural style promotes a more structured way of developing an application, by loosely coupling the different components and therefore boost maintainability and scalability. It also has a great impact on the development process when working with a team of developers, as each microservice can be designed independently from the others. From a deployment point of view, the CodeKataBattle platform can be described as a three-tier architecture, since a single server runs all microservices, clients can connect to that server and the microservices can contact a remote database server for persistent data storage and manipulation. This structure of the system is shown more in detail in the following of the document. As for the data layer, the CodeKataBattle is built on a shared database, that all microservices can access. This way of thinking the data layer simplified data management, especially in situations where the data content managed by different microservices is often times related and logically interconnected. Finally, some architectural patterns are employed in the design to allow an effective communication between microservices. CodeKataBattle microservices expose RESTful APIs to receive requests from the outside and respond with data (or to provide some sort of computation on data). An event-driven approach is also employed internally to improve performance and reduce coupling between microservices. A Model-View-Controller pattern is also adopted in order to separate concerns between the software components that have to manage incoming requests and showing graphical user interfaces.

All these architectural choices are just mentioned here to provide an overview of the system, they will be better explained and unpacked down the line of this document.

The following image shows the major components of the CodeKataBattle system.

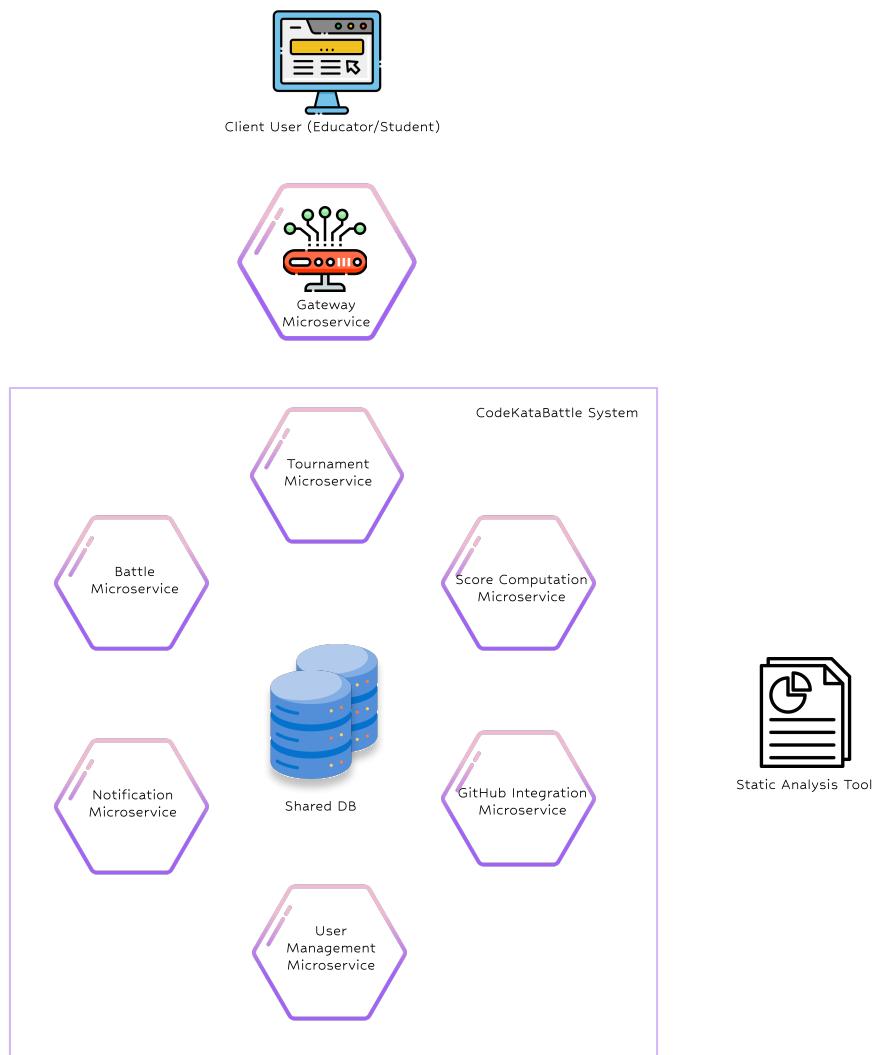


Figure 1: High-level view of the major components

## 1.3 Definitions, Acronyms, Abbreviations

### 1.3.1 Definitions

A brief list of the most meaningful and relevant terms and synonyms used in this document is reported here, in order to make reading process smoother and clearer:

Term	Definition
User, Actor	A user of the CodeKataBattle system, which includes both educators and students.
Educator, Professor, Teacher	A type of user of the CodeKataBattle system.
Student	A type of user of the CodeKataBattle system.
System, Platform, Application, Machine, Software	All synonyms to indicate CodeKataBattle.
Battle, Coding challenge, Problem, Teaser	A code kata battle offered on CodeKataBattle.
Consolidation Stage	Phase occurring at the end of a battle (after submission deadline) in which the educator that created the battle is asked to personally assess the students' code solutions.
Registration Deadline	Valid for both tournaments and battles, it is the date by which students are asked to subscribe to a tournament or a battle on CodeKataBattle.
Submission Deadline	In the context of a battle, the submission deadline is the date after which no additional code solution for the battle can be submitted to the system.
Ranking, Classification	Ordered list of teams or students based on achieved scores.
Push	Upload code solutions on GitHub repository.
Pull	Download code solutions from GitHub repository.

Term	Definition
Fork	Creating a personal copy of a GitHub repository, which inherits the structure and content of the original repository at the moment the fork is performed.
GitHub workflow	File containing code (usually written in YAML) to instruct GitHub on actions to take when certain events happen in a GitHub repository. In this project, workflows are used to fire a notification from GitHub to CodeKataBattle when a commit is performed on the repository.
GitHub Actions	Pre-configured actions that can be employed inside GitHub workflows to make GitHub carry out specific operations based on the specific needs of the user.
Build automation scripts	Files containing code useful to automatically build a project or (in this specific case) the students' code solutions for a battle.
Test cases	Files containing code useful to automatically test the students' code solutions for a battle.
Evaluation Criteria	Indicate the set of parameters that are accounted for by an external static analysis tool in order to assign a partial score to the students' code solutions for a battle. Examples of Evaluation Criteria might be security, reliability, robustness and so on.
Badges, Rewards	In a tournament, Badges or Rewards are prizes that are assigned to students when the tournament ends based on personal achievements of the student in that tournament.
Architectural style	A collection of principles that shape or govern the design of a software application.
Structure, View	In the context of software architectures, a structure or a view is a perspective or point of view that is highlighted when describing the software architecture. A structure or a view is usually characterized by a specific set of elements/components and types of interactions between them.

<b>Term</b>	<b>Definition</b>
Event-Driven Architecture	Event-driven architecture is a software design pattern where the flow of the system is determined by events. Components or services within the system communicate asynchronously by producing, detecting, and responding to events, promoting decoupling and scalability in distributed systems.
Component	In the context of the Component & Connector view of a software architecture, a component is a replaceable piece of software that is responsible for a specific functionality of the system that it is part of
Participate, Join, Sign up, Take part, Subscribe	Synonyms employed to describe the action of students engaging with tournaments or battles on CodeKataBattle.
Create, Publish, Generate	Synonyms to express the action of educators creating new battles or tournaments on CodeKataBattle.
Evaluate, Assess, Assign score	Synonyms to express the action of associating a score to a battle code solution.
Submit, Hand in	Synonyms describing the action of a student giving to the system a code solution to a battle.
Show, Display	Synonyms to express the responses of the system to user requests. CodeKataBattle shows or displays something to the users.

### 1.3.2 Acronyms

A list of acronyms used throughout the document for simplicity and readability:

1. RASD - Requirements And Specification Document
2. CKB - CodeKataBattle
3. UI - User Interface
4. GH - GitHub
5. UML - Unified Modeling Language

6. DB - Data Base

7. DBMS - Data Base Management System

## 1.4 Reference Documents

Here's a list of reference documents that have been used in order to shape the Design Document of the CodeKataBattle system. In the following, all external sources of information that have contributed to the fabrication of this document are mentioned.

1. Stakeholders' specification provided by the R&DD assignment for the Software Engineering II course at Politecnico Di Milano for the year 2023/2024.
2. IEEE Std 1016™-2009, IEEE Standard for Information Technology—Systems Design—Software Design Descriptions.
3. ISO/IEC/IEEE-42010, Second edition, 2022-11, Software, systems and enterprise-Architecture description.
4. UML specifications, version 2.5.1.  
Link: <https://www.omg.org/spec/UML/2.5.1/About-UML>

## 1.5 Document Structure

The following of the Design Document for the CodeKataBattle project is divided into four major sections, which aim at describing the overall design of the system in order to support the development and implementation of the final product.

**Section 2, Architectural Design**, is the most design-relevant one. Its main objective is to provide the reader with a series of views or structure of the software architecture that has been selected for CodeKataBattle . Indeed, section 2 is further divided into:

- Overview: provides a high-level description of the most important components of the system and their interactions (in an informal notation).
- Component view: this section provides the first structure of the software architecture, which is the Component & Connector structure, useful for illustrating the relevant components of the system from a dynamic perspective and the way they collaborate to achieve the final goals. In this section, UML components diagrams are largely employed to convey these ideas and notions.
- Deployment view: this section is about another structure of the software architecture, related to the deployment of CodeKataBattle . The most important objective of this chapter is to show the mapping between the software components of CodeKataBattle and the hardware devices that will physically execute the app. UML deployment diagrams are a great tool to unpack this topic.
- Runtime view: this section employs sequence diagrams in order to explain the flow of events and interactions within the system's components, in a consistent way with the previous chapters.
- Component interfaces: in here it is possible to provide a complete specification of the most important methods and functions that each interface exposed by the various components of the system must show.
- Selected architectural styles and patterns: a revision of the main architectural styles and patterns with a more in detail explanation of the reasons why they have been chosen for this project.

**Section 3, User Interface Design**, is about user interfaces (UI). More specifically, this section is concerned with giving some guidelines to UI designers on how the final application should look like (color themes, placement of most relevant UI items...), as well as on the logical role that these interfaces have in the development (what functionalities they provide to the user).

Moving on, **section 4 (Requirement Traceability)** is dedicated to a matrix that shows how the requirements that have been drawn and derived for CodeKataBattle map onto the components that have been highlighted in the previous sections of the document.

Finally, **section 5 (Implementation, Integration and Test Plan)** is concerned with illustrating the implementation strategy adopted (order of implementation of components), the integration strategy (how to integrate new sub-components into the application under-development), and the test strategy for the integration of different components in the system.

## 2 Architectural Design

### 2.1 Overview

#### 2.1.1 High Level View

This section is dedicated to an overview of the architectural elements composing the CodeKata system and their most important interactions.

The CKB system is built with a microservices architectural style. A microservices architectural style is a type of software architecture in which the application is developed as a collection of services, which are units of functionalities designed to cooperate with one another in order to achieve the goals for which the system is developed. In order to make this description as clear as possible, a high-level view of the system (with its microservices) is illustrated in the following image:

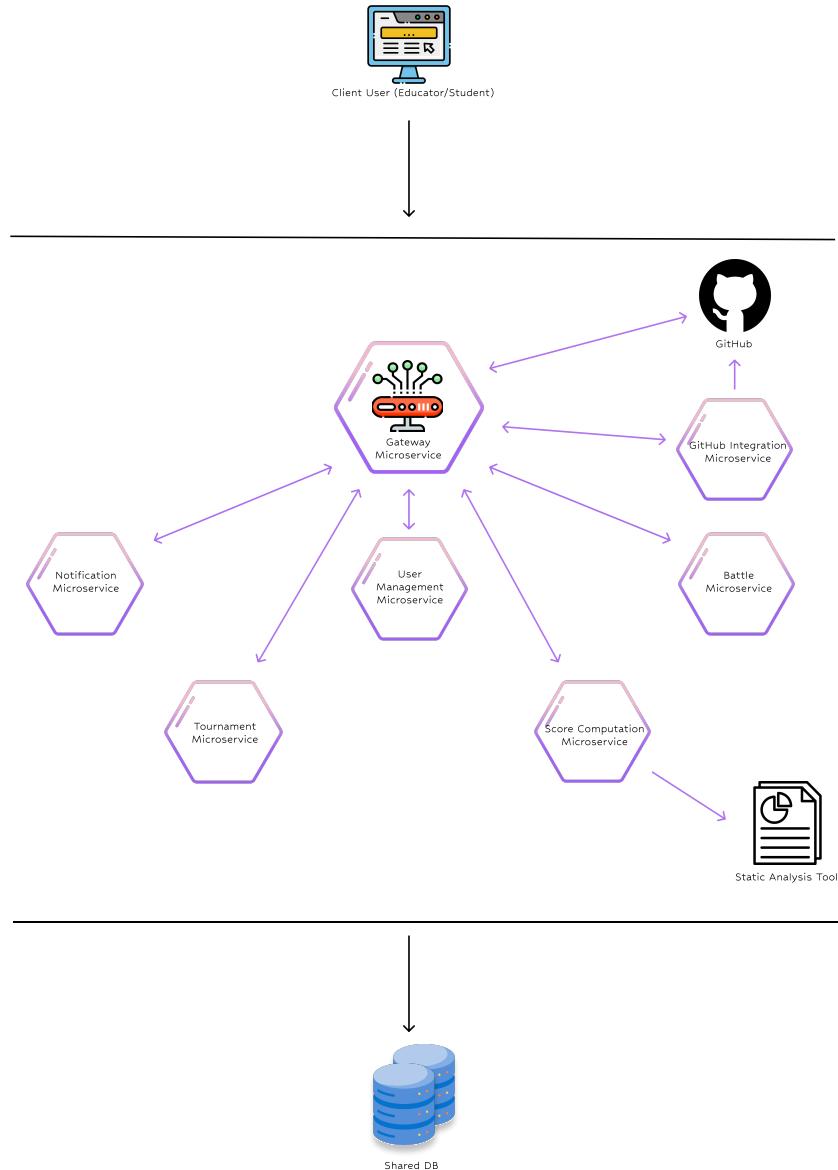


Figure 2: Overview of microservices and main interactions

From a very high-level perspective, all the previously mentioned elements are also represented in this figure. The client is the first icon on the top, the CodeKataBattle system is represented as a set of hexagonal microservices, which also leverage external platforms, like GitHub and the Static Analysis Tool. Finally, at the very bottom, the data layer is shown with a database icon.

There are seven microservices in the CodeKataBattle system, each one offering some functionality, described as follows:

- **Gateway Microservice:** this microservice is responsible for a couple of things. First off, the Gateway Microservice handles the authentication process of users through GitHub. From the figure, it's easy to spot the relationship between this microservice and GitHub external actor. Moreover, the Gateway handles all the incoming users' requests and dispatches them to the specific microservice that has to handle them. All users requests pass by the Gateway, as well as all responses of the system traverse the gateway to reach the users. In order to grant availability and performance, this microservice can be replicated multiple times on the server side of the application.
- **User Management Microservice:** this microservice is responsible for the management of users' data and profiles. Thus, the User Management Microservice controls the usernames of students and educators, as well as providing the user profile page every time a user accesses CodeKataBattle .
- **Tournament Microservice:** this microservice grants control over the tournaments and manages tournaments data in the shared database. It is responsible for the creation of a tournament from an educator, as it provides the user interface to do that. Besides, it maintains data on open tournaments, closed tournaments, tournaments rankings and so on. It is also responsible for providing the tournaments' home pages when requested.
- **Battle Microservice:** this is the microservice responsible for managing battles. It provides the interface to create a new battle to an educator requesting it, maintains all data related to battles and delivers the battle home page when requested. It is also responsible for handling teams of students, as well as keeping the rankings of battles updated.
- **GitHub Integration Microservice:** this microservice is in charge of handling all the API requests involving GitHub, apart from the login phase (delegated to the Gateway Microservice). More specifically, this microservice is very helpful when CodeKataBattle has to create a new GitHub repository for a battle, or when students code solutions must be downloaded from GitHub.
- **Score Computation Microservice:** the purpose of this microservice is to calculate the score to be assigned to a student code solution for a battle. In order to do so, this microservice uses the build automation scripts and test cases provided by the educator, calculates the time passed from the beginning of the battle and leverages the Static Analysis Tool as well.
- **Notification Microservice:** this microservice is concerned with all the notifications needed for tournaments and battles. The Notificaiton Microservice listens to events in the system (event-driven development) and produces notifications for students or educator.

As for the interactions between these microservices, they will be addressed in much greater detail in the following section of this document. For now, it is relevant to know that all communications going from the client to the CodeKataBattle platform and vice versa traverse the gateway. Also the

several user interfaces which CodeKataBattle is composed of are provided by different microservices (concerned with the proper data related to the interface), but the transmission of these interface is always mediated by the gateway.

All microservices also expose a **RESTful API**, which is the access point to the data and functionalities they offer. Thus, microservices will interact with one another through this interfaces when necessary, and these details will be shown in the following views.

Furthermore, every microservice has access to the same **shared database**, thanks to the interfaces exposed by the DBMS system, but each component covers different types of manipulations and computations on this shared data space, which are dependent on the functionalities offered by the microservice in question.

The interactions that occur inside this system also rely on an **event-driven pattern**. This pattern allows components (microservices) to asynchronously produce events on an Event Bus (or Event Queue) and other components to consume (read) those events and take actions accordingly. Further details will be supplied in the following of the Design Document.


## 2.2 Component View

This section aims at illustrating the various components that make up the CodeKataBattle system. In the following, UML Component diagrams are employed to illustrate the logical software elements that collaborate in order to achieve the goals set for the system to be developed.

Since the structure of components of the CodeKataBattle system wouldn't fit into a single diagram, multiple representations are supplied to make the document as clear as possible and avoid cluttering. The decisions regarding how to divide the diagrams of the Component View have been taken based on the idea of grouping together components that frequently interact with each other. It is important to mention that although the explanation makes use of separated graphics, the system is a single one and the elements represented here in different diagrams will be part of the same system and will take part in the overall functioning of the platform together.

### 2.2.1 RESTful APIs component diagram

One of the first characteristics that have been mentioned in the introductory section about CodeKataBattle is that microservices expose RESTful APIs in order to receive and respond to commands, expose data and collaborate with one another. This view aims at describing from a high perspective the ways microservices exploit these APIs to work.

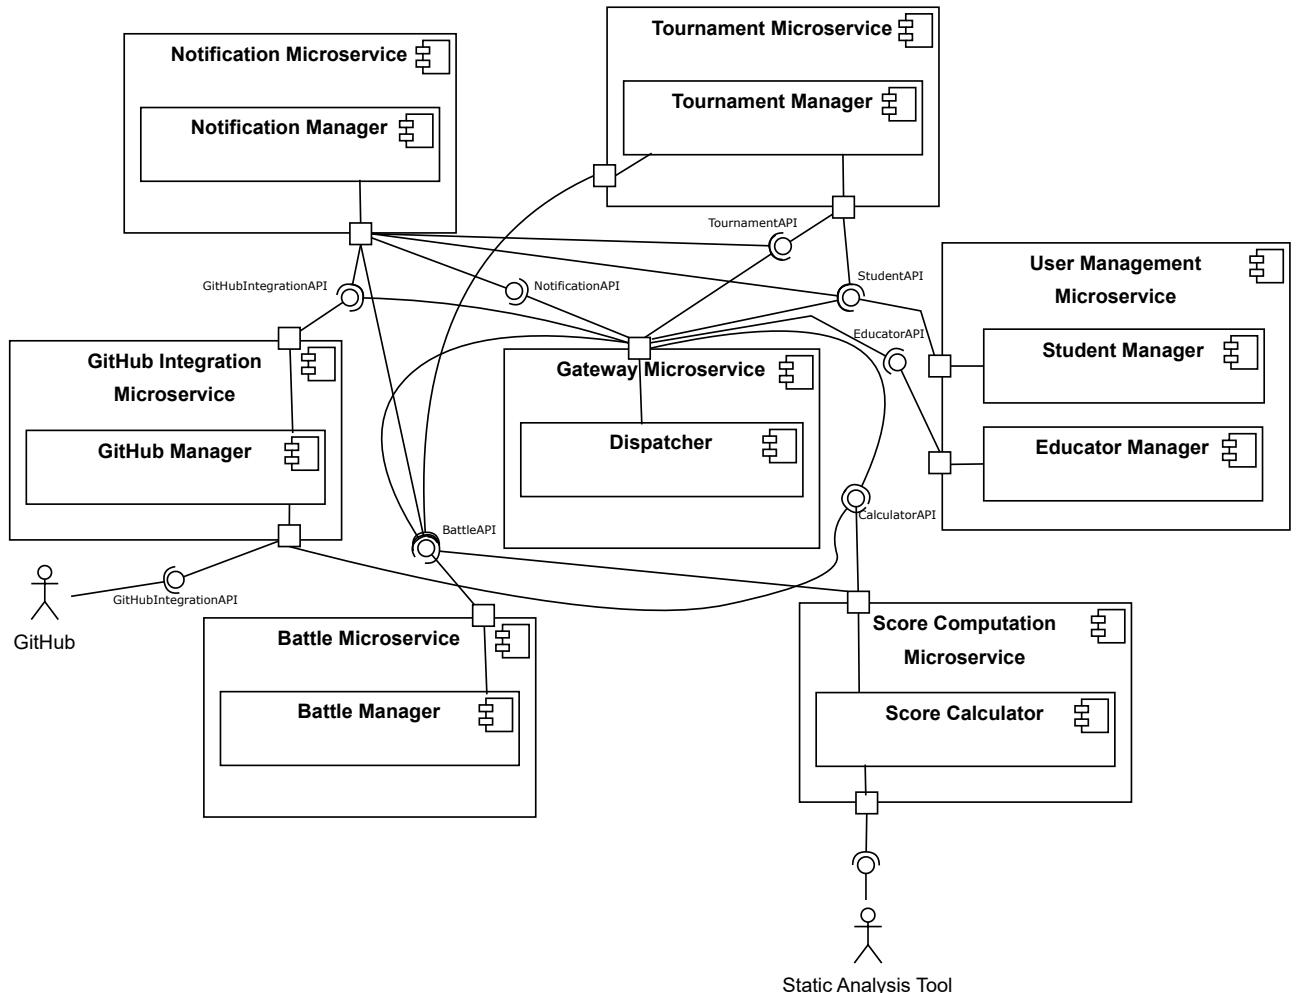

Let's break down the main ideas that the diagram tries to convey. This UML component diagram is employed in order to show the RESTful APIs that are offered by each microservice in the system. These APIs provide specific computations on data related to the service offered by the microservice in question. For instance, the Tournament Microservice will expose an API that works on the tournaments data inside the shared database and exposes relevant information on tournaments.


The gateway is the entry point for all users' requests. The Dispatcher component inside the Gateway is responsible for delivering the users' requests to the correct microservices that will have to handle them. This is why the Dispatcher "uses" all the APIs exposed by the other microservices.

For some kinds of computations, the various microservices that compose CodeKataBattle may also exploit each other through their RESTful APIs. In this diagram, these interactions are shown. For instance:

- The Notification Manager needs to query the Tournament manager and the Battle manager every time it has to retrieve the list of students subscribed to a tournament or to a battle (in order to deliver the notification to a specific set of students).
- The Notification Manager has to query the Student Manager when the list of all students of CodeKataBattle is needed (for example to notify all students of a new tournament available on the platform).
- The Notification Manager requires access to the data handled by the GitHub Manager in order to retrieve the link to the remote repository of a battle and compose the notification for all students subscribed to that battle (when the registration deadline of the battle passes).
- The GitHub manager component uses the CalculatorAPI in order to pass the downloaded source code of a new student solution to the Score Calculator component that will in turn automatically compute the score to assign to it.
- The Score Calculator must exploit the BattleAPI in order to request an update on the battle ranking every time a new score is available.
- The Tournament Manager requires access to the Student Manager data in order to assign badges when the tournament is closed.

This diagram has to be read and interpreted also accounting for the event-driven paradigm that is adopted in the project. Some of the interactions and flows of events inside the system happen in an asynchronous manner with an event-driven approach that is further described in the following views. That's why some interactions, that might seem missing here are actually handled in an asynchronous way to increase the performance of the overall system.

The last important point to make about this diagram is related to the "Manager" components inside the various microservices. These components internally implement a Model-View-Controller pattern to provide their services. The following representation shows a component diagram that only focuses on the internals of the "Manager" component for a generic microservice:

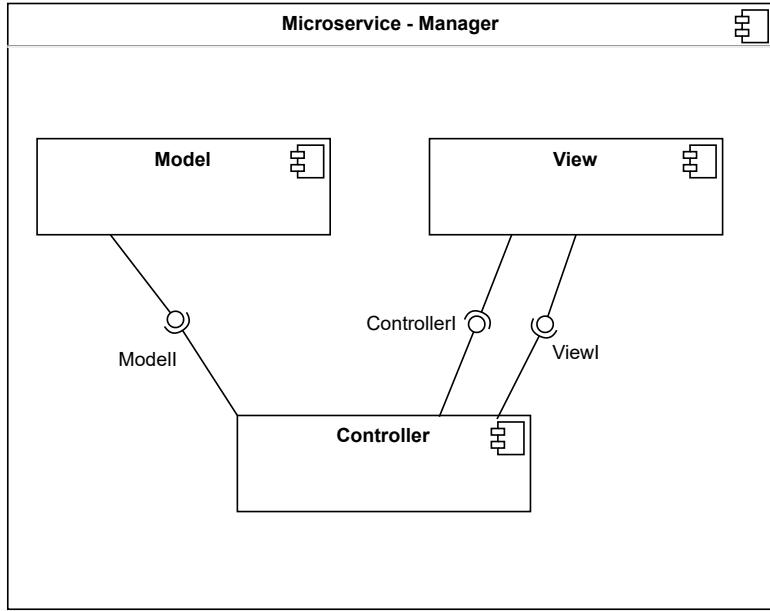

The Model component is responsible for organizing and managing data. Each microservice in the CodeKataBattle system is specific for a portion of the data domain. For instance, the Tournament Microservice only focuses on managing and providing information on tournaments. Therefore, each Model component inside the Manager components take care of maintaining consistent data with the DBMS, accessing the DBMS when needed and so on.

The View is the component offering the user interface. Since different microservices focus on different types of information in the CodeKataBattle ecosystem, the several user interfaces are spread across the microservices and managed through the View components.

The Controller is the "bridge" between the Model and the View. This component is responsible for:

- Receiving the requests from the View component when the user interacts with the user interface.
- Performing the correct computation based on those requests.
- Manipulating data through the Model, propagating the users' requests to the data layer.
- Updating the View if the computation resulted in some changes of the user interface.

In the following of the document, the Manager component will be used in a more general sense to capture the behavior and functionality of all this internal architecture.


## 2.2.2 Service Discovery component diagram

This very simple component diagram shows an important service that is offered by the Gateway microservice to allow all microservices to locate each other and therefore collaborate. This service is called "Service Discovery" and it consists in maintaining a register (inside the Gateway microservice) of active microservices.

In this way:

- A new microservice brought up can register itself in order to be localized by the other microservices.
- All microservices can contact other active microservices in the system to advance some requests.

Here's the diagram:

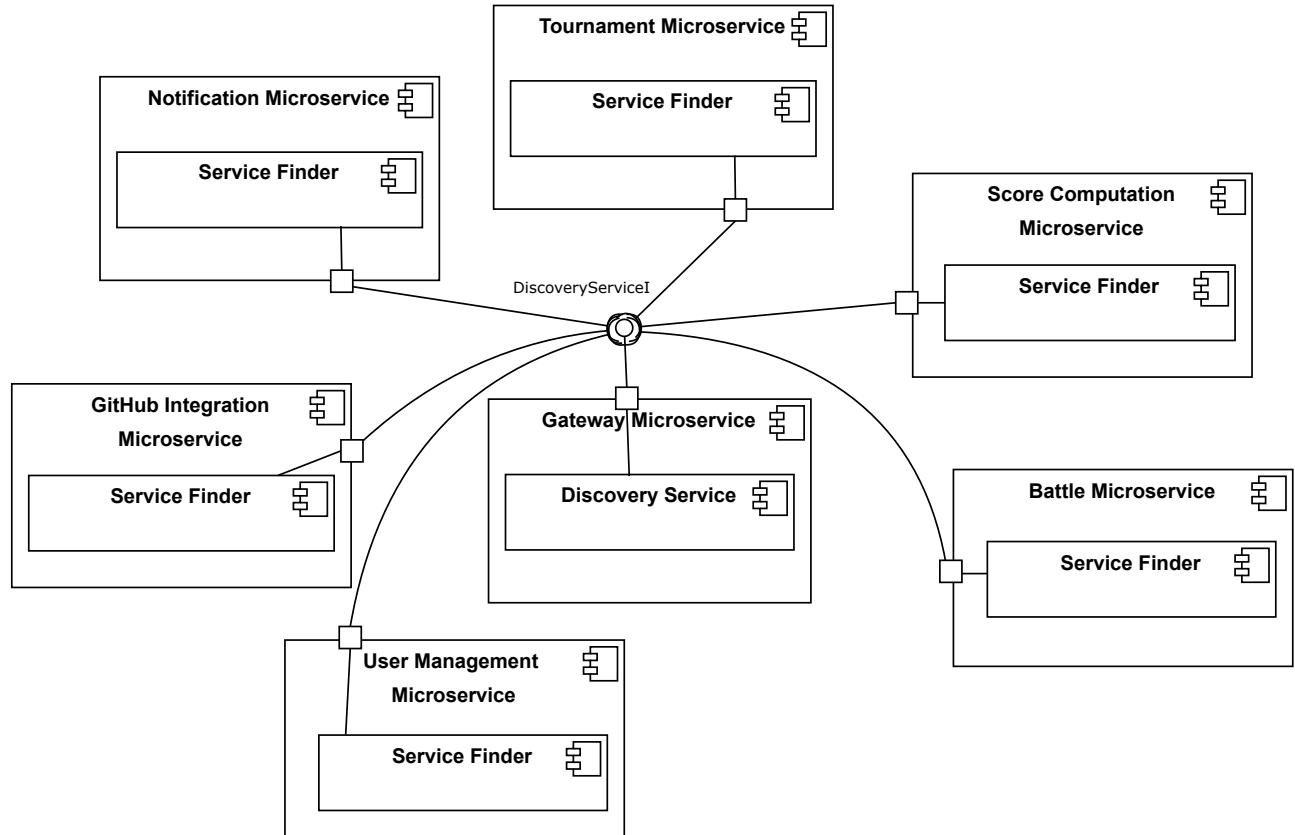


The interpretation is quite simple. The Gateway Microservice contains a component called Discovery Service, which is the software component that implements the logic to offer the discovery service. The Discovery Service component exposes an API (DiscoveryServiceI), that can be used by all other microservices in order to locate each other.

### 2.2.3 Event-driven pattern components

This section illustrates all the components that are needed in the system in order to implement an asynchronous, event-driven communication between microservices. This design choice has been taken in order to lighten up the system in specific interactions between microservices that would otherwise require a computationally expensive synchronous communication.

The following diagram shows the major components that help achieve an event-driven architecture:

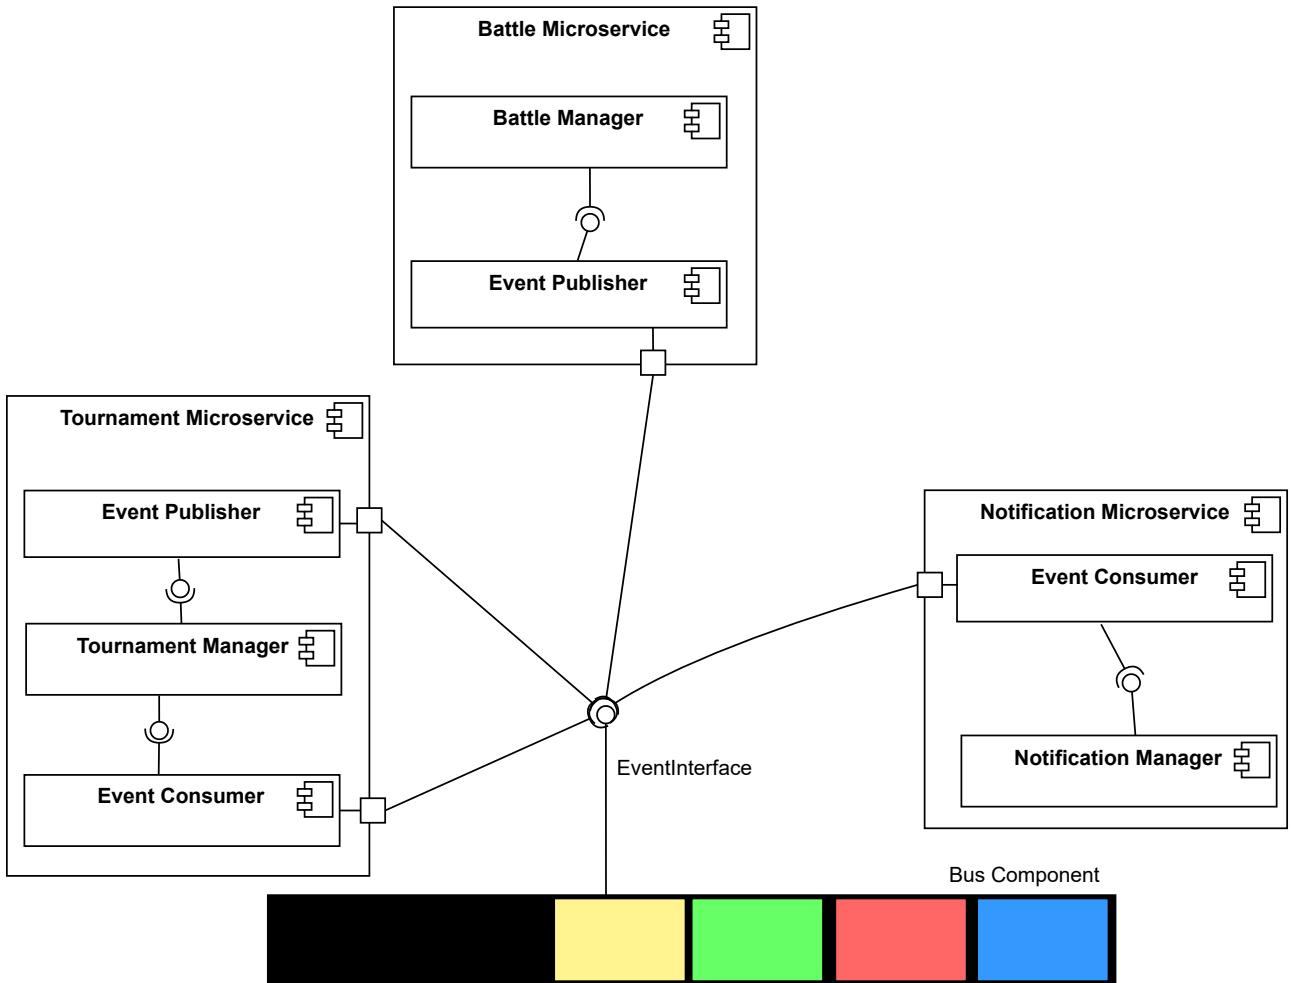

The most important element is the **Bus component**, which can be thought of as a queue of messages or events. Microservices in the **CodeKataBattle** system can either produce events (i.e. push events on the queue) or consume events (i.e. read events on the queue) and take actions accordingly.

It is important to mention that this representation is purposely general and not tied up with any specific software product, framework or implementation. The concrete way in which this design is achieved is left to the implementation of the product.

From the diagram, it is possible to see that only some microservices are illustrated, which are the

only one exploiting this mechanism to communicate and interact. Inside these microservices, there is an Event Publisher component if the microservice has to be able to publish events on the Bus, and there might be an Event Consumer component in case the microservice has to be able to read from the Bus the events that are queued.


The Tournament Microservice, for instance, has both the Event Publisher component and the Event Consumer component. Indeed, the Tournament Microservice has to publish an event every time a new tournament is created or closed. At the same time, the tournament has to be able to read from the bus when a battle is finished, to take actions accordingly.

The Battle microservice only publishes events when the battle is created and terminates.

The Notification Microservice is the one always listening to upcoming events in order to fabricate the correct notifications for the users of the CodeKataBattle platform.

#### 2.2.4 Data layer access component diagram

This diagram proposes a convenient view to see how the access is performed by the various microservices on the shared data layer (shared DBMS).

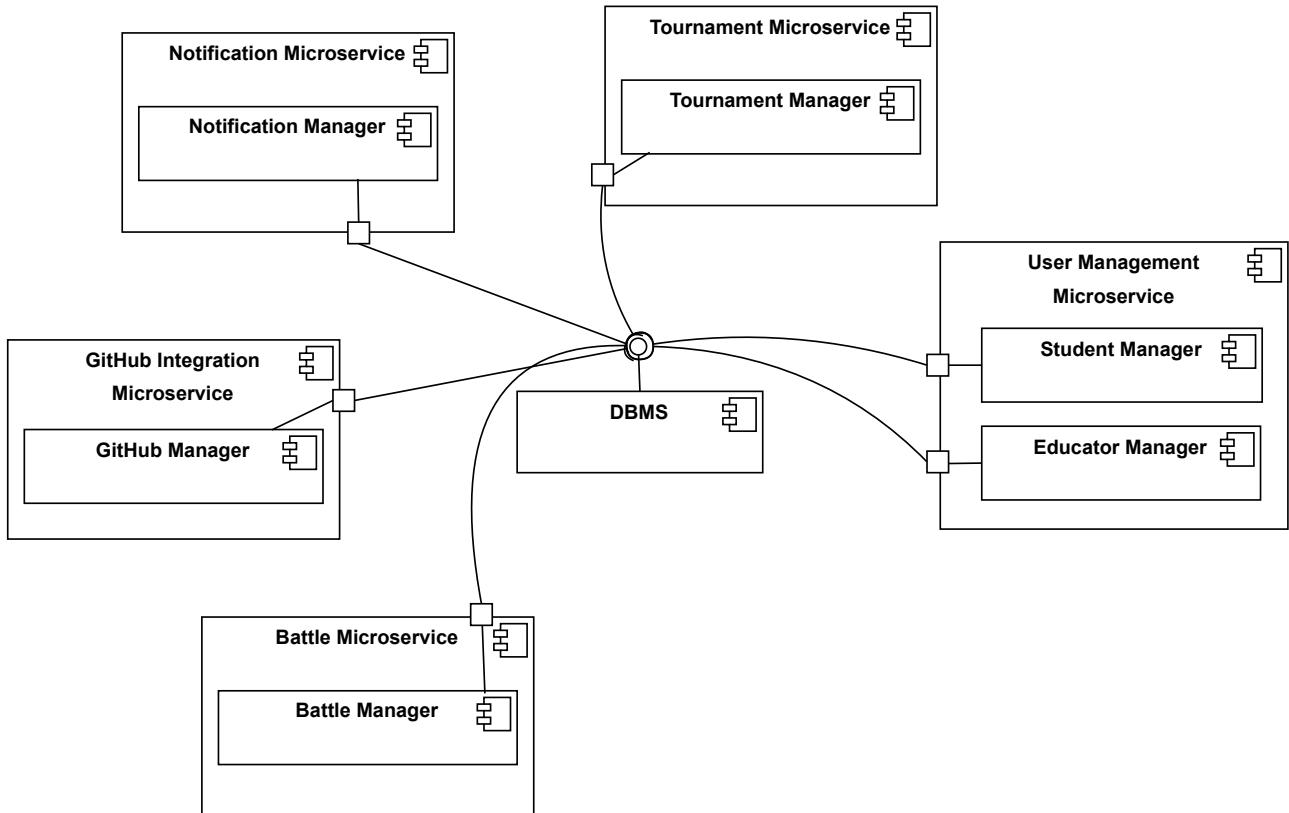

The DBMS exposes an interface that is employed by all microservices to work with the persistent data stored in the DBMS.

Looking at every microservice individually, it is possible to notice that they all are equipped with a "Manager" component, which is responsible for manipulating and accessing data.


Every microservice of the CodeKataBattle application is responsible for a different section of the data domain. For instance, the Tournament microservice only works on the data stored in the shared DBMS that is related to tournaments and offers to the other microservices all the relevant information about tournaments that might be needed.

## 2.2.5 User interfaces component diagram

This diagram proposes a convenient view of the system for what concerns user interfaces. The design choices that have been taken in the CodeKataBattle system as concerns the user interfaces can be summed up in this way:

- The different interfaces that are offered to the user are not gathered in a single component, but they are scattered across the various microservices. This decision is due to the fact that different UIs offer different views on the data of the application. Therefore, some microservices (working on a specific section of the data domain) might be more suitable for providing a specific user interface than others.
- All the times a user interface is offered to the user, the Gateway Microservice handles the transmission of data, standing in between the user and the access to the internal microservice. Therefore, all the UIs content passes by the Gateway before reaching the client user.

This diagram tries to illustrate the two points of the above list, by representing a View component inside each microservice that is responsible for building and offering specific user interfaces when required. The Gateway microservice intercepts the user's requests and when a new UI is needed, it contacts the correct microservice that will supply it. It has to be mentioned the fact that this UML diagram is not a standard one, in the sense that the interfaces exposed by the components in this view are not sets of methods but UIs. Nevertheless it is intended as a beneficial illustration to show part of the MVC pattern (with the View components inside the microservices) and the distribution of UIs in the system.

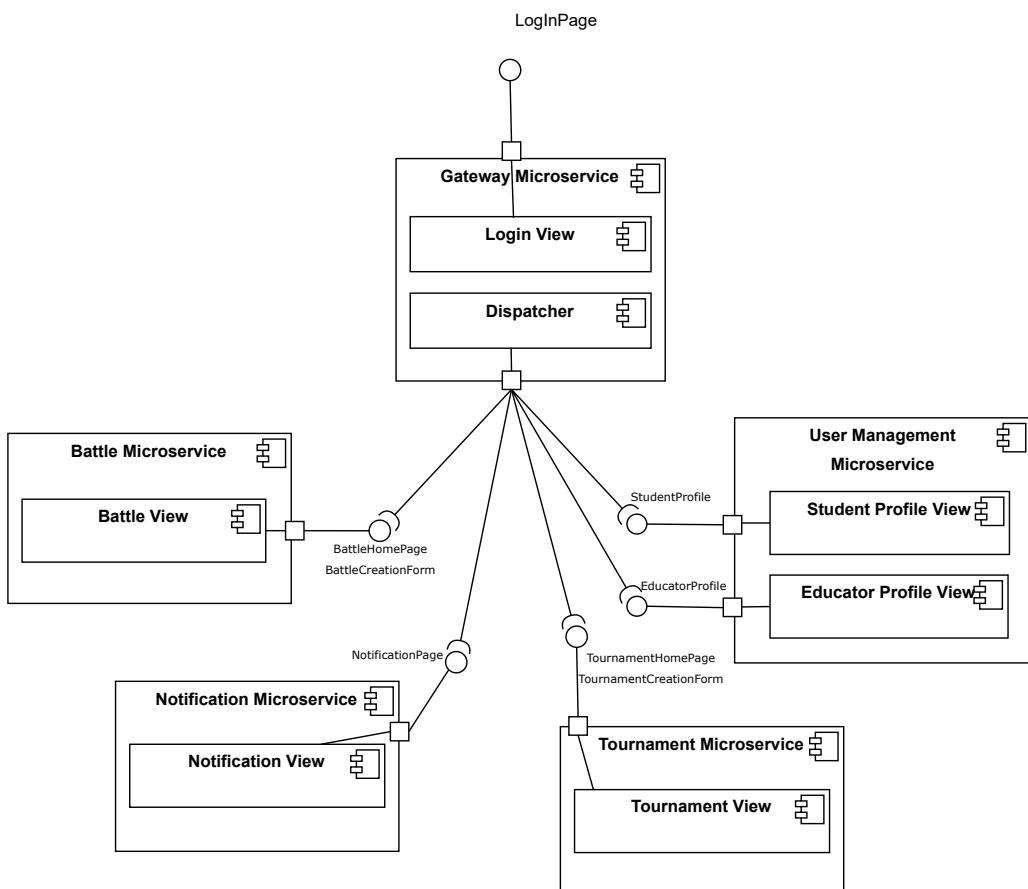

## 2.3 Deployment View


The deployment view addresses the how and where of the CodeKataBattle system's execution, examining the distribution of components, the orchestration of services, and the overall infrastructure that supports the software. In other terms, this section is dedicated to a mapping between software artifacts that implement the logic that makes CodeKataBattle work and the hardware devices that are needed to concretely execute them.

This document aims to provide a comprehensive understanding of the architectural choices that facilitate efficient resource utilization, scalability to meet varying workloads, and the ability to adapt to evolving operational requirements.

As in the previous sections, this view of the system is provided through multiple diagrams that go deeper and deeper into the details of the deployment environment. These diagrams are not exclusive to one another, rather they should be seen as a hierarchical illustration of the same concept, from a more high-level approach, to a more detailed insight.

### 2.3.1 High-level Deployment View

This diagram shows the bare minimum set of components that are needed to illustrate the deployment view for the CodeKataBattle system.

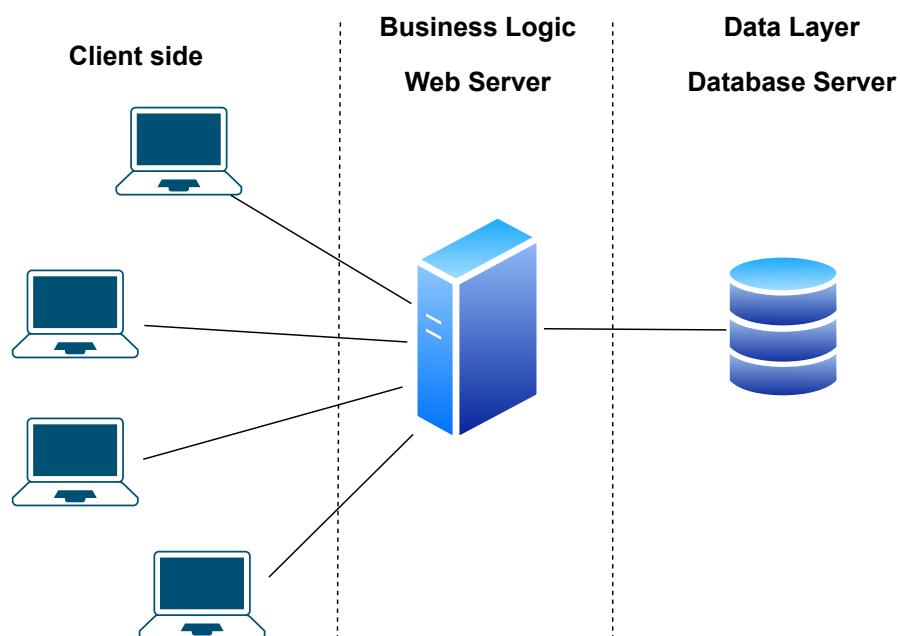


As it is possible to see from the figure, from a deployment perspective, the CodeKataBattle platform can be classified as a three-tier architecture. The three distinct areas in the illustration represent the three tiers (layers) of the architecture, more specifically the client users (on the left), the server (in the center) and the data layer (on the right).

All users are equipped with a device with internet connection that is able to send and receive requests to the server hosting CodeKataBattle . The entire CodeKataBattle is hosted on a single remote server, where all microservices are launched as separate programs, interacting with each other. The data layer can be implemented with a remote Database server that provides persistent data support to the whole system.

This deployment architecture is very convenient for a series of reasons. First off, it allows for a complete separation of concerns between the various layers, in particular between the business logic of the application (hosted on the server) and the data layer (in the DBMS). Moreover, it is an extensible architecture that can be further developed and enlarged in order to accommodate for a varying workload. For instance, the data layer can be replicated on multiple servers, in order to increase performance for accessing and manipulating data. This same strategy can be adopted for the business layer in case of necessity.

### 2.3.2 Detailed Deployment View

The following representation offers some more insights on how the software artifacts that implement the various components of the CodeKataBattle application map onto hardware elements.

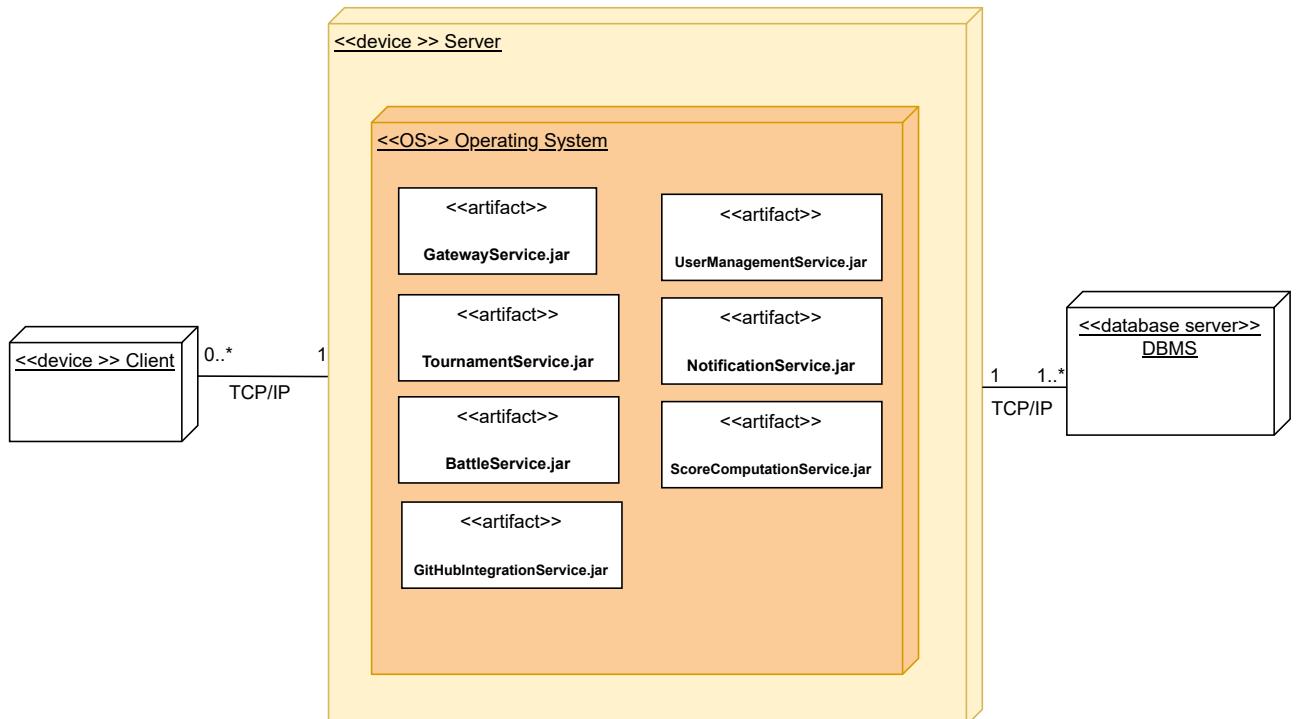

The major elements in the representation are still the same as in the previous description. On the left, the client side, equipped with a device that has internet access in order to communicate with the server over a TCP/IP protocol. The multiplicity specifications on the line that connects the client with the server shows that many clients can be interacting with the server simultaneously.

The server is the big box at the center of this diagram. The UML deployment diagram offers the possibility to show the execution environment of the CodeKataBattle system by nesting multiple boxes.

All the microservices artifacts are mapped onto the single server instance. Indeed they are executed as separate processes inside the server machine.

Finally, on the right hand side, there is the data layer, which consists of a database server that is connected to the central server over the internet as well (TCP/IP protocol).

This design has been chosen because it allows for smooth and easy extension of the system whenever it is needed. For instance, the DBMS can be replicated multiple times, in order to parallelise the requests coming from the server. If a more advanced distributed architecture was needed, the artifacts implementing the various microservices could simply be split across different nodes of the network and the overall system would still work correctly (with some settings and configurations). The microservices themselves could be replicated inside the server machine in order to boost performance even more.

## 2.4 Run Time Views

This section provides a detailed perspective on how the system works and interacts with components during its execution on runtime. It focuses on the dynamic aspects of the software, emphasizing the flow of control, data, and communication between different modules or components.

### Educator login

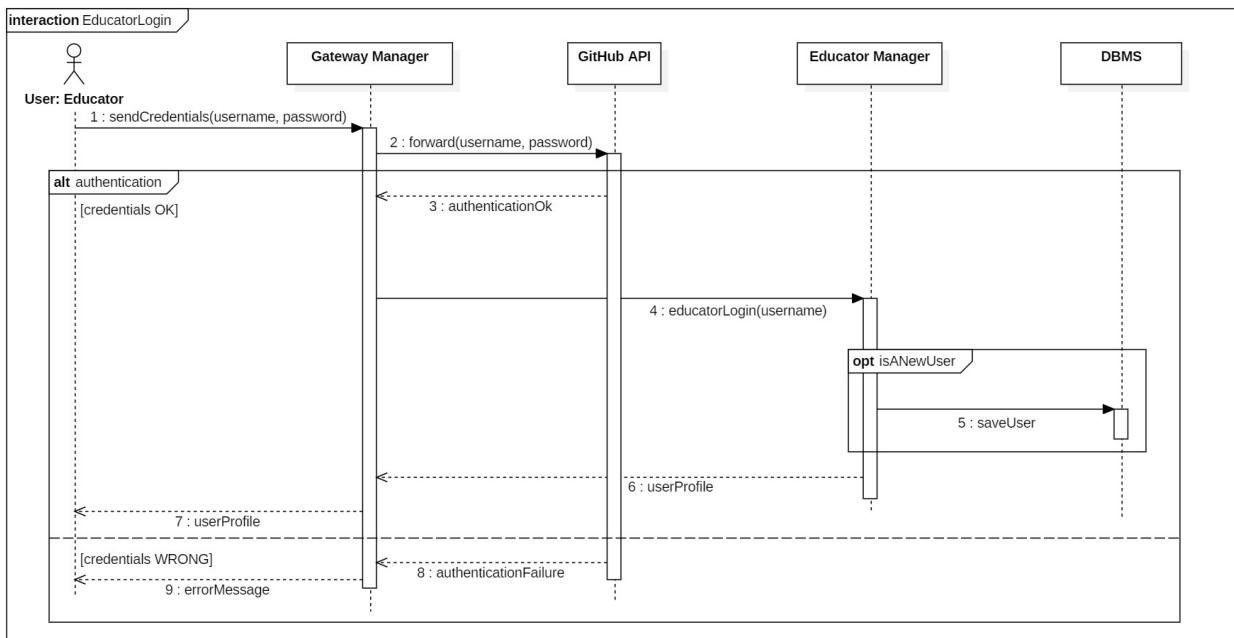


Figure 3: Runtime view of the login of an educator

The educator login process unfolds in the following manner: the Educator initiates the login by contacting the Gateway Manager and transmitting their credentials. Subsequently, the Gateway Manager interfaces with the GitHub API to verify and authorize access. Two possible scenarios may unfold: a successful authentication or an unsuccessful one. In the latter case, an error message is generated and displayed to the Educator. In the event of a successful authentication, the Gateway Manager communicates with the Educator Manager, forwarding all relevant data to be stored in case it is the Educator's first sign-in. In both scenarios, the Educator Manager is responsible for returning the user profile to the Educator.

This process ensures a seamless and secure login experience, with appropriate feedback provided to the Educator based on the outcome of the authentication process.

## Student login

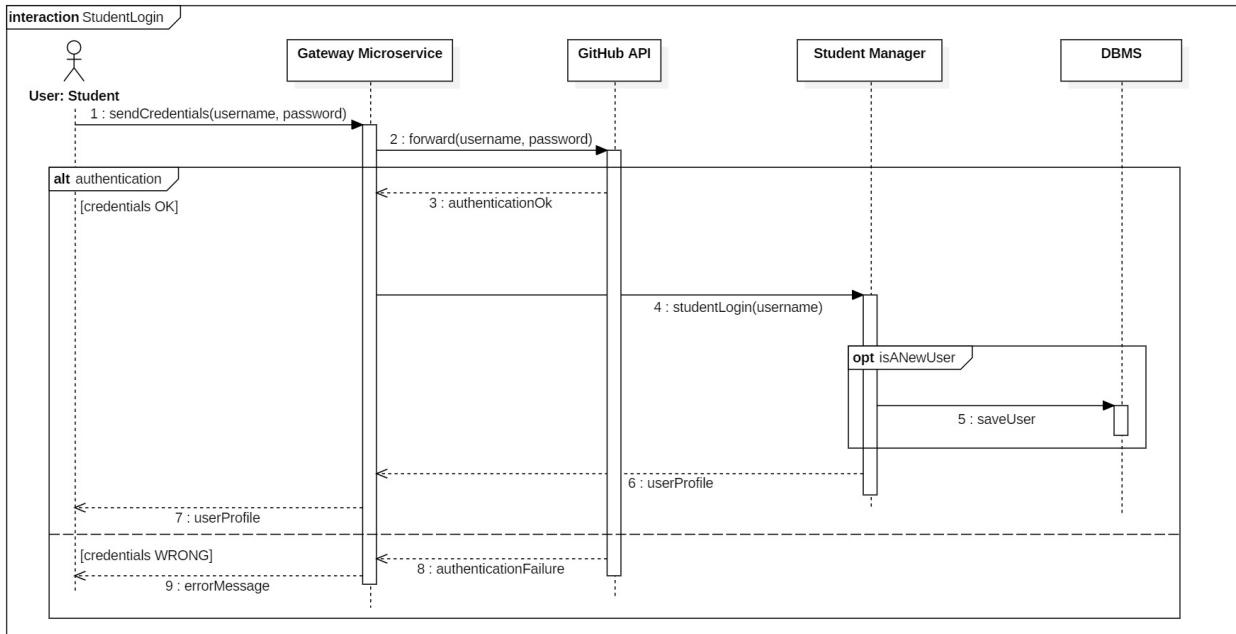


Figure 4: Runtime view of the login of a student

The student login process mirrors that of the educator, with the primary distinction lying in the actor, now the student, and the involvement of different microservices. Here's how it unfolds: the Student initiates the login process by reaching out to the Gateway Manager and submitting their credentials. Subsequently, the Gateway Manager interfaces with the GitHub API to validate and authorize access.

Similar to the educator's login process, two potential outcomes are possible: a successful authentication or an unsuccessful one. In the case of an unsuccessful authentication, an error message is generated and presented to the student. However, in the event of a successful authentication, the Gateway Manager now communicates directly with the Student Manager. The Student Manager is then responsible for handling the data, including storage in the case of the student's initial sign-in, and returning the user profile to the student.

Despite the differences in actors and microservices, the student login process ensures a comparable and secure user experience, tailored to the specific needs of the student user role.

## Tournament creation

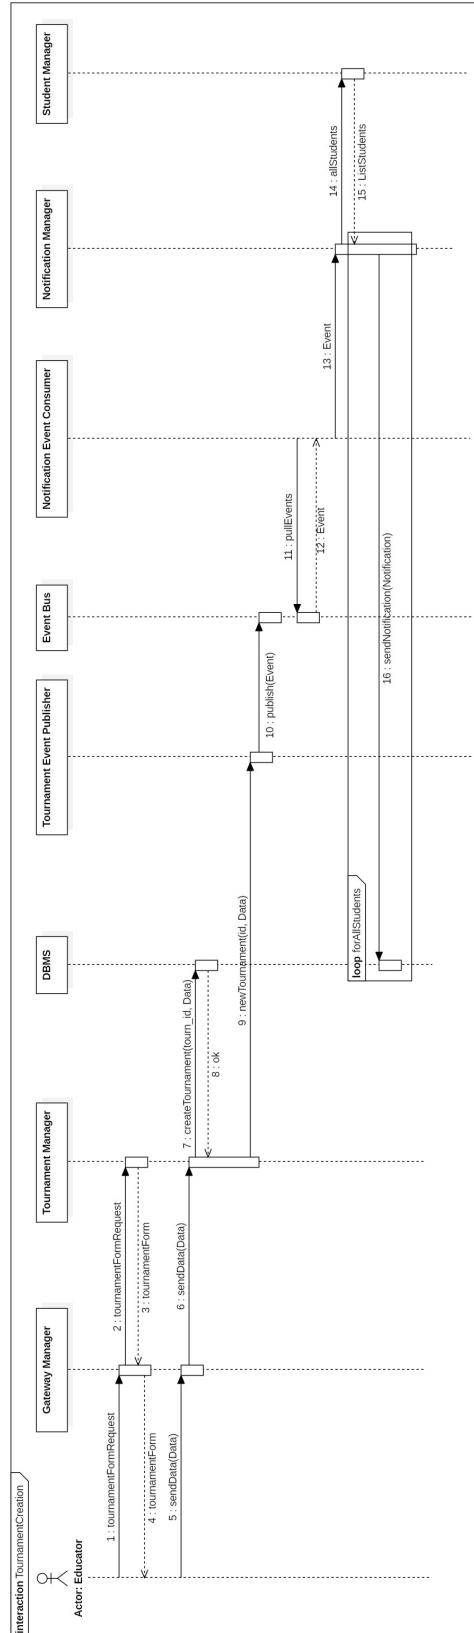


Figure 5: Runtime view of the creation of a tournament

In Figure 5, the diagram illustrates the interactions between components when an educator initiates the creation of a new tournament. Initially, the educator contacts the Gateway Manager, which then sends a request to the Tournament Manager in order to obtain the form necessary for the creation process. After receiving the form, the educator fills it out and sends it back to the Tournament Manager. The Tournament Manager stores the information in the DBMS and triggers a notification to signify the successful creation of the tournament.

While the specific details of this notification process will be discussed momentarily, it is worth noting that this sequence remains consistent across various runtime views and will be omitted in subsequent descriptions.

Subsequently, the Tournament Publisher receives the data pertaining to the newly created tournament and communicates with the Event Bus to publish this information. Then, asynchronously, the Notification Consumer polls the Event Bus, retrieving the new event. Once obtained, the Notification Consumer generates a notification and forwards it to the Student Manager. The Student Manager then iterates through all the students, ensuring each receives the notification.

## Battle creation

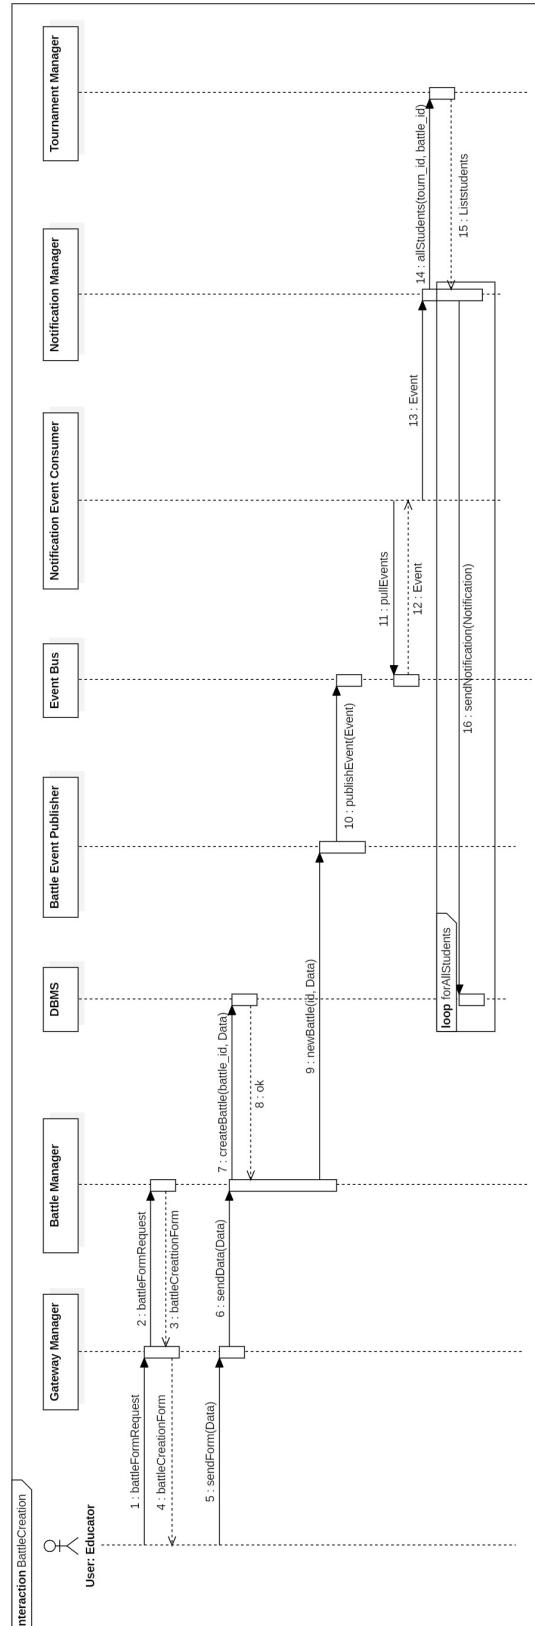


Figure 6: Runtime view of the creation of a battle

The process for battle creation mirrors that of tournaments. The Educator initiates the process by sending a request to the Gateway Manager, which forwards the request to the Battle Manager. The Battle Manager responds by providing the necessary form for the Educator to complete. Subsequently, the Educator fills out the form and returns it to the Battle Manager. The Battle Manager then stores the information for the newly created battle in the DBMS. Similar to the tournament creation, a new event is generated.

It's important to note that, in this context, all the students notified will only be those subscribed to the tournament in which the battle has been created.

## End of a tournament

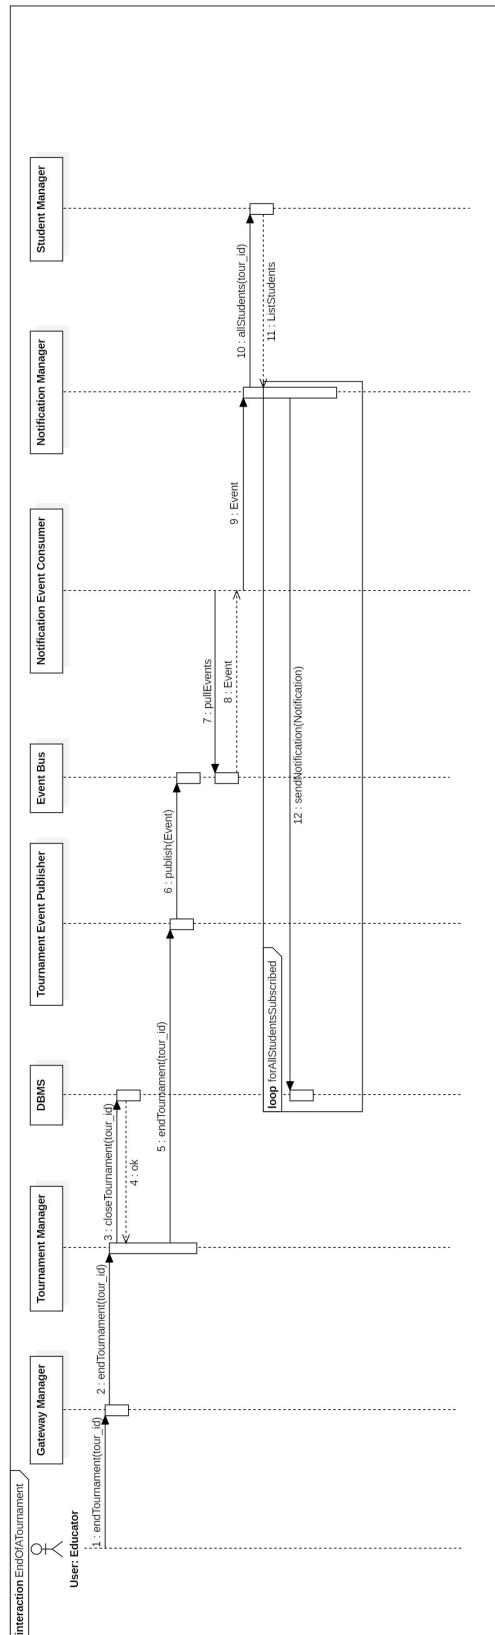


Figure 7: Runtime view when the end of a tournament is reached

When a tournament concludes, the determination is made by the Educator, who initiates the process by sending a request to the Gateway Manager. The Gateway Manager then forwards this request to the Tournament Manager, which in turn updates the relevant data regarding the tournament in the DBMS. Following the update, a new event is generated and disseminated to all the students who have subscribed to that particular tournament, adhering to the previously outlined notification mechanism.

## End of a battle

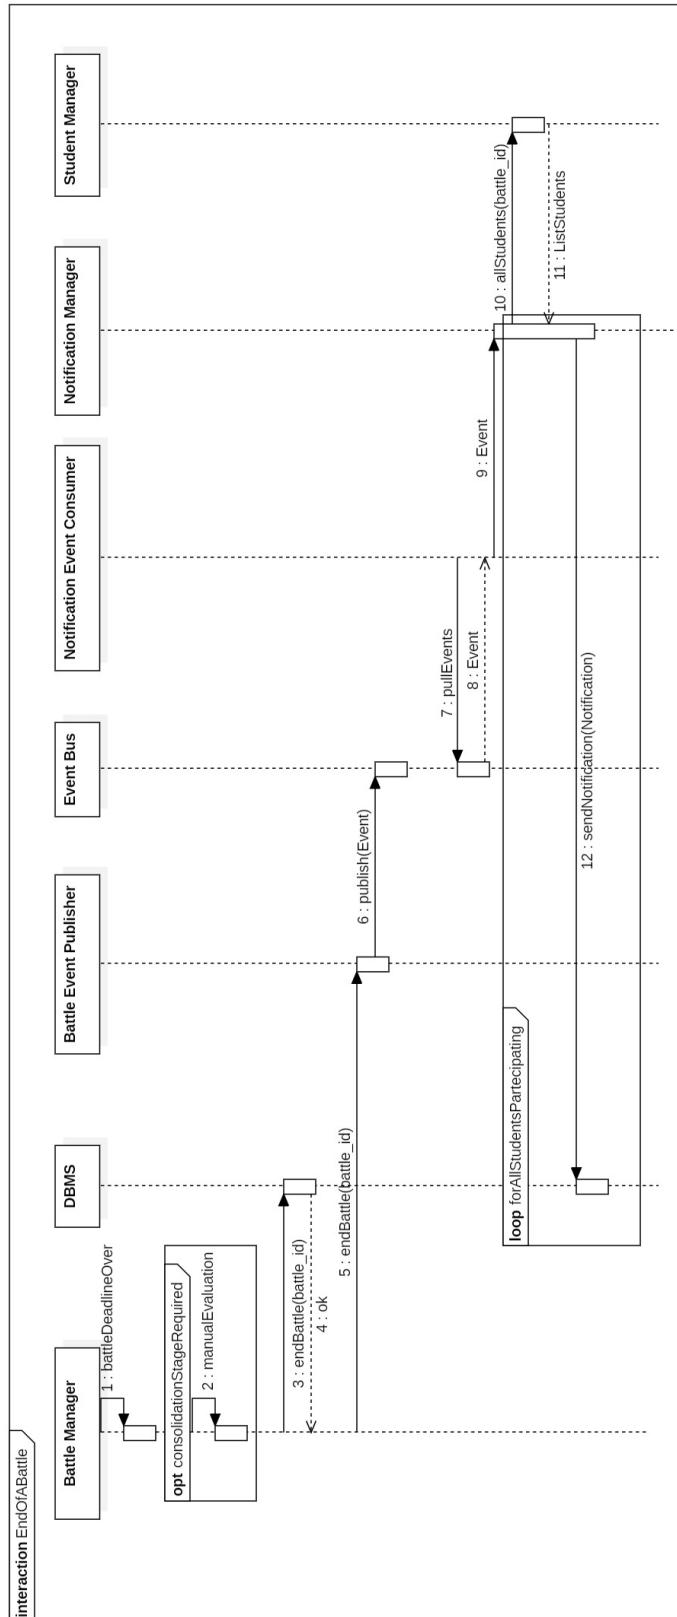


Figure 8: Runtime view when a battle ends

The conclusion of a battle occurs upon reaching its specified deadline, and the mechanism for monitoring this may involve a polling system, depending on the chosen development framework. Once the deadline is reached, the system checks whether a manual evaluation is required, as determined during the battle's creation. Subsequently, the parameters of the battle are updated by interacting with the DBMS. Following this update, an event is generated, mirroring the previously described process, and disseminated accordingly.

## 2.5 Component Interfaces

This section illustrates a comprehensive list of interfaces offered by the various components of the CodeKataBattle system, along with the specifications for their internal methods. A description is provided for each method in order to understand what it is useful for.

The following tables are divided by microservice.

### 1 - Gateway Microservice

DiscoveryService

Return Type	Signature	Description
URL	findService(String serviceName)	This method is offered to allow all microservices to locate each other and therefore collaborate.
void	registerService(String serviceName, URL location)	This method allows a newly-created service to register itself on the list of available services, in order to be located by the other microservices if needed.
List<URL>	allServices()	This method returns a list of all the available services at the moment in the system.

## 2 - User Management Microservice

The following interfaces are RESTful APIs offered by the Manager components that handle Students and Educators' data.

StudentAPI

Return Type	Signature	Description
List<Student>	getAllStudents()	This method is offered to retrieve a list of all the students with an account on CodeKataBattle.
void	addStudent(username)	Adds a new student the first time it accesses CodeKataBattle.
void	removeStudent(username)	Removes the student profile with the specified username from the system.
List<String>	getStudentInfo(username)	Retrieves all the information related to a specific student, like list of badges, statistics...
List<String>	getBadges(username)	Returns the list of badges won by the student with the specified username.
List<File>	getStudentProfileUI(username)	This method builds and returns the files that are needed to offer the user interface for a student's profile.

## EducatorAPI

<b>Return Type</b>	<b>Signature</b>	<b>Description</b>
List<Educator>	getAllEducators()	This method is offered to retrieve a list of all the educators with an account on CodeKataBattle.
void	addEducator(username)	Adds a new educator the first time it accesses CodeKataBattle.
void	removeEducator(username)	Removes the educator profile with the specified username from the system.
List<File>	getEducatorProfileUI(username)	This method builds and returns the files that are needed to offer the user interface for an educator's profile.

### 3 - Tournament Microservice

The following interface is a RESTful APIs offered by the Manager component that handles Tournaments' data.

TournamentAPI

Return Type	Signature	Description
void	addTournament(tournamentName, tournamentInfo)	Adds a new tournament to the ones available on the CodeKataBattle platform. Notice that tournamentInfo is a complex entity that comprises a set of mandatory elements for the creation of a new tournament. Tournament names are the identifiers for battles and have to be unique in CodeKataBattle .
void	closeTournament (tournamentName)	Closes the tournament with the tournamentName specified. The tournament ranking is published and badges assigned.
List<Tournament>	getAllTournaments()	Retrieves a list of all the tournaments available on the CodeKataBattle system in the moment the method is called.
void	grantPermissions (tournamentName, username)	This method allows to grant permissions to publish battles to an educator with the specified username in the tournament identified by the tournamentId.

## TournamentAPI

<b>Return Type</b>	<b>Signature</b>	<b>Description</b>
void	addStudent(tournamentName, username)	Adds the student with the specified username to the list of students that are subscribed to the tournament.
List<Student>	getStudents(tournamentName)	Retrieves a list of all the students that are subscribed to the tournament with the tournamentName specified.
List<Educator>	getEducators(tournamentName)	Retrieves a list of all the educators that have permissions to publish battles inside the tournament with the tournamentName specified.
String	getCreator(tournamentName)	Returns the username of the Educator that created the tournament with the tournamentName specified.
List<Badge>	getBadges(tournamentName)	Retrieves a list of all the badges that have been defined for the tournament with the tournamentName specified.
List<Float>	getRanking(tournamentName)	Retrieves the ranking of all students subscribed to a specific tournament with the tournamentName specified.

## TournamentAPI

<b>Return Type</b>	<b>Signature</b>	<b>Description</b>
void	updateRanking(tournamentName)	Requires to update the ranking of a tournament with new data that is now available.
List<Battle>	getBattles(tournamentName)	Retrieves a list of all the battles that have been published in the tournament with the tournamentName specified.
List<File>	getTournamentCreationForm()	Returns all the necessary material to display to an educator the user interface to insert data for a new tournament to be created.
List<File>	getTournamentHomePage(tournamentName)	Returns all the necessary material to display to an user of CodeKataBattle the home page of a tournament, with all the information related to it.

## Tournament - EventPublisher

<b>Return Type</b>	<b>Signature</b>	<b>Description</b>
void	publishEvent(Event)	Publishes an event on the event bus.

## Tournament - EventConsumerI

<b>Return Type</b>	<b>Signature</b>	<b>Description</b>
Event	consumeEvent()	Reads an event from the event bus.
List<Event>	consumeAllEvents()	Reads all the events published on the event bus.

## 4 - Battle Microservice

The following interface is a RESTful APIs offered by the Manager component that handles Battles' data.

BattleAPI

Return Type	Signature	Description
void	addBattle(battleName, tournamentName, battleInfo)	Adds a new battle to the tournament specified with tournamentName. Notice that battleInfo is a complex entity that comprises a set of mandatory elements for the creation of a new battle. Battle names are the identifiers for battles and have to be unique in CodeKataBattle .
void	terminateBattle(battleName)	Terminates the battle named battleName; the final ranking is drawn and published.
void	addTeam(battleName, teamName, List<Student>)	Adds a new team to the battle called battleName, composed of the students specified in the second parameter of the function. In case of a single student, the teamName is the username of the solo player by default.
String	getCreator(battleName)	Returns the username of the educator that created the battle named battleName.
List<Team>	getAllTeams(battleName)	Retrieves a list of all the teams that participate in the battle named battleName.

## BattleAPI

<b>Return Type</b>	<b>Signature</b>	<b>Description</b>
List<Student>	getAllStudents(battleName)	Retrieves a list of all the students participating in the battle named battleName.
List<Student>	getStudentsInTeam(battleName, teamName)	Retrieves a list of user- names of the students that are part of a specific team named teamName inside the battle battleName.
List<Float>	getRanking(battleName)	Retrieves the ranking of the battle named battle- Name.
void	updateScore(battleName, teamName, newScore)	Updates the maximum score assigned to a specific team and the ranking is changed accordingly.
Float	getTeamScore(battleName, teamName)	Retrieves the maximum score assigned to a team in a battle so far.
Date	getCreationTime(battleName)	Returns the exact date and time when the battle called battleName was created (useful for computing scores).
List<File>	getBattleCreationForm()	Returns all the necessary material to display to an educator the user interface to insert data for a new bat- tle to be created.
List<File>	getTournamentHomePage(battleName)	Returns all the necessary material to display to an user the home page of the battle named battleName.

## Battle - EventPublisherI

Return Type	Signature	Description
void	publishEvent(Event)	Publishes an event on the event bus.

## 5 - Notification Microservice

The following interface is a RESTful APIs offered by the Manager component that handles Notification data.

NotificationAPI

Return Type	Signature	Description
List<Notification>	getNotifications(username)	Retrieves all the notifications that are stored for the user with the specified username.
List<File>	getNotificationUI()	Returns all the necessary material to display to a student the user interface to see the notifications that have arrived to him/her on CodeKataBattle.

Notification - EventConsumerI

Return Type	Signature	Description
Event	consumeEvent()	Reads an event from the event bus.
List<Event>	consumeAllEvents()	Reads all the events published on the event bus.

## 6 - GitHub Integration Microservice

The following interface is a RESTful APIs offered by the Manager component that handles GitHub integration with CodeKataBattle.

GitHubIntegrationAPI

Return Type	Signature	Description
URL	getRepositoryLink(battleName)	Retrieves the link to the remote GitHub repository created by CodeKataBattle for the battle named battleName.
URL	createRepository(battleName)	Creates a new GitHub repository for the battle named battleName and returns its link.
void	removeRepository(battleName)	Deletes the GitHub repository for the battle named battleName, when the battle is closed.
void	newCommit(battleName, username)	This method is offered to receive notifications from GitHub when a new commit is performed by a student in a repository that stores solutions for a battle named battleName.
List<File>	pullSources(battleName, username)	Downloads the latest source code files for the user specified by username in the context of the battle named battleName.

## GitHub Integration - EventConsumerI

Return Type	Signature	Description
Event	consumeEvent()	Reads an event from the event bus.
List<Event>	consumeAllEvents()	Reads all the events published on the event bus.

## 7 - Score Computation Microservice

### CalculatorAPI

Return Type	Signature	Description
Float	calculateScore(sourceCode, buildScripts, testCases, timePassed, evaluationCriteria)	This method implements the main functionality of the microservice, which is computing the score of a specific solution submitted by a student and return it.

## 2.6 Selected Architectural Styles and Patterns

This section delves into our architectural decisions, explaining the reasoning behind each choice. We aim for a system that not only meets current demands but also allows for flexibility and evolution. A comprehensive view empowers both developers and stakeholders with a clear understanding of how these choices contribute to the overall success of the software engineering work.

### Microservices Architecture

The adoption of a microservices architecture is driven by several factors, contributing to the versatility and adaptability of our application:

- *Scalability*: Microservices allow independent scaling, enabling the scalability of sub-services without scaling out the entire system, fostering a versatile and responsive application.
- *Fault Tolerance*: Unlike monolithic approaches with inter-dependencies, microservices minimize the impact of a single module failure, ensuring the application remains largely unaffected.
- *Deployment and Productivity*: Microservices facilitate continuous integration and delivery. The modular structure enhances team productivity and team work, with each member responsible for a specific service.
- *Maintainability*: Microservices reduce the effort spent on understanding separate pieces of software, enhancing overall system maintainability.

### RESTful APIs

The adoption of the REST architectural style for designing and implementing our APIs offers a scalable, efficient, and interoperable communication model. This choice is motivated by several relevant advantages:

- *Simplicity and Intuitiveness*: RESTful APIs follow a straightforward design using standard HTTP methods.
- *Scalability*: The stateless nature of REST allows for easy scalability, promoting a loosely coupled and scalable architecture.
- *Flexibility and Modularity*: RESTful APIs encourage a modular and resource-centric design, promoting clean separation of concerns. Each microservice in the architecture focuses on a specific section of the data domain and leaves the rest to the other components.
- *Interoperability*: Leveraging standard HTTP protocols makes REST platform-agnostic, facilitating interoperability across different technologies and devices.
- *Statelessness*: RESTful APIs' statelessness simplifies server logic, improves reliability, and allows for easy recovery from failures, contributing to a more robust and fault-tolerant system.

## **Model-View-Controller (MVC)**

The adoption of the Model-View-Controller architecture lays the foundation for a well-organized, maintainable, and scalable application. This choice is motivated by several factors:

- *Modular Organization*: MVC divides the Manager components inside the various microservices into three interconnected components: Model, View, and Controller. This enhances code readability, facilitates easier debugging, and allows for independent development of each component.
- *Separation of Concerns*: MVC enforces a clear separation of concerns, simplifying development, making it easier to maintain, extend, and modify individual components without affecting the others.
- *Reusability and Extensibility*: The modular structure of MVC promotes code reusability, allowing components to be reused in different parts of the application or in future projects.
- *Testability*: MVC enhances the testability of our application, allowing for independent testing of each component, ensuring that each part of the application functions correctly.
- *Improved Collaboration*: MVC's division of responsibilities facilitates collaboration among teammates operating on this project, fostering efficiency.

## **Event-Driven Architecture (EDA)**

Beside the fact that the adoption of Event-Driven Architecture (EDA) enhances real-time responsiveness, and scalable communication, its use in the CodeKataBattle system is specifically driven by the desire to generate asynchronous notifications. Through the Notification Consumer, Tournament Publisher, and Battle Publisher, we effectively mitigate the overhead of requesting additional computation for each action involving Notification, Tournament, and Battle Managers. In this way, the Battle and Tournament Publishers are able to create new events when a battle or a tournament begins or ends, and the Notification Consumer can asynchronously read these events and fabricate all the necessary notifications for the users of CodeKataBattle. All of this, without requiring neither the Battle, nor the Tournament microservices to stop their ongoing tasks. Other advantages of the architecture are:

- *Decoupled Components*: EDA promotes decoupling of components by relying on events as the means of communication. This results in a more flexible architecture, allowing for independent development, testing, and deployment.
- *Scalability*: EDA facilitates scalability by enabling the distribution of components and services. This asynchronous and distributed nature supports the scalability of our application, allowing it to handle increased loads and adapt to varying workloads.

### **2.6.1 Database Management**

The data layer of the CodeKataBattle application is composed of a shared database, which provides persistent data access to all the microservices. This choice derives from the fact that although the different microservices making up the CodeKataBattle system have different concerns, they still operate on pieces of information that are frequently related (tournaments and battles, users and badges, battles

and GitHub repositories...). A shared and common place to store the data of the application facilitates the accomplishment of data consistency and data sharing between different processes (microservices).

More specifically, managing the shared database involves the design of internal partitions to divide data among various microservices. Each partition is replicated to guarantee reliability and availability. Protocols such as multi-Paxos or Raft, which manage replicated state machines, can be considered as implementation choices; 2PC could be used across partitions, assuming the reachability of the majority of nodes, to ensure the atomicity and consistency of transactions.

## 3 User Interface Design


This section is a refinement of the chapter "3.1.1 User Interface" of the Requirements Analysis and Specification Document (RASD) related to the CodeKataBattle project. At the level of detail that is allowed for a design document, it is possible to delve deeper into the various interactions that the platform offers to the external user (either a student or an educator).

The images inserted in this section serve as mockups of the user interfaces provided by the system and therefore they have to be interpreted as general guidelines for the designers and developers to grasp the application should look like at the end of the implementation process.

In order to facilitate the understanding of the reader, the following description is going to take first the point of view of an Educator using CodeKataBattle and then there will be a switch to the student perspective.

### 3.1 Login Phase


The initial step for accessing CodeKataBattle is of course logging in the system, and this is possible thanks to the initial user interface provided by the application. It is illustrated in the following image:

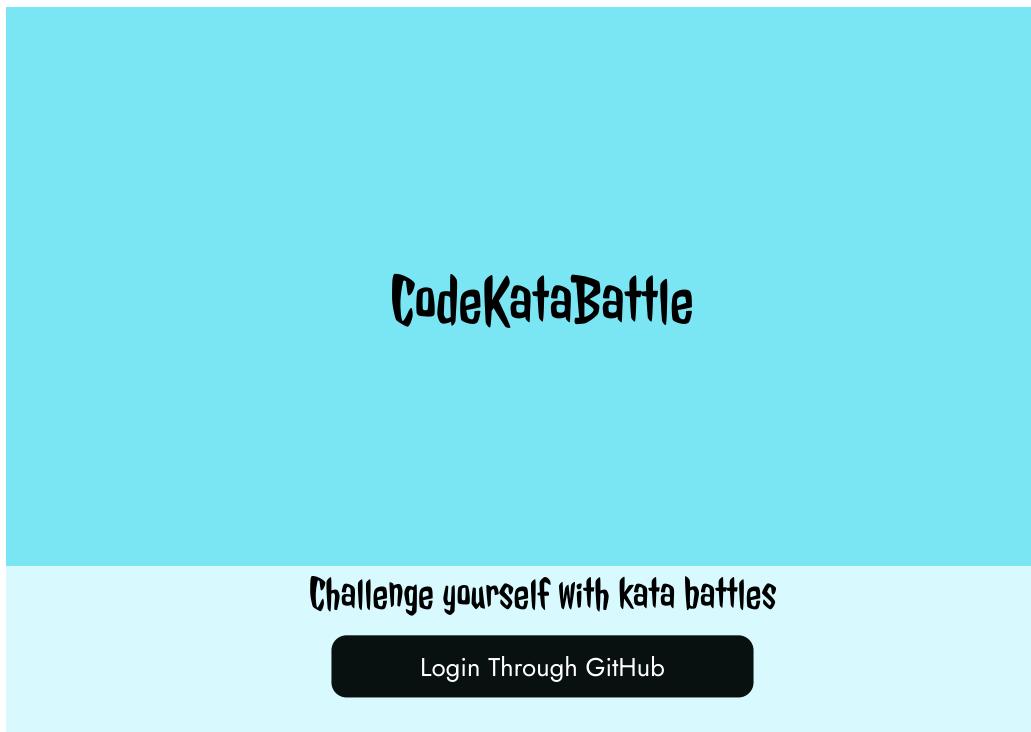

By clicking on the button "Login Through Github" the user will be redirected to a web page where s/he will be able to insert his/her personal GitHub credentials.

### 3.2 Educator personal profile

As stated in the introduction, the description now takes the point of view of an educator. The first page displayed after the login is the personal profile of the educator, as it is possible to observe in the following illustration:

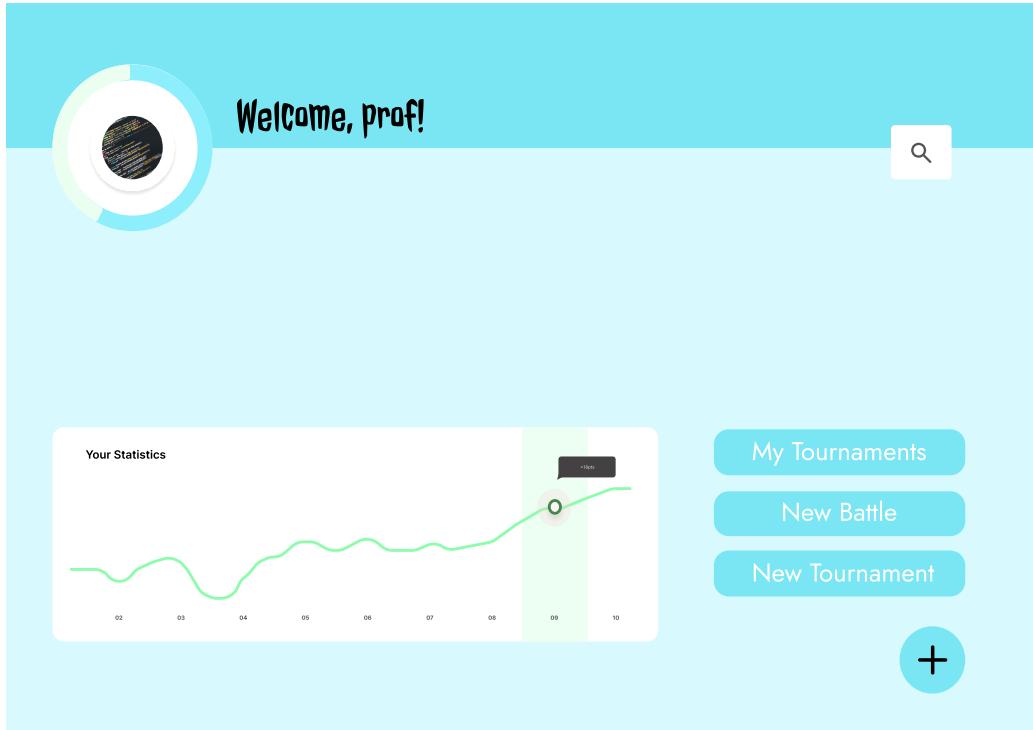

This page offers various functionalities:

- My Tournaments button allows an educator to see the list of tournaments that s/he created or the ones s/he has permissions to publish battles in. The Tournament microservice is responsible for providing this list.
- New Battle button allows for the creation of a new battle. When the educator clicks on it, the Tournament microservice is involved because a list of tournaments in which the educator is allowed to publish battles has to be supplied. The educator is then able to select a tournament out of that list (in which s/he wants to publish the battle) and automatically the page for creating the new battle pops up (as described later on).
- New Tournament button allows for the creation of a new tournament. The request is passed to the Tournament Microservice which will reply with the tournament creation form (as shown later on).

Let's assume now the educator clicks on the "New Tournament" button. The following section shows the interface that pops up in this case.

### 3.3 Creation of a new tournament

In order to create a new tournament, the tournament creation form has to be filled in by the educator. A sketch of how this form would look like is reported here:


The image shows a user interface for creating a new tournament. At the top left is a circular icon containing a camera-like symbol. Next to it, the text "New Tournament" is displayed in a stylized font. To the right of the text is a yellow trophy icon with a star on top. Below the header, there are input fields: "Name:" followed by a text input field, "Description:" followed by a text input field with placeholder text "Type here a description of the tournament...", "Registration By:" followed by a date input field "MM/YY/YYYY", and a blue button labeled "Define badges". In the bottom right corner, there is a blue square button with a white checkmark inside.

The most important pieces of information for a tournament are clearly visible in the image, as the educator is able to set the tournament name, the tournament description and the registration deadline. There is also a dedicated section for the badges, that will be assigned at the end of the tournament.

Once the educator fills in all the form, s/he can confirm with the button in the bottom right side of the interface. As s/he does it, the tournament home page appears on the screen, as illustrated in the next section.

### 3.4 Tournament home page

Whenever a student or an educator search for a tournament and clicks on it, the tournament home page pops up. This is how the page is designed in order to provide all the relevant information related to a tournament:

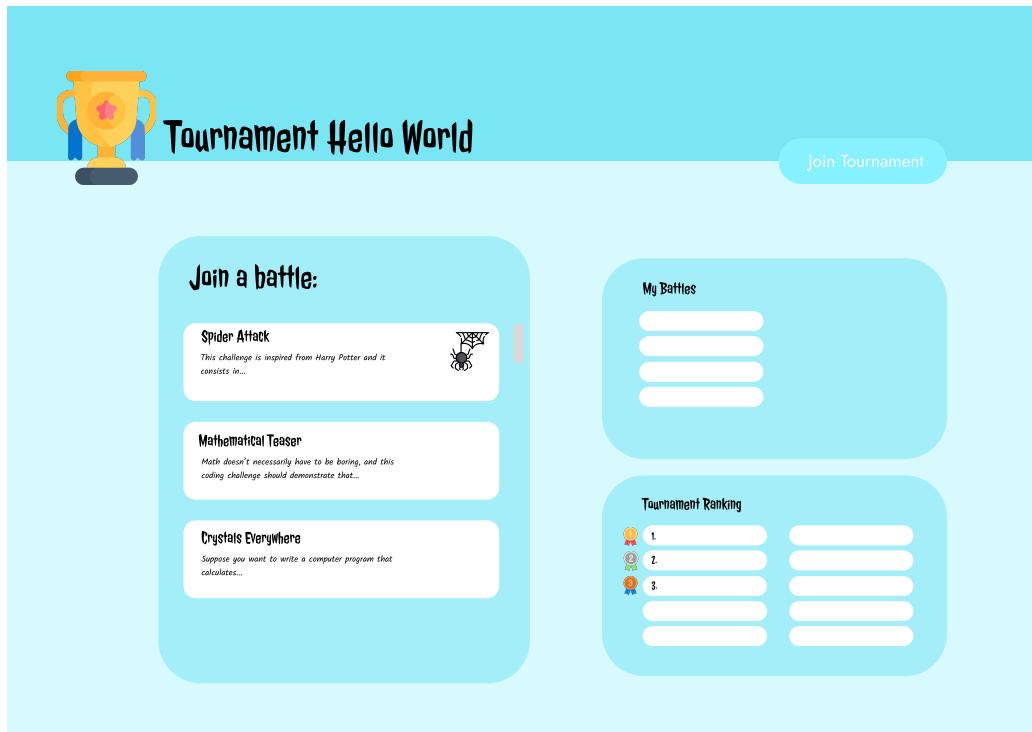


In the top right corner of the page, there is a button that allows the user to join the tournament. As a student clicks on it, the request is dispatched to the Tournament Microservice that will take care of verifying if the registration deadline for the tournament hasn't passed yet and consequently add the student to the set of students subscribed to the tournament.

On the left, a list of the battles published within the tournament are available for students to join them and for educators to see them. On the right hand side, two panels appear. Going top to bottom, the first one is a list of battles that the student joined, the second one is the tournament ranking, which displays all the students participating in the tournament as a list of names.

### 3.5 Creation of a new battle

Let's now go back to the educator's home page (educator profile). Let's suppose the educator clicks on the "New Battle" button. The first response of CodeKataBattle will be showing a list of the tournaments in which the educator has permissions to publish battles. The following image shows this interface:

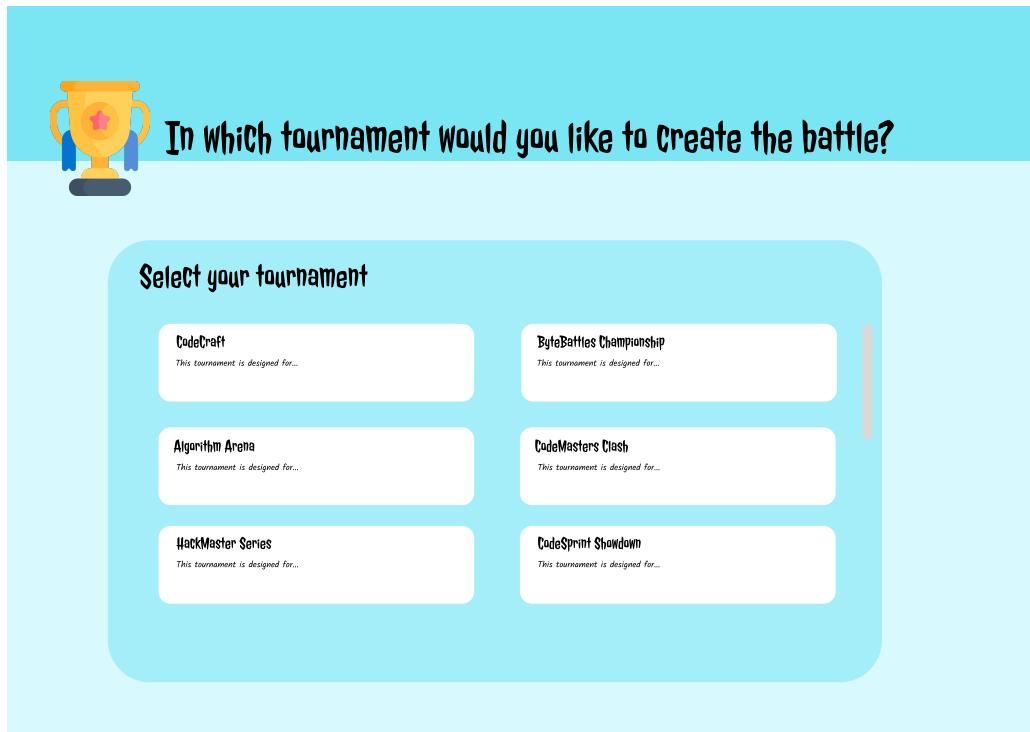

As the educator selects the tournament, a new page shows up, displaying the battle creation form.

A screenshot of a "New Battle" creation form. The form is set against a light blue background with a white main area. At the top left is a circular icon containing a small screenshot of a code editor. Next to it is the text "New Battle" in a stylized font, followed by two crossed swords. Below this, there are several input fields and controls:

- A "Name:" field with a placeholder text input box.
- A "Description:" field with a placeholder text input box.
- Two date input fields: "Registration By:" and "Submission By:", each with a placeholder "MM/YY/XXXX".
- Two numerical input fields: "Max students per team:" and "Min students per team:", each with a placeholder input box.
- A "Upload build scripts" button.
- A "Upload test cases" button.
- A "Consolidation stage:" toggle switch, which is currently turned on (green).
- An "Evaluation Criteria:" input field with a checkmark icon in a blue box to its right.

All the pieces of information that are needed for the creation of a new battle have their respective


fields in this user interface. Once all these parts have been correctly defined, the educator can confirm his/her choices with the button in the bottom right corner of the interface. As the confirmation button is pressed, the Battle Microservice will be immediately provided with all the data that the educator provided through this interface, in order to allow the Battle Manager to create a new battle and store this data in a persistent manner.

It is now possible to switch to the student's point of view to illustrate the user interfaces that the CodeKataBattle system provides.

First off, the interface for signing in CodeKataBattle is the same, as both educators and students are required to log in through their GitHub account.

### 3.6 Student personal profile

As the login phase is successfully concluded CodeKataBattle displays the student's personal profile. The following figure sketches the look of this user interface:

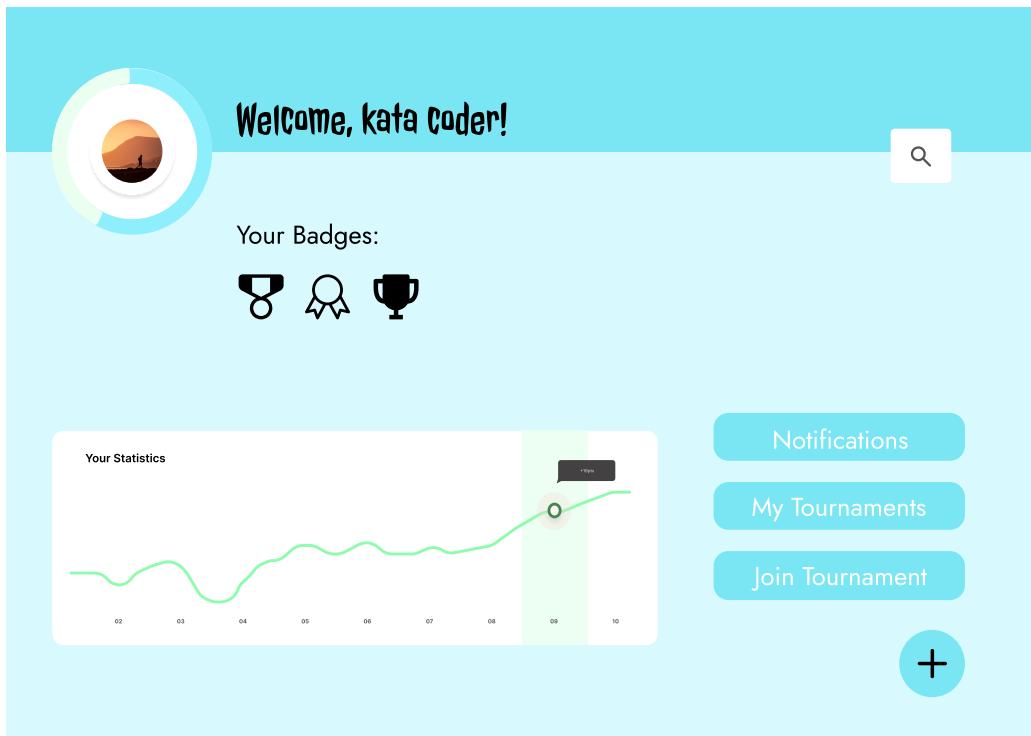


In the central part, a list of the badges earned by the student is shown, and it is visible to all the users of CodeKataBattle navigating to this student's profile. The buttons on the right hand side offer the major functionalities that the student requires in order to use the application.

When the student clicks on the "Notifications" button, CodeKataBattle responds with a new interface that shows all the notifications that arrived for the student in question. The Notification Microservice is responsible in this case for retrieving the list of notifications related to a specific student and building the corresponding interface, which is shown in the following section.

### 3.7 Notification interface

Here's a mockup of the Notification interface for a student:

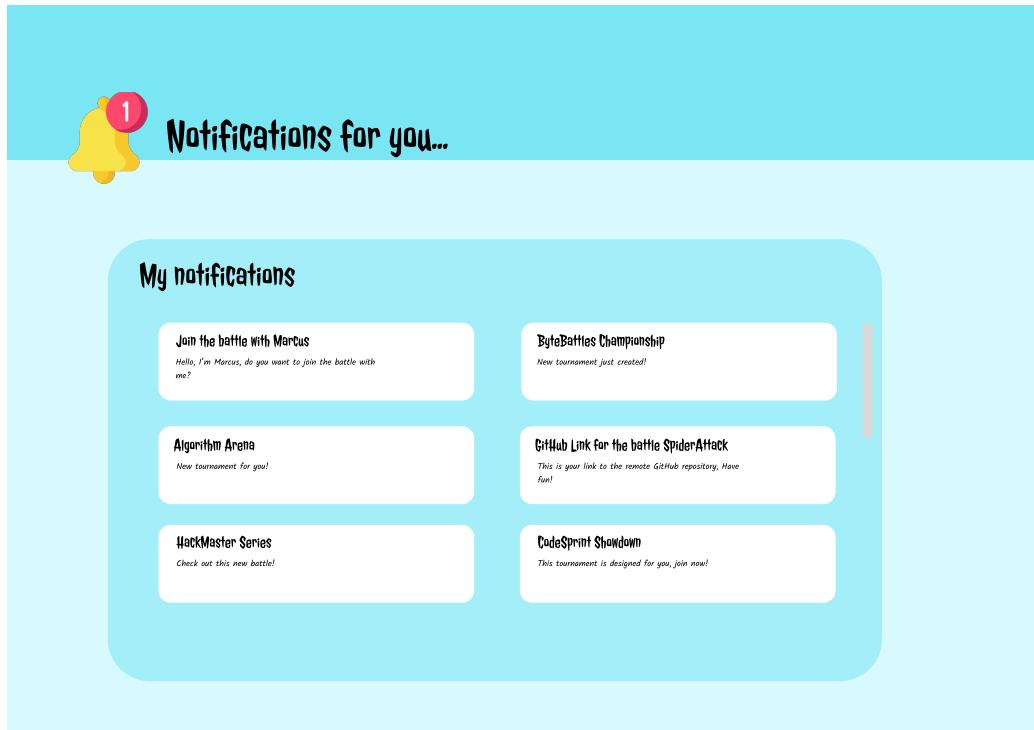


The illustration is pretty straightforward as it is composed of a single central pane that gathers all the notifications for the student. Among the various notifications that can reach a student there are:

- Notification for the creation of a new tournament.
- Notification for the request of another student to join a battle together as a team.
- Notification for the creation of a new battle.
- Notification that carries the link to the remote GitHub repository for a battle the student is subscribed to.
- Notification for the termination of a tournament.
- Notification for the termination of a battle.

Going back to the student's personal profile, let's see what happens when the "Join Tournament" button is clicked.

### 3.8 Joining a tournament


As the "Join Tournament" button is clicked, CodeKataBattle provides to the student a list of tournaments that are available in that moment inside the platform. The Tournament Microservice is responsible for providing such list of tournaments and building the relative user interface. This is the look of the interface for joining a new tournament:

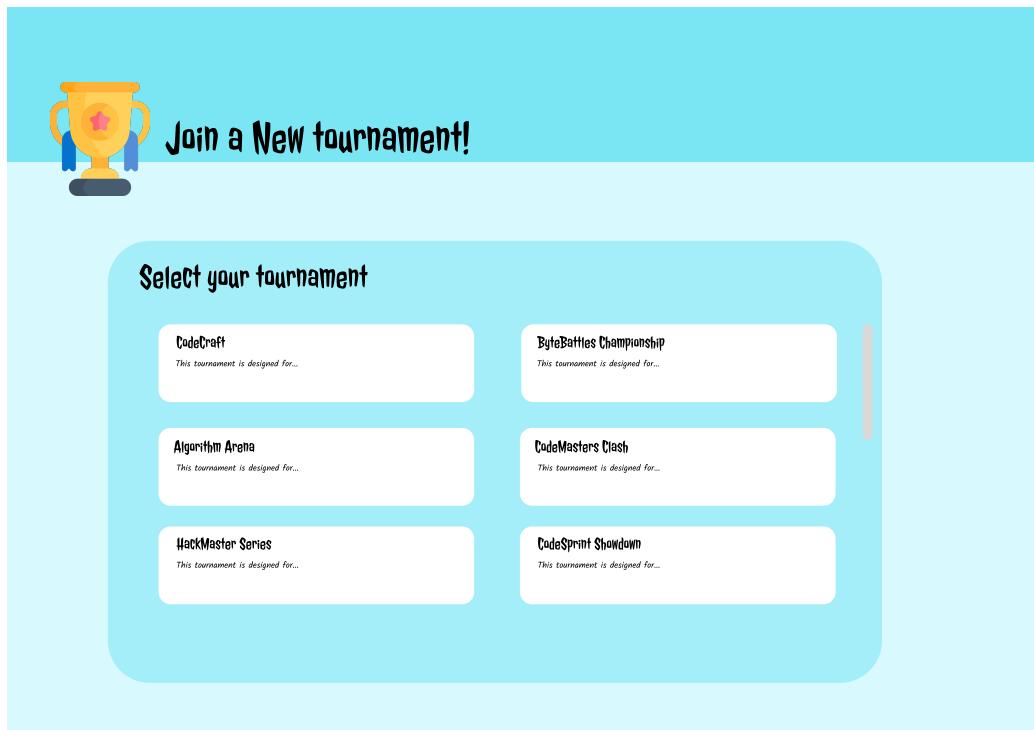

The student can browse all the tournaments available on CodeKataBattle from here. When the student clicks on one of the tournaments, the tournament home page shows up (as illustrated in section 3.4) and the button "Join Tournament" will be visible if the registration deadline for the tournament hasn't passed yet.

### 3.9 Joining a Battle

In order to join a new battle, the student has to start from his personal profile and click on the button "My Tournaments". The Tournament Microservice will be queried as a consequence and a list of tournaments to which the student is subscribed is displayed. This step is necessary because it is not possible to subscribe to a battle in a tournament without having previously joined the tournament itself. From the list of tournaments, the student will select the one in which s/he wants to join a battle, and the tournament home page will pop up. The tournament home page contains the list of battles for that specific tournament. From here, the student can browse all the battles available. When s/he clicks on one of these battles, the battle home page is shown. The following image gives a representation of the battle home page:

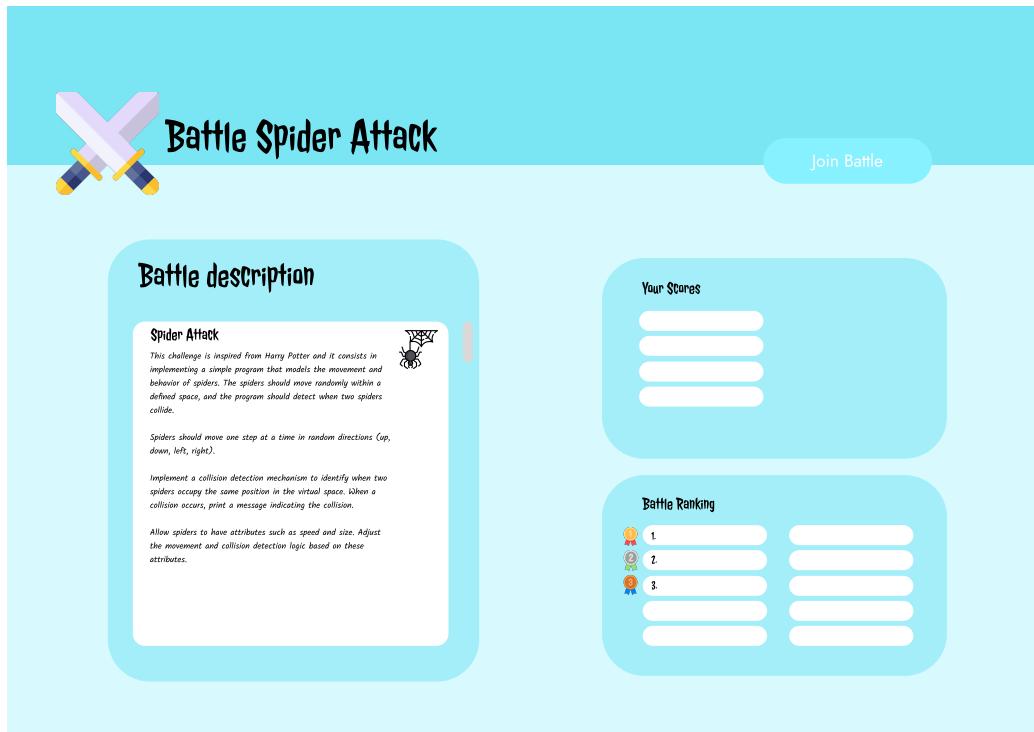

In the top right corner, the button to join the battle is displayed if the battle's registration deadline hasn't passed yet. In the left hand side, the battle description is provided, to make the student understand what kind of coding challenge the battle focuses on. On the right hand side, there is a list of scores associated to the student's code solutions for that battle (initially empty) and the battle ranking (ranking of teams).

## 4 Requirements Traceability

In the following, a traceability matrix is reported to facilitate the mapping between the requirements, as presented in the Requirements Analysis and Specification Document (RASD), and the components of the CodeKataBattle system that are involved in meeting those requirements.

The various components that are mentioned here can be found in section 2.2 Component View of this Design Document, with a more detailed explanation of their role.

ReqID	Requirement Description	Components Involved		
R1.1	The system allows students to log in the platform using their GitHub account.	Gateway	Microservice (Dispatcher).	User Management Microservice (Student Manager).
R1.2	The system notifies all students on the platform every time a new tournament is created.	Notification Microservice (Notification Manager, Notification Event Consumer).	Tournament Microservice (Tournament Manager, Tournament Event Publisher).	
R1.3	When the student requires it, the system shows the list of tournaments available on the platform for subscription (whose registration deadline hasn't passed yet).	Gateway	Microservice (Dispatcher).	Tournament Microservice (Tournament Manager).
R1.4	When the student requires it, the system shows the list of tournaments the student is subscribed to.	Gateway	Microservice (Dispatcher).	Tournament Microservice (Tournament Manager).
R1.5	The system allows students to subscribe to tournaments, by the end of the registration deadlines set for the tournaments.	Gateway	Microservice (Dispatcher).	Tournament Microservice (Tournament Manager).
R1.6	The system notifies all students subscribed to a tournament every time a new battle within that tournament is published.	Notification Microservice (Notification Manager, Notification Event Consumer).	Battle Microservice (Battle Event Publisher).	Tournament Microservice (Tournament Manager).

<b>ReqID</b>	<b>Requirement Description</b>	<b>Components Involved</b>
R1.7	The system allows students subscribed to a tournament to join battle(s) within that tournament, by the end of the registration deadline set for the battle(s).	Gateway Microservice (Dispatcher). Battle Microservice (Battle Manager).
R1.8	The system allows students subscribed to a tournament to join a battle of the tournament either on their own or creating teams with other students.	Gateway Microservice (Dispatcher). Battle Microservice (Battle Manager).
R1.9.1	The system creates a new GitHub repository dedicated to a battle right after the registration deadline for that battle passes.	Battle Microservice (Battle Manager). GitHub Integration Microservice (GitHub Manager).
R1.9.2	The system sends the link of the GitHub repository dedicated to a battle to all the students subscribed to that battle.	Notification Microservice (Notification Manager, Notification Event Consumer). GitHub Integration Microservice (GitHub Manager). Battle Microservice (Battle Manager).
R1.9.3	The system accepts notifications from GitHub in order to know when a new commit is performed by a student in any GitHub repository forked by the one created by the system itself.	GitHub Integration Microservice (GitHub Manager).
R1.9.4	The system pulls from the GitHub repositories of ongoing battles the new students' code solutions, every time it receives a notification from GitHub of a new commit in those repositories.	GitHub Integration Microservice (GitHub Manager).

<b>ReqID</b>	<b>Requirement Description</b>	<b>Components Involved</b>
R1.10	The system calculates and then publishes the new score of a team's solution every time it receives a notification from GitHub of a new commit performed by a member of the team.	GitHub Integration Microservice (GitHub Manager). Score Computation Microservice (Score Calculator). Battle Microservice (Battle Manager).
R1.11	The system notifies all students participating in a battle when the final ranking of teams is available on the platform.	Battle Microservice (Battle Manager, Battle Event Publisher). Notification Microservice (Notification Manager, Notification Event Consumer).
R1.12	The system notifies all students subscribed to a tournament when the tournament is closed by the educator who created it.	Gateway Microservice (Dispatcher). Tournament Microservice (Tournament Manager, Tournament Event Publisher). Notification Microservice (Notification Manager, Notification Event Consumer).
R2.1	The system allows educators to log in the platform using their GitHub account.	Gateway Microservice (Dispatcher). User Management Microservice (Educator Manager).
R2.2	The system allows educators to create new tournaments.	Gateway Microservice (Dispatcher). Tournament Microservice (Tournament Manager, Tournament Event Publisher).
R2.3	The system allows the educator that created a tournament to grant the permission of publishing battles within his/her tournament to other educators on the platform.	Gateway Microservice (Dispatcher). Tournament Microservice (Tournament Manager, Tournament Event Publisher).

<b>ReqID</b>	<b>Requirement Description</b>	<b>Components Involved</b>
R2.4	The system allows educators to create new battle(s) in the tournaments they have the permissions to do so.	Gateway Microservice (Dispatcher). Battle Microservice (Battle Manager, Battle Event Publisher).
R2.5	The system doesn't take into account any new code solution for a battle after the submission deadline of that battle.	Battle Microservice (Battle Manager). GitHub Integration Microservice (GitHub Manager).
R2.6	After the submission deadline of a battle and only if a consolidation stage had been requested by the educator at battle creation time, the system sets a time frame for the educator that created the battle to allow him/her to assign personal scores to the students' code solutions.	Gateway Microservice (Dispatcher). Battle Microservice (Battle Manager).
R2.7	The system takes into account the personal scores assigned by the educator during the consolidation stage of a battle only if the educator assigned a score to all teams within the imposed time frame.	Battle Microservice (Battle Manager).
R2.8	At the end of a battle and after the consolidation stage (if requested), the system automatically calculates and publishes the final rank of all teams that participated in that battle.	Battle Microservice (Battle Manager).
R2.9	When a tournament is closed, the system automatically publishes the rank of all students that participated in the tournament.	Tournament Microservice (Tournament Manager).

<b>ReqID</b>	<b>Requirement Description</b>	<b>Components Involved</b>
R3.1	The system allows students subscribed to the same tournament to invite each other in order to join battles together as a team, respecting the minimum and maximum number of students permitted for a team in the battle.	Gateway Microservice (Dispatcher). Tournament Microservice (Tournament Manager). Battle Microservice (Battle Manager). Notification Microservice (Notification Manager).
R3.2	The system allows students to accept or reject invitations from other student asking to join a battle together as a team.	Gateway Microservice (Dispatcher). Battle Microservice (Battle Manager). Notification Microservice (Notification Manager).
R3.3	The system allows students to set the name of their team when they join a battle with other students.	Gateway Microservice (Dispatcher). Battle Microservice (Battle Manager).
R3.4	The system calculates and then publishes the score assigned to a new code solution of a team in a battle, every time GitHub notifies the platform of a new commit performed by a member of such team.	GitHub Integration Microservice (GitHub Manager). Score Computation Microservice (Score Calculator). Battle Microservice (Battle Manager).
R3.5	The system constantly keeps updated the total ranking of teams for a battle, which evolves based on the new code solutions that are uploaded by students on the GitHub repository.	GitHub Integration Microservice (GitHub Manager). Score Computation Microservice (Score Calculator). Battle Microservice (Battle Manager).
R3.6	The system calculates and publishes the final ranking of teams when a battle ends.	Battle Microservice (Battle Manager).

<b>ReqID</b>	<b>Requirement Description</b>	<b>Components Involved</b>
R3.7	The system allows only the educators and students involved in a battle to see the partial or final ranking of teams for that battle.	Gateway Microservice (Dispatcher). Battle Microservice (Battle Manager).
R3.8	The system automatically calculates and keeps updated the total ranking of students subscribed to a tournament, based on the scores each student received in the battles he participated in.	Tournament Microservice (Tournament Manager, Tournament Event Consumer). Battle Microservice (Battle Manager, Battle Event Publisher).
R3.9	The system allows all users on the platform to see the partial or final rankings of tournaments.	Gateway Microservice (Dispatcher). Tournament Microservice (Tournament Manager).
R3.10	The system allows educators to define customary badges (rewards) for the students participating in their tournaments, at tournament creation time.	Gateway Microservice (Dispatcher). Tournament Microservice (Tournament Manager).
R3.11	The system assigns badges (rewards) to students that participated in a tournament, when the tournament is closed by the educator that created it.	Gateway Microservice (Dispatcher). Tournament Microservice (Tournament Manager). User Management Microservice (Student Manager).
R3.12	The system allows all users on the platform to search for the personal profile of a student and see the corresponding account.	Gateway Microservice (Dispatcher). User Management Microservice (Student Manager).
R3.13	The system allows all users on the platform to see the list of badges owned by a student for the tournaments s/he participated in.	Gateway Microservice (Dispatcher). User Management Microservice (Student Manager).

## **5 Implementation, Integration and Test plan**

### **5.1 Overview**

In the development of CodeKataBattle the choice of a suitable testing strategy is crucial. Given the inherent complexities and distributed nature of microservices, traditional hierarchical testing approaches may prove less effective.

In recognition of these challenges, the testing strategy employed for CKB aligns with the thread strategy. Unlike hierarchical methods, the thread strategy focuses on testing specific threads or pathways through the system, allowing for more granular and targeted assessments. This approach is particularly well-suited for microservices, where a clear hierarchy may be challenging to establish, and interactions between services play a fundamental role in overall system behavior.

### **5.2 Implementation Plan**

#### **5.2.1 Features Identification**

#### **5.2.2 Components Integration and Testing**

### **5.3 System Testing**

### **5.4 Additional Specifications on testing**

## 6 Effort spent

	Alessandro	Matteo	Sara
Introduction	18	25	0
Architectural Design	13	19	0
User Interface Design	0	0	0
Requirements Traceability	0	3	0
Implementation, Integration and Test Plan	0	0	0

Table 16: Time spent on every section of the DD for each student

## 7 References