# Cucumber Report

| Start : May 19, 9:37:38.151 PM | End : May 19, 9:38:41.051 PM | Duration : 1 m 2.900 s |
|---|---|---|
| Features | Scenarios | Steps |
| PASSED - 0<br>FAILED - 1<br>SKIPPED - 0 | PASSED - 1<br>FAILED - 1<br>SKIPPED - 0 | PASSED - 9<br>FAILED - 1<br>SKIPPED - 0 |

| Feature | | Scenario | | | | Step | | | |
| --- | --- | --- | --- | --- | --- | --- | --- | --- | --- |
| **Name** | **Duration** | **T** | **P** | **F** | **S** | **T** | **P** | **F** | **S** |
| *To verify cucumber functionalities* | *1 m 2.900 s* | 2 | 1 | 1 | 0 | 10 | 9 | 1 | 0 |

| Tag | Scenario | | | | Feature | | | |
|---|---|---|---|---|---|---|---|---|
| Name | T | P | F | S | T | P | F | S |
| @HappyPath | 1 | 1 | 0 | 0 | 1 | 0 | 1 | 0 |
| @ErrorPath | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |

| # | Feature Name | T | P | F | S | Duration |
|---|---|---|---|---|---|---|
| 1 | To verify cucumber functionalities | 2 | 1 | 1 | 0 | 1 m 2.900 s |

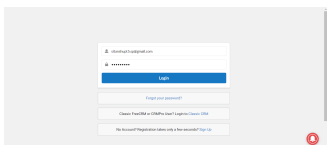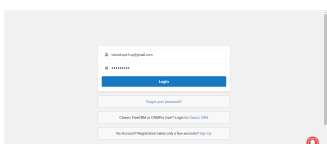| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|---|---|---|---|---|---|---|
| 1 | To verify cucumber functionalities | To verify the login functionality happy path | 5 | 5 | 0 | 0 | 18.928 s |
| 2 | To verify cucumber functionalities | To verify the login functionality error path | 5 | 4 | 1 | 0 | 43.934 s |
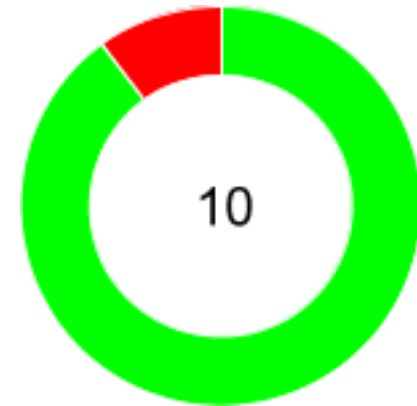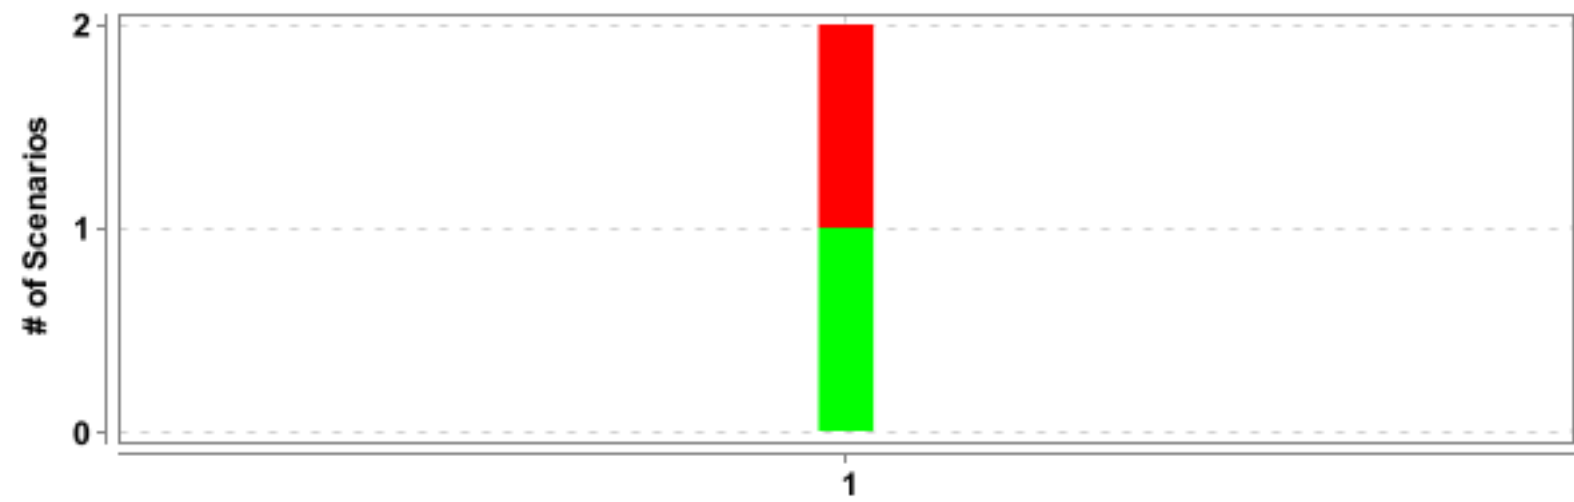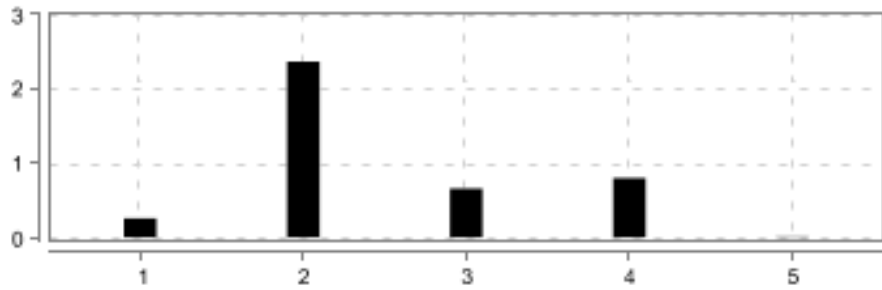
## To verify cucumber functionalities

| FAILED | DURATION - 1 m 2.900 s | Scenarios Total - 2 Pass - 1 Fail - 1 Skip - 0 | Steps Total - 10 Pass - 9 Fail - 1 Skip - 0 |
|--------|------------------------|----------|-------|
| / 9:37:38.151 PM // 9:38:41.051 PM / | | | |

## To verify the login functionality happy path
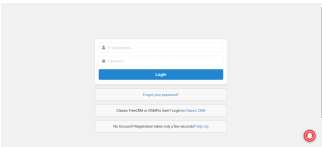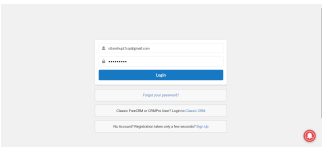
| PASSED | DURATION - 18.928 s | Steps Total - 5 Pass - 5 Fail - 0 Skip - 0 |
|--------|---------------------|------|
| / 9:37:38.164 PM // 9:37:57.092 PM / | | |
| To verify cucumber functionalities | | |
| @HappyPath | | |

| # | Step / Hook Details | Status | Duration |
|---|---------------------|--------|----------|
| 1 | Given User is on Landing Page | PASSED | 0.254 s |
| | AFTER_STEP - stepDefinitions.Hooks.stepTearDown(io.cucumber.java.Scenario) | PASSED | 0.491 s |
| | image | | |
| | | | |
| 2 | When User clicks on the Login link | PASSED | 2.363 s |
| | AFTER_STEP - stepDefinitions.Hooks.stepTearDown(io.cucumber.java.Scenario) | PASSED | 2.015 s |
| | image | | |
| | | | |

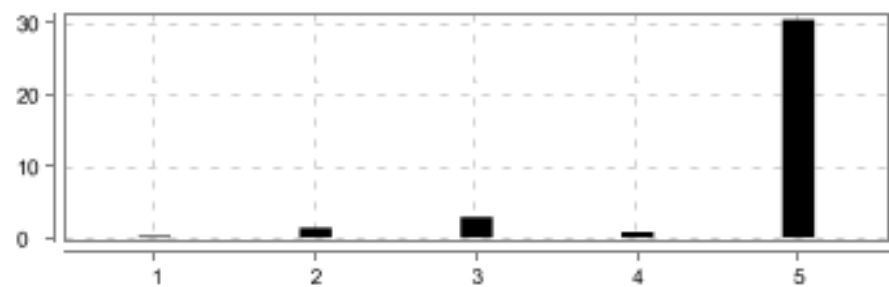| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| 3 | Then User should be navigated to Login Page | PASSED | 0.654 s |
| | AFTER_STEP - stepDefinitions.Hooks.stepTearDown(io.cucumber.java.Scenario) | PASSED | 0.573 s |
| | image | | |
| |  | | |
| 4 | When User logs in with username "sitanshupt5.sp@gmail.com" and password "Bapuna10@" | PASSED | 0.796 s |
| | AFTER_STEP - stepDefinitions.Hooks.stepTearDown(io.cucumber.java.Scenario) | PASSED | 0.316 s |
| | image | | |
| |  | | |
| 5 | Then User should be logged in successfully | PASSED | 0.009 s |
| | AFTER_STEP - stepDefinitions.Hooks.stepTearDown(io.cucumber.java.Scenario) | PASSED | 0.229 s |
| | image | | |
| |  | | |

## To verify the login functionality error path

| FAILED | DURATION - 43.934 s | | Steps |
|---|---|---|---|
| / 9:37:57.117 PM // 9:38:41.051 PM / | |  | Total - 5 <br> Pass - 4 <br> Fail - 1 <br> Skip - 0 |
| To verify cucumber functionalities | | | |
| @ErrorPath | | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| 1 | Given User is on Landing Page | PASSED | 0.241 s |
| | AFTER_STEP - stepDefinitions.Hooks.stepTearDown(io.cucumber.java.Scenario) | PASSED | 0.486 s |
| | image  | | |
| 2 | When User clicks on the Login link | PASSED | 1.365 s |
| | AFTER_STEP - stepDefinitions.Hooks.stepTearDown(io.cucumber.java.Scenario) | PASSED | 0.483 s |
| | image  | | |
| 3 | Then User should be navigated to Login Page | PASSED | 2.852 s |
| | AFTER_STEP - stepDefinitions.Hooks.stepTearDown(io.cucumber.java.Scenario) | PASSED | 0.391 s |
| | image  | | |
| 4 | When User logs in with username "sitanshupt5.sp@gmail.com" and password "Bapuna01@" | PASSED | 0.759 s |
| | AFTER_STEP - stepDefinitions.Hooks.stepTearDown(io.cucumber.java.Scenario) | PASSED | 0.308 s |
| | image  | | |
| 5 | Then User should not be logged in successfully | FAILED | 30.341 s |
| | org.openqa.selenium.TimeoutException: Expected condition failed: waiting for visibility of Proxy element for: DefaultElementLocator 'By.xpath: //p[text()= "Invalid login"]' (tried for 30 second(s) with 500 milliseconds interval)<br>    at org.openqa.selenium.support.ui.WebDriverWait.timeoutException(WebDriverWait.java:87) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| | at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:231) | | |
| | at stepDefinitions.Steps.user_should_not_be_logged_in_successfully(Steps.java:50) | | |
| | at ?.User should not be logged in successfully(file:///D:/New%20Workspace/Crow/src/main/java/features/Module1.feature:18) | | |
| | Caused by: org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//p[text()= "Invalid login"]"}   (Session info: chrome=101.0.4951.67) For documentation on this error, please visit: https://selenium.dev/exceptions/#no_such_element Build info: version: '4.1.4', revision: '535d840ee2' System info: host: 'LAPTOP-DTT1M6R1', ip: '192.168.29.82', os.name: 'Windows 10', os.arch: 'amd64', os.version: '10.0', java.version: '1.8.0_271' Driver info: org.openqa.selenium. chrome.ChromeDriver Command: [4128bced78b138de7704f091648addf4, findElement {using=xpath, value=//p[text()= "Invalid login"]}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 101.0.4951.67, chrome: {chromedriverVersion: 101.0.4951.41 (93c720db8323..., userDataDir: C:\Users\Sitanshu\AppData\L...}, goog:chromeOptions: {debuggerAddress: localhost:55314}, javascriptEnabled: true, networkConnectionEnabled: false, pageLoadStrategy: normal, platform: WINDOWS, platformName: WINDOWS, proxy: Proxy(), se:cdp: ws://localhost:55314/devtoo..., se:cdpVersion: 101.0.4951.67, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:largeBlob: true, webauthn:virtualAuthenticators: true} Session ID: 4128bced78b138de7704f091648addf4 | | |
| | at sun.reflect.GeneratedConstructorAccessor21.newInstance(Unknown Source) | | |
| | at sun.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |
| | at java.lang.reflect.Constructor.newInstance(Constructor.java:423) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:200) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:133) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:53) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:184) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:167) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:142) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:567) | | |
| | at org.openqa.selenium.remote.ElementLocation$ElementFinder$2.findElement(ElementLocation.java:162) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:60) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:385) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:377) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:70) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:39) | | |
| | at com.sun.proxy.$Proxy40.isDisplayed(Unknown Source) | | |
| | at org.openqa.selenium.support.ui.ExpectedConditions.elementIfVisible(ExpectedConditions.java:307) | | |
| | at org.openqa.selenium.support.ui.ExpectedConditions.access$000(ExpectedConditions.java:40) | | |
| | at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:293) | | |
| | at org.openqa.selenium.support.ui.ExpectedConditions$10.apply(ExpectedConditions.java:290) | | |
| | at org.openqa.selenium.support.ui.FluentWait.until(FluentWait.java:208) | | |
| | at stepDefinitions.Steps.user_should_not_be_logged_in_successfully(Steps.java:50) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke0(Native Method) | | |
| | at sun.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) | | |
| | at sun.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) | | |
| | at java.lang.reflect.Method.invoke(Method.java:498) | | |
| | at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| | at io.cucumber.java.Invoker.invoke(Invoker.java:24) | | |
| | at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) | | |
| | at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) | | |
| | at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) | | |
| | at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) | | |
| | at io.cucumber.core.runner.ExecutionMode$1.execute(ExecutionMode.java:10) | | |
| | at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:92) | | |
| | at io.cucumber.core.runner.TestStep.run(TestStep.java:64) | | |
| | at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) | | |
| | at io.cucumber.core.runner.TestCase.run(TestCase.java:104) | | |
| | at io.cucumber.core.runner.Runner.runPickle(Runner.java:71) | | |
| | at io.cucumber.junit.PickleRunners$NoStepDescriptions.run(PickleRunners.java:151) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:135) | | |
| | at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:27) | | |
| | at org.junit.runners.ParentRunner$3.run(ParentRunner.java:290) | | |
| | at org.junit.runners.ParentRunner$1.schedule(ParentRunner.java:71) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) | | |
| | at org.junit.runners.ParentRunner.access$000(ParentRunner.java:58) | | |
| | at org.junit.runners.ParentRunner$2.evaluate(ParentRunner.java:268) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:363) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:199) | | |
| | at io.cucumber.junit.Cucumber.runChild(Cucumber.java:90) | | |
| | at org.junit.runners.ParentRunner$3.run(ParentRunner.java:290) | | |
| | at org.junit.runners.ParentRunner$1.schedule(ParentRunner.java:71) | | |
| | at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:288) | | |
| | at org.junit.runners.ParentRunner.access$000(ParentRunner.java:58) | | |
| | at org.junit.runners.ParentRunner$2.evaluate(ParentRunner.java:268) | | |
| | at io.cucumber.junit.Cucumber$RunCucumber.evaluate(Cucumber.java:234) | | |
| | at org.junit.runners.ParentRunner.run(ParentRunner.java:363) | | |
| | at org.junit.runner.JUnitCore.run(JUnitCore.java:137) | | |
| | at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:68) | | |
| | at com.intellij.rt.junit.IdeaTestRunner$Repeater.startRunnerWithArgs(IdeaTestRunner.java:33) | | |
| | at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:230) | | |
| | at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:58) | | |
| | * Not displayable characters are replaced by '?'. | | |
| | AFTER_STEP - stepDefinitions.Hooks.stepTearDown(io.cucumber.java.Scenario) | PASSED | 0.366 s |
| | image | | |

| # | Step / Hook Details | Status | Duration |
|---|---|---|---|
| |  | | |