In [116…
```python
import pandas as pd
import matplotlib.pyplot as plt
import seaborn as sns
import plotly.express as px

from sklearn.tree import DecisionTreeRegressor
from sklearn.ensemble import RandomForestRegressor
from sklearn.linear_model import LinearRegression
from sklearn.model_selection import train_test_split
from sklearn.metrics import r2_score, mean_absolute_error, mean_absolute_percentage_error
```

In [117…
```python
car_data = pd.read_csv('car_sales_data.csv', header = 0, sep=',')
car_data.head()
```

Out[117…

	Manufacturer	Model	Engine size	Fuel type	Year of manufacture	Mileage	Price
0	Ford	Fiesta	1.0	Petrol	2002	127300	3074
1	Porsche	718 Cayman	4.0	Petrol	2016	57850	49704
2	Ford	Mondeo	1.6	Diesel	2014	39190	24072
3	Toyota	RAV4	1.8	Hybrid	1988	210814	1705
4	VW	Polo	1.0	Petrol	2006	127869	4101

In [118…
```python
car_data.shape
```

Out[118…
```
(50000, 7)
```

In [119…
```python
car_data.isnull().sum()
```

Out[119…
```
Manufacturer           0
Model                  0
Engine size            0
Fuel type              0
Year of manufacture    0
Mileage                0
Price                  0
dtype: int64
```

In [120…
```
car_data.loc[car_data.duplicated()]
```

Out[120…

	Manufacturer	Model	Engine size	Fuel type	Year of manufacture	Mileage	Price
5426	VW	Polo	1.2	Petrol	2003	10000	8024
9862	Ford	Mondeo	1.4	Diesel	1987	224569	883
14745	BMW	Z4	2.4	Petrol	1999	12000	13410
19020	Toyota	Yaris	1.0	Petrol	1996	13500	5087
19337	VW	Polo	1.0	Petrol	2000	11500	5950
23927	VW	Polo	1.2	Petrol	2021	1000	27901
25368	VW	Golf	1.2	Diesel	2011	6000	17401
28576	VW	Polo	1.2	Petrol	2003	10000	8024
34246	VW	Passat	2.0	Diesel	2003	10000	16087
35647	Ford	Focus	1.6	Petrol	2019	2000	39636
41536	VW	Passat	1.8	Diesel	1996	13500	9394
45904	Ford	Fiesta	1.2	Petrol	2003	124092	3691

In [121…
```
car_data = car_data.drop_duplicates()
```

In [122…
```
car_data.duplicated().sum()
```

Out[122…
```
np.int64(0)
```

In [123…
```
car_data.shape
```

Out[123…
```
(49988, 7)
```

In [124…
```
car_data.head()
```

Out[124…

	Manufacturer	Model	Engine size	Fuel type	Year of manufacture	Mileage	Price
0	Ford	Fiesta	1.0	Petrol	2002	127300	3074
1	Porsche	718 Cayman	4.0	Petrol	2016	57850	49704
2	Ford	Mondeo	1.6	Diesel	2014	39190	24072
3	Toyota	RAV4	1.8	Hybrid	1988	210814	1705
4	VW	Polo	1.0	Petrol	2006	127869	4101

In [125…

```
car_data.info()
```

```
<class 'pandas.core.frame.DataFrame'>
Index: 49988 entries, 0 to 49999
Data columns (total 7 columns):
 #   Column               Non-Null Count  Dtype  
---  ------               --------------  -----  
 0   Manufacturer         49988 non-null  object 
 1   Model                49988 non-null  object 
 2   Engine size          49988 non-null  float64
 3   Fuel type            49988 non-null  object 
 4   Year of manufacture  49988 non-null  int64  
 5   Mileage              49988 non-null  int64  
 6   Price                49988 non-null  int64  
dtypes: float64(1), int64(3), object(3)
memory usage: 3.1+ MB
```

In [126…

```
car_data.groupby('Manufacturer')['Price'].mean().plot(kind = 'bar')
```

Out[126…

```
<Axes: xlabel='Manufacturer'>
```

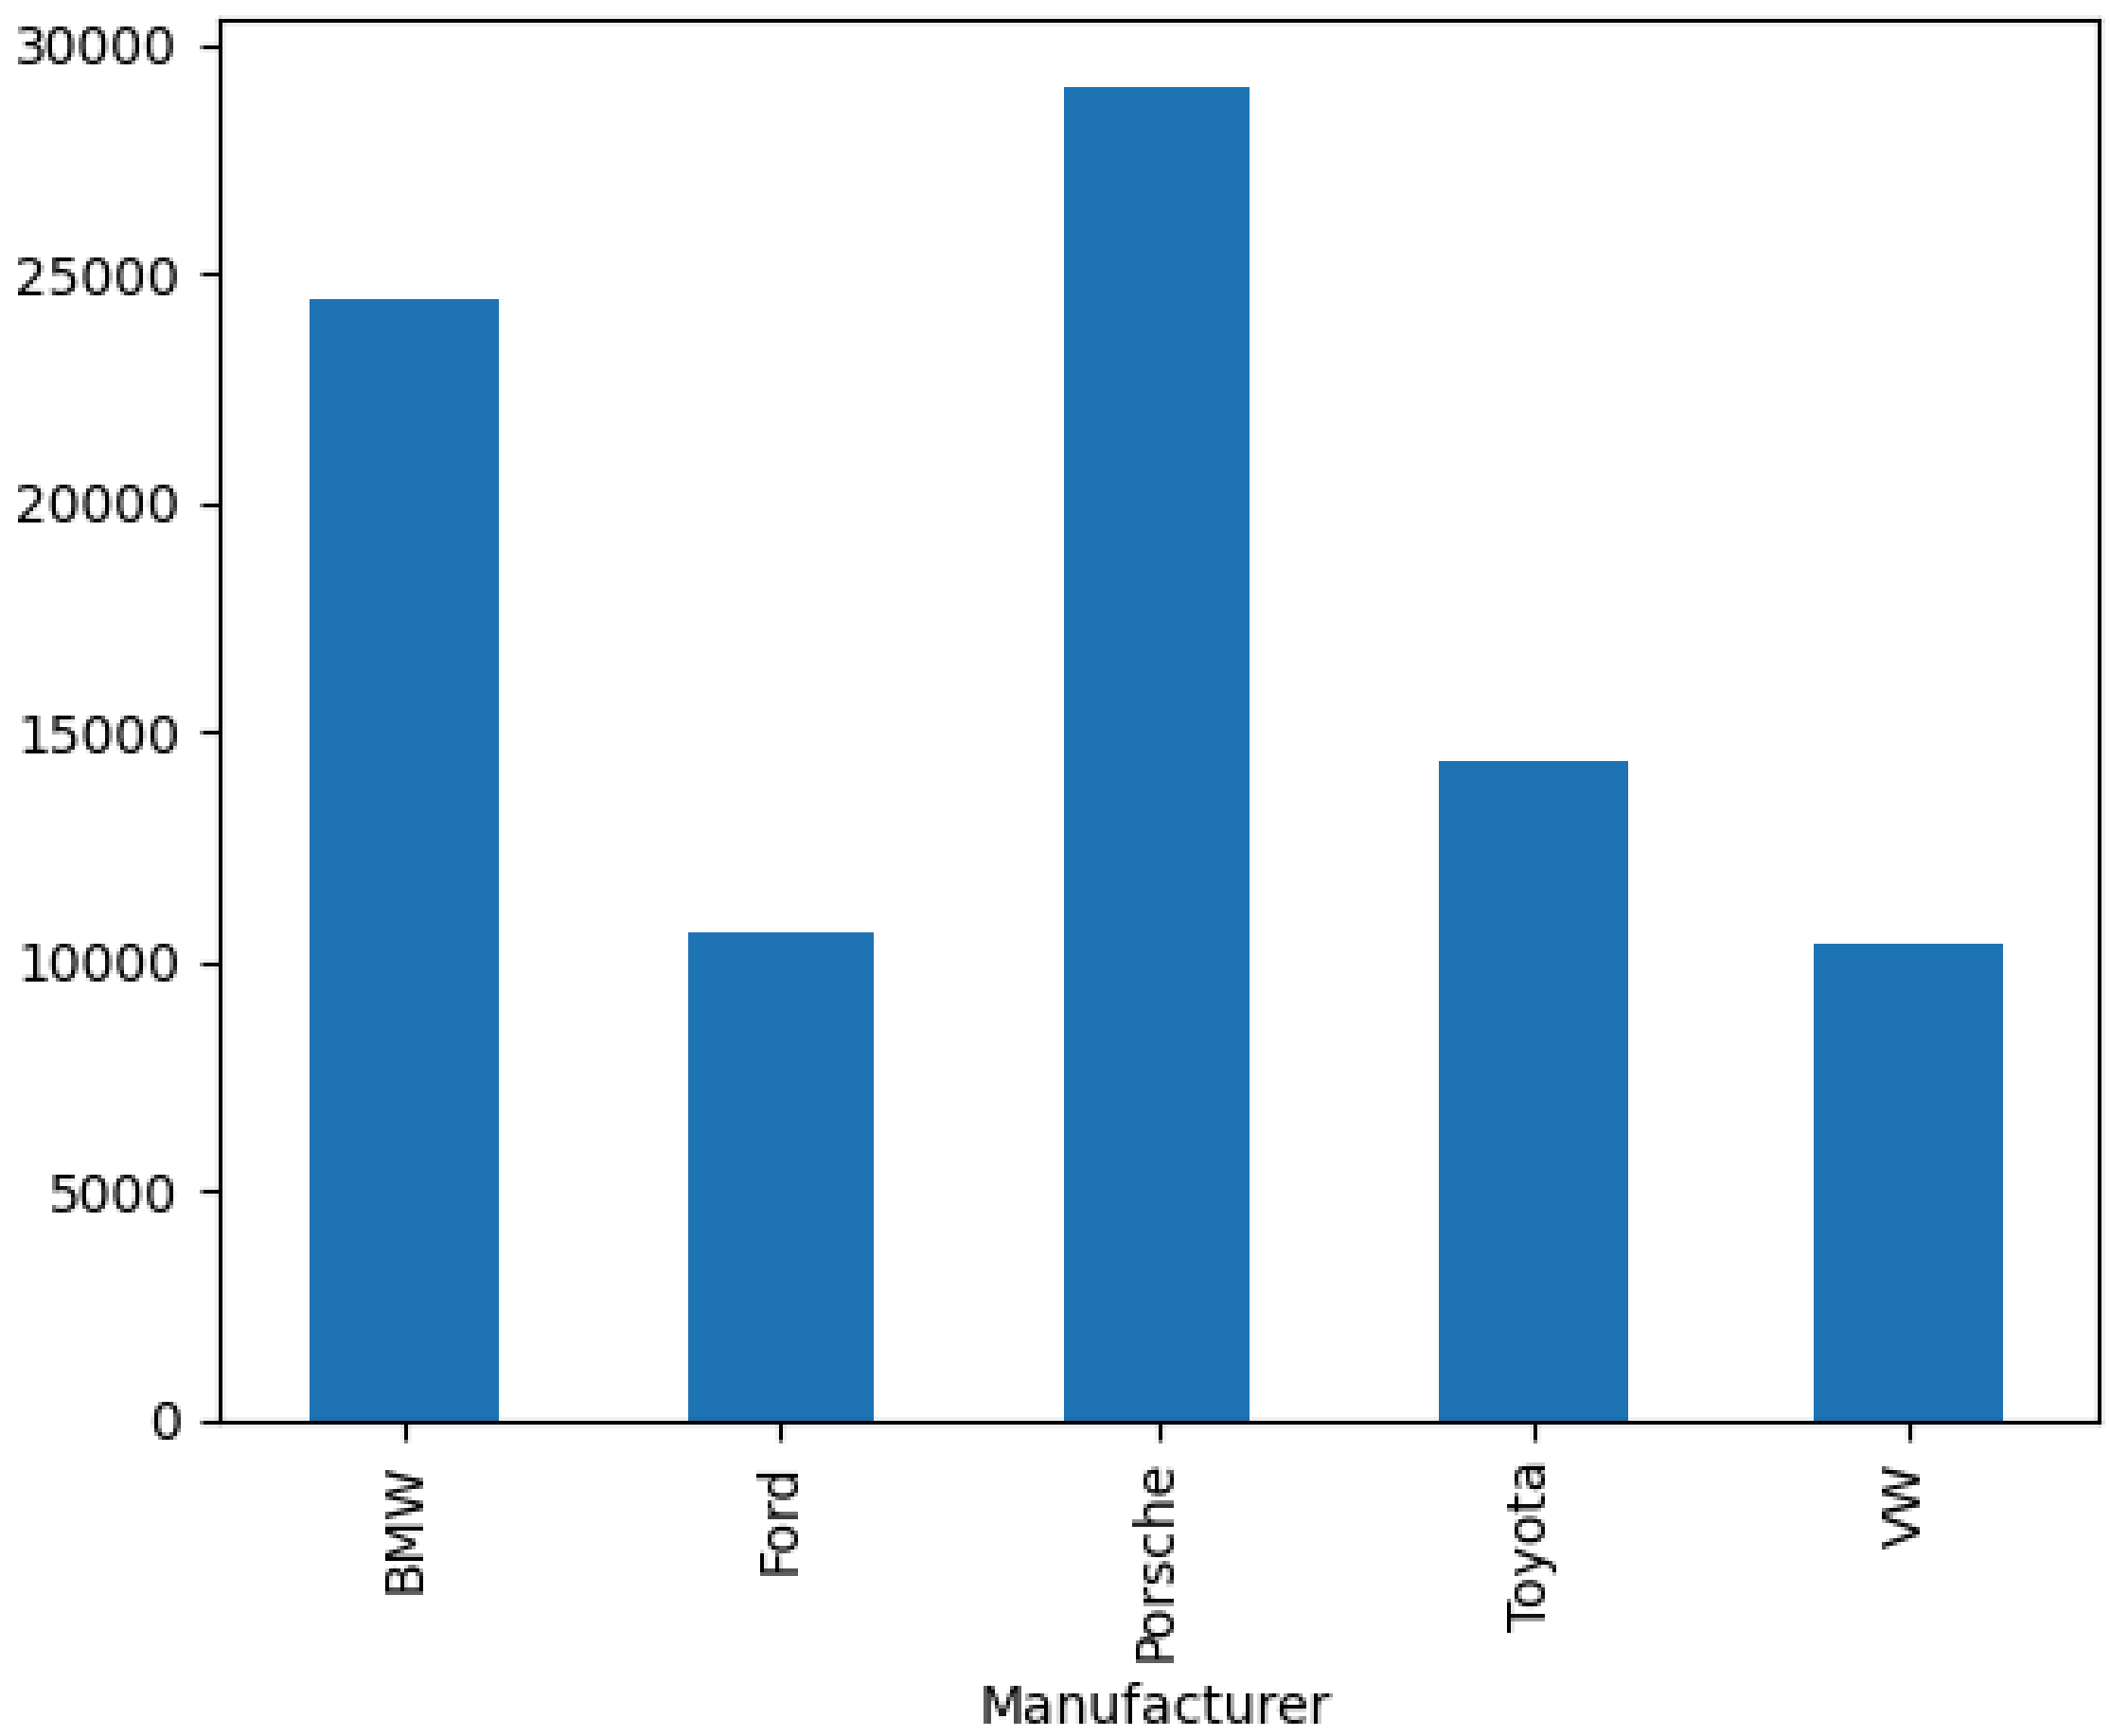

In [127…
```
car_data.groupby('Model')['Price'].mean().plot(kind = 'bar')
```

Out[127…

<Axes: xlabel='Model'>

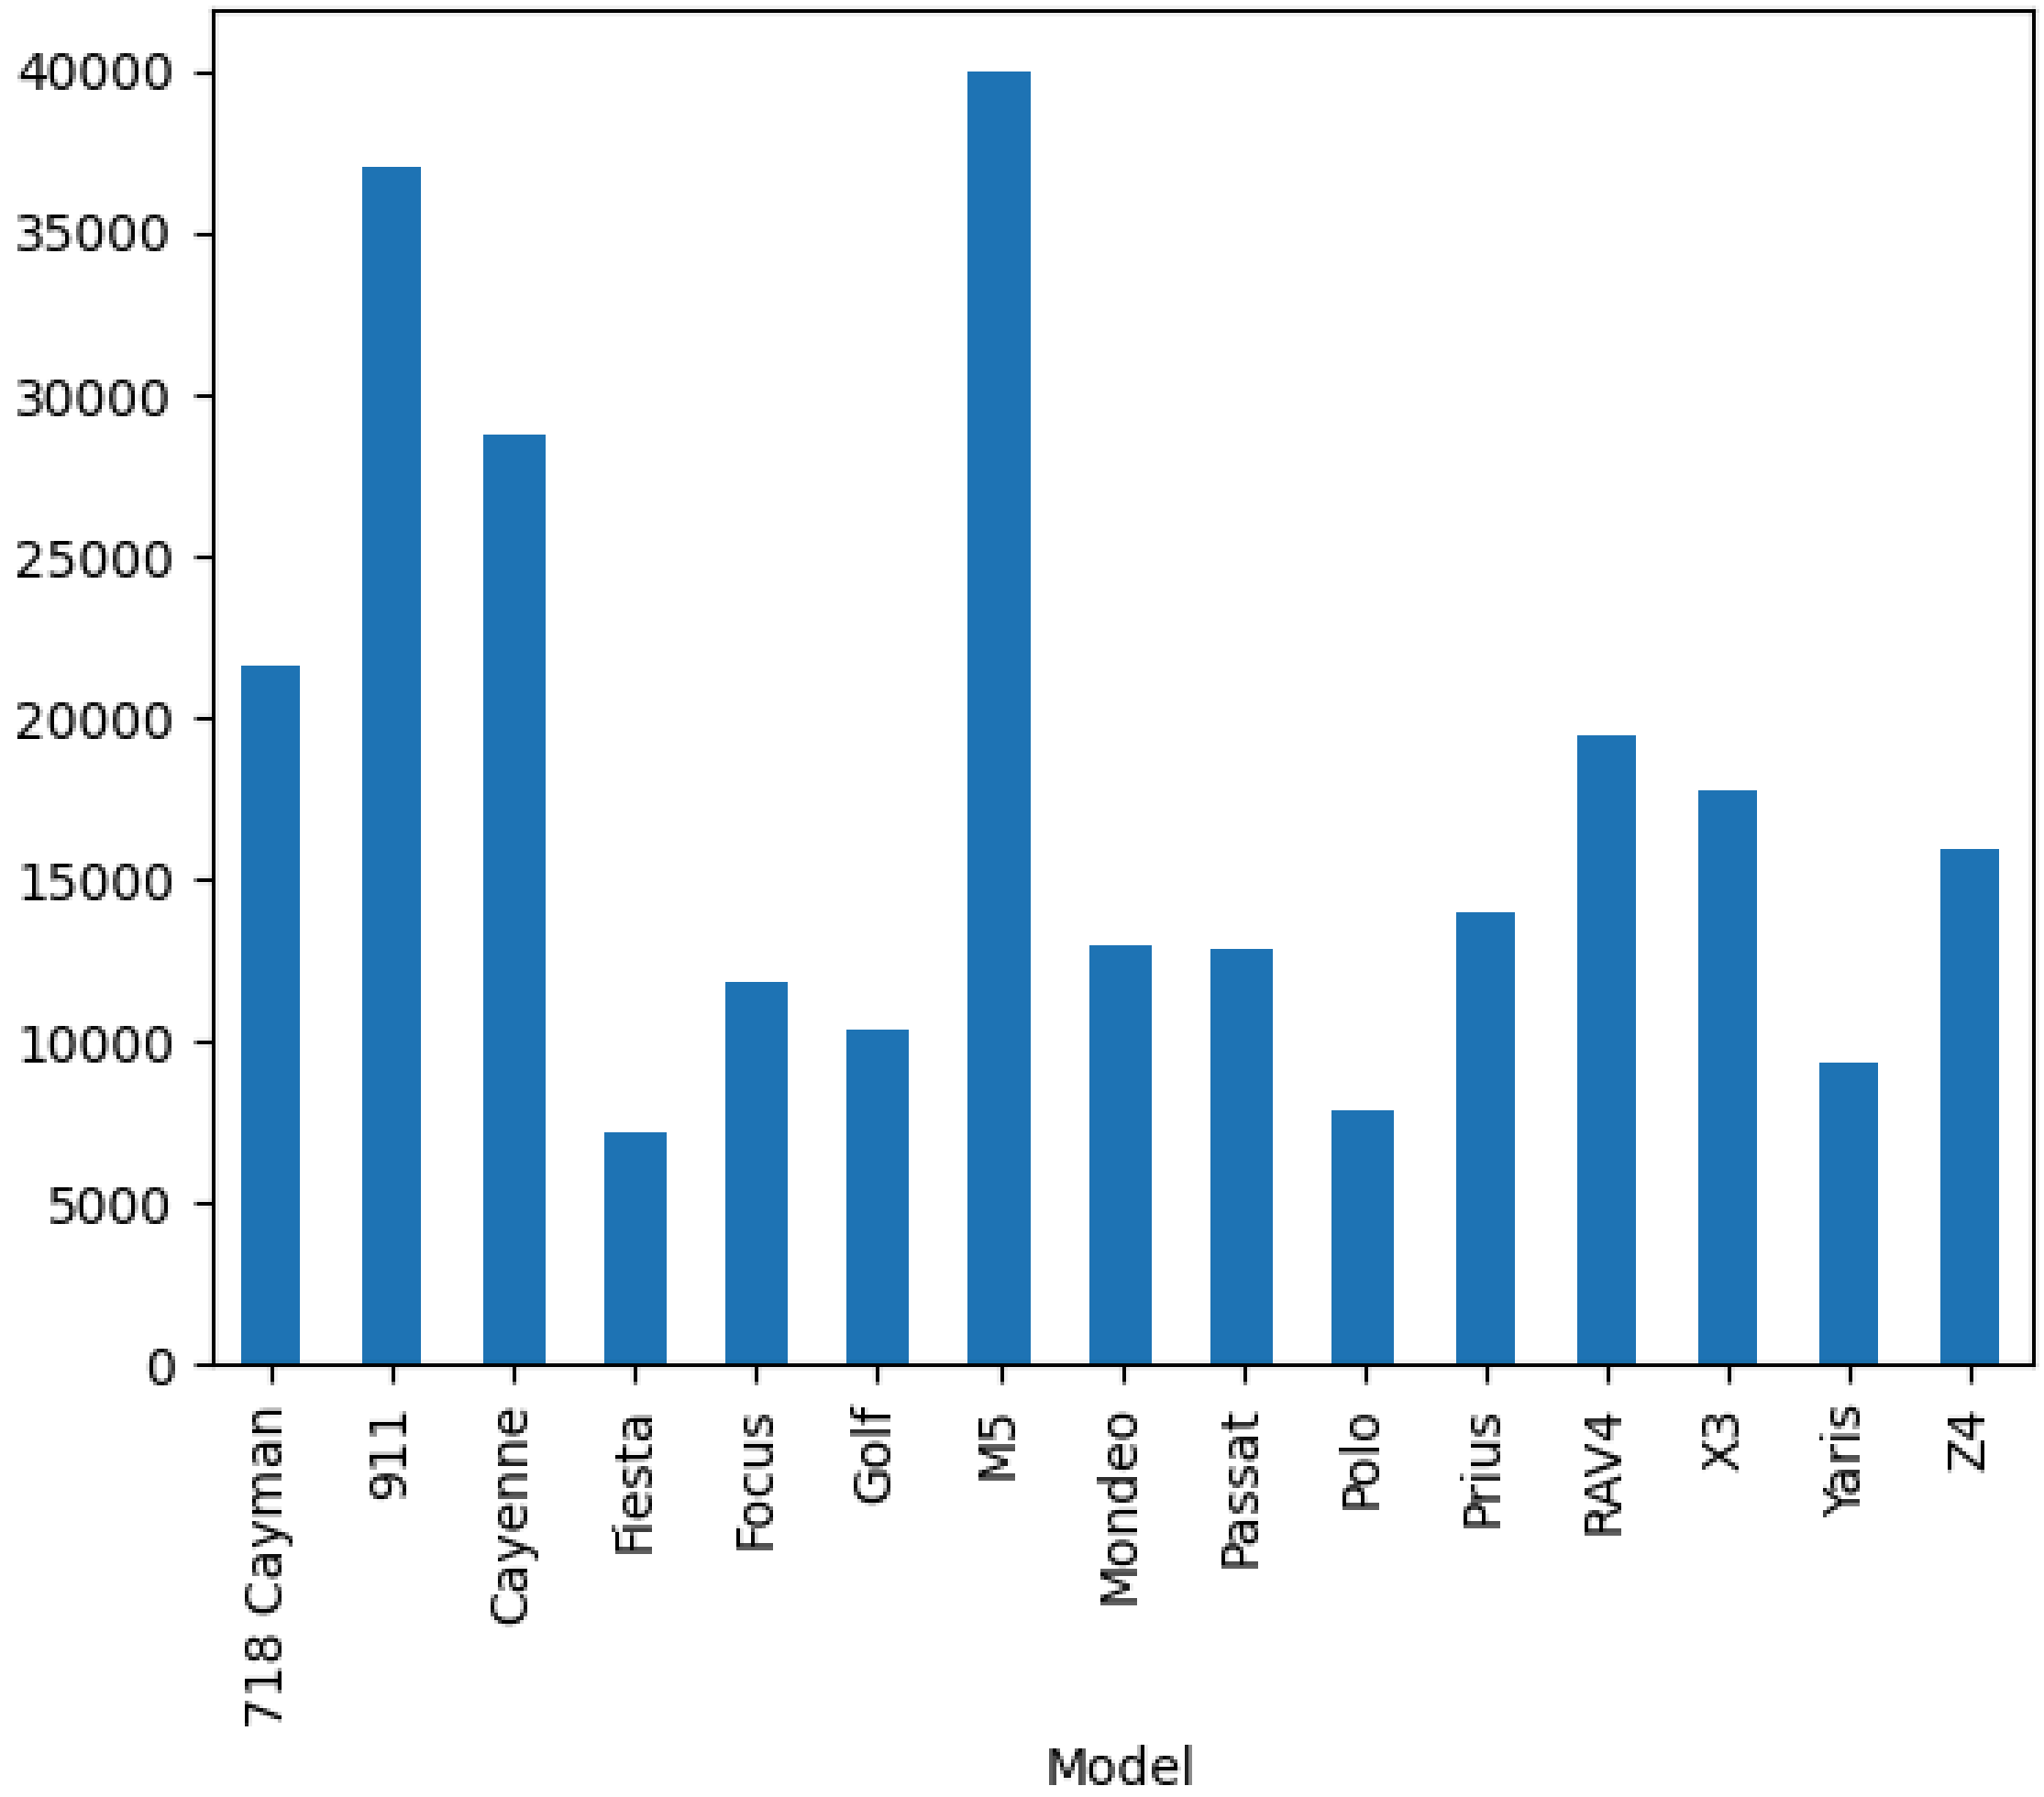

In [128…

```
car_data.groupby('Fuel type')['Price'].mean().plot(kind = 'bar')
```

Out[128…

```
<Axes: xlabel='Fuel type'>
```

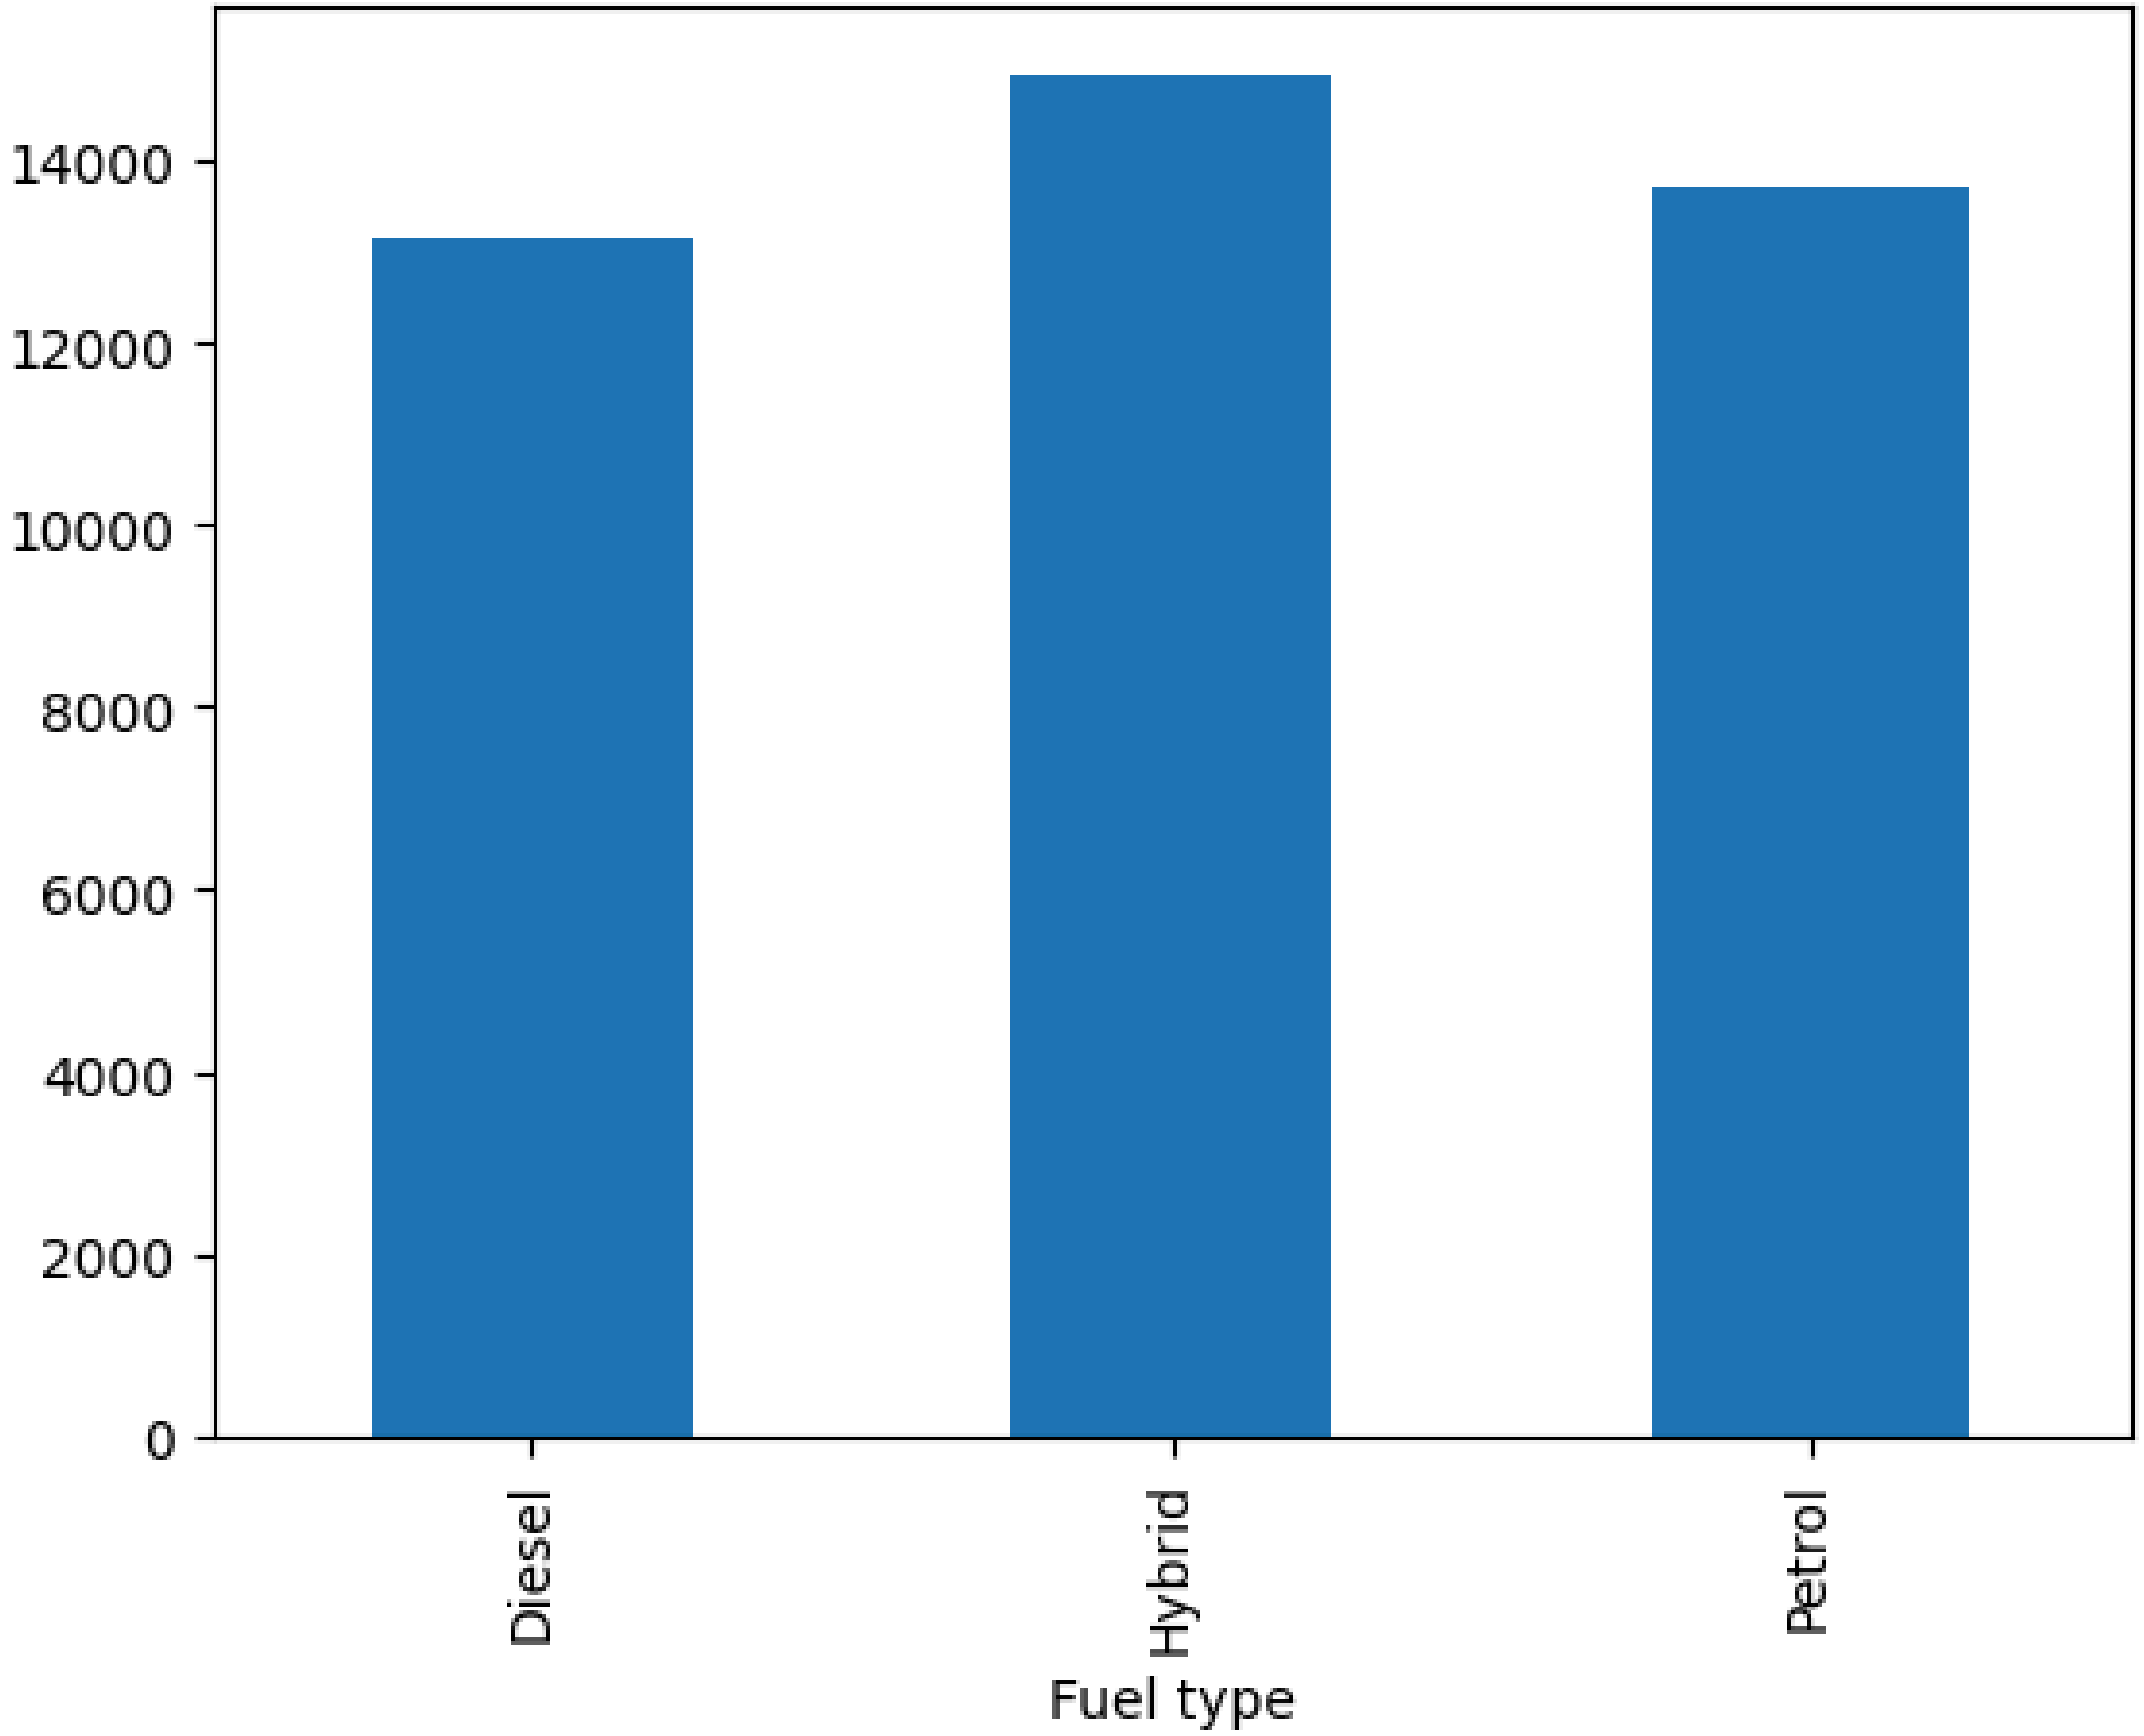

In [129…

```
corr_matrix = car_data.corr(numeric_only=True)

sns.heatmap(data = corr_matrix, annot = True)
```

Out[129…

```
<Axes: >
```

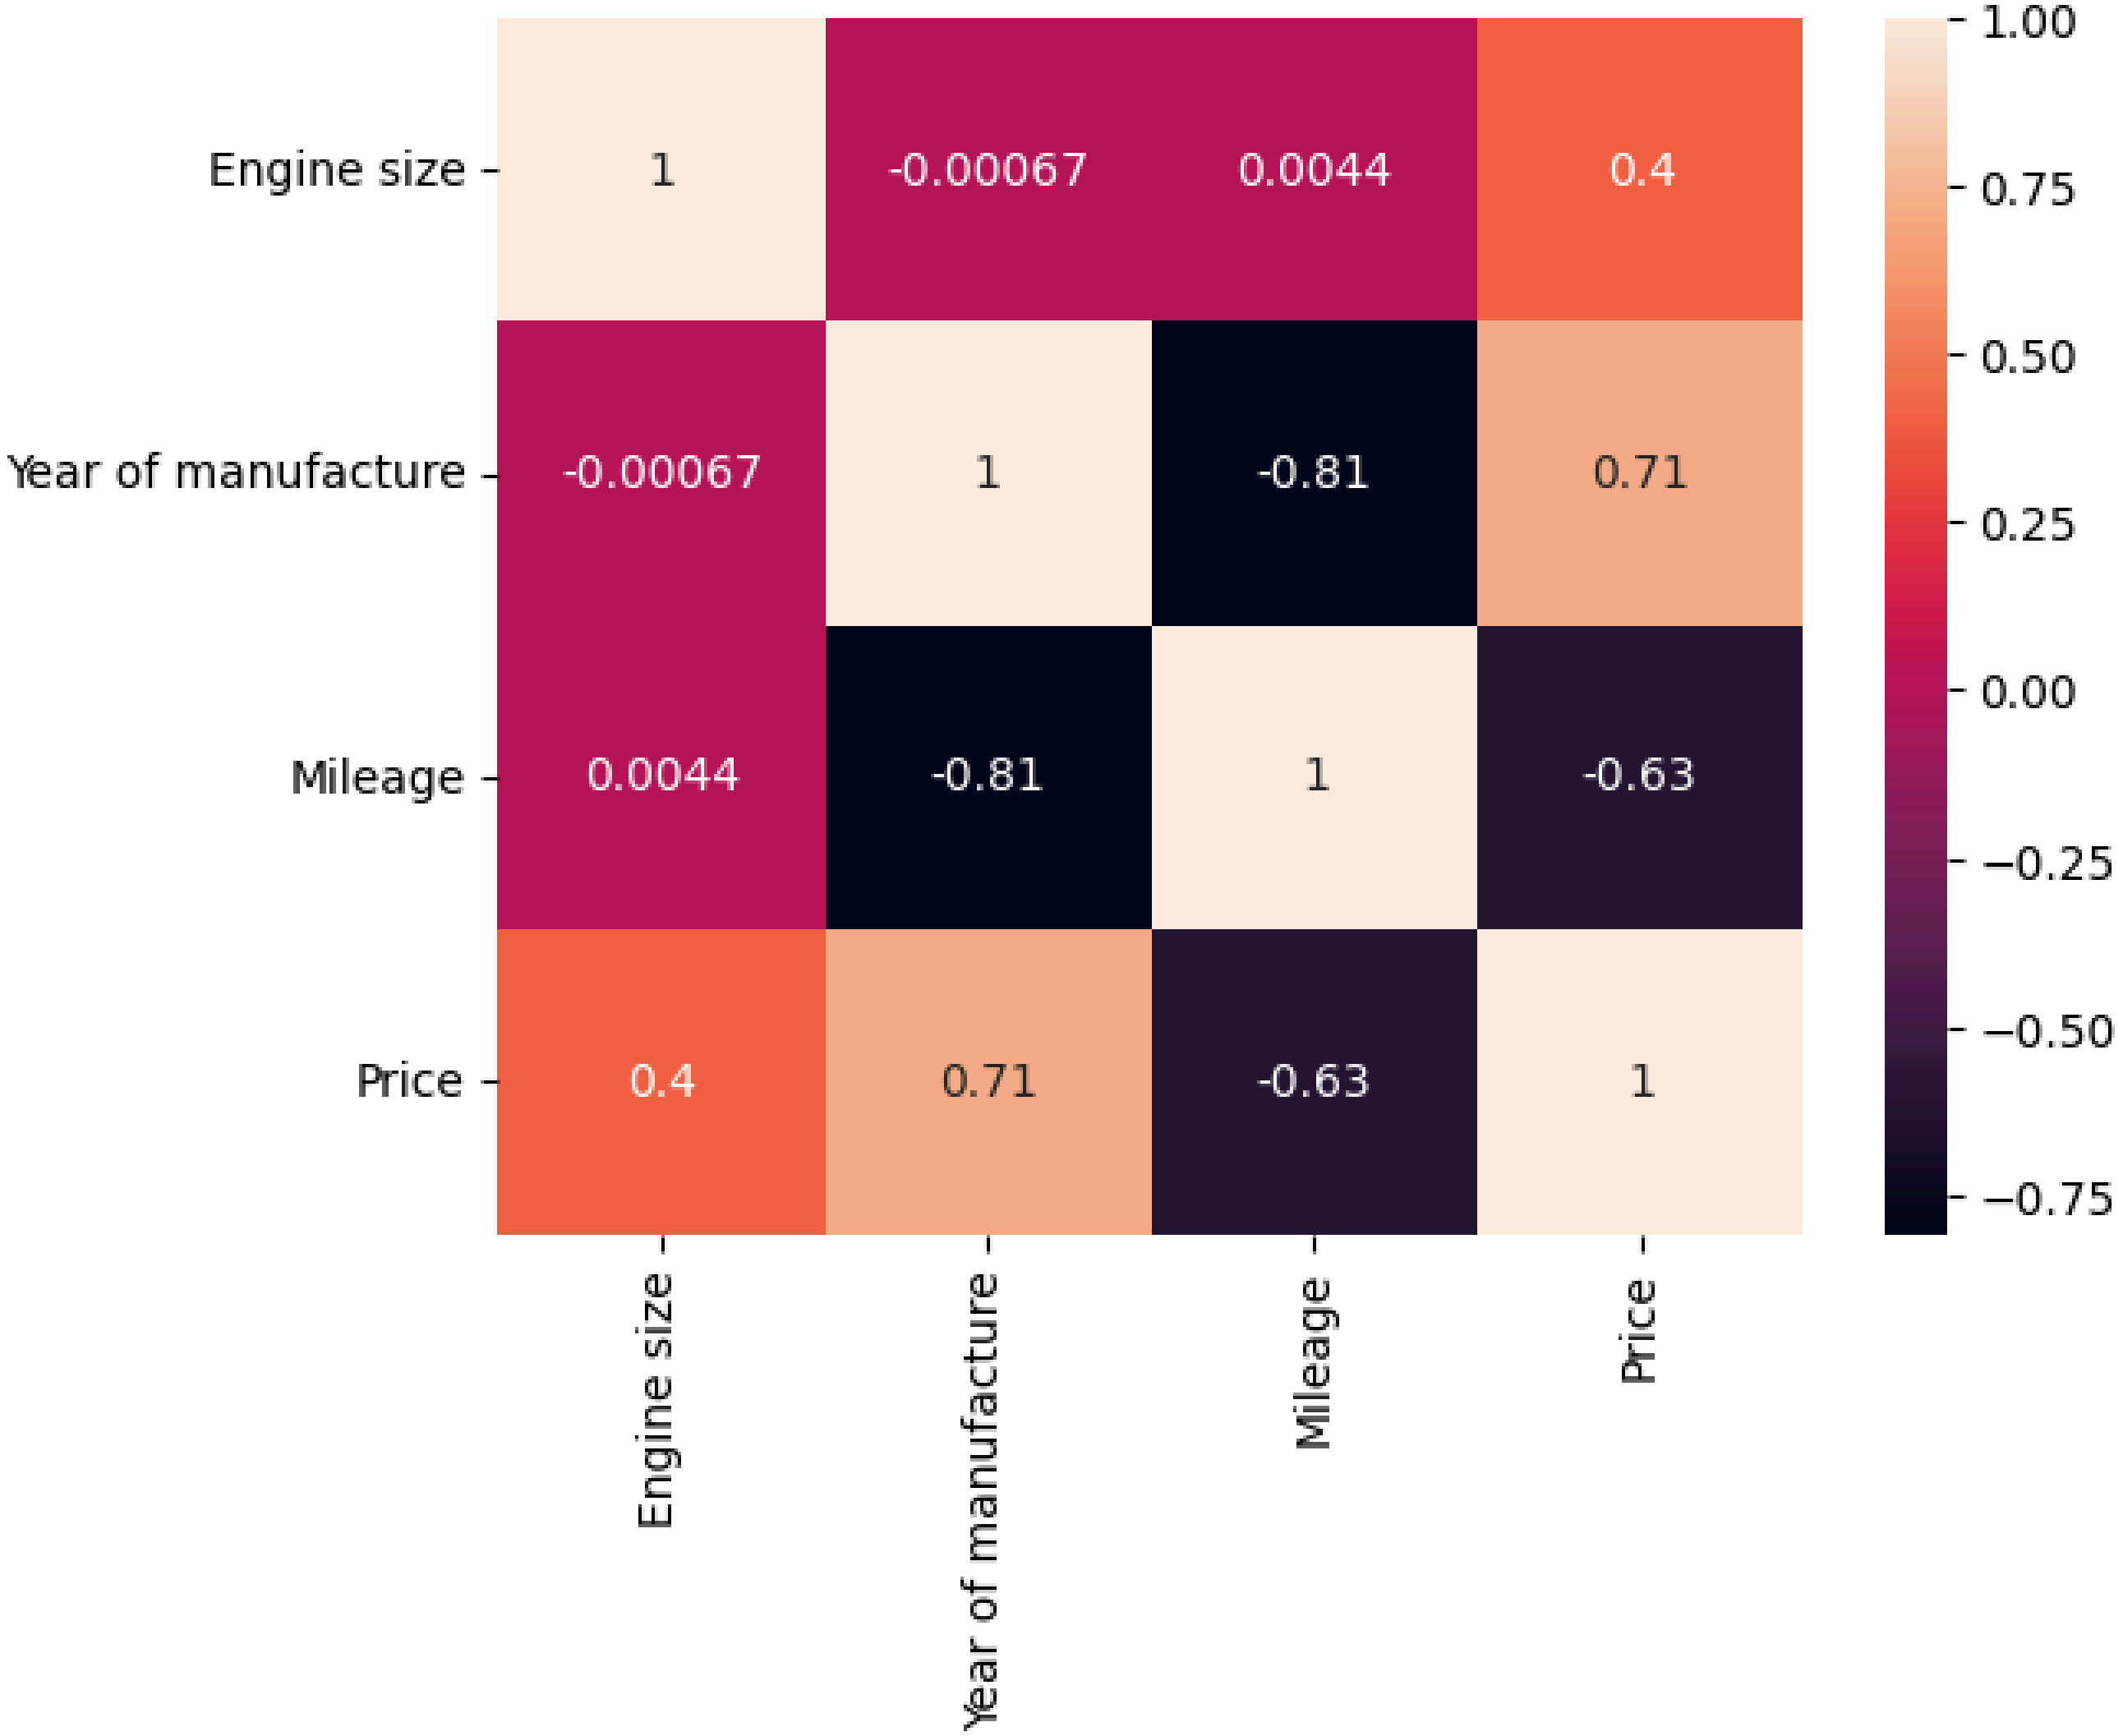

In [130…

```
car_data.head()
```

Out[130…

	Manufacturer	Model	Engine size	Fuel type	Year of manufacture	Mileage	Price
0	Ford	Fiesta	1.0	Petrol	2002	127300	3074
1	Porsche	718 Cayman	4.0	Petrol	2016	57850	49704
2	Ford	Mondeo	1.6	Diesel	2014	39190	24072
3	Toyota	RAV4	1.8	Hybrid	1988	210814	1705
4	VW	Polo	1.0	Petrol	2006	127869	4101

In [131…

```
manufacturer = pd.get_dummies(car_data['Manufacturer'], drop_first=True, dtype = int)
manufacturer
```

Out[131…

	Ford	Porsche	Toyota	VW
0	1	0	0	0
1	0	1	0	0
2	1	0	0	0
3	0	0	1	0
4	0	0	0	1
...	...	...	...	...
49995	0	0	0	0
49996	0	0	1	0
49997	1	0	0	0
49998	1	0	0	0
49999	0	0	0	1

49988 rows × 4 columns

In [132…

```
model = pd.get_dummies(car_data['Model'], drop_first=True, dtype = int)
model
```

Out[132…

	911	Cayenne	Fiesta	Focus	Golf	M5	Mondeo	Passat	Polo	Prius	RAV4	X3	Yaris	Z4
0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	0	0	0	0	0	0	0	0
2	0	0	0	0	0	0	1	0	0	0	0	0	0	0
3	0	0	0	0	0	0	0	0	0	0	1	0	0	0
4	0	0	0	0	0	0	0	0	1	0	0	0	0	0
...	...	...	...	...	...	...	...	...	...	...	...	...	...	...
49995	0	0	0	0	0	1	0	0	0	0	0	0	0	0
49996	0	0	0	0	0	0	0	0	0	1	0	0	0	0
49997	0	0	0	0	0	0	1	0	0	0	0	0	0	0
49998	0	0	0	1	0	0	0	0	0	0	0	0	0	0
49999	0	0	0	0	1	0	0	0	0	0	0	0	0	0

49988 rows × 14 columns

In [133…

```
fuel_type = pd.get_dummies(car_data['Fuel type'], drop_first=True, dtype = int)
fuel_type
```

Out[133...

	Hybrid	Petrol
0	0	1
1	0	1
2	0	0
3	1	0
4	0	1
...	...	...
49995	0	1
49996	1	0
49997	0	0
49998	0	0
49999	0	0

49988 rows × 2 columns

In [134...

```
car_data = pd.concat([car_data, manufacturer, model, fuel_type], axis = 1)
car_data
```

Out[134…

	Manufacturer	Model	Engine size	Fuel type	Year of manufacture	Mileage	Price	Ford	Porsche	Toyota	...	Mondeo	Passat	Polo	Prius
0	Ford	Fiesta	1.0	Petrol	2002	127300	3074	1	0	0	...	0	0	0	0
1	Porsche	718 Cayman	4.0	Petrol	2016	57850	49704	0	1	0	...	0	0	0	0
2	Ford	Mondeo	1.6	Diesel	2014	39190	24072	1	0	0	...	1	0	0	0
3	Toyota	RAV4	1.8	Hybrid	1988	210814	1705	0	0	1	...	0	0	0	0
4	VW	Polo	1.0	Petrol	2006	127869	4101	0	0	0	...	0	0	1	0
...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...
49995	BMW	M5	5.0	Petrol	2018	28664	113006	0	0	0	...	0	0	0	0
49996	Toyota	Prius	1.8	Hybrid	2003	105120	9430	0	0	1	...	0	0	0	1
49997	Ford	Mondeo	1.6	Diesel	2022	4030	49852	1	0	0	...	1	0	0	0
49998	Ford	Focus	1.0	Diesel	2016	26468	23630	1	0	0	...	0	0	0	0
49999	VW	Golf	1.4	Diesel	2012	109300	10400	0	0	0	...	0	0	0	0

49988 rows × 27 columns

In [135…

```
car_data = car_data.drop(['Manufacturer','Model','Fuel type'], axis = 1)
car_data
```

Out[135…

	Engine size	Year of manufacture	Mileage	Price	Ford	Porsche	Toyota	VW	911	Cayenne	...	Mondeo	Passat	Polo	Prius	RAV4	X3
0	1.0	2002	127300	3074	1	0	0	0	0	0	...	0	0	0	0	0	0
1	4.0	2016	57850	49704	0	1	0	0	0	0	...	0	0	0	0	0	0
2	1.6	2014	39190	24072	1	0	0	0	0	0	...	1	0	0	0	0	0
3	1.8	1988	210814	1705	0	0	1	0	0	0	...	0	0	0	0	1	0
4	1.0	2006	127869	4101	0	0	0	1	0	0	...	0	0	1	0	0	0
...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...	...
49995	5.0	2018	28664	113006	0	0	0	0	0	0	...	0	0	0	0	0	0
49996	1.8	2003	105120	9430	0	0	1	0	0	0	...	0	0	0	1	0	0
49997	1.6	2022	4030	49852	1	0	0	0	0	0	...	1	0	0	0	0	0
49998	1.0	2016	26468	23630	1	0	0	0	0	0	...	0	0	0	0	0	0
49999	1.4	2012	109300	10400	0	0	0	1	0	0	...	0	0	0	0	0	0

49988 rows × 24 columns

In [136…

```
y = car_data['Price']
X = car_data.drop('Price', axis = 1)
```

In [137…

```
X.head()
```

Out[137…

	Engine size	Year of manufacture	Mileage	Ford	Porsche	Toyota	VW	911	Cayenne	Fiesta	...	Mondeo	Passat	Polo	Prius	RAV4	X3	Yaris
0	1.0	2002	127300	1	0	0	0	0	0	1	...	0	0	0	0	0	0	0
1	4.0	2016	57850	0	1	0	0	0	0	0	...	0	0	0	0	0	0	0
2	1.6	2014	39190	1	0	0	0	0	0	0	...	1	0	0	0	0	0	0
3	1.8	1988	210814	0	0	1	0	0	0	0	...	0	0	0	0	1	0	0
4	1.0	2006	127869	0	0	0	1	0	0	0	...	0	0	1	0	0	0	0

5 rows × 23 columns

Using Linear Regression Model.

In [138…

```
X_train, X_test, y_train, y_test = train_test_split(X,y, test_size=0.2, random_state=1)

price_model = LinearRegression()
price_model.fit(X_train, y_train)
pre_y = price_model.predict(X_test)
```

In [139…

```
r2_score = r2_score(y_test, pre_y)
r2_score
```

Out[139…

```
0.7202786935921439
```

In [140…

```
mae = mean_absolute_error(y_test, pre_y)
mae
```

Out[140…

```
5768.897203223273
```

In [141…

```
residual_test = y_test - pre_y

fig = px.scatter(x = pre_y, y = residual_test, title = 'Residual Plot')
fig.add_hline(y = 0, line_color = 'darkblue')
fig.update_layout(xaxis_title = 'Fitted Values(pre_y)', yaxis_title = 'Residual (Residual_test)')
fig.show()
```

In [158…

```
plt.figure(figsize = (14,8))
sns.scatterplot(x = pre_y, y =residual_test)
plt.axhline(y = 0, color = 'darkblue')
plt.title('Residual Plot')
plt.xlabel('Fitted Values (pre_y)')
plt.ylabel('Residuals (Residual_test)')
```

Out[158…

```
Text(0, 0.5, 'Residuals (Residual_test)')
```

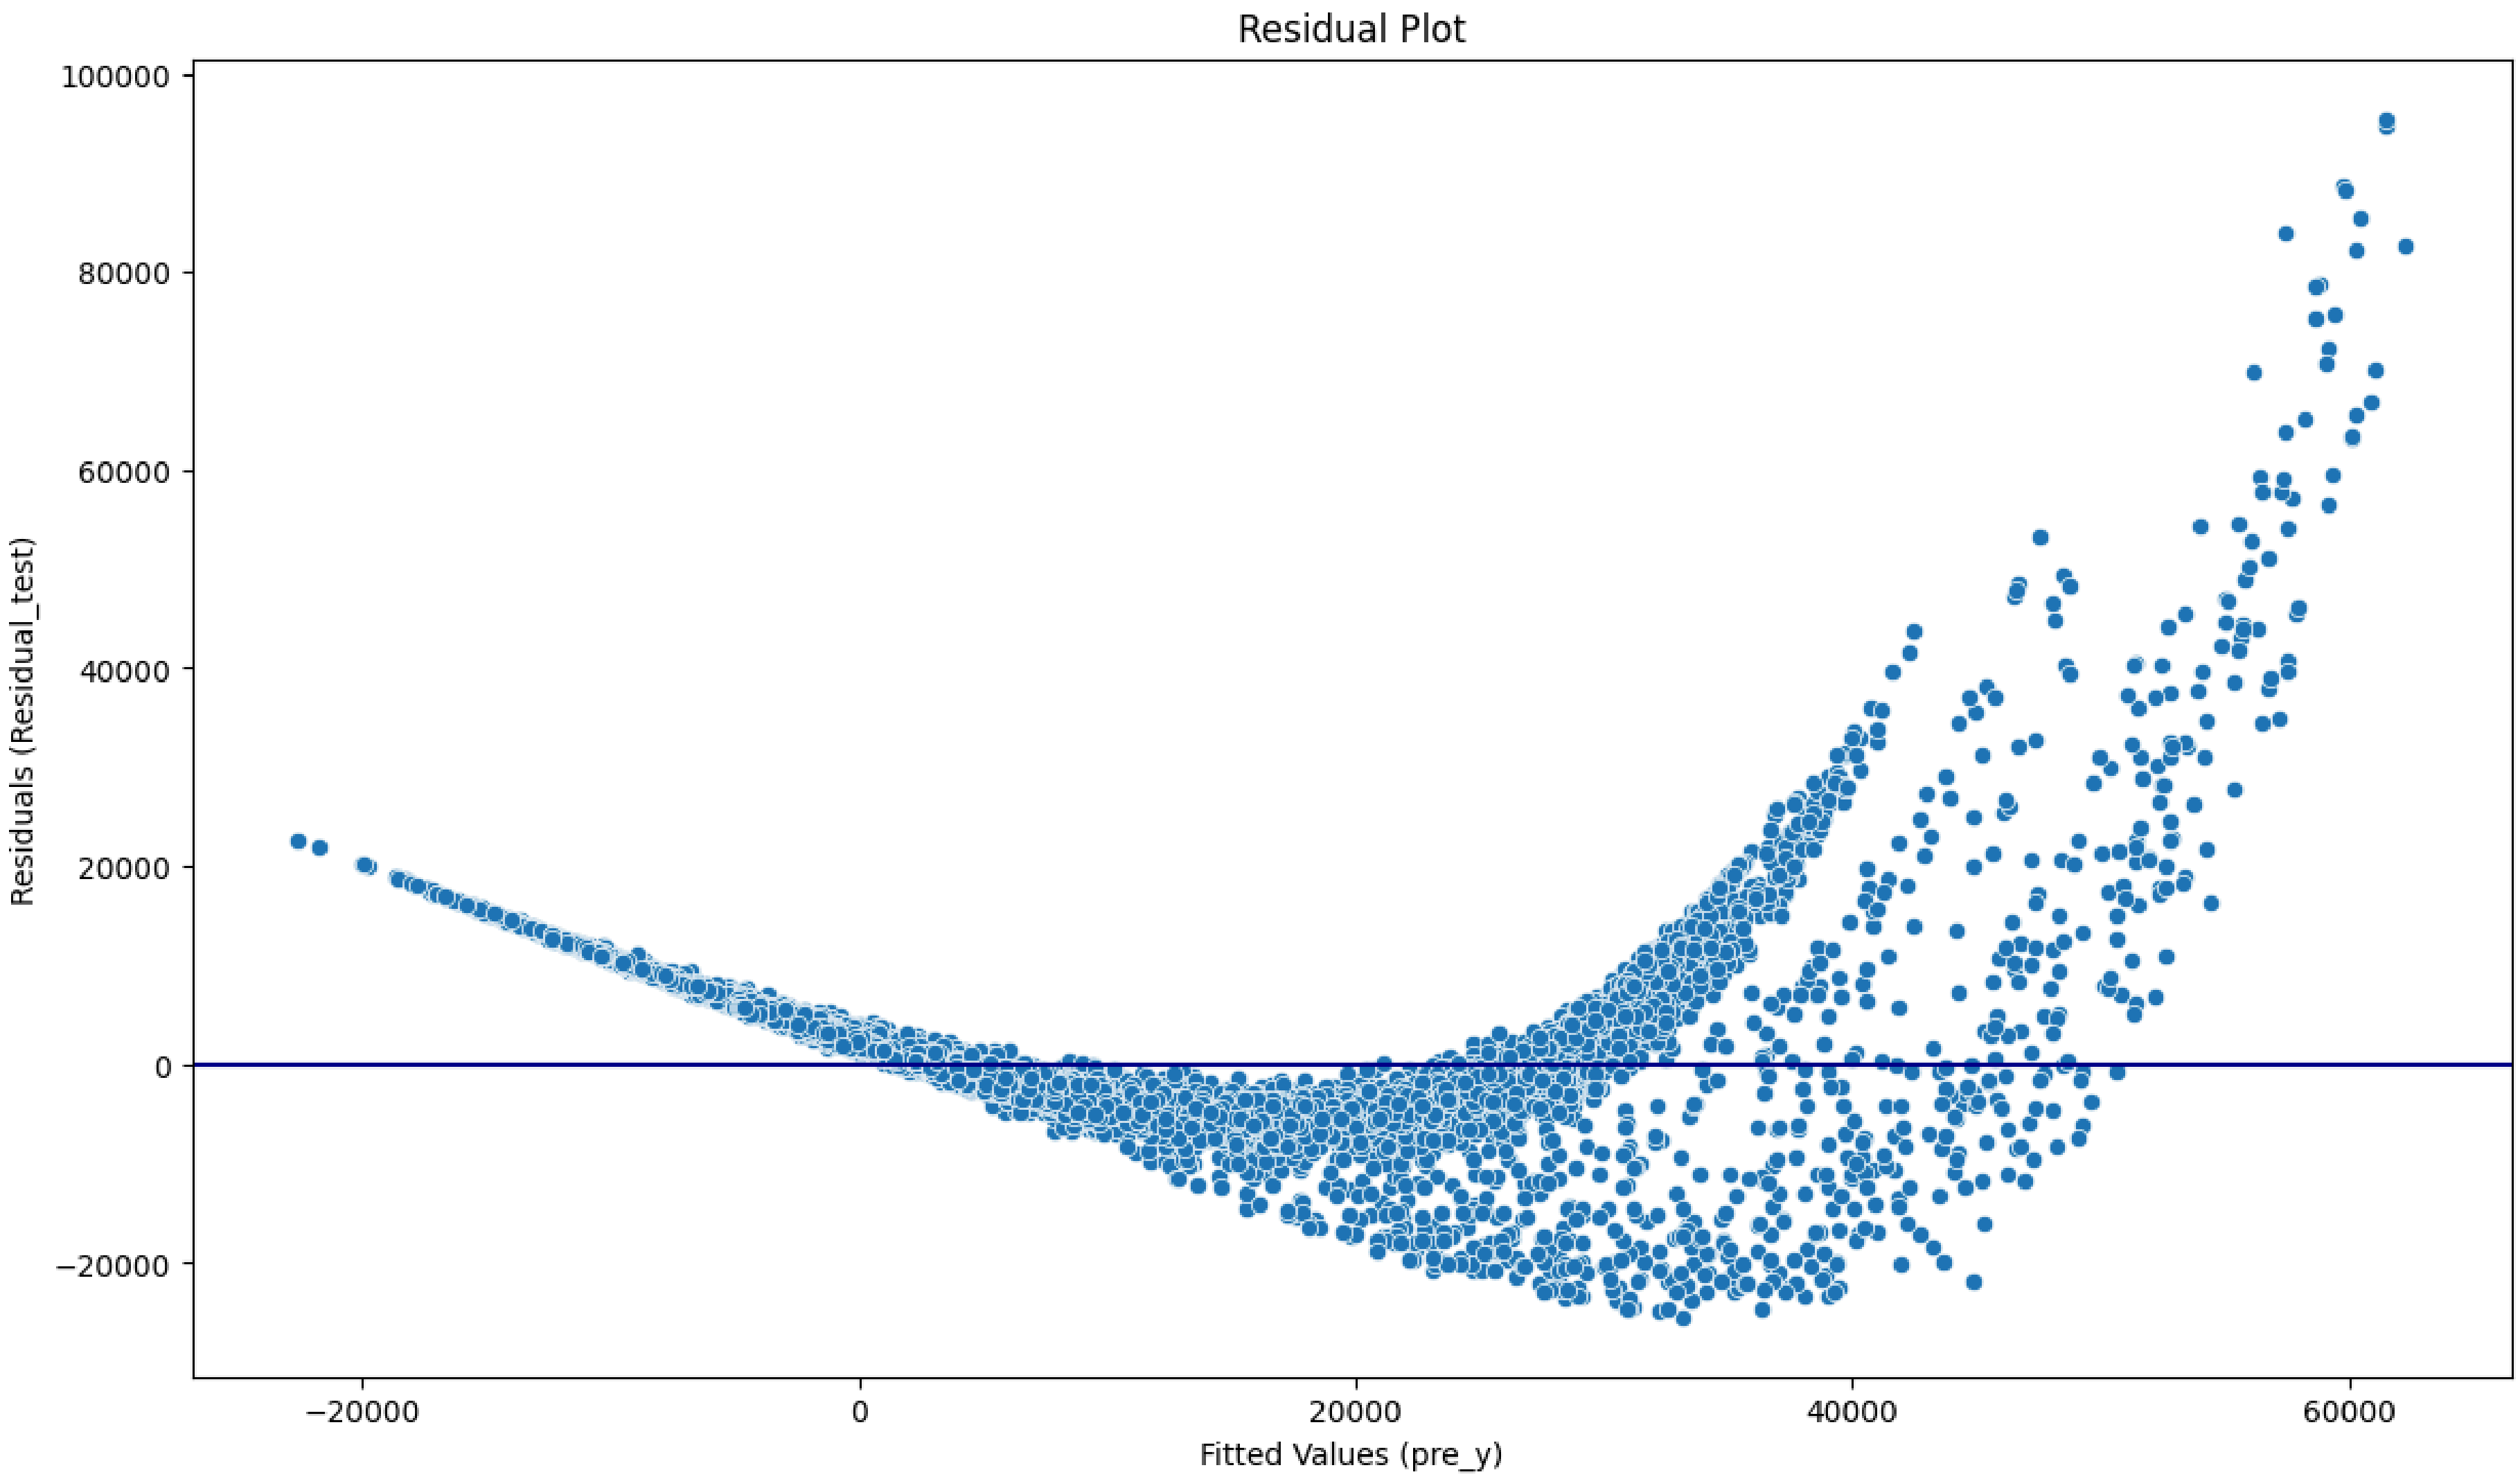

As per the above calculations, R Squared is closer to 1. That means, regression relation is strong. In other words, the feature variables are largely contributes to the price of a car. But here, the Mean Absolute Error is higher. We can see by looking at the Residual plot. It having a pattern between y_test and pre_y. It indicates eventhough it had higher R Squared value, Linear Regression model is not suitable here.

Using Random Forest Regressor

In [142…
```
model2 = RandomForestRegressor()

model2.fit(X_train,y_train)
pre_y2 = model2.predict(X_test)
```

In [143…
```
mae2 = mean_absolute_error(y_test,pre_y2)
mae2
```

Out[143…
```
295.6777215443088
```

In [144…
```
mape2 = mean_absolute_percentage_error(y_test,pre_y2)*100
mape2
```

Out[144…
```
2.8893363746381695
```

In [145…
```
plt.scatter(x = y_test, y = pre_y2)
plt.title('y_test vs pre_y2')
plt.xlabel('y_test')
plt.ylabel('pre_y2')
```

Out[145…
```
Text(0, 0.5, 'pre_y2')
```

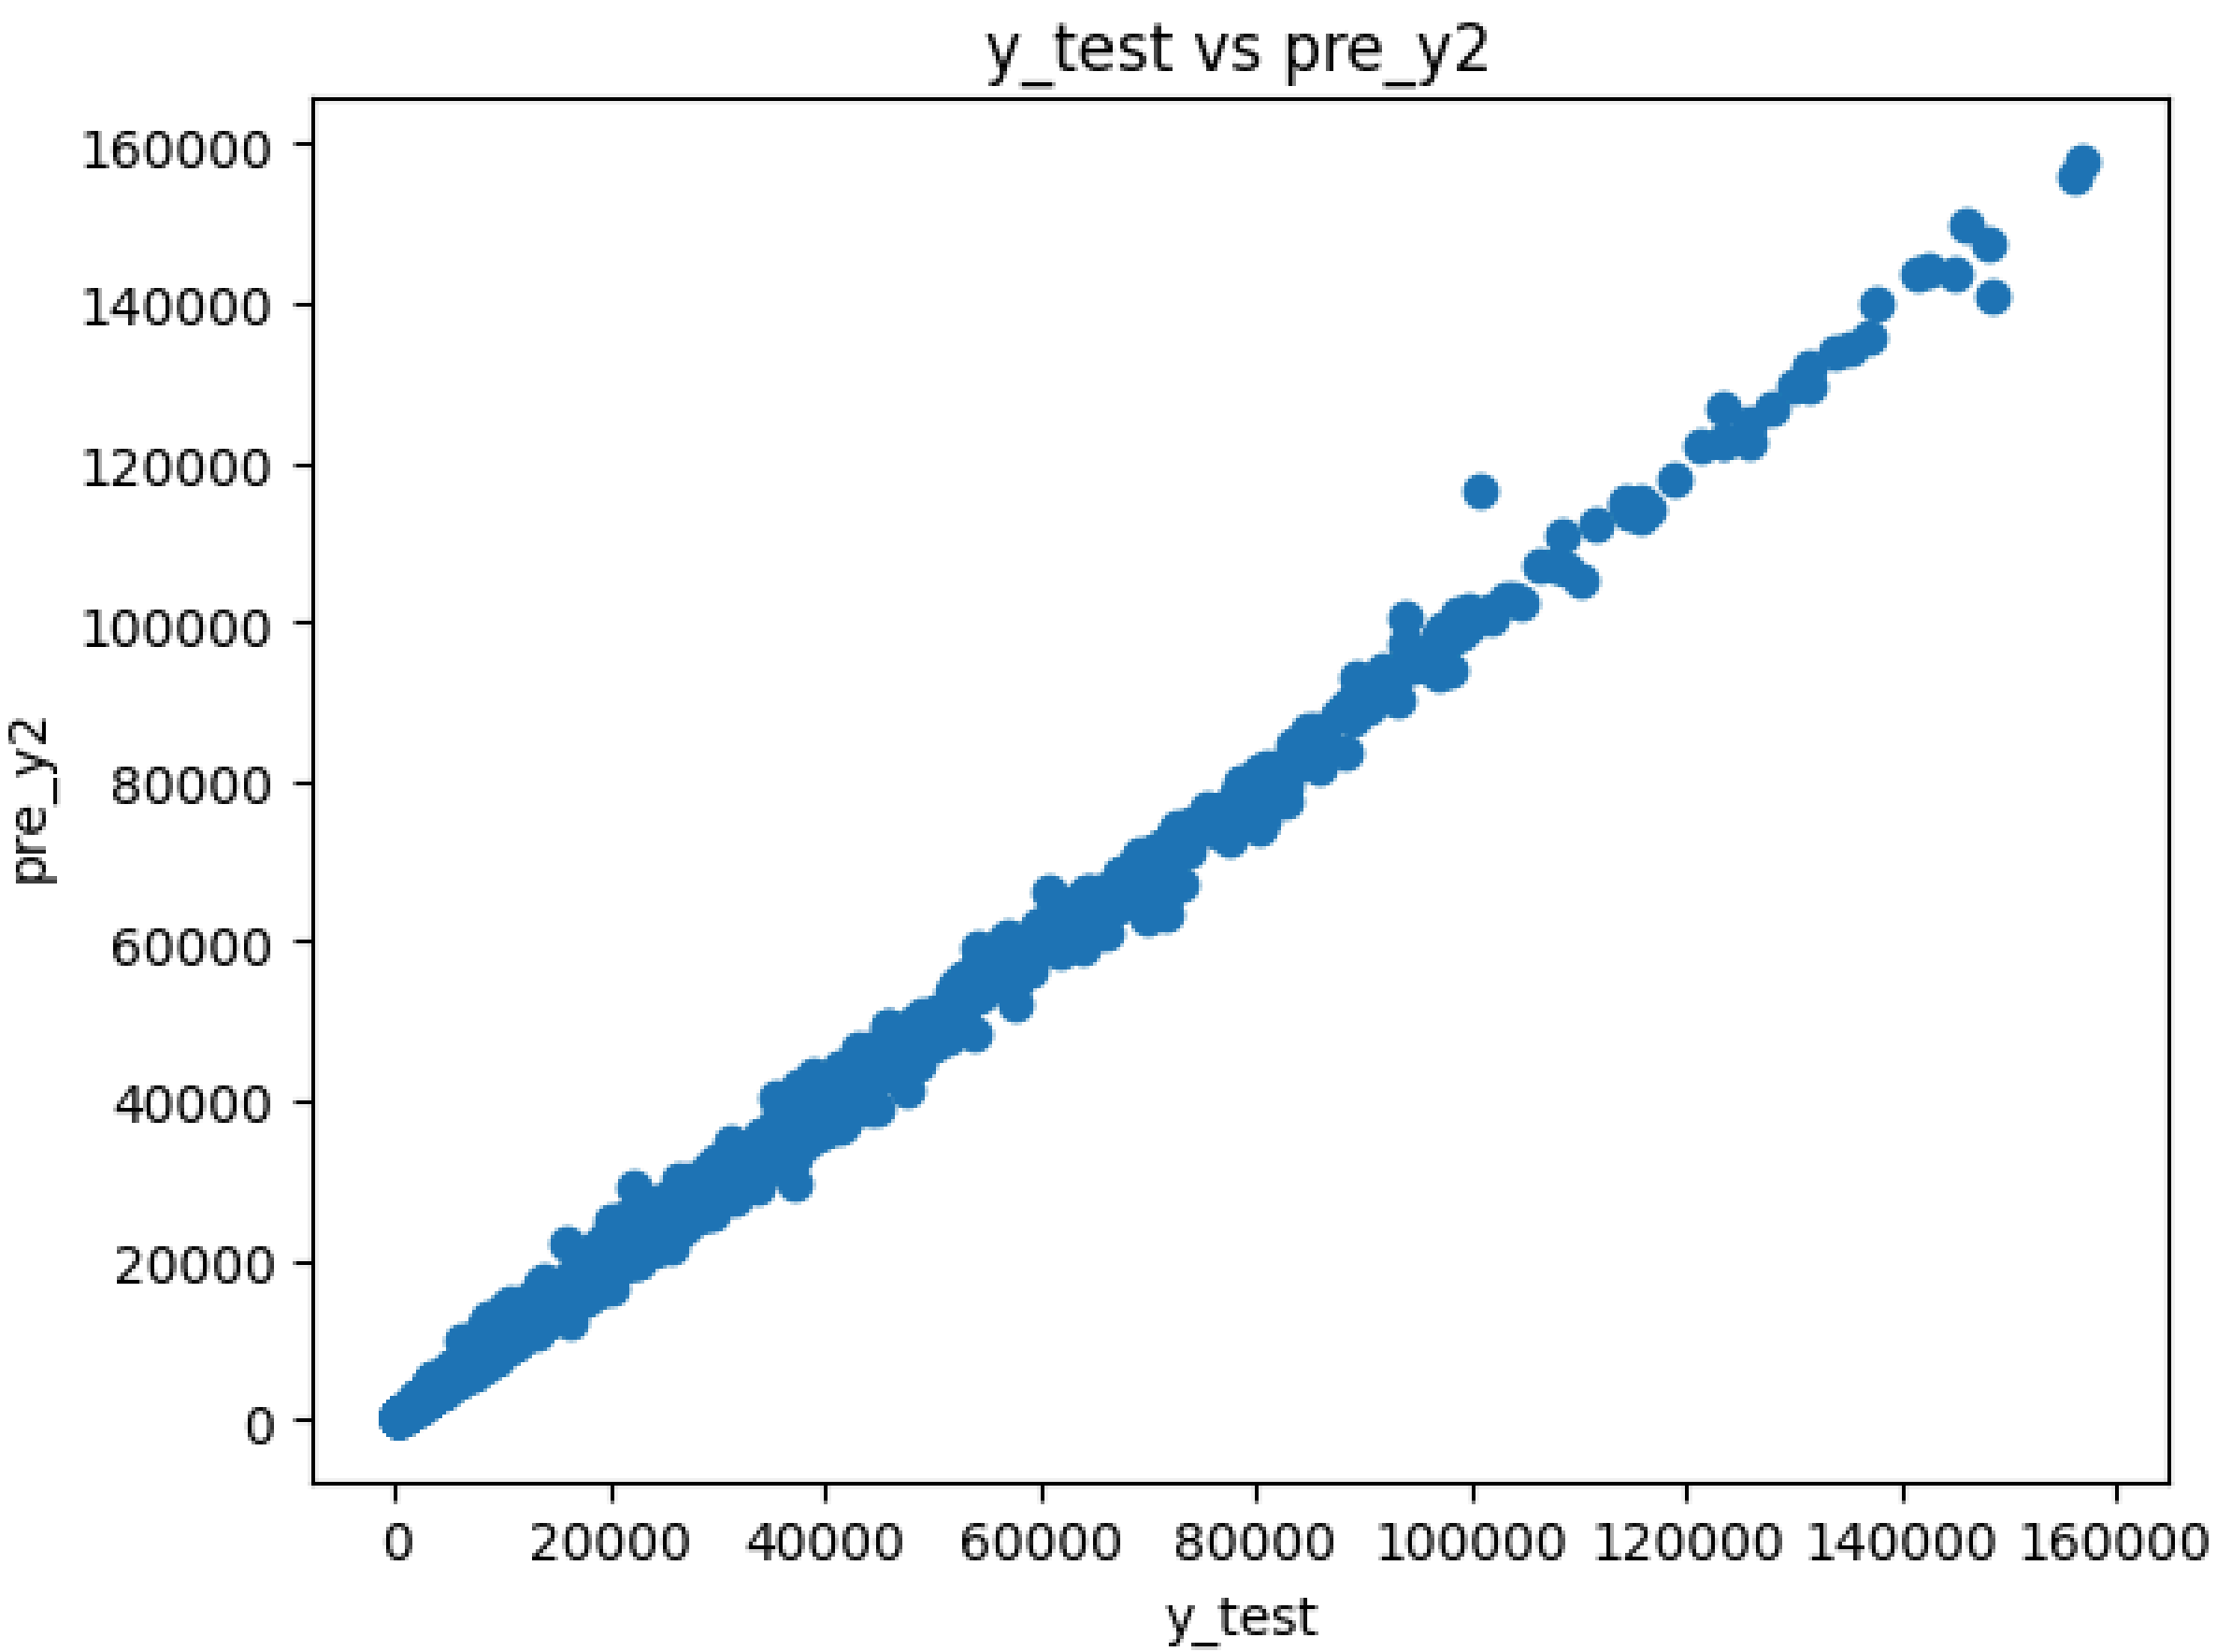

By looking at the following scatter plot, we can say, Random Forest Regressor model is more suitable than Linear Regression model, Because its Mean Squared Error very much lesser, and its close to 3%. We can show the suitability of the model by looking at the Residual Plot (plotting residuals against fitted values). Residuals are closely scattered around line y = 0 means, the model used is more suitable to make predictions.

In [146...

```
residual_test2 = y_test - pre_y2

fig = px.scatter(x = pre_y2, y = residual_test2 ,title = 'Residual Plot')
fig.add_hline(y = 0, line_color = 'darkblue')
fig.update_layout(xaxis_title = 'Fitted Values (pre_y2)', yaxis_title = 'Residuals (Residual Test2)')
fig.show()
```

In [156...

```
plt.figure(figsize = (14,8))
sns.scatterplot(x = pre_y2, y =residual_test2 )
```

```
plt.axhline(y = 0, color = 'darkblue')
plt.title('Residual Plot')
plt.xlabel('Fitted Values (pre_y2)')
plt.ylabel('Residuals (Residual_test2)')
```

Out[156… Text(0, 0.5, 'Residuals (Residual_test2)')

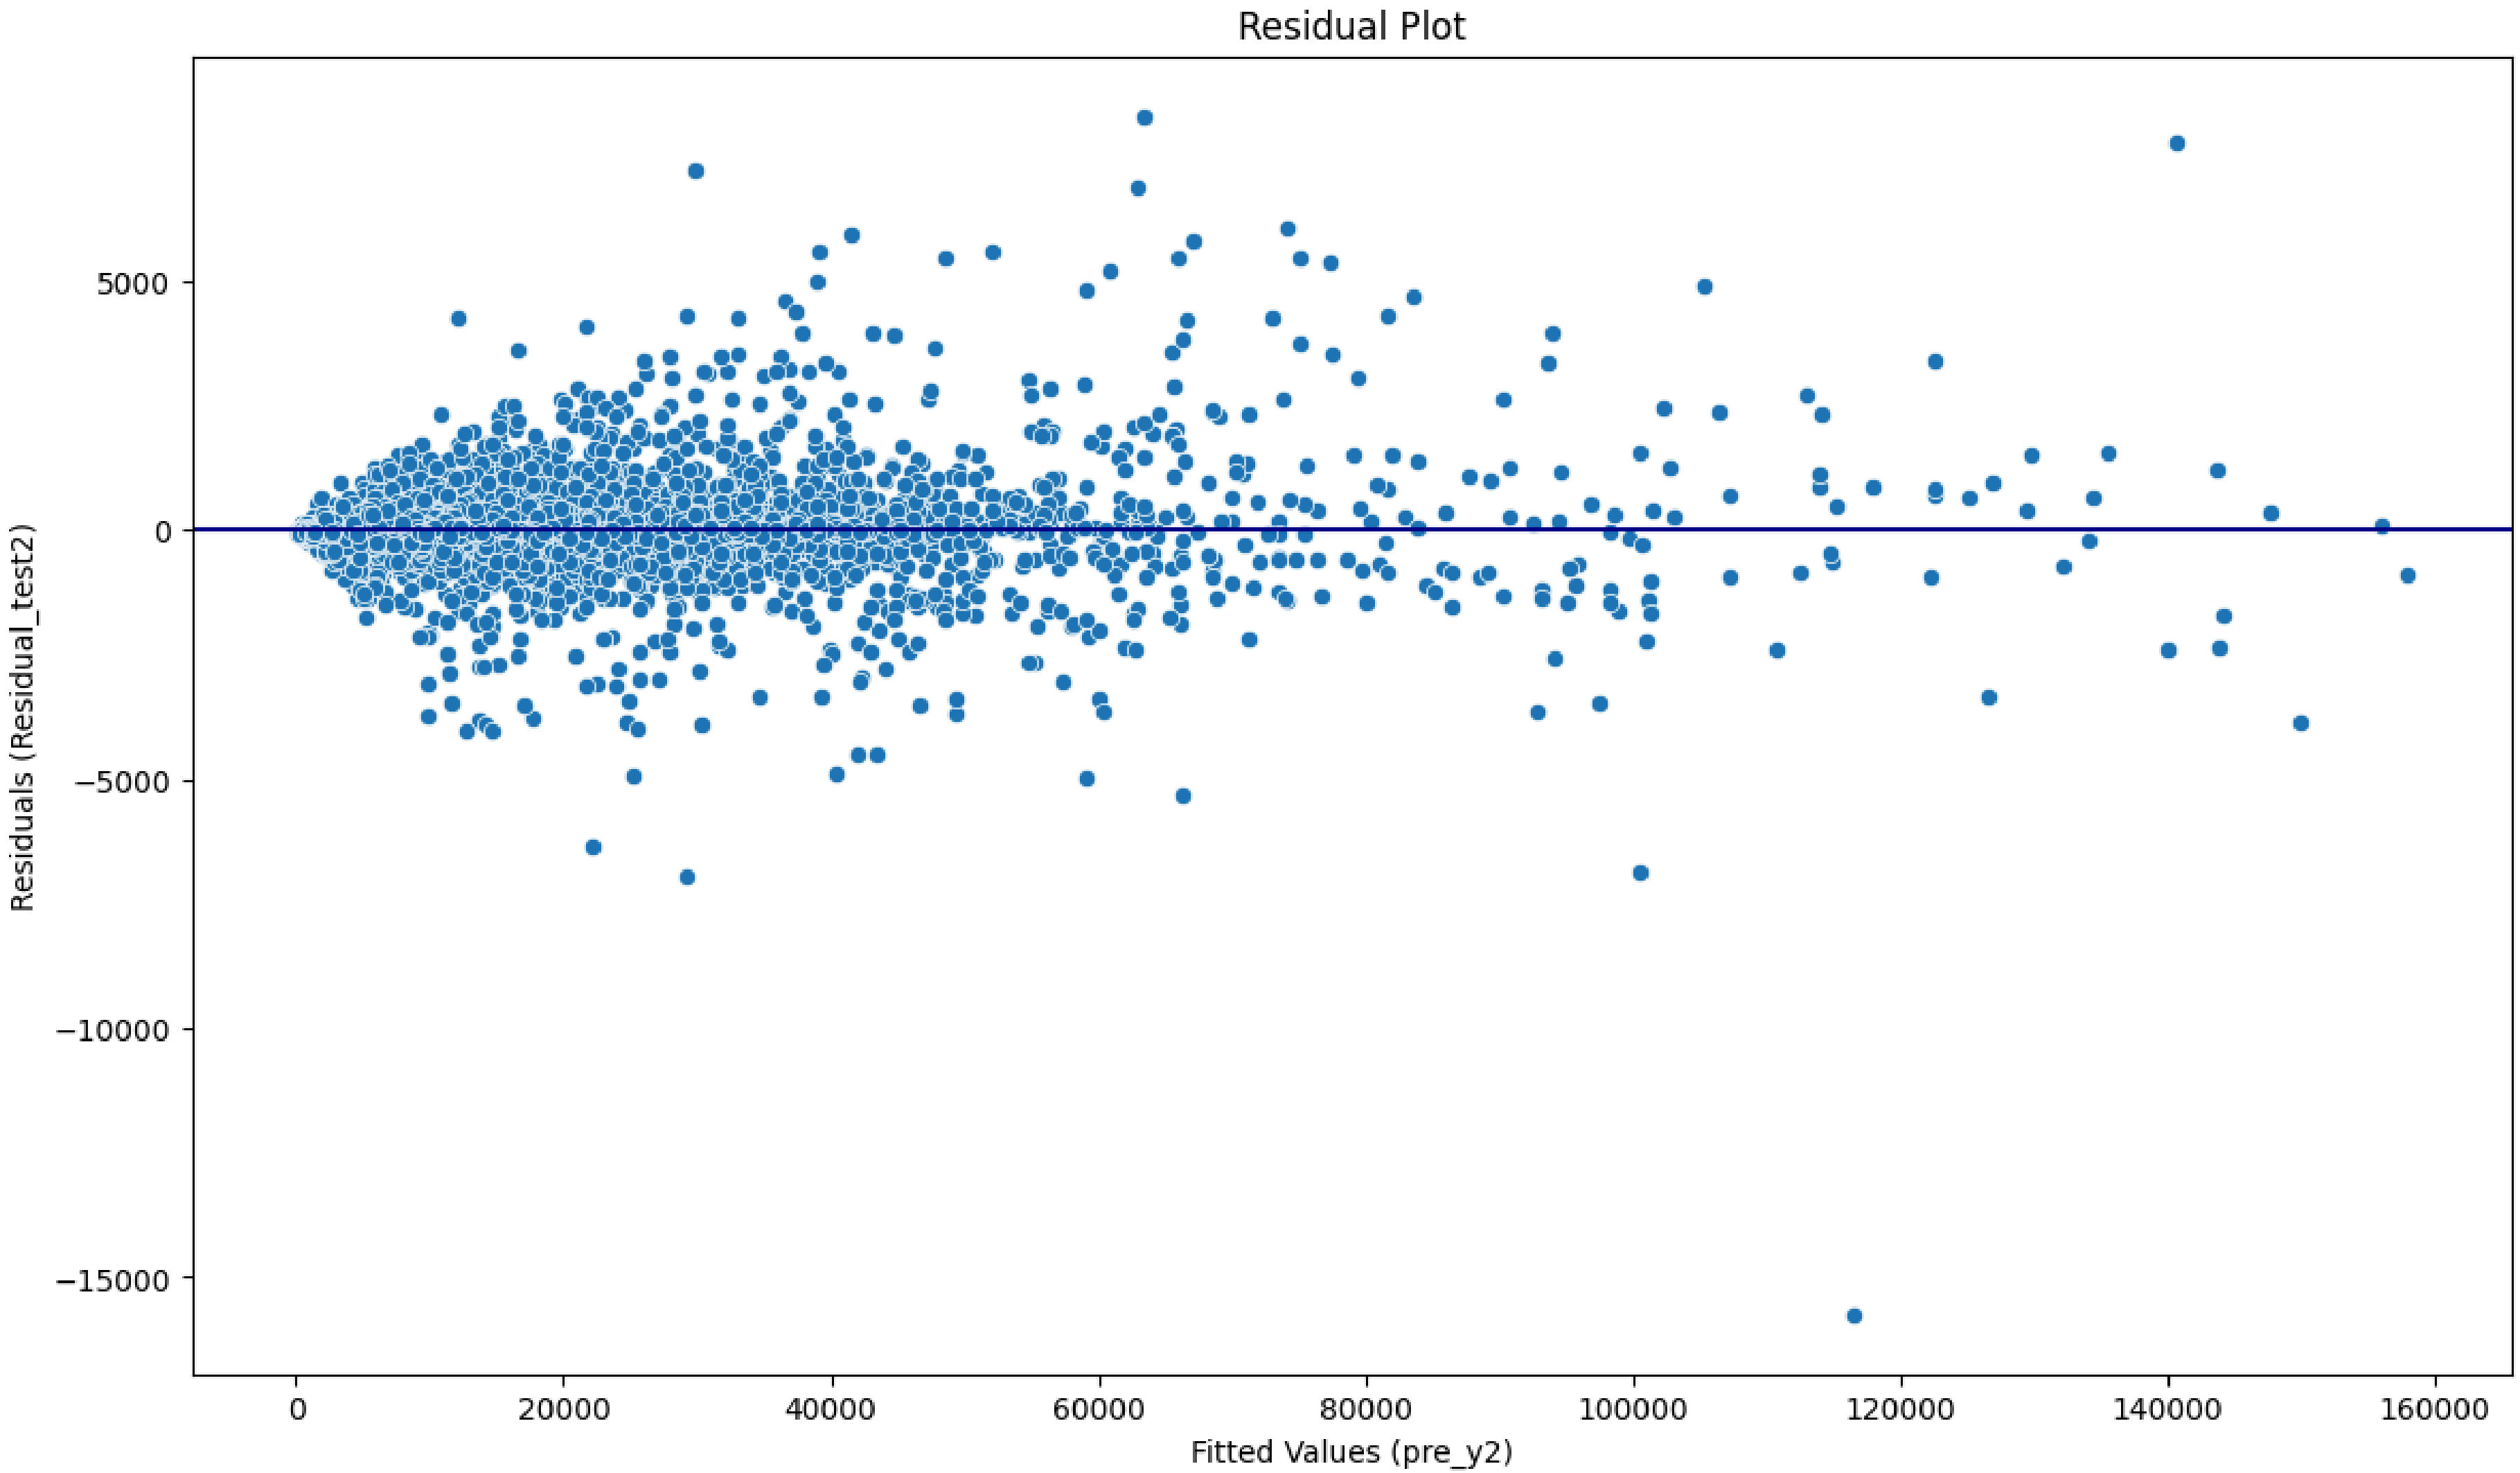

Using Decision Tree Regressor Model

In [147…

```
model3 = DecisionTreeRegressor()

model3.fit(X_train,y_train)
pre_y3 = model3.predict(X_test)
```

In [149…

```
mae3 = mean_absolute_error(y_test,pre_y3)
mae3
```

Out[149…

```
443.37147429485896
```

In [150…

```
mape3 = mean_absolute_percentage_error(y_test, pre_y3)*100
mape3
```

Out[150…

```
4.6874850445230445
```

In [159…

```
residual_test3 = y_test - pre_y3
plt.figure(figsize = (14,8))
sns.scatterplot(x = pre_y3, y =residual_test3 )
plt.axhline(y = 0, color = 'darkblue')
plt.title('Residual Plot')
plt.xlabel('Fitted Values (pre_y3)')
plt.ylabel('Residuals (Residual_test3)')
```

Out[159…

```
Text(0, 0.5, 'Residuals (Residual_test3)')
```

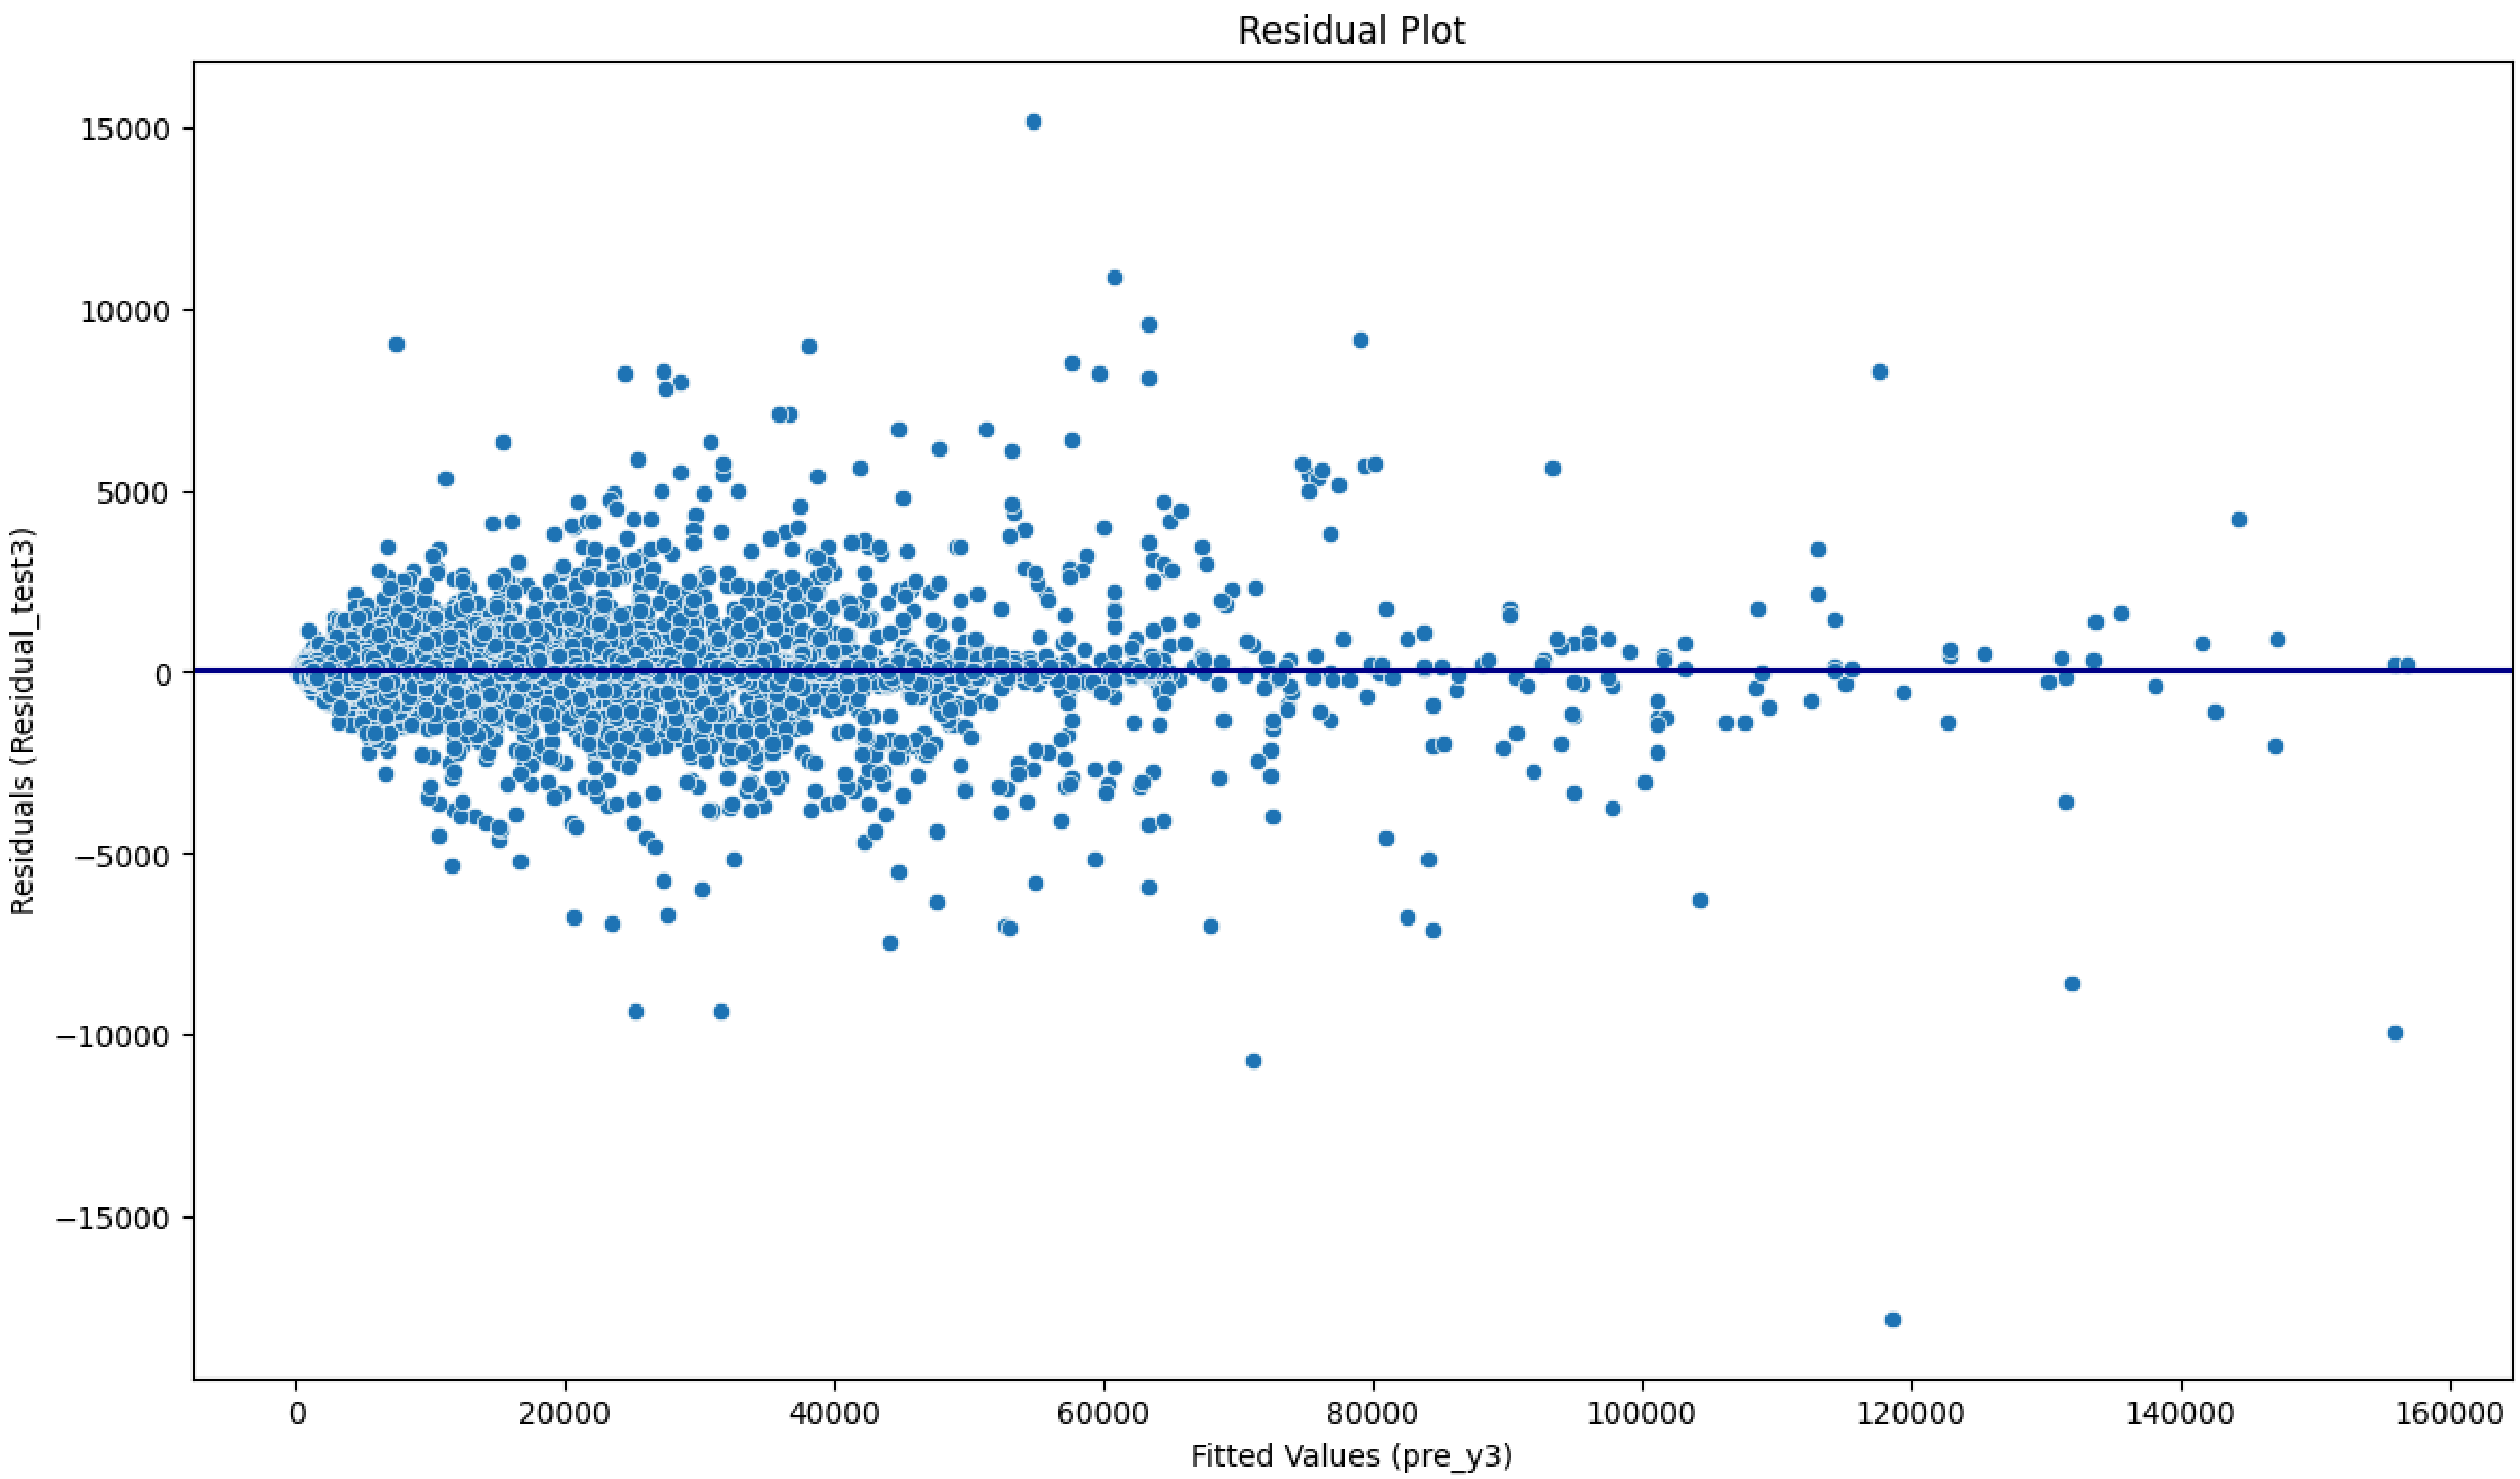

In [151…

```
fig = px.scatter(x = pre_y3, y = residual_test3, title = 'Residual Plot')
fig.add_hline(y = 0, line_color = 'darkblue')
fig.update_layout(xaxis_title = 'Fitted Values (pre_y3)', yaxis_title = 'Residuals (residual_test3)')
fig.show()
```

The above Residual Plot also indicates that the model Decision Tree Regressor also suitable for make predict car price.

In Conclution, we can use Decision Tree Regressor and Random Forest Regressor to make predictions for this dataset. Random Forest Dataset is most suitable.