

# GeoSPARQL 1.1: an almost decadal update to the most important geospatial LOD standard

Nicholas J. Car<sup>1</sup>[0000–0002–8742–7730],  
Timo Homburg<sup>2</sup>[0000–0002–9499–5840], and  
Simon J.D Cox<sup>3</sup>[0000–0002–3884–3420]

<sup>1</sup> SURROUND Australia Pty Ltd., Australia &  
Australian National University, Australia  
`nicholas.car@surroundaustralia.com`  
<https://surroundaustralia.com>

<sup>2</sup> Mainz University Of Applied Sciences, Germany  
`timo.homburg@hs-mainz.de`

<sup>3</sup> Commonwealth Scientific & Industrial Research Organisation, Australia  
`simon.cox@csiro.au`

**Abstract.** The Open Geospatial Consortium published the GeoSPARQL 1.0 standard in 2012 containing multiple parts that define “SPARQL extension functions”, “RIF rules”, “an RDF/OWL ontology for information based on the General Feature Model” and supporting vocabularies, all for Semantic Web spatial data.

In the 8+ years since its publication, GeoSPARQL has become the most important spatial Semantic Web standard, as judged by references to it in other Semantic Web standards and its wide use in Semantic Web data.

An update to the standard was proposed in 2019 to deliver GeoSPARQL 1.1 in 2021 with a charter to: handle outstanding change requests and source new ones from the GeoSPARQL user community as well to “better present” the standard, that is to better link all the standard’s parts and better document & exemplify elements. Expected updates included possible alignments to other ontologies, possible handling of new spatial referencing systems, new geometry representations, and new artifact presentation.

In this paper, we will discuss the submitted change requests and resulting updates to the standard. We will also discuss the theory behind updates and our expectations for GeoSPARQL 1.1’s use.

**Keywords:** GeoSPARQL · GeoSPARQL 1.1 · spatial · geospatial · Semantic Web · RDF · OWL · OGC · Open Geospatial Consortium · standard.

## 1 Introduction

The GeoSPARQL standard, first issued in 2021 by the Open Geospatial Consortium (OGC)<sup>4</sup> is one of, if not the most<sup>5</sup>, used *Semantic Web* ontologies for representing spatial data.

The original GeoSPARQL release, which we refer to as GeoSPARQL 1.0, contained a *specification* document, a main “GeoSPARQL” ontology in an RDF file and a “Simple Features Vocabulary” ontology also in an RDF file. The “GeoSPARQL” ontology content, as well as lists of geospatial functions that could be performed on RDF data via SPARQL<sup>6</sup> queries was defined in the specification document, as were entailment rules and requirements & abstract tests for testing ontology data and function implementations. Within the last few years, the function lists from the specification were extracted into a SKOS<sup>7</sup> vocabulary.

## 2 Motivation to update GeoSPARQL

The Open Geospatial Consortium (OGC) & World Wide Web Consortium’s (W3C) *Spatial Data On The Web Working Group* (SDWWG) established *Spatial Data On The Web Best Practices* [4] which noted shortcomings with then current spatial data standards such as “A best practice for returning geometries in a specific requested CRS has not yet emerged”. The group also informally captured specific suggested updates for GeoSPARQL<sup>8</sup>, however no updates to GeoSPARQL were ultimately made by that Working Group.

Recently, 2019, the OGC reconstituted a *GeoSPARQL Standards Working Group* (SWG) to update GeoSPARQL. The general motivation for work within the area of GeoSPARQL, that of *Semantic Web* spatial data, and a series of fault fixes and proposed extensions to GeoSPARQL 1.0 are captured in an OGC White Paper [1]. Some, but not all of the SDWWG’s ideas have been taken up by the SDW, for example the *Best Practices* [4] aspiration that “A possible way forward is an update for the GeoSPARQL spatial ontology. This would provide an agreed spatial ontology, i.e., a bridge or common ground between geographical and non-geographical spatial data...”. This point has been considered by the SWG and included in future releases’ scope.

Another *Best Practices* issue raised is that “it makes sense to publish different geometric representations of a spatial object that can be used for different purposes”, again, this is being considered by the SWG with initial thoughts centering on defining *roles* of geometries with respect to features.

<sup>4</sup> <https://www.ogc.org>

<sup>5</sup> It’s hard to calculate use but references to GeoSPARQL other well-known standards, such as DCAT2 (<https://www.w3.org/TR/vocab-dcat/>) suggests this

<sup>6</sup> <https://www.w3.org/TR/sparql11-query/>

<sup>7</sup> <https://www.w3.org/TR/skos-reference/>

<sup>8</sup> [https://www.w3.org/2015/spatial/wiki/Further\\_development\\_of\\_GeoSPARQL](https://www.w3.org/2015/spatial/wiki/Further_development_of_GeoSPARQL)

The SWG’s charter - its final scope of work - is also published by the OGC [2] and this guides the SWG’s activities. Specific actions of the SWG and their staging are explained through the use of a publicly-available online task tracking system within the SWG’s working online code repository<sup>9</sup>.

At a high-level, proposed updates to GeoSPARQL by both the SDWWG and the SWG may be categorised as one of the following:

- \* new geometry serializations
  - GeoJSON, KML etc. Newer, popular format
- \* new ontology classes to cater for more nuanced spatial information
- \* more spatial functions
  - implementing functions well-known in non *Semantic Web* spatial systems
- \* scalar spatial properties
  - area, volume etc. alongside geometries
- \* better handling of Spatial (Coordinate) Reference Systems (SRS)
  - potentially allowing for automated coordinate serialization conversions
- \* Internet protocol-based selection of different geometries for features

Some of these proposed updates were predicted in GeoSPARQL 1.0, with the *Future Work* section listing several of the points above as expected or potential.

The SWG’s *Charter*, anticipating that the more obvious updates such as new geometry serializations would certainly be implemented, listed the following areas of investigation that emerged from SWG proponent’s discussions:

- \* a revision of the “upper ontology” structuring of GeoSPARQL
  - better/differently defining how GeoSPARQL’s **Feature** and other classes relate to one another and to other fundamental concepts in the ontology
- \* alignments to other ontologies, perhaps *W3C Time Ontology in OWL*[6]
- \* catering for very different SRSes, such as Discrete Global Grid Systems

Specifically ruled out of scope was any investigation of property graphs. Recent (last several years) discussion in the OGC and elsewhere about property graphs motivated a consideration of them, however, the SWG proponents felt that while property graphs might be important for future *Semantic Web* spatial data systems, there was more than enough work scoped for initial SWG work (several revisions of the standard) to initially exclude this area of investigation.

After initial meetings, the SWG determined to make multiple releases of GeoSPARQL updates with different goals:

- \* **1.1**: extensions that are fully compatible with GeoSPARQL 1.0
- \* **1.2**: fully or mostly compatible extensions but which are larger additions to the standard’s conceptual coverage
- \* **2.0**: a future GeoSPARQL that might be quite different and partly incompatible with GeoSPARQL 1.0

<sup>9</sup> <https://github.com/opengeospatial/ogc-geosparql/projects/1>

The reason for expecting a future, incompatible, GeoSPARQL 2.0 is that early SWG attendees thought spatio-temporal relations and fundamental ontology elements in GeoSPARQL either could or should be remodelled, which might break the current, familiar, **Feature/Geometry** class relations. Details of these potential changes haven't been fully expounded, at the time of this paper, however initial SWG attendees' intuition is that a future GeoSPARQL 2.0 might generalise spatial concepts and move away from only, or primarily, *geospatial*, or perhaps focus not just on **Feature/Geometry** relations but look to generalised mechanisms for describing dimensions of features of which *geometry* is one of many (and perhaps) *temporality* too).

An originally unforeseen area of updates to GeoSPARQL is new modes of standard presentation. Motivated by conceptual work within the W3C and the OGC for multi-part standards presentation, this has resulted in profile declarations, explained in the next section.

### 3 Updates in GeoSPARQL 1.1

So far (as of June, 2020) the GeoSPARQL SWG has triaged change requests for GeoSPARQL releases and has addressed many 1.1 requests which are the only ones we report here. The next sections foreshadow likely 1.2 and 2.0 updates.

#### 3.1 Profile Declaration

One of the first actions undertaken by the SWG was to link the GeoSPARQL 1.0 elements through a *profile* declaration, where a profile is a special type of *specification*, as defined by *The Profiles Vocabulary*[3]. The specific motivation for this was the SWG's recognition that GeoSPARQL 1.0 consisted of multiple parts, not all of which were easy to discover. As a result, some GeoSPARQL users were unaware of some of the resources and some resources were accidentally duplicated or partly re-implemented. Profile declarations of this sort are anticipated, by the OGC, as being the *best practice* way for it to deliver multi-part standards.

The profile declaration for GeoSPARQL 1.0 will be published by the OGC as a stand-alone resource sometime in early 2021 along with some updated GeoSPARQL 1.0 resources. The profile declaration for GeoSPARQL 1.1 will be published at the same time as all, or most, of the 1.1 releases' updated resources, currently expected in mid-2021. The 1.1 releases' resources are:

1. a profile declaration
2. a specification document
3. an RDF/OWL ontology document
4. a Functions & Rules vocabulary, derived from the ontology
5. a Simple Features feature types vocabulary
6. a set of RIF[8] rules
7. SHACL[9] shapes for RDF data validation

Both the 1.0 and the 1.1 resources are currently available from the SWG's online code repository<sup>10</sup>.

### 3.2 New geometry literals

Three new geometry serializations are introduced:

1. **GeoJSON** (Geo- JavaScript Object Notation)[5]
2. **KML** (Keyhole Markup Language)[10]
3. **DGGS** (Discrete Global Grid System)[11]

An example of a point's GeoJSON geometry serialization is given below, followed by an unrelated simple polygon *AusPIX*<sup>11</sup> DGGS geometry serialization.

**Listing 1.1.** GeoJSON geometry serialization example

```
""{"type":"Point", "coordinates":[-83.38,33.95]}""
^^<http://www.opengis.net/ont/geosparql#geoJSONLiteral>
```

**Listing 1.2.** AusPIX DGGS geometry serialization example

```
""<https://w3id.org/dggs/auspex> DirectedOrdinateList
(R3231 R3234 R3235 R3238 R3243 R3246)""
^^<http://www.opengis.net/ont/geosparql#dggsWktLiteral>
```

The first two of these new serializations have been much anticipated and were requested by the SDWWG and many users of GeoSPARQL, due to those formats' popularity.

The third new serialization format is more forward-looking in that it is not driven by user demand but by predicted demand. DGGS does not have a single, concrete format standard as the others do, nor is it ever likely to - different DGGSes will likely implement very different data formats - so GeoSPARQL 1.1 makes generalized provisions for DGGS serializations but presents no detailed requirements for them, only stating that the specific DGGS must be identified.

### 3.3 New spatial functions

While spatial aggregation functions are the norm in many non-semantic geospatial databases such as POSTGIS or Oracle Spatial, at the time of defining the GeoSPARQL 1.0 standard, aggregation functions had not yet been introduced into the SPARQL standard, but have been since with SPARQL 1.1 [12]. Spatial aggregation functions similar to traditional (relation database), aggregation functions such as AVG, MAX, or MIN allow aggregated results of geometry queries, for example, to create the union of a set of selected serialized geometries. While calculating these aggregates is certainly possible outside of a semantic database, and thus GeoSPARQL, the inclusion of the functions provides distinct advantages:

<sup>10</sup> <https://github.com/opengeospatial/ogc-geosparql>

<sup>11</sup> <https://w3id.org/dggs/auspex>

1. No client-side library is needed to create an aggregated geometry result
2. Fewer and more appropriate results can be returned using a spatial aggregate function (for example, a union geometry result)
3. Spatial aggregates from different SPARQL endpoints can easily be calculated using federated queries

In addition to the *geof:union*, *geof:envelope* and *geof:convexHull* functions already defined in GeoSPARQL 1.0, for use within SPARQL **FILTER** operations, GeoSPARQL 1.1 defines *geosf:Union*, *geosf:Envelope* and *geosf:ConvexHull* as well as *geosf:BoundingCircle*, *geosf:Centroid*, *geosf:ConcatLines* - concatenating a set of overlapping linestrings that overlap - and *geosf:ConcaveHull* that can be used to return aggregated results. Listing 1.3 gives an example of one of these new functions in use.

**Listing 1.3.** Aggregation Function example SPARQL query

```
# returns the circle geometry bounding all the geometries
# of Feature <x>
SELECT (geosaf:BoundingCircle(?geo) AS ?circ)
WHERE {
    <x> geo:hasGeometry/geo:asWKT ?geo .
}
```

New functions to retrieve the minimum and maximum values of geometries' coordinates are also added: *geof:minX* & *geof:maxX*, *geof:minY* & *geof:maxY* and *geof:minZ* & *geof:maxZ*.

### 3.4 Ontology extensions

Figure 1 overviews the ontology, as of release 1.1.

GeoSPARQL 1.1 extends the GeoSPARQL ontology by adding a new class, **geo:SpatialMeasure**. This class represents a spatial measurement such as a volume, length, or area associated with a measurement amount and a unit of measure. It is the range of three newly-defined properties: **geo:hasArea**, **geo:hasLength** and **geo:hasVolume** which make these attributes of a geometry better accessible using SPARQL.

These additions address a number of change requests from the SDWWG and the SWG but, given the introduction of a dedicated *measure* class, they do more than just provide for a few scalar spatial measures and open up GeoSPARQL to general patterns of measurement present in ontologies such as the W3C's *SOSA* [7].

The 1.1 release also adds the property **geo:inSRS**, which allows declarations of a geometry's SRS, independent of serializations. It paves the way for future definition of SRSes in RDF, as anticipated for GeoSPARQL 2.0.

## 4 Conclusions

An staged schedule of updates to this very important *Semantic Web* spatial data standard has been initiated with simple, obvious and strictly backwards-

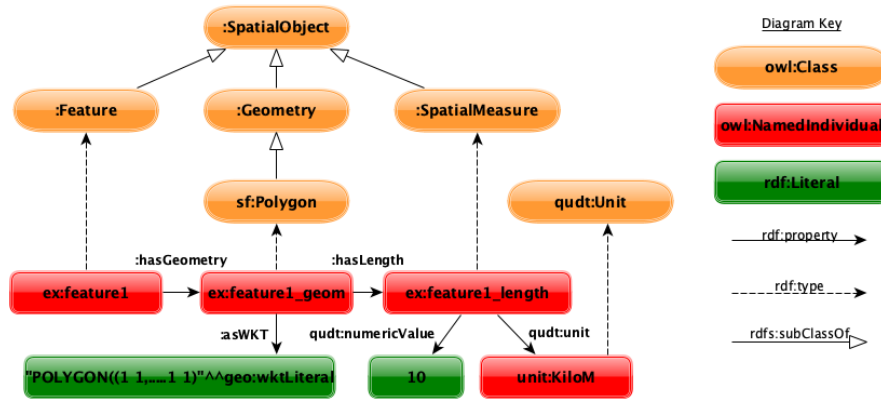


Fig. 1. GeoSPARQL 1.1 ontology including one example feature

compatible changes now in progress for GeoSPARQL 1.1. 1.2 will include more detailed work later in 2021 and 2.0, as yet un-specified, might be a somewhat different standard, to be determined by more requirements gathering and feedback on the 1.1 and 1.2 releases.

#### 4.1 Future Work

- \* GeoSPARQL extension ontologies: SRS systems
- GeoSPARQL 1.2: More literals?
- \* GeoSPARQL 2.0: Full featured support for 3D, simple features functions, coverages?

#### References

1. Abhayaratna, J., van den Brink, L., Car, N., Atkinson, R., Homburg, T., Knibbe, F., McGlinn, K., Wagner, A., Bonduel, M., Holten Rasmussen, M., Thiery, F.: OGC Benefits of Representing Spatial Data Using Semantic and Graph Technologies. OGC White Paper, Open Geospatial Consortium (Oct 2020), <http://docs.ogc.org/wp/19-078r1/19-078r1.html>
2. Abhayaratna, J., van den Brink, L., Car, N., Homburg, T., Knibbe, F.: Ogc geosparql 2.0 swg charter. Ogc swg charter, Open Geospatial Consortium (Aug 2020), <https://portal.ogc.org/files/93345>
3. Atkinson, R., Car, N.J.: The Profiles Vocabulary. W3C Working Group Note, World Wide Web Consortium (May 2020), <https://www.w3.org/TR/dx-prof/>
4. van den Brink, L., Barnaghi, P., Tandy, J., Atezing, G., Atkinson, R., Cochrane, B., Fathy, Y., Garcia Castro, R., Haller, A., Harth, A., Janowicz, K., Kolozali, e., van Leeuwen, B., Lefrançois, M., Lieberman, J., Perego, A., Le-Phuoc, D., Roberts, B., Taylor, K., Troncy, R.: Best practices for publishing, retrieving, and using spatial data on the web. *Semantic Web* **10**(1), 95–114

- (Dec 2018). <https://doi.org/10.3233/SW-180305>, <https://www.medra.org/servlet/aliasResolver?alias=iospress&doi=10.3233/SW-180305>
5. Butler, H., Daly, M., Doyle, A., Gillies, S., Hagen, S., Schaub, T., et al.: The geojson format. Internet Engineering Task Force (IETF) (2016)
  6. Cox, S., Little, C.: Time Ontology in OWL. W3C Recommendation, World Wide Web Consortium (Oct 2017), <https://www.w3.org/TR/owl-time/>
  7. Haller, A., Janowicz, K., Cox, S., Le Phuoc, D., Taylor, K., Lefrançois, M.: Semantic Sensor Network Ontology. W3C Recommendation, World Wide Web Consortium (Oct 2017), <https://www.w3.org/TR/vocab-ssn/>
  8. Kifer, M., Boley, H.: RIF Overview (Second Edition). W3C working group note, World Wide Web Consortium (Oct 2013), <https://www.w3.org/TR/rif-overview/>
  9. Knublauch, H., Kontokostas, D.: Shapes Constraint Language (SHACL). W3C Recommendation, W3C RDF Data Shapes Working Group (2017), <https://www.w3.org/TR/shacl/>
  10. Nolan, D., Lang, D.T.: Keyhole Markup Language. In: XML and Web Technologies for Data Sciences with R, pp. 581–618. Springer New York, New York, NY (2014). [https://doi.org/10.1007/978-1-4614-7900-0\\_17](https://doi.org/10.1007/978-1-4614-7900-0_17), [https://doi.org/10.1007/978-1-4614-7900-0\\_17](https://doi.org/10.1007/978-1-4614-7900-0_17)
  11. Sahr, K., White, D.: Discrete Global Grid Systems. Computing Science and Statistics pp. 269–278 (1998)
  12. W3C SPARQL Working Group: SPARQL 1.1 Overview. W3C Recommendation, World Wide Web Consortium (2013), <http://www.w3.org/TR/sparql11-overview/>