



Aim: To perform the environments are used in Postman.

Environment variables:

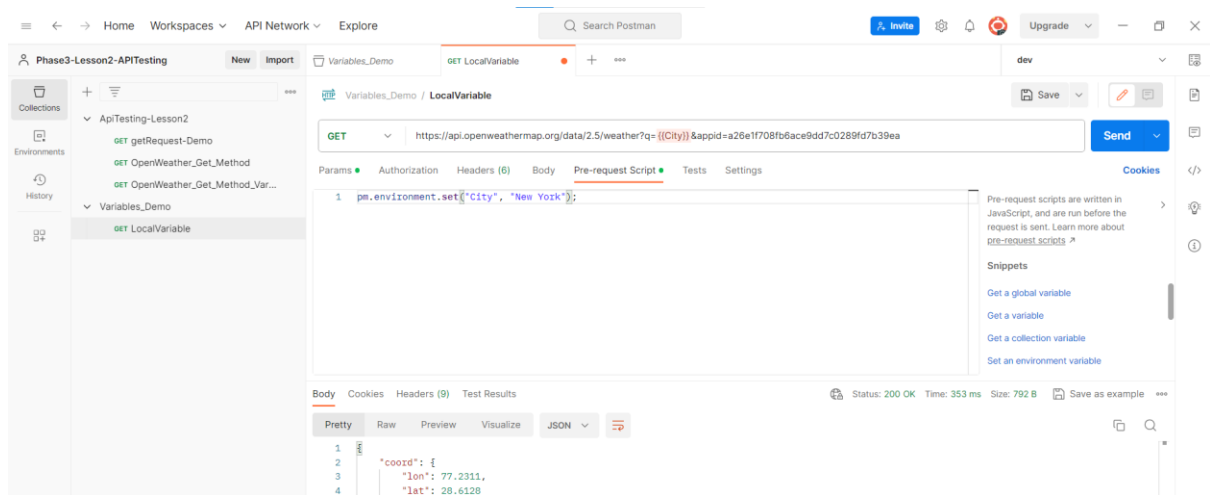

Change environment to QA

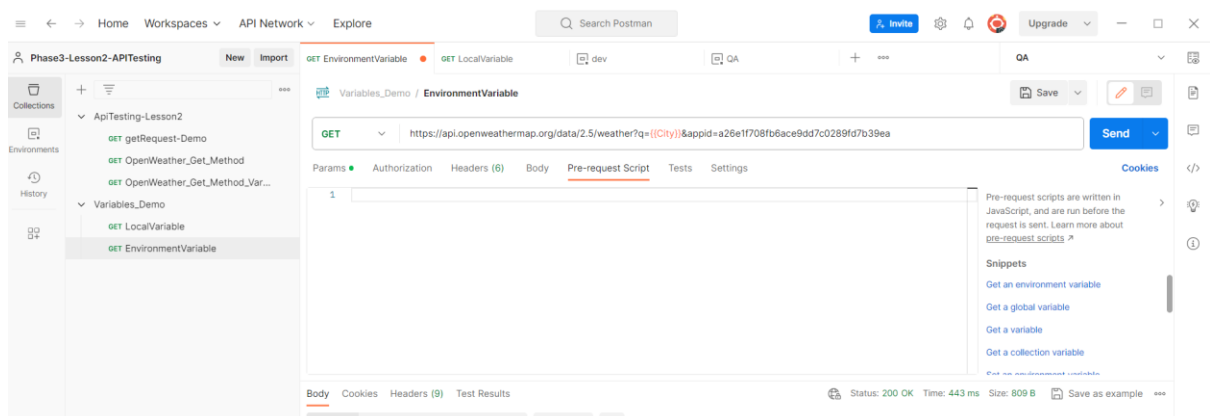

Collection variables: -> Collection level variable

A variable that will be available by default to every request in that collection only. This variable will be applicable even if you have not selected any environment.

Collection variable will always be created on collection dashboard

Postman interface showing the 'Variables_Demo' collection. The 'Variables' tab is active, displaying a table of variables. A tooltip at the bottom states: 'I use variables to reuse values and protect sensitive data'.

Variable	Initial value	Current value
<input checked="" type="checkbox"/> Add new variable		

Postman interface showing the 'Variables_Demo' collection. The 'Variables' tab is active, displaying a table of variables. The 'apikey' variable is selected, showing its current value.

Variable	Initial value	Current value
<input checked="" type="checkbox"/> apikey		a26e1f708fb6ace9dd7c0289fd7b39ea
<input type="checkbox"/> Add new variable		

Global variables:

Postman interface showing the 'Globals' tab. The 'Globals' tab is active, displaying a table of global variables. The 'Base_URL' variable is selected, showing its current value.

Variable	Type	Initial value	Current value
<input checked="" type="checkbox"/> Base_URL	default		https://api.openweathermap.org
<input type="checkbox"/> Add new variable			

