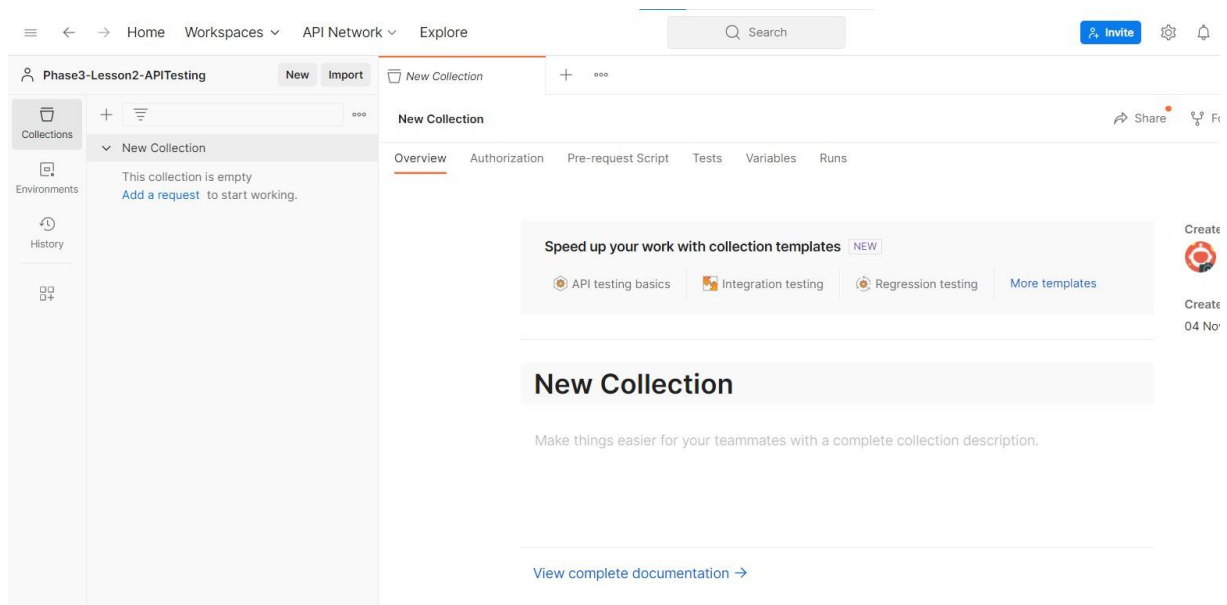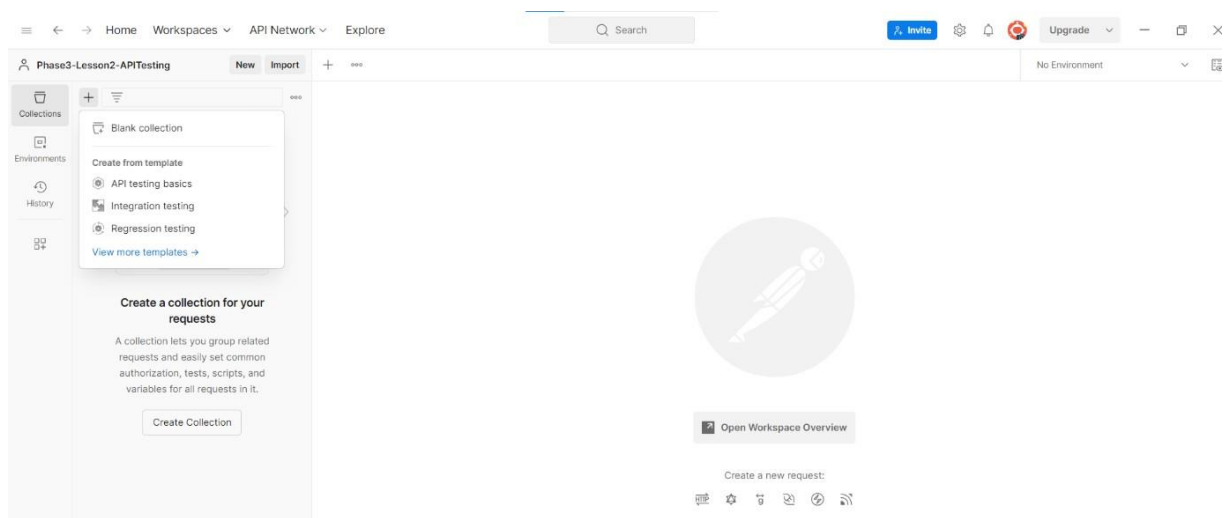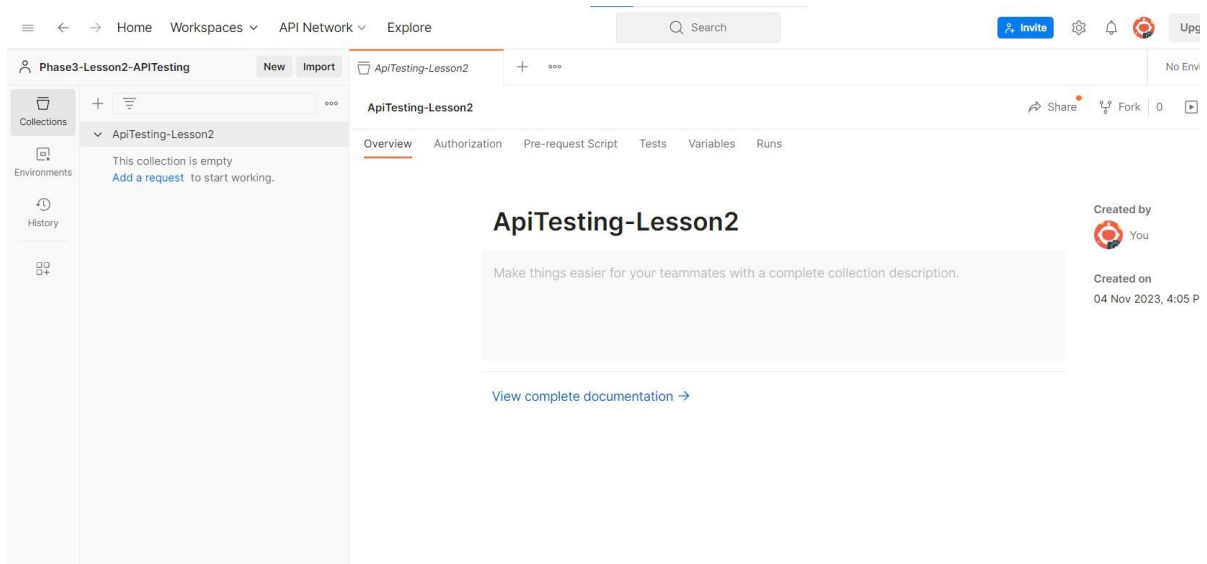Aim: To perform the work on GET requests, with an example.
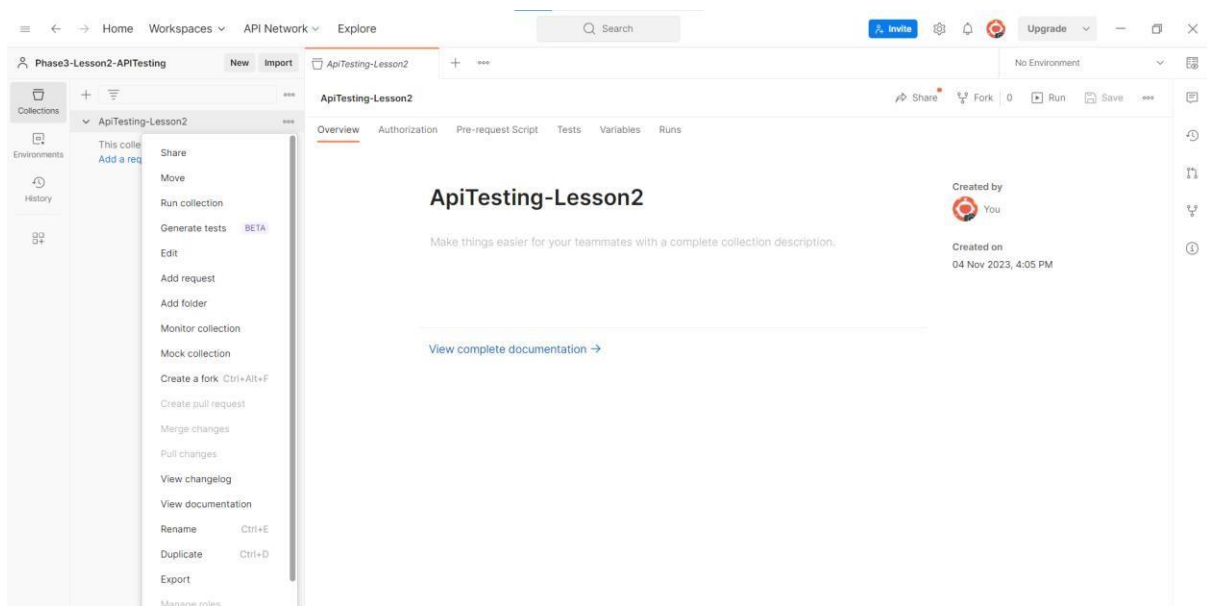
Create a collection first:

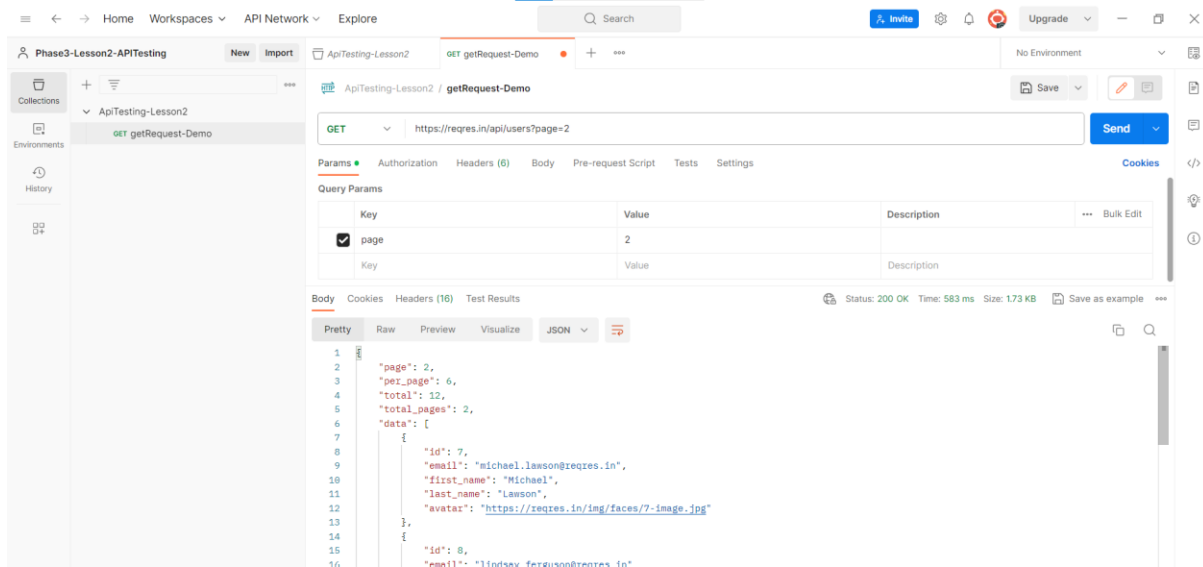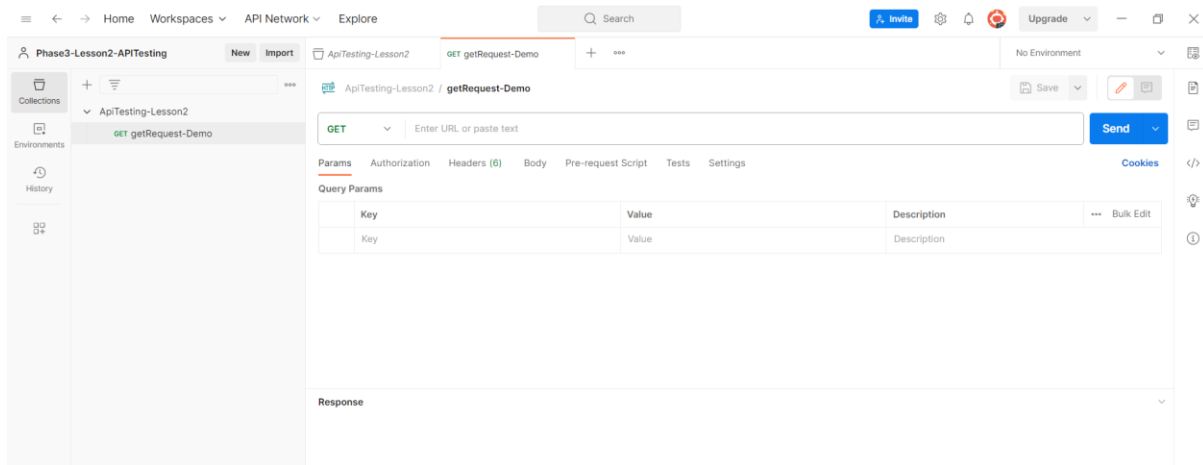Give a name to the collection on right side:

Create a request and understand it:

```
1  {
2      "page": 2,
3      "per_page": 6,
4      "total": 12,
5      "total_pages": 2,
6      "data": [
7          {
8              "id": 7,
9              "email": "michael.lawson@reqres.in",
10             "first_name": "Michael",
11             "last_name": "Lawson",
12             "avatar": "https://reqres.in/img/faces/7-image.jpg"
13         },
14         {
15             "id": 8,
16             "email": "lindsey.ferguson@reqres.in"
```

Built-in API request by city name

You can call by city name or city name, state code and country code. Please note that searching by states available only for the USA locations.

API call

```
https://api.openweathermap.org/data/2.5/weather?q={city name}&appid={API key}
```

```
https://api.openweathermap.org/data/2.5/weather?q={city
```

OpenWeather   Q Weather in your city   Guide   API   Dashboard   Marketplace   Pricing   Maps   Our Initiatives   Partners   Blog   For Business   Siva... ▾   Support▾

We have sent the confirmation link to **sivaji9052557046@gmail.com**. Please check your email.

New Products   Services   API keys   Billing plans   Payments   Block logs   My orders   My profile   Ask a question

You can generate as many API keys as needed for your subscription. We accumulate the total load from all of them.

Key	Name	Status	Actions
9e67332be56a76728f4c95bc00a36fea	Default	Active	⬤ ✎ ✖
a26e1f708fb6ace9dd7c0289fd7b39ea	apikeypostman	Active	⬤ ✎ ✖

Create key

[API key name]   [Generate]