

Parul University

paruluniversity844.examly.io/test?id=d761232d-b3ae-4c73-a439-963d810c1627e757cf89-e4f3-45b3-ad45-9a1ae9cab523

Internet Status: Online

Practice_AWS_S3_Static...

Section 1/1 | AWS_Static_Website_COD (1)

Name : Derangula Siva Kumar | Roll Number : 23

43:27

Submit Test

1

Question No : 1 / 1

Task Details:

- Create an S3 Bucket with the following details:
 - **Bucket Name:** coder<Your AWS Account ID>
 - **Region:** us-west-2
 - **Tag:**
 - Key: Project
 - Value: MarketingSite
 - Ensure to **enable the bucket versioning**
- Upload and Configure Files:
 - Upload a file named **home.html** to the root of the bucket.
 - Create a folder named **assets/** in the bucket.
 - Upload a file named **banner.jpg** to this folder.
 - Ensure **public read access** is **enabled** for the home.html file.
 - **Enable Static Website Hosting** and set the **index document** to **home.html**.

Specifications:

- **Bucket Name:** coder<Your AWS Account ID>
- **Bucket Region:** us-west-2

To start the test, Click the below AWS account link. Copy and Paste the given User Name and Password.

AWS Account URL : [Open Environment](#)

AWS User Name : Coder

AWS Password : y0XqX0:WRge26\$c

Run Test Case

Submit Cloud

Answered0/1

Bookmarked0/1

Skipped1/1

Not Viewed0/1

Saved in Server0/1

View More

Marks : 10 | Negative Marks : 0

Parul University

paruluniversity844.examly.io/test?id=d761232d-b3ae-4c73-a439-963d810c1627e757cf89-e4f3-45b3-ad45-9a1ae9cab523

Internet Status: Online

Practice_AWS_S3_Static...

Question No 1

Amazon S3 buckets must include a unique name with specific settings. You can use the AWS CLI to automate the configuration of an S3 bucket.

Task Details

- Create a new S3 bucket named "marketing-site-assets" in the "us-west-2" region. The bucket must have a tag with the key "Project" and the value "MarketingSite". The bucket must have a folder named "assets" and a file named "banner.jpg" uploaded to it. The bucket must have public access enabled for the file "home.html". The bucket must have versioning enabled. The bucket must have a static website configured.
- Upload the file "home.html" to the bucket.

Answered 0/1Bookmarked 0/1Skipped 1/1Not Viewed 0/1Saved in Server 0/1View More

Marks : 10Negative Marks : 0

Run Test CaseSubmit Cloud

43:45

Submit Test

Enter User Name and Password

Test Case Results

Total : 8Success : 8Failure : 0

Test Case	Weightage	Result	Error
Bucket exists with correct naming pattern	0.15	Success	NA
Bucket Region is us-west-2	0.15	Success	NA
Has 'Project=MarketingSite' tag	0.15	Success	NA
'assets' folder exists with 'banner.jpg'	0.1	Success	NA
home.html file exists	0.15	Success	NA
Public access enabled for home.html	0.1	Success	NA
Versioning enabled	0.1	Success	NA
Static website configured	0.1	Success	NA

<

Directory buckets

Table buckets

Vector buckets

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for this account

Dashboards

Storage Lens groups

AWS Region

US West (Oregon) us-west-2

Amazon Resource Name (ARN)

```
arn:aws:s3:::coder121340335752
```

Creation date

October 4, 2025, 09:59:19 (UTC+05:30)

Edit

Versioning is a means of keeping multiple variants of an object in the same bucket. You can use versioning to preserve, retrieve, and restore every version of every object stored in your Amazon S3 bucket. With versioning, you can easily recover from both unintended user actions and application failures. [Learn more](#) 

Bucket Versioning

Enabled

Multi-factor authentication (MFA) delete


An additional layer of security that requires multi-factor authentication for changing Bucket Versioning settings and permanently deleting object versions. To modify MFA delete settings, use the AWS CLI, AWS SDK, or the Amazon S3 REST API. [Learn more](#) 

Disabled

Edit

You can use bucket tags to track storage costs and organize buckets. [Learn more](#)

Key	Value
Project	MarketingSite

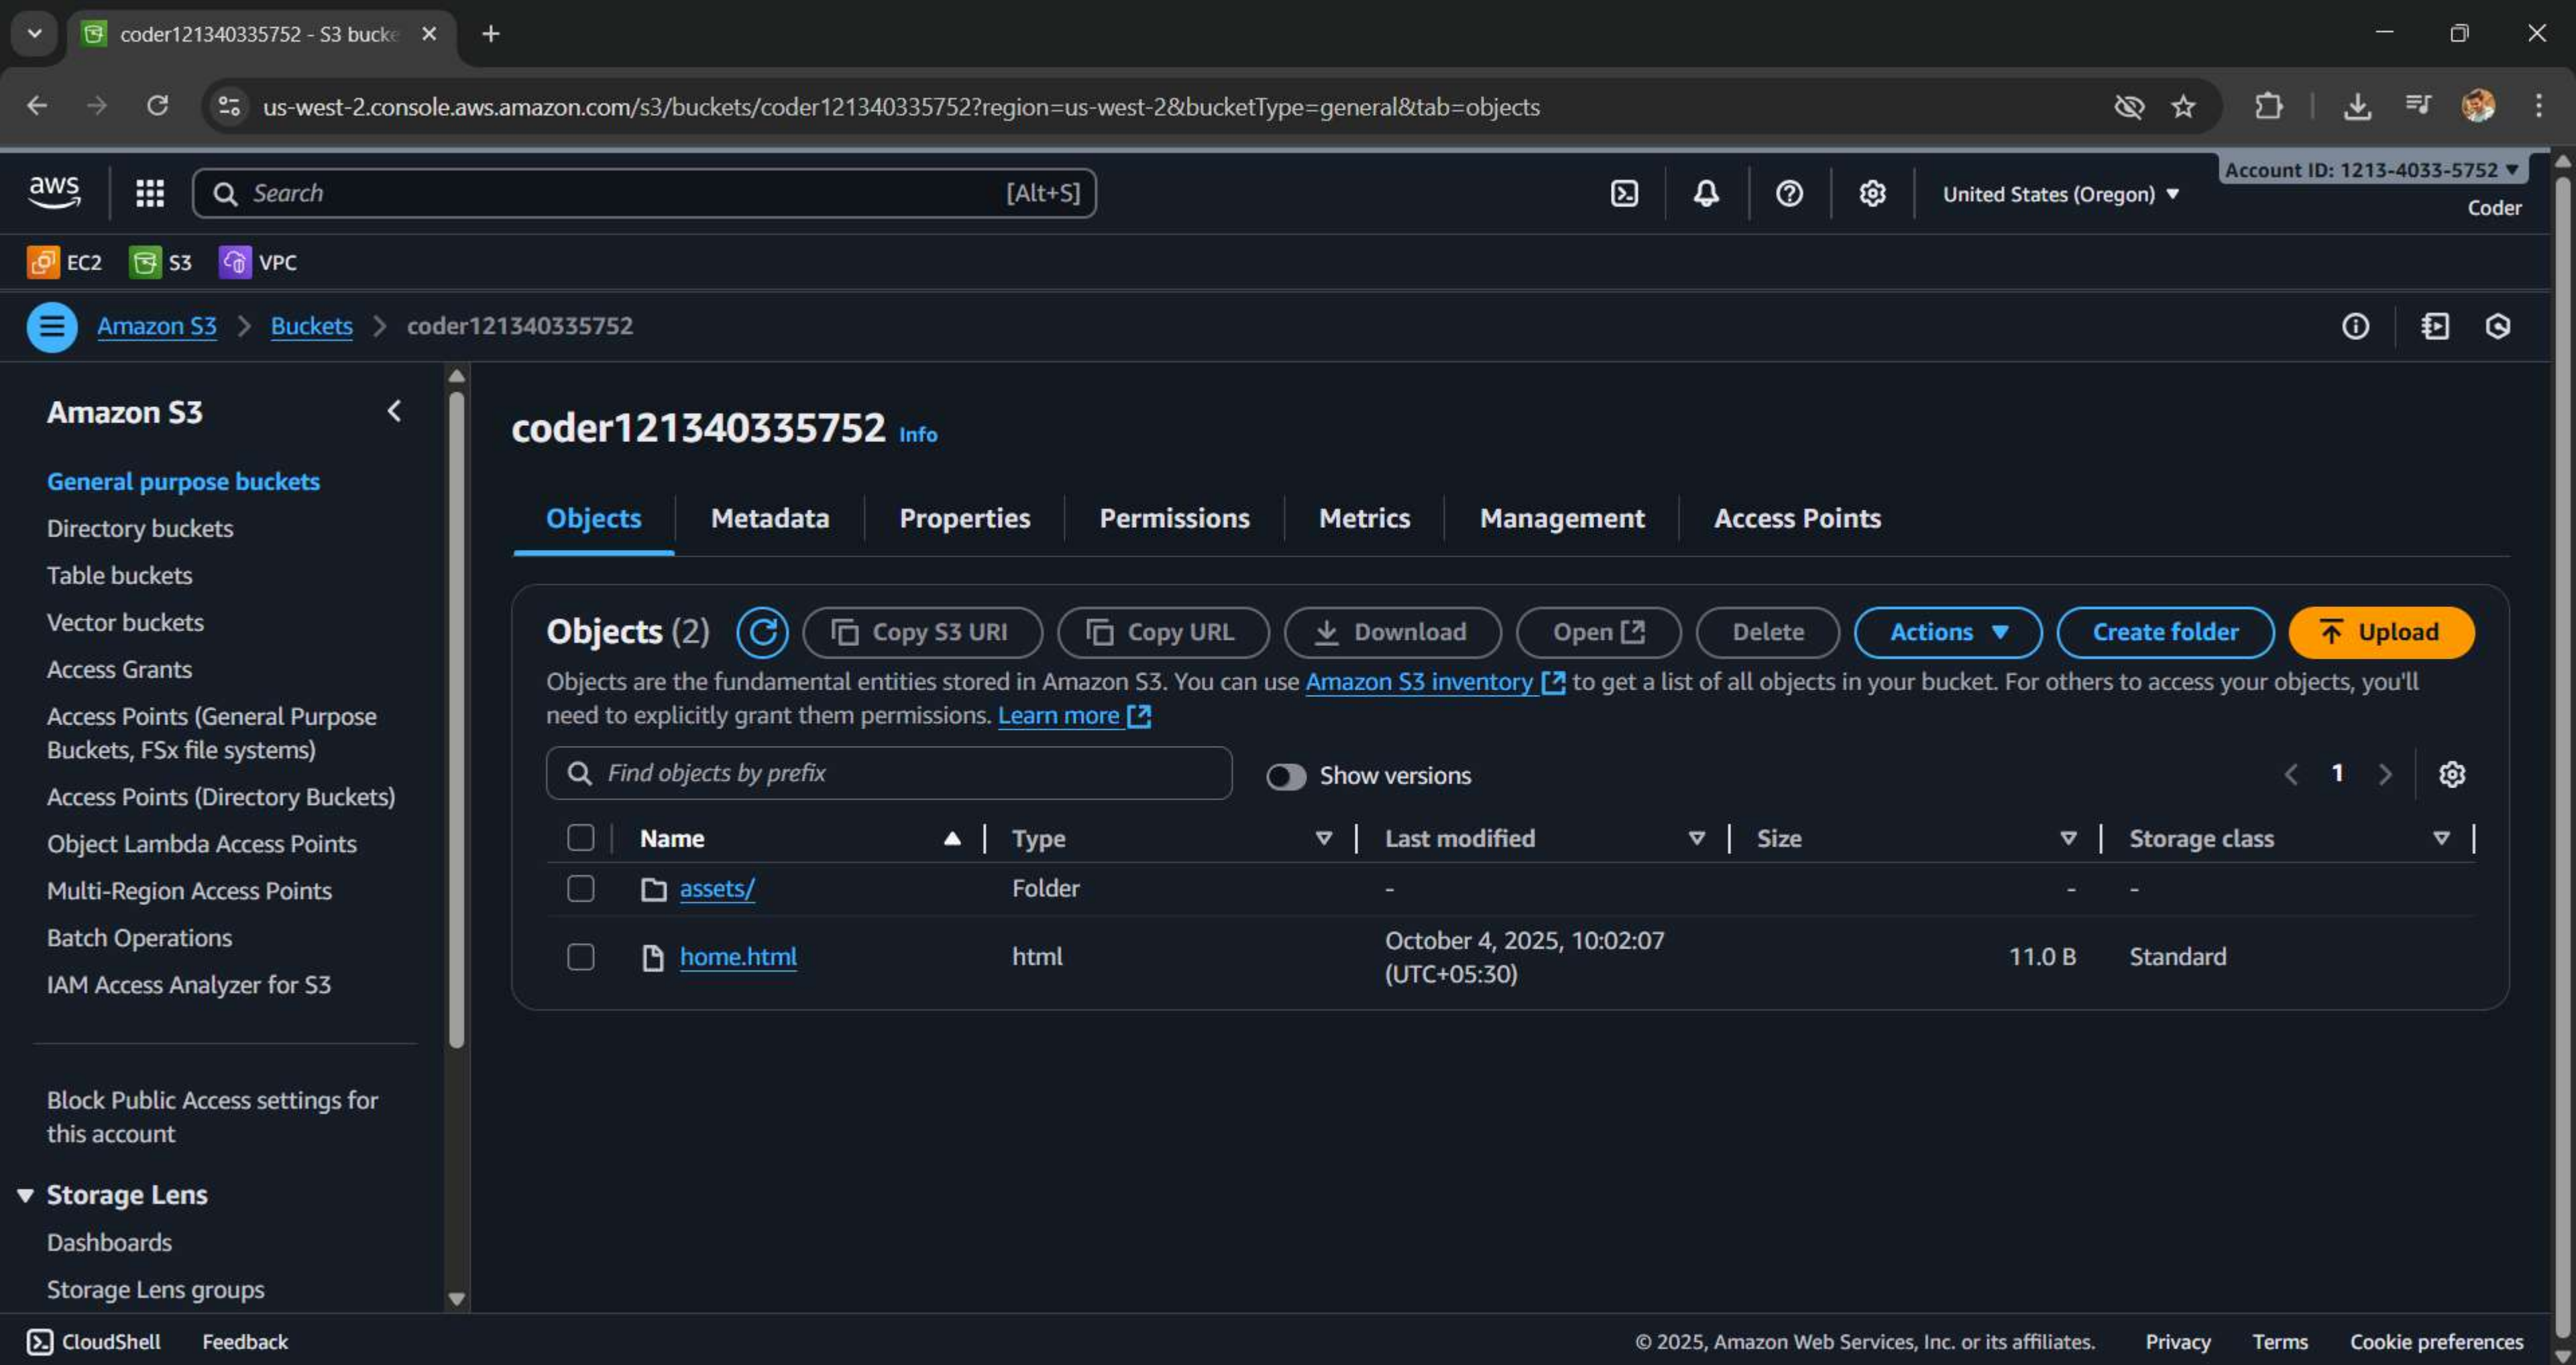

Amazon S3

General purpose buckets

Directory buckets

Table buckets

Vector buckets

Access Grants

Access Points (General Purpose Buckets, FSx file systems)

Access Points (Directory Buckets)

Object Lambda Access Points

Multi-Region Access Points

Batch Operations

IAM Access Analyzer for S3

Block Public Access settings for this account

▼ Storage Lens

Dashboards

Storage Lens groups

coder121340335752

Info

Objects

Metadata

Properties

Permissions

Metrics

Management

Access Points

Objects (2)

🔄

📄 Copy S3 URI

📄 Copy URL

⬇️ Download

🔗 Open

Delete

Actions ▼

Create folder

📤 Upload

Objects are the fundamental entities stored in Amazon S3. You can use [Amazon S3 inventory](#) to get a list of all objects in your bucket. For others to access your objects, you'll need to explicitly grant them permissions. [Learn more](#)

🔍 Find objects by prefix

🔌 Show versions

< 1 >

⚙️

☐	Name	Type	Last modified	Size	Storage class
☐	assets/	Folder	-	-	-
☐	home.html	html	October 4, 2025, 10:02:07 (UTC+05:30)	11.0 B	Standard

