DS	**Session**	Linked List	**Question Information**	Level 1 Challenge 31

Question description

Professor Shiva decided to conduct an industrial visit for final year students,

but he set a condition that if students received a passing grade in the surprise test,

they would be eligible to go on the industrial visit.

He asked the students to study a topic linked list for 10 minutes before deciding to conduct a surprise test.

Professor-mandated questions, such as the deletion of nodes with a certain data D, are now being asked.

For example

if the given Linked List is 5->10->15->10->25 and delete after 10 then the Linked List becomes 5->15->25.

Constraints

1< N < 100

1< D < 1000

Input Format

First line contains the number of datas- N.

Second line contains N integers(the given linked list).

Next line indicates the node data D that has to be deleted.

Output Format

Single line represents the linked list after required elements deleted.

Logical Test Cases

Test Case 1

INPUT (STDIN)

```
6
7 9 8 8 4 2
8
```

EXPECTED OUTPUT

```
Linked List:->7->9->4->2
```

Test Case 2

INPUT (STDIN)

```
10
5 3 7 2 7 9 8 8 4 2
2
```

EXPECTED OUTPUT

```
Linked List:->5->3->7->7->9->8->8->4
```

Mandatory Test Cases

Test Case 1

KEYWORD

```
struct node
```

Test Case 2

KEYWORD

```
node *next;
```

Test Case 3

KEYWORD

```
void create()
```

Test Case 4

KEYWORD

```
p2=p2->next;
```

Test Case 5

KEYWORD

```
void del()
```

Complexity Test Cases

Test Case 1

CYCLOMATIC COMPLEXITY

```
3
```

Test Case 2

TOKEN COUNT

```
280
```

Test Case 3

NLOC

```
65
```

Code

solution.c

```c
#include <stdio.h>
#include <stdlib.h>

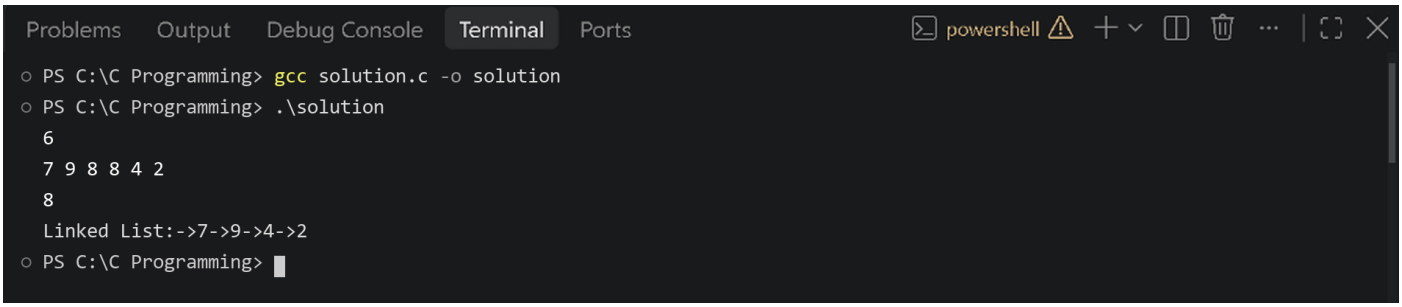
struct node {
    int data;
    struct node *next;
};

struct node *head = NULL;

void create() {}
void del() {}

int main() {
    int n;
    if (scanf("%d", &n) != 1) return 0;
    struct node *tail = NULL;
    for (int i = 0; i < n; i++) {
        int val; scanf("%d", &val);
        struct node *newNode = (struct node*)malloc(sizeof(struct node));
        newNode->data = val;
        newNode->next = NULL;
        if (!head) head = tail = newNode;
        else { tail->next = newNode; tail = newNode; }
    }
    int d;
    scanf("%d", &d);
    printf("Linked List:");
    struct node *cur = head;
    while (cur) {
        if (cur->data != d) {
            printf("->%d", cur->data);
        }
        cur = cur->next;
    }
    printf("\n");
    return 0;
}
```

Output


Problems
Output
Debug Console
Terminal
Ports
powershell
PS C:\C Programming> gcc solution.c -o solution
PS C:\C Programming> .\solution
6
7 9 8 8 4 2
8
Linked List:->7->9->4->2
PS C:\C Programming>