


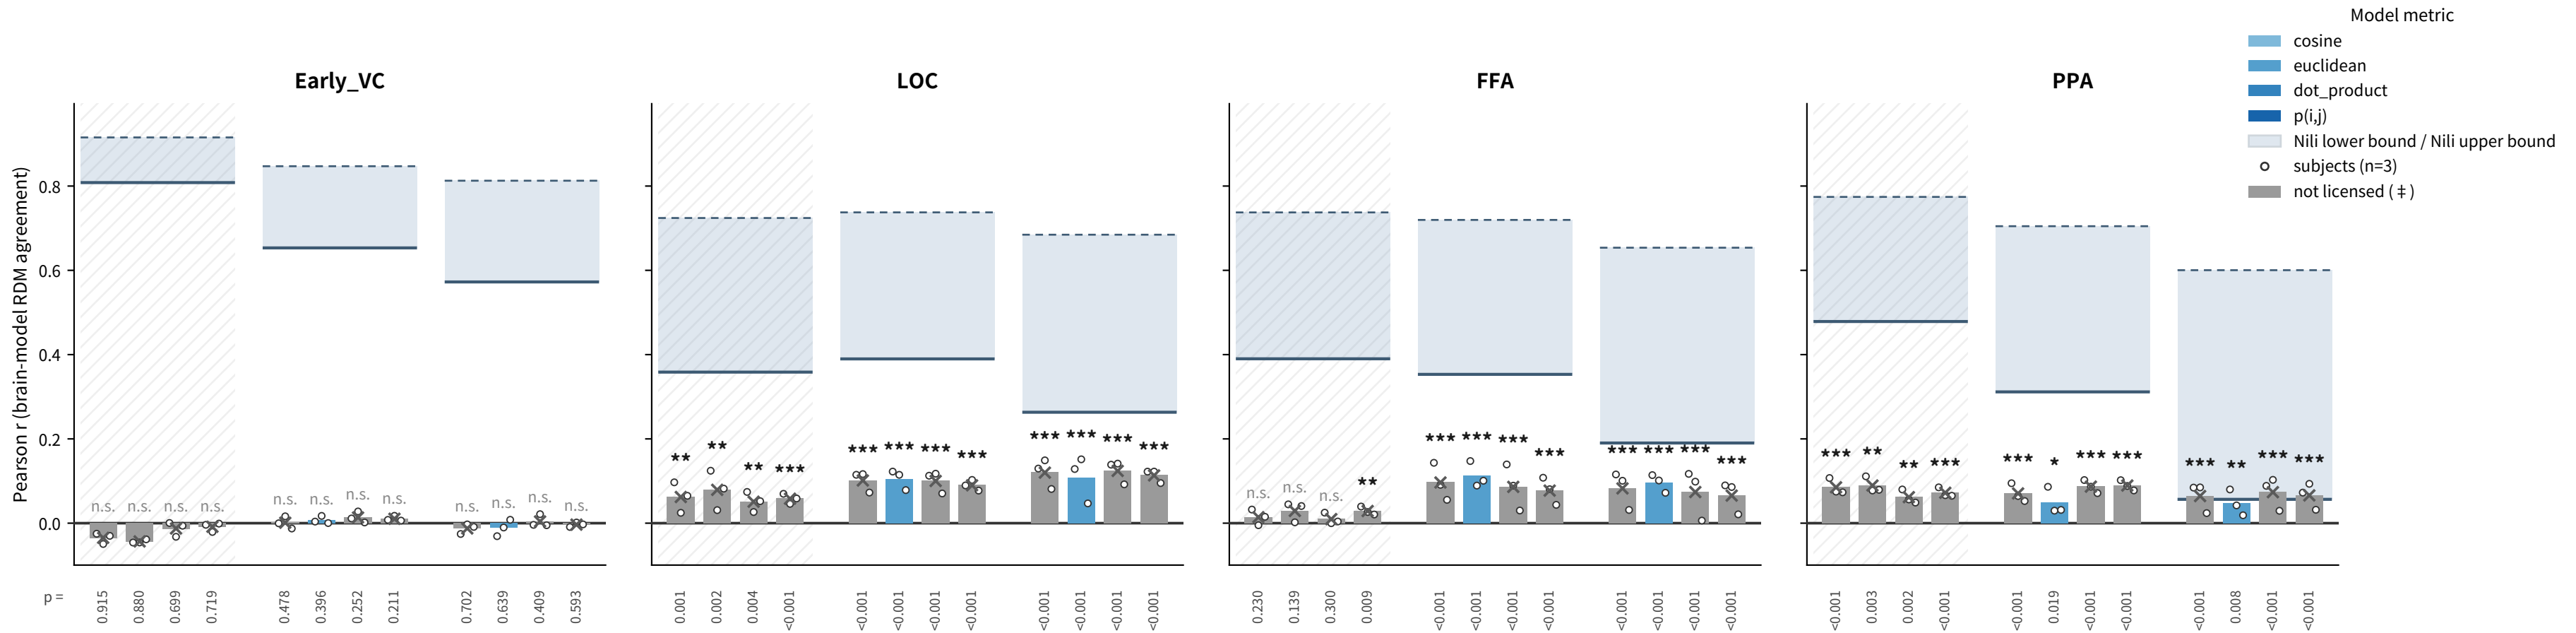

Significance: *** $p < 0.001$, ** $p < 0.01$, * $p < 0.05$, n.s. (10000 permutations, resolution floor 0.001) is
 With 10000 permutations the p-value resolution floor is 0.0005, the test mark only means the value is pinned at that floor.
 Sign normalisation: pairs whose brain-side and model-side metrics differ in kind (distance vs similarity) are sign-flipped, so up is always agreement.
 Upstream p-values are one-sided upper-tail on the raw score, so sign-flipped pairs provisionally use 1-p (a two-sided reading); these should be recomputed upstream on sign-normalised scores.
 The p row is decimal, with values at or below 0.001 shown as "<0.001" (rounded to 3 decimal places).
 Bands are Nili's bounds (lower = solid, upper = dashed). They compare brain RDMs with each other and are therefore never sign-flipped.
 The bars are not competing models: they are the same claim computed by different procedures.
 No error bars are drawn (with $S=3$ the bootstrap interval is [point estimate, 1.0] by construction and carries no information). Open circles are per-subject values.
 ‡ = not licensed. A pair's ceiling is set by the weaker of its two sides, and only comparators at or below that rung may be used.