

AuthZFactory.  
CreateAnonAuthZ()

//Info  
Boolean arrays encapsulate multiple authorization attributes.

\_adminAuthZ:  
[0] canCreateAdmin  
[1] canEnableAccount

\_accountAuthZ:  
[0] Edit  
[1] View  
[2] Delete

\_messageAuthZ:  
[0] send  
[1] reply  
[2] view  
[3] mark  
[4] delete

\_inviteAuthZ:     Text  
[0] send  
[1] view  
[2] accept  
[3] delete



\_householdAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] disband

\_tenantAuthZ:  
[0] view  
[1] promote  
[2] demote  
[3] remove  
[4] leave

\_expenseAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] delete

\_taskAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] delete

\_sRequestAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] delete

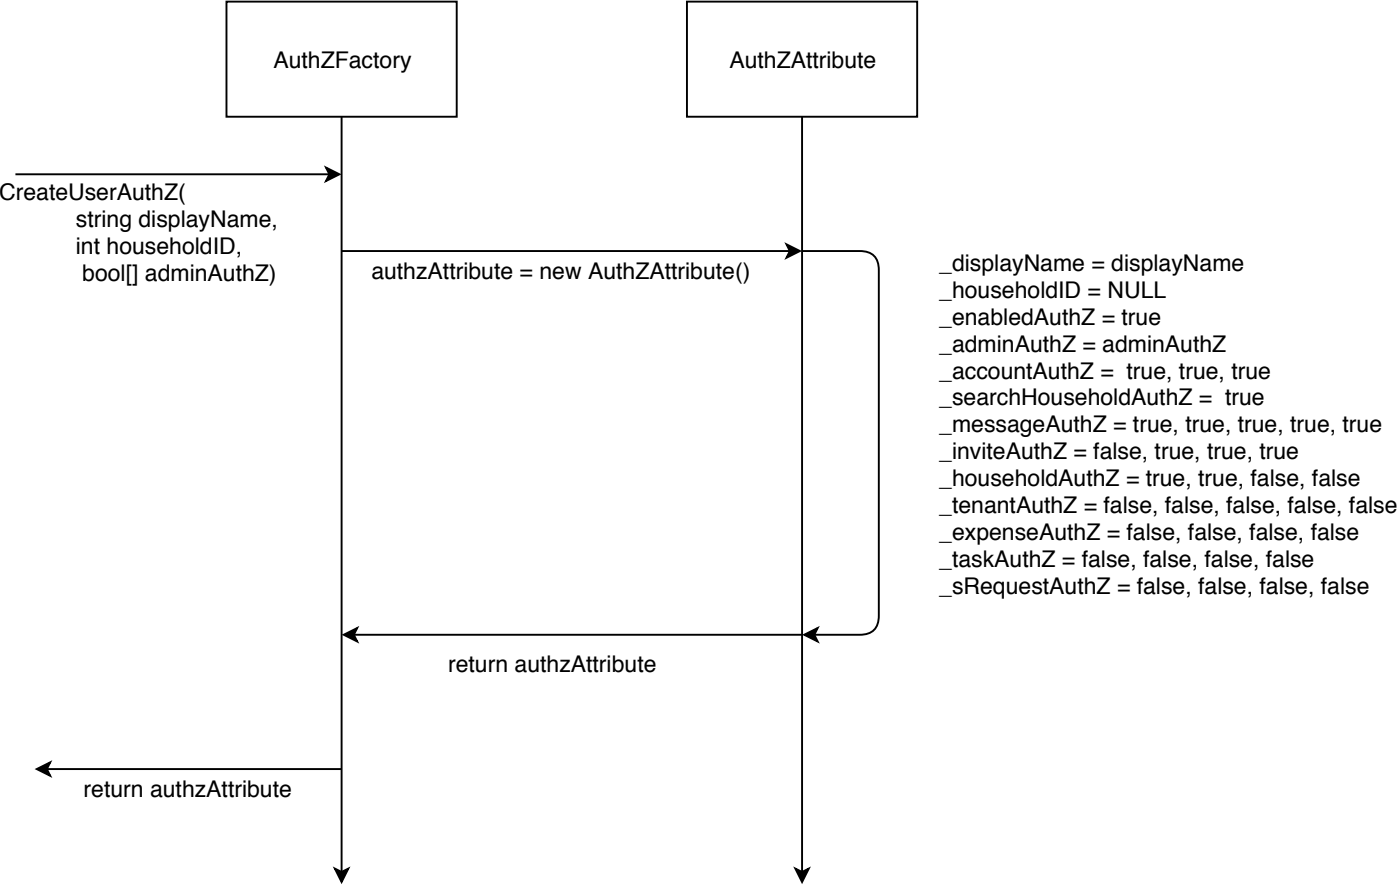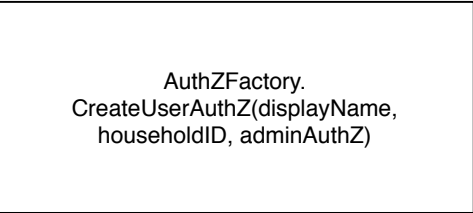

//Info  
Boolean arrays encapsulate multiple authorization attributes.

\_adminAuthZ:  
[0] canCreateAdmin  
[1] canEnableAccount

\_accountAuthZ:  
[0] Edit  
[1] View  
[2] Delete

\_messageAuthZ:  
[0] send  
[1] reply  
[2] view  
[3] mark  
[4] delete

\_inviteAuthZ:  
[0] send  
[1] view  
[2] accept  
[3] delete


\_householdAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] disband

\_tenantAuthZ:  
[0] view  
[1] promote  
[2] demote  
[3] remove  
[4] leave

\_expenseAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] delete

\_taskAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] delete

\_sRequestAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] delete

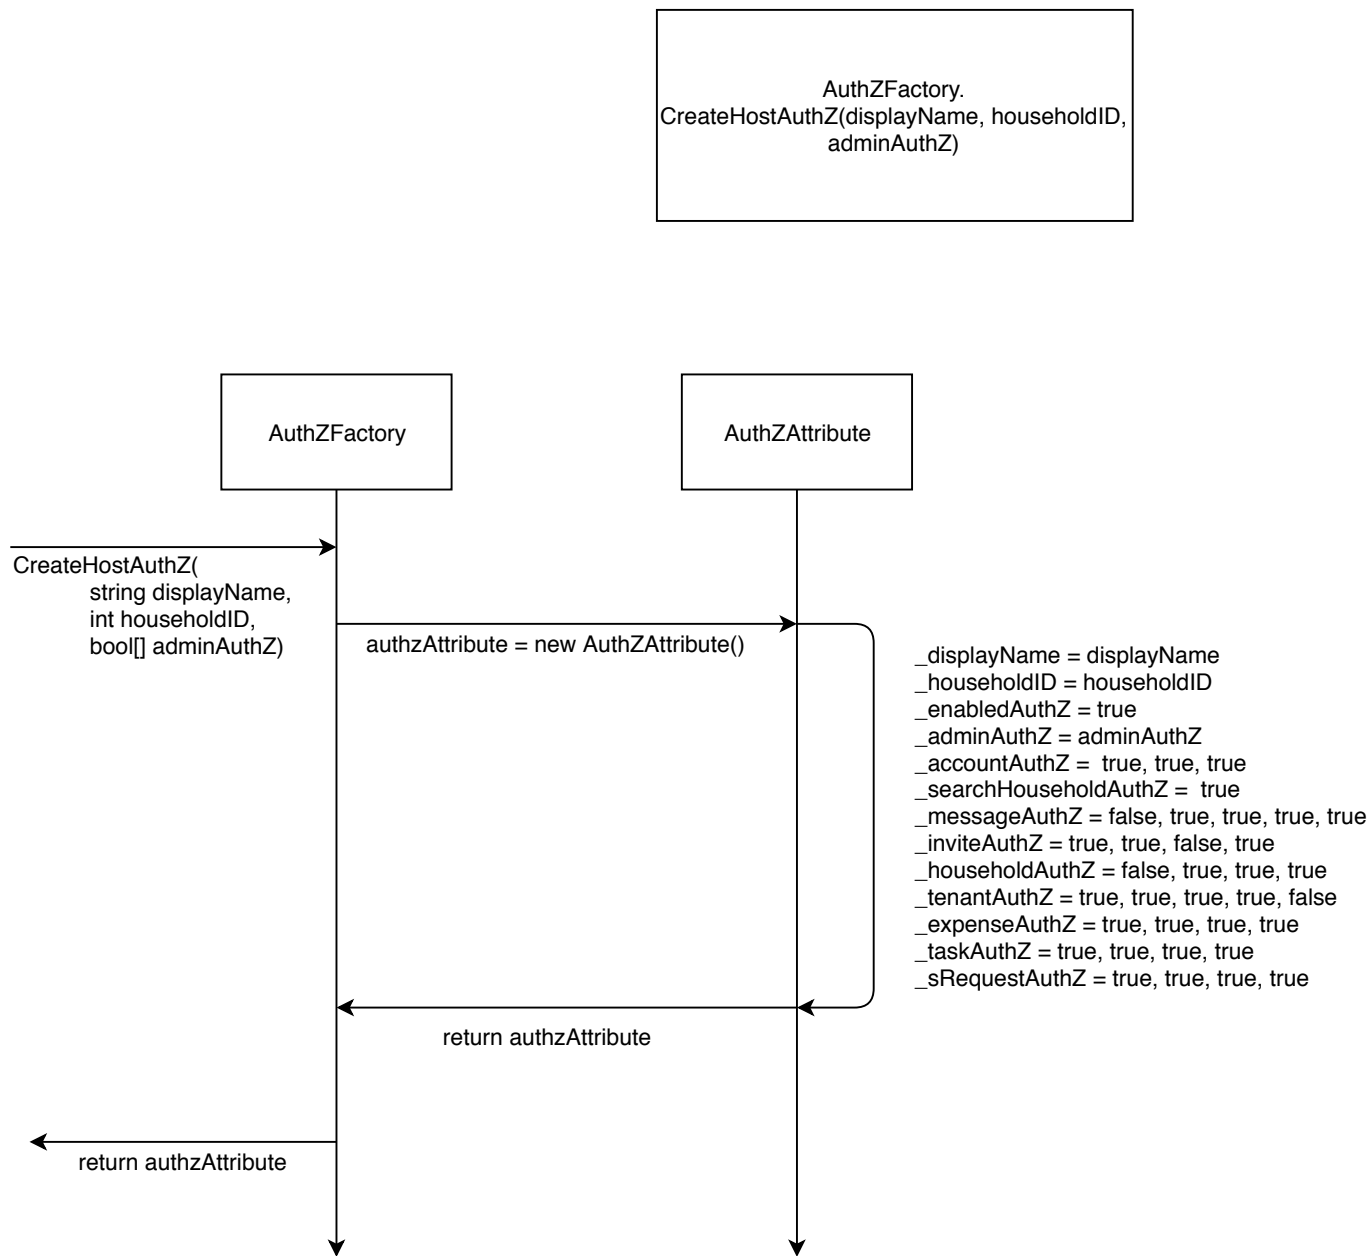

AuthZFactory.  
CreateHostAuthZ(displayName, householdID,  
adminAuthZ)

//Info  
Boolean arrays encapsulate multiple  
authorization attributes.

\_adminAuthZ:  
[0] canCreateAdmin  
[1] canEnableAccount

\_accountAuthZ:  
[0] Edit  
[1] View  
[2] Delete

\_messageAuthZ:  
[0] send  
[1] reply  
[2] view  
[3] mark  
[4] delete

\_inviteAuthZ:      Text  
[0] send  
[1] view  
[2] accept  
[3] delete


\_householdAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] disband

\_tenantAuthZ:  
[0] view  
[1] promote  
[2] demote  
[3] remove  
[4] leave

\_expenseAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] delete

\_taskAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] delete

\_sRequestAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] delete

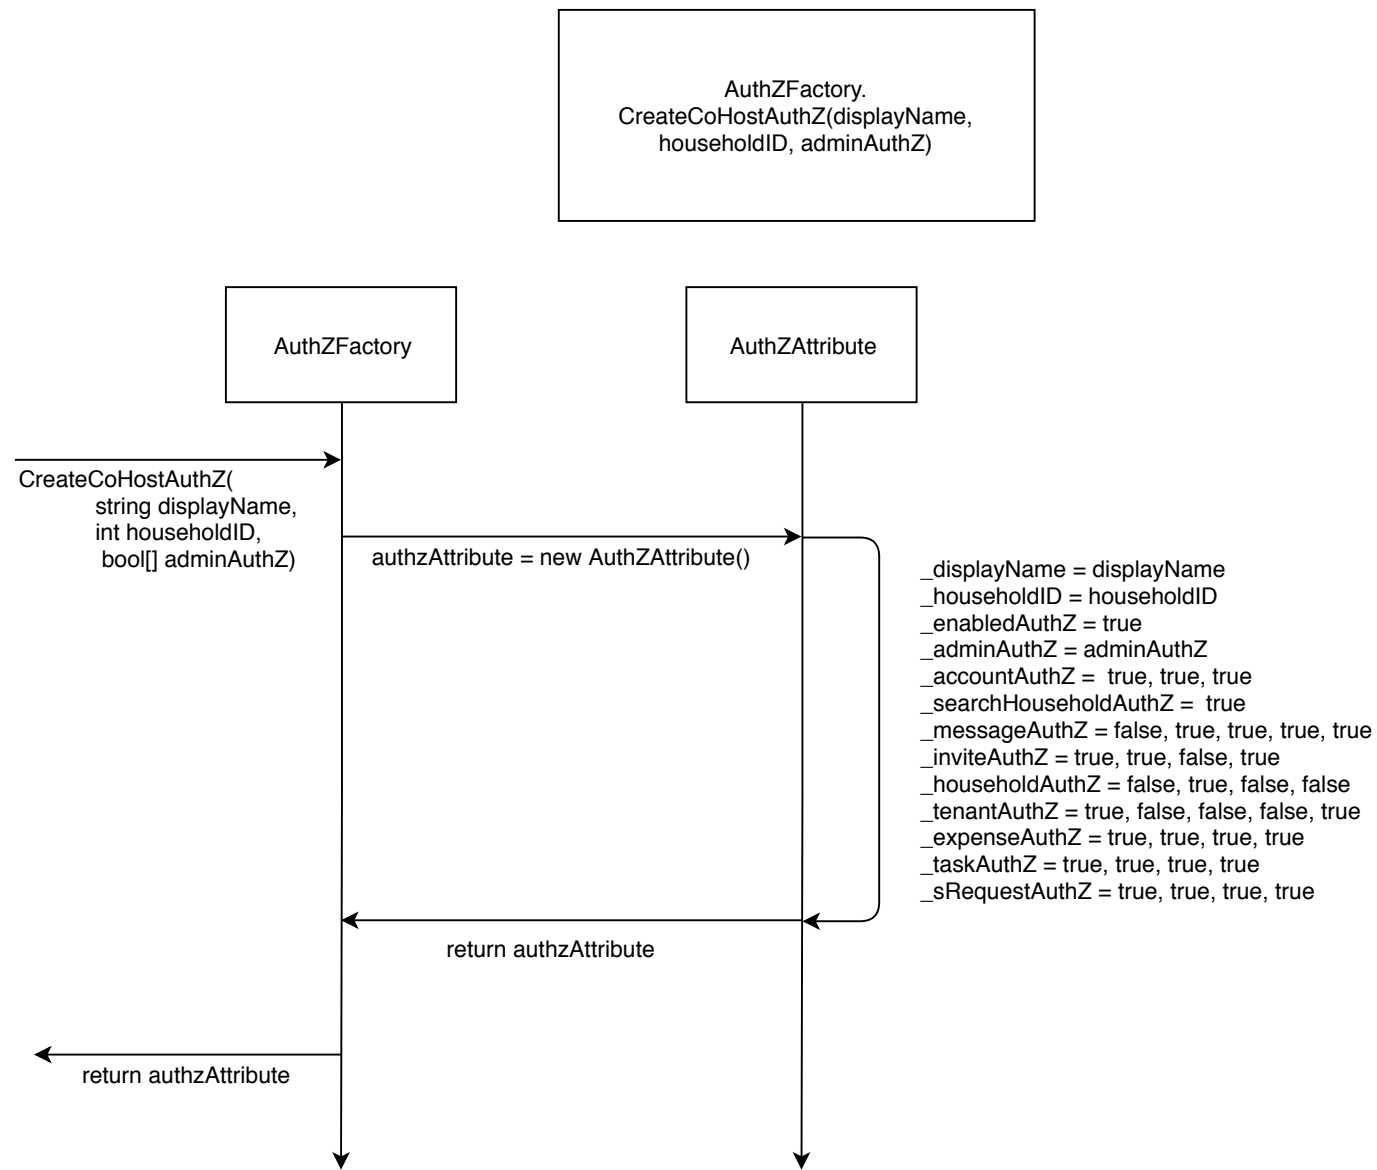

//Info  
Boolean arrays encapsulate multiple authorization attributes.

**\_adminAuthZ:**  
[0] canCreateAdmin  
[1] canEnableAccount

**\_accountAuthZ:**  
[0] Edit  
[1] View  
[2] Delete

**\_messageAuthZ:**  
[0] send  
[1] reply  
[2] view  
[3] mark  
[4] delete

**\_inviteAuthZ:**  
[0] send  
[1] view  
[2] accept  
[3] delete


**\_householdAuthZ:**  
[0] create  
[1] view  
[2] edit  
[3] disband

**\_tenantAuthZ:**  
[0] view  
[1] promote  
[2] demote  
[3] remove  
[4] leave

**\_expenseAuthZ:**  
[0] create  
[1] view  
[2] edit  
[3] delete

**\_taskAuthZ:**  
[0] create  
[1] view  
[2] edit  
[3] delete

**\_sRequestAuthZ:**  
[0] create  
[1] view  
[2] edit  
[3] delete

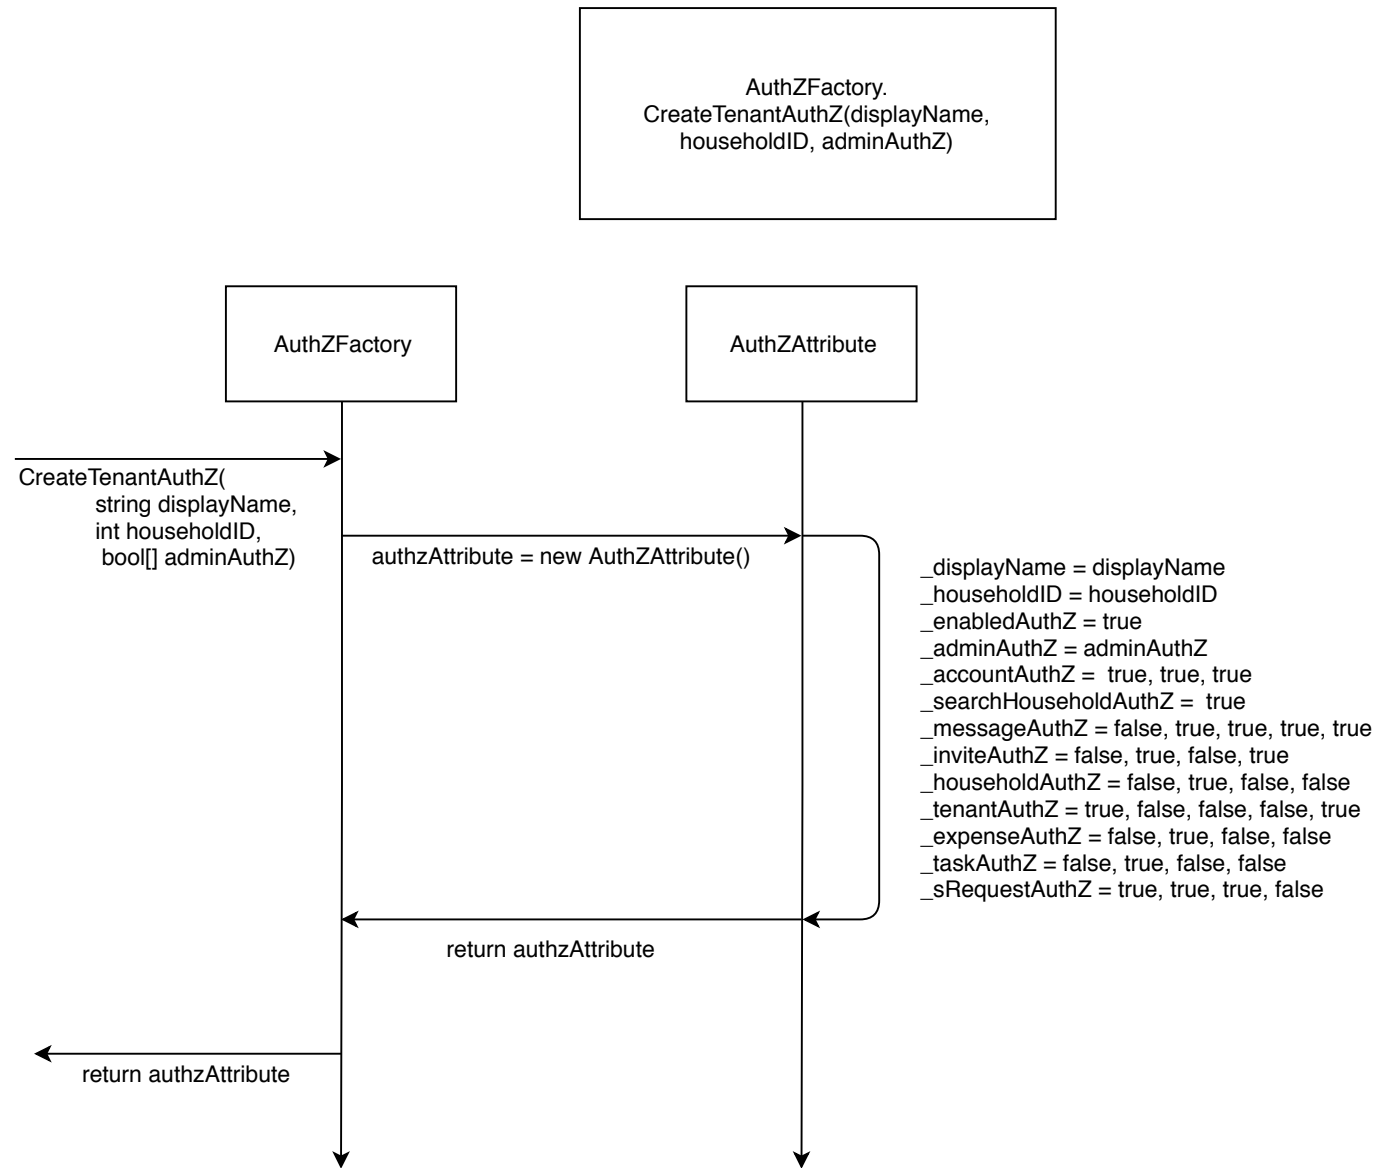

//Info  
Boolean arrays encapsulate multiple authorization attributes.

\_adminAuthZ:  
[0] canCreateAdmin  
[1] canEnableAccount

\_accountAuthZ:  
[0] Edit  
[1] View  
[2] Delete

\_messageAuthZ:  
[0] send  
[1] reply  
[2] view  
[3] mark  
[4] delete

\_inviteAuthZ:  
[0] send  
[1] view  
[2] accept  
[3] delete

\_householdAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] disband

\_tenantAuthZ:  
[0] view  
[1] promote  
[2] demote  
[3] remove  
[4] leave

\_expenseAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] delete

\_taskAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] delete

\_sRequestAuthZ:  
[0] create  
[1] view  
[2] edit  
[3] delete