



California State University Long Beach

College of Engineering

Computer Engineering Computer Science Department

Tuesday, November 26th, 2019

Sixfold Development Low Level Design Document

Group Members:

Michell Kuang (Team Lead)	013421094
Joshua McDaniel	014542786
Jingyan Du	014436615
Peter Park	002948398
Jacen Tan	012393782
Daniel Gione	016513144

Version History

Version	Date	Author(s)	Comments
V1.0	11/23/2019	All members	-Baseline document
V1.0.1	11/23/2019	Joshua McDaniel	-Logging Creation and Writing

1. Introduction


This document serves to outline the low level designs of each individual feature provided by the RoomAid web application. Each diagram will depict the flow of it's specific feature in order to explain the purpose and logic behind each component for developers to understand and implement.

2. Logging

Logging will occur throughout every component of the application and will successfully create logs based upon the function that called it and the user who initialized said function. Logs will be stored within a datastore (MongoDB) and a flat file (.CSV) according to the dates that they are recorded.

2.1 Log Create and Write

When a logging function is called, a log will be generated using values that are gathered from the calling function. These include the time of calling, the class of the calling function, the name of the calling function, the user identification of the user that initialized the function, the session identification of said user, the plaintext description of the log, and the level of the log itself(i.e. None, Debug, Info, Error, Warning, Fatal). Upon generation of each of the above criteria, the information is passed into LogMessage() to create an instance of that log. Using that instance, the handlers, DSHandler(...) and FileHandler(...), will be able to write the appropriate data to their specified locations. Since the LogMessage object is passed into each handler, the FileHandler(...) will require the data to be formatted into a string before writing.

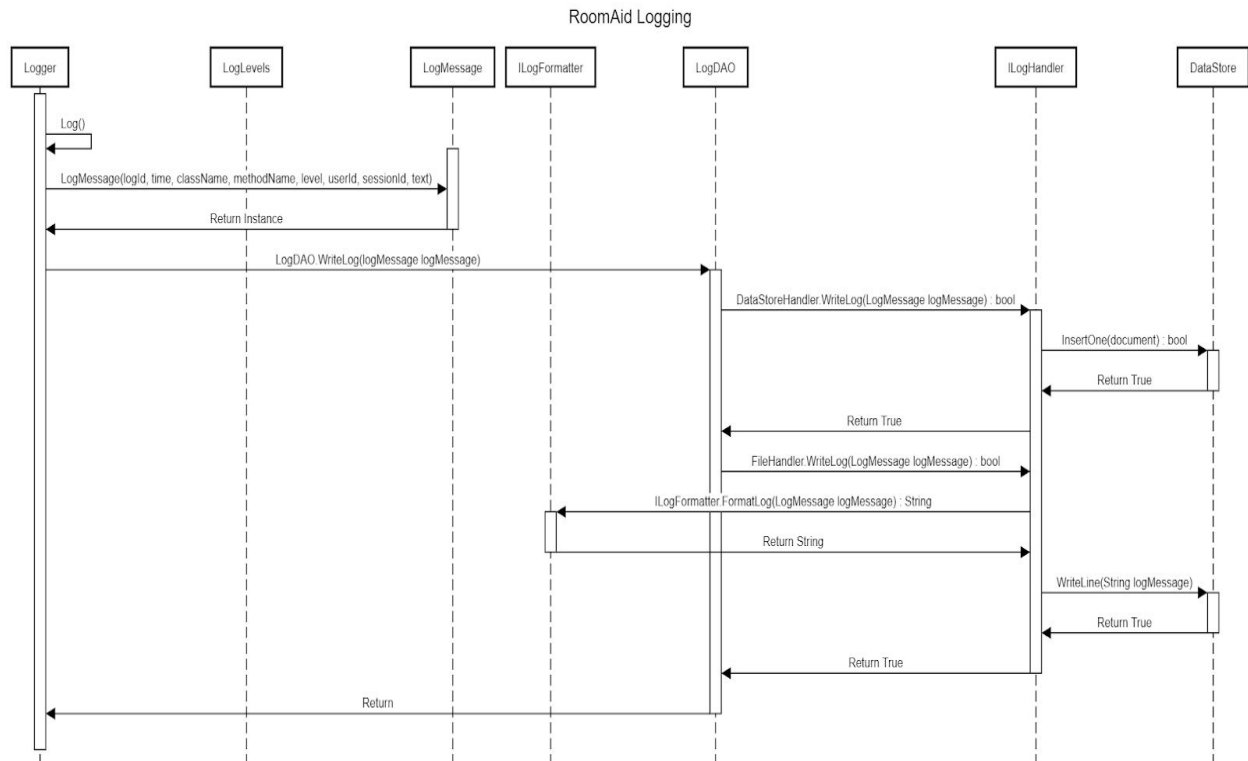

2.1.1 Log Create and Write: Failure to Write: Successful Rewrite

Provided that the writing to either location fails, the system will throw an exception identifying the failure and will attempt to rewrite the log a total of three times. If any attempted rewrite is successful, the function will return and the process will continue as expected.

