

Django

Deployment

Deploy means?

- To deploy a project means to make it visible for other people on the internet.

Where to Deploy?


- There are many providers out there that offers servers for Django projects.
- We will use the **render** platform
- **Why?** because they offer a free solution that only requires you to create an render account.

Create Requirements

- When you create a Django application, there are some Python packages that your project depends on.
- Django itself is a Python package, and we have to make sure that the server where we deploy our project also has the Django package installed, and all the other packages your project requires.
- Run this command in the command view:

```
(base) PS C:\django\django> conda activate myenv  
(myenv) PS C:\django\django> pip freeze > requirements.txt
```

Check that requirements.txt is created

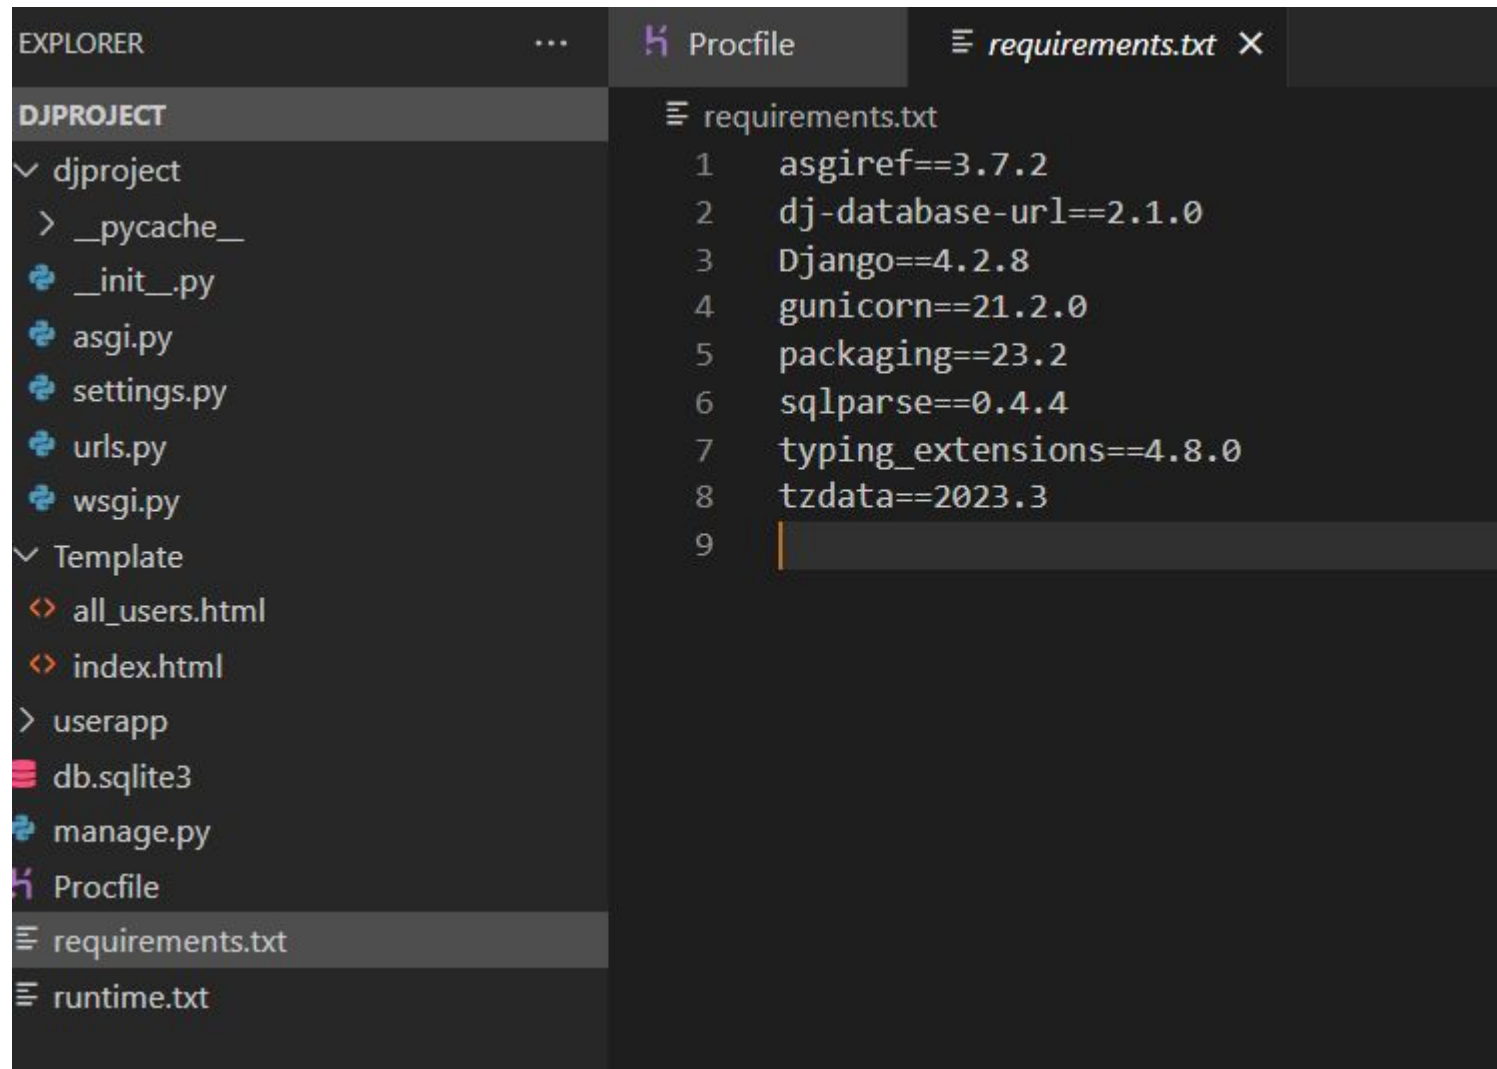

The image shows a screenshot of a code editor interface with two tabs: 'Procfile' and 'requirements.txt'. The 'requirements.txt' tab is active, displaying the following content:

```
requirements.txt
1 asgiref==3.7.2
2 dj-database-url==2.1.0
3 Django==4.2.8
4 gunicorn==21.2.0
5 packaging==23.2
6 sqlparse==0.4.4
7 typing_extensions==4.8.0
8 tzdata==2023.3
9
```


The Explorer sidebar on the left shows the project structure:

- DJPROJECT
 - ✓ djproject
 - > __pycache__
 - __init__.py
 - asgi.py
 - settings.py
 - urls.py
 - wsgi.py
 - ✓ Template
 - <> all_users.html
 - <> index.html
 - > userapp
 - db.sqlite3
 - manage.py
 - Procfile
 - requirements.txt
 - runtime.txt

Allow all Hosts in settings.py

```
20 # Quick-start development Follow link \(ctrl + click\) le for production
21 # See https://docs.djangoproject.com/en/4.2/howto/deployment/checklist/
22
23 # SECURITY WARNING: keep the secret key used in production secret!
24 SECRET_KEY = "django-insecure-4*o&)80+w!-fj8@5(5)x4ui!g-nf^5m6--813l9c1%*&jgg$#- "
25
26 # SECURITY WARNING: don't run with debug turned on in production!
27 DEBUG = True
28
29 ALLOWED_HOSTS = ["*"]
30
```


Create Procfile

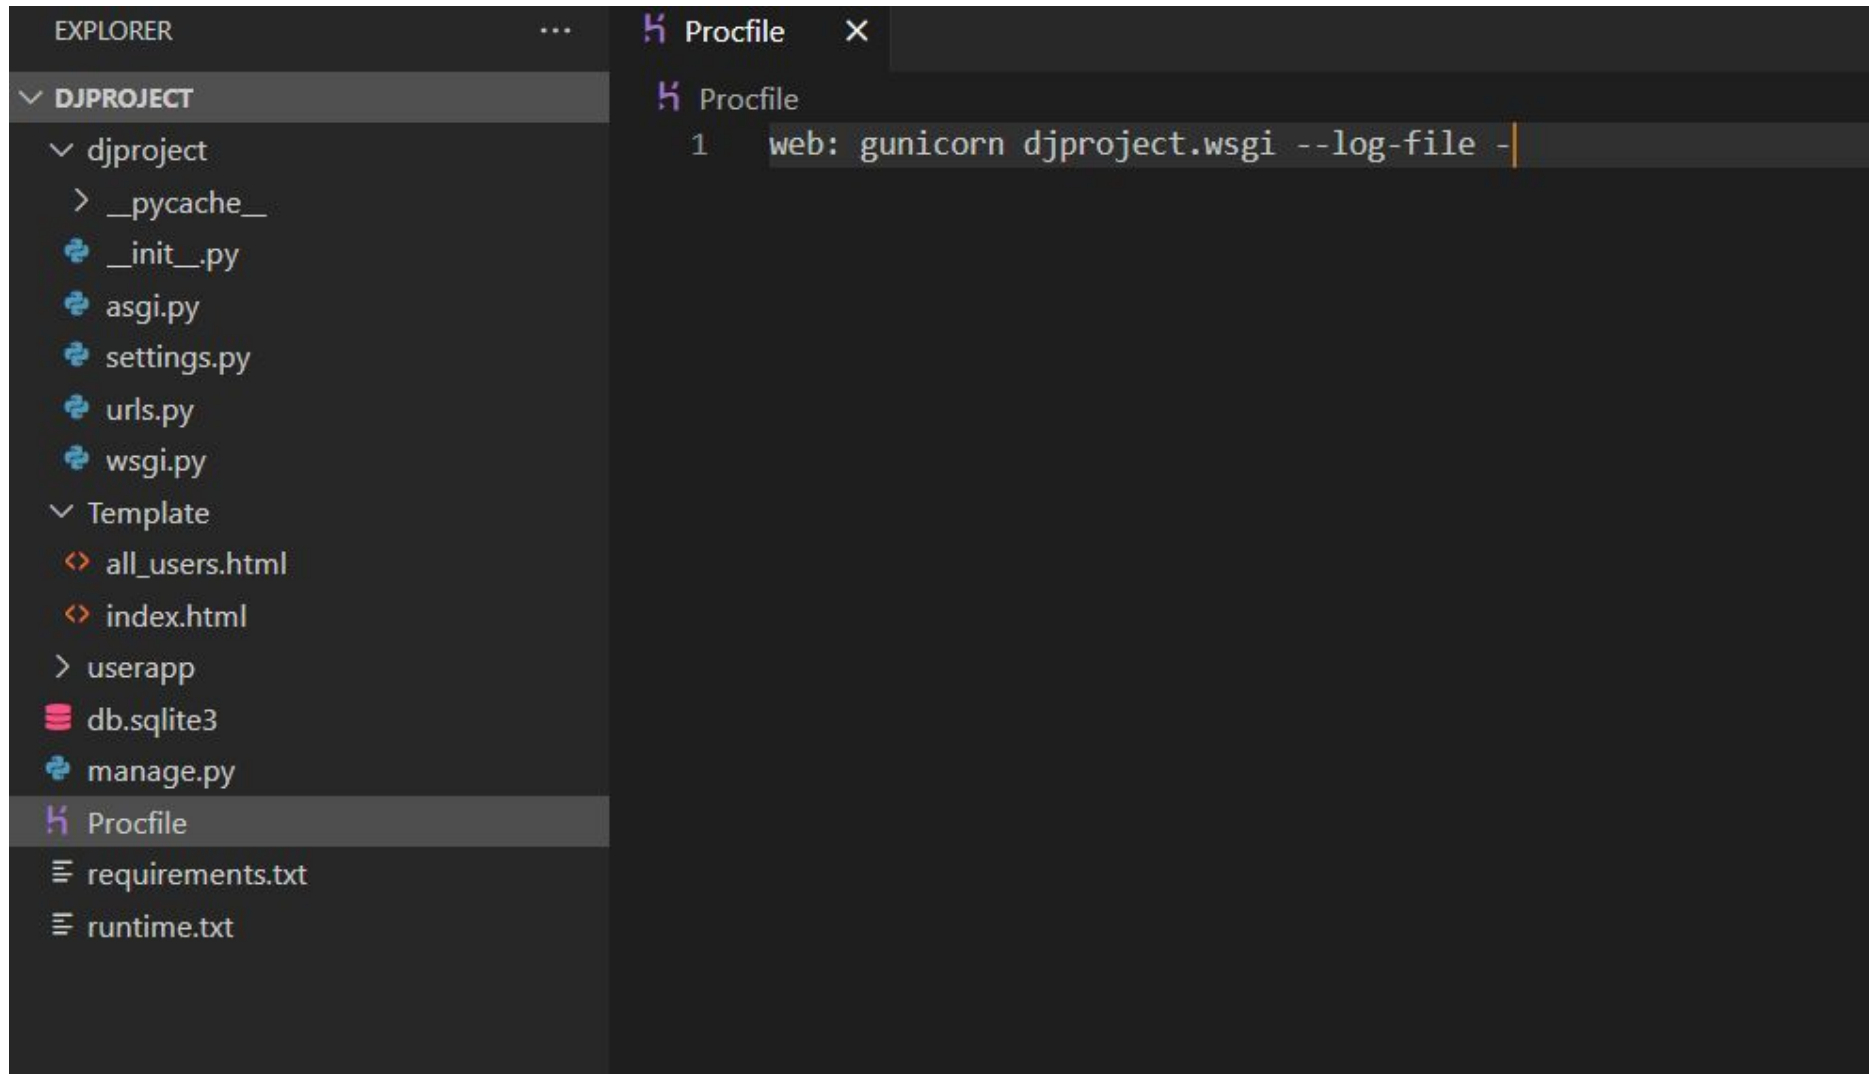

Create runtime.txt

First, Check your python version


```
(myenv) PS C:\django\djproject> python --version  
Python 3.9.0
```

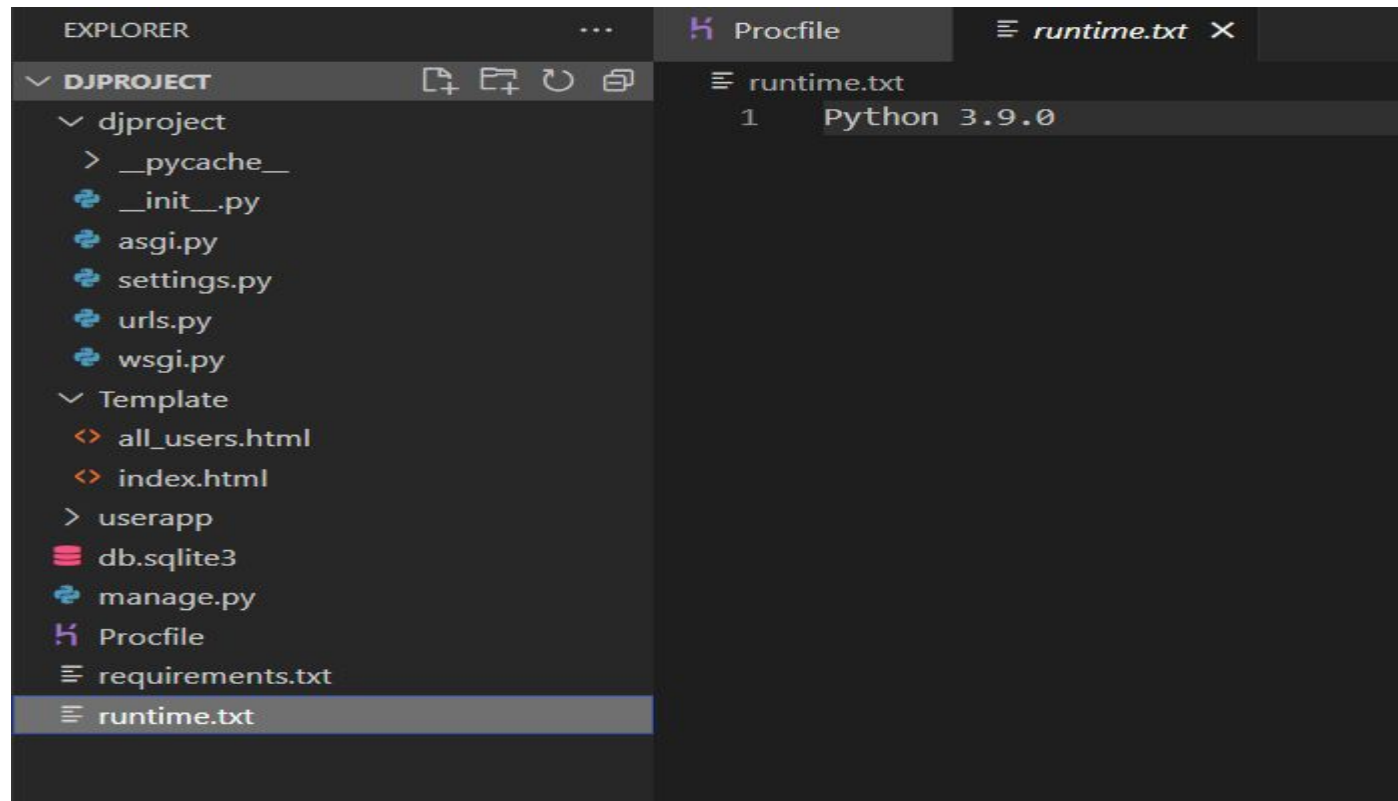

Create Github account

- Go to <https://github.com/>
- Signup
- Verify your email address
- sign in

Click New to create New repository

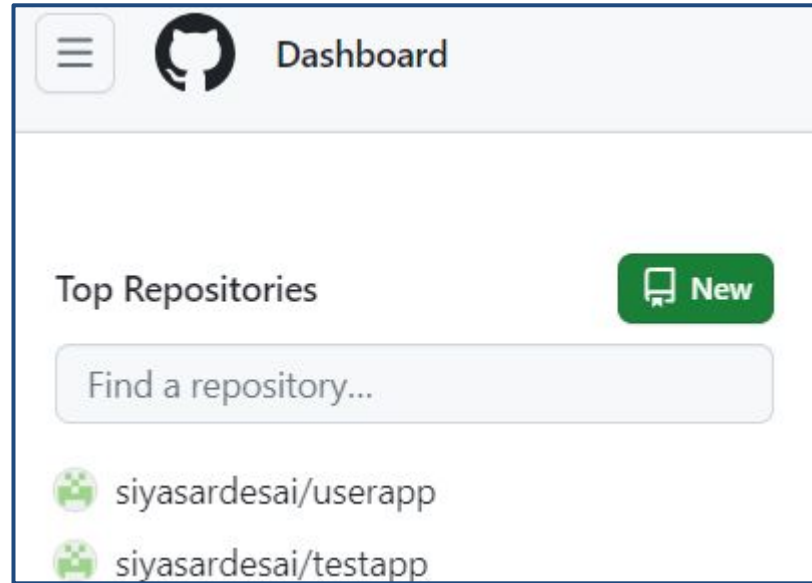

Click Create Repository button


Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere?

[Import a repository.](#)

Required fields are marked with an asterisk ().*

Owner *



Repository name *

/ FirstDjango

✓ FirstDjango is available.

Great repository names are short and memorable. Need inspiration? How about [expert-pancake](#) ?

Description (optional)



Public

Anyone on the internet can see this repository. You choose who can commit.



Private

You choose who can see and commit to this repository.

Next, Click on uploading existing file

 **FirstDjango** Public

 Pin  Unwatch **1**  Fork **0**  Star **0**



Set up GitHub Copilot

Use GitHub's AI pair programmer to autocomplete suggestions as you code.

Get started with GitHub Copilot



Add collaborators to this repository

Search for people using their GitHub username or email address.


Invite collaborators

Quick setup — if you've done this kind of thing before

 Set up in Desktop or HTTPS SSH

Get started by [creating a new file](#) or uploading an existing file. We recommend every repository include a [README](#), [LICENSE](#), and [.gitignore](#).

Drag & drop all files from django project folder & commit the changes

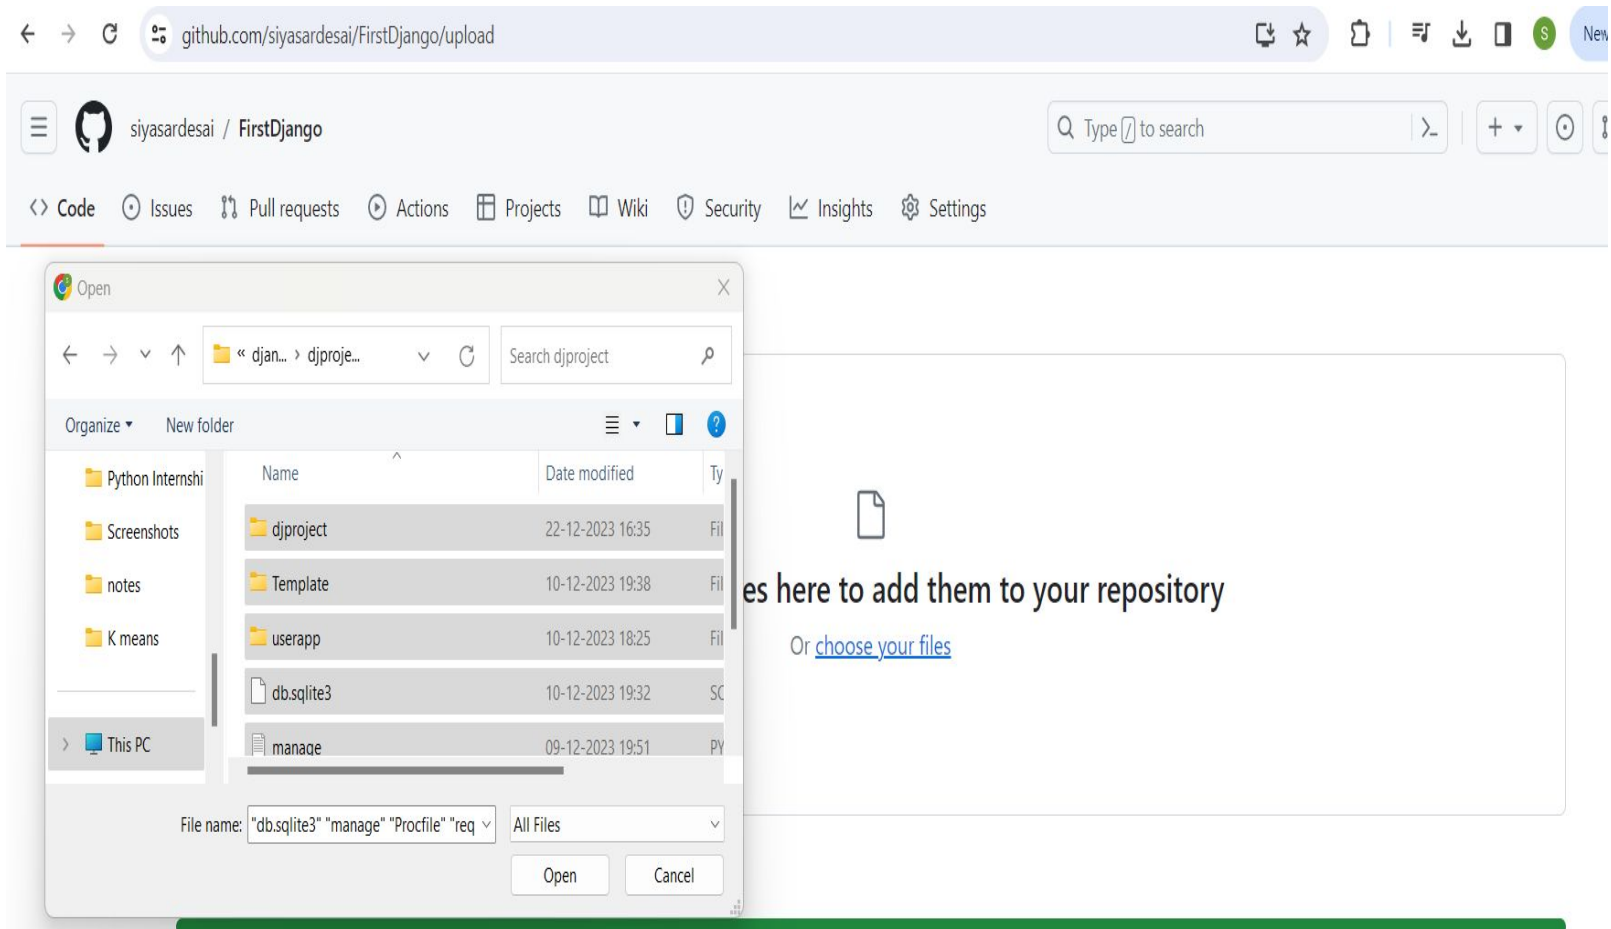

Once you see all files & folders from django successfully uploaded, lets move to render platform

 **FirstDjango** Public

Pin Unwatch 1

main 1 Branch 0 Tags t Add file Code

 **siyasardesai** Add files via upload

23d580d · 1 minute ago 1 Commits

 Template	Add files via upload	1 minute ago
 django	Add files via upload	1 minute ago
 userapp	Add files via upload	1 minute ago
 Procfile	Add files via upload	1 minute ago
 db.sqlite3	Add files via upload	1 minute ago
 manage.py	Add files via upload	1 minute ago
 requirements.txt	Add files via upload	1 minute ago
 runtime.txt	Add files via upload	1 minute ago

Sign up to <https://render.com/> using your github account



Dashboard

Blueprints

Env Groups

Docs

Community

Help

New +

Overview

Search services

SERVICE NAME

STATUS

TYPE

firstd

Deployed

Web

FirstDjango

Deployed

Web service



Web Service

Web services are kept up and running at all times, with native SSL and HTTP/2 support. Add a persistent disk or custom domain. Scale up and down with ease. [Learn more.](#)

Static Site

Web Service

Private Service

Background Worker

Cron Job

PostgreSQL

Redis

Blueprint

Select “Deploy from GitHub repo”

Create a new **Web Service**

Connect a Git repository, or use an existing image.

How would you like to deploy your web service?

- ☒ **Build and deploy from a Git repository**
Connect a GitHub or GitLab repository.

- ☐ **Deploy an existing image from a registry** ADVANCED
Pull a public image from any registry or a private image from Docker Hub, GitHub, or GitLab.

Next

Connect your repository

Create a new **Web Service**

Connect your Git repository or use an existing public repository URL.

Connect a repository

Search...

 siyasardesai / Ednotes-Users • 2 hours ago

Connect

 siyasardesai / FirstDjango • a day ago

Connect

 siyasardesai / test • a day ago

Connect

 siyasardesai / testapp • 12 days ago

Connect

 siyasardesai / dep1 • 18 days ago

Connect

Enter name of service: firstd
start Command: gunicorn djproject.wsgi --log-file -
Select free Hobby Project
Select Deploy web service

Runtime

The runtime for your web service.

Python 3



Build Command

This command runs in the root directory of your repository when a new version of your code is pushed, or when you deploy manually. It is typically a script that installs libraries, runs migrations, or compiles resources needed by your app.

```
$ pip install -r requirements.txt
```


Start Command

This command runs in the root directory of your app and is responsible for starting its processes. It is typically used to start a webserver for your app. It can access environment variables defined by you in Render.

```
$ gunicorn djproject.wsgi --log-file -
```

Now, click on link
<https://firstdd.onrender.com/>

once deployment is live

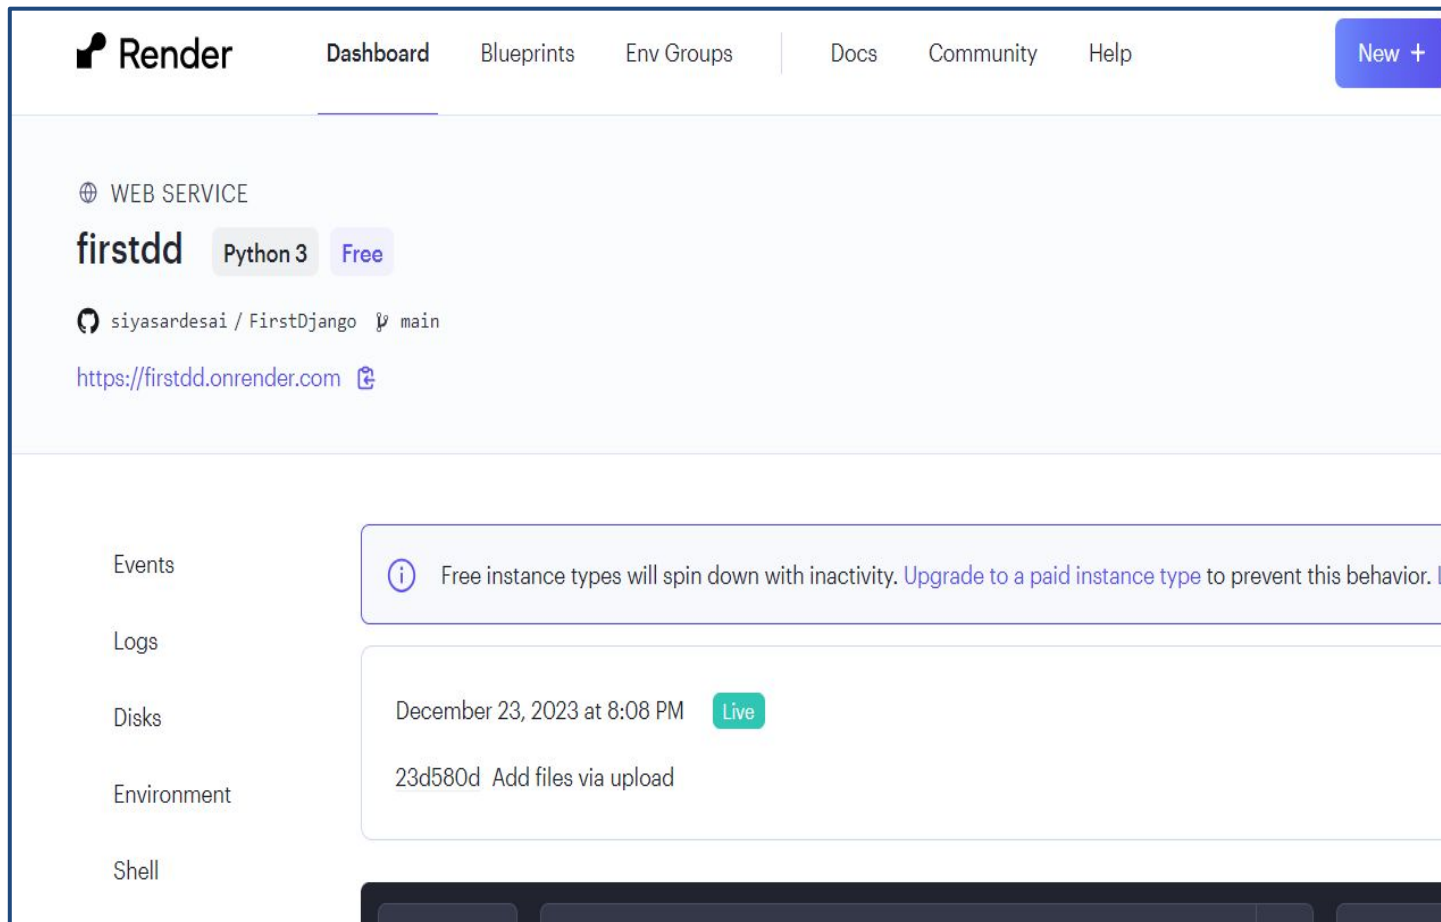

The screenshot shows the Render dashboard interface. At the top, there's a navigation bar with the Render logo and links to Dashboard, Blueprints, Env Groups, Docs, Community, and Help. A 'New +' button is on the right. Below the navigation bar, the main content area displays a 'WEB SERVICE' for 'firstdd'. It indicates the service is using 'Python 3' and is on a 'Free' plan. The repository is 'siyasardesai / FirstDjango' on the 'main' branch. The deployment URL is 'https://firstdd.onrender.com'. On the left sidebar, there are links for Events, Logs, Disks, Environment, and Shell. The main content area shows a deployment event from December 23, 2023, at 8:08 PM, with a 'Live' status. A message at the top of the deployment details states: 'Free instance types will spin down with inactivity. Upgrade to a paid instance type to prevent this behavior. L'. Below this, there's a link to 'Add files via upload'.

Render

Dashboard Blueprints Env Groups Docs Community Help New +

WEB SERVICE

firstdd Python 3 Free

siyasardesai / FirstDjango main

<https://firstdd.onrender.com>

Events

Logs

Disks

Environment

Shell

Free instance types will spin down with inactivity. Upgrade to a paid instance type to prevent this behavior. L

December 23, 2023 at 8:08 PM Live

23d580d Add files via upload

Deploy Now

← → ↻ 🔍 firstdd.onrender.com/users/

Members

- Raju Singh
- janvi Reddy

*Thank
you*